

ROOM FINISH SCHEDULE												
NO.	ROOM	FLOOR	BASE	WAINS	WALLS		CEILING		WOOD	METAL	KEYNOTE	REMARKS
					MAT	FINISH	MAT.	FINISH				
SANCTUARY BUILDING 'ALTERNATE S-1'												
S-1	STAIR	CPT-3	4" CV. RBR	~~	EXISTING	PNT-1, PNT-10	**EXISTING GYP. BD.-1	PNT-7	PNT-1	PNT-G	3,7,8,10	RUBBER TREADS RISERS, CARPET TILE LANDINGS
S100	NARTHEX	P. TILE-1, 2, 3	3" P. TILE	~~	*GYP. BD.-1	PNT-1, PNT-10, PNT-4	*GYP. BD.-1	PNT-7	PNT-1	PNT-G	1,7,10	*GYP. BD. AT SOUTH WALLS FULL HT., EVERYWHERE ELSE30" A.F.F. **REPLACE WHERE MISSING ON RCP.
S101	CORRIDOR	P. TILE-1,2,3 / CPT-3	3" P. TILE / CWB	~~	EXISTING	PNT-1	EXISTING	PNT-7	PNT-1	PNT-G	7,10	
S104A	FOYER	CPT-4	CWB	~~	EXISTING, GYP. BD.	PNT-1, PNT-3	EXISTING	PNT-7	PNT-1	PNT-G	1,7,10	
S105	CORRIDOR	P. TILE-1,2,3 / CPT-3	3" P. TILE / CWB	~~	EXISTING	PNT-1, PNT-3, PNT-10	EXISTING	PNT-7	PNT-1	PNT-G	1,7,10	
S119	VESTIBULE	P. TILE-1,2	3" P. TILE	~~	EXISTING	PNT-1	EXISTING	PNT-7	~~	~~	7,10	
S120	OFFICE	CPT-2	4" CV RBR	~~	EXISTING / GYP. BD.-1	PNT-1	EXISTING	PNT-7	~~	PNT-G	7	
S122	OFFICE	CPT-2	4" CV RBR	~~	EXISTING / GYP. BD.-1	PNT-1	EXISTING	PNT-7	~~	PNT-G	7	
S123	CHOIR PRACTICE	CPT-1	4" CV RBR	~~	GYP. BD.-1	PNT-1, PNT-4	EXISTING	PNT-7	~~	PNT-G	1,7	
S131	CORRIDOR	P. TILE-1,2,3 / CPT-3	3" P. TILE / CWB	~~	EXISTING	PNT-1, PNT-3	EXISTING	PNT-7	PNT-1	PNT-G	1,7,10	
S-2	STAIR	CPT-3	4" CV. RBR	~~	EXISTING	PNT-1, PNT-10	EXISTING	PNT-7	PNT-1	PNT-G	3,8,10	RUBBER TREADS RISERS, CARPET TILE LANDINGS
S203	CORRIDOR	CPT-3	CWB	~~	EXISTING / GYP. BD.-1	PNT-1, PNT-3	GYP. BD.-2	PNT-7, PNT-11	~~	PNT-G	1,7,10	GLASS RAILING AT BALCONY
S205	OFFICES	CPT-2	EXISTING	~~	*GYP. BD.-1	PNT-1, PNT-3	GYP. BD.-1	PNT-7	~~	PNT-G	1,7	*GYP. BD. REPAIR AT EAST WALL AND CEILING
S207	OFFICE	CPT-2	4" CV RBR	~~	GYP. BD.-1	PNT-1, PNT-3	GYP. BD.-1	PNT-7	~~	PNT-G	1,7	

RFS ABBREVIATIONS

ACT	2X2 ACOUSTIC LAY-IN CEILING TILE
P. TILE	PORCELAIN TILE
VCT	VINYL COMPOSITION TILE
LVT	LUXURY VINYL TILE FLOORING
S. CONC	SEALED CONCRETE
CPT	CARPET TILE
WD	WOOD GYM FLOOR SYSTEM (SEE DTL. 1/A302)
RBR SF	RUBBER SPORTS FLOOR
CMT	CERAMIC MOSAIC TILE
CMTB	CERAMIC MOSAIC TILE BASE
ERF	EPOXY RESIN FLOORING
3" P.TILE	3" PORCELAIN BASE
VRBR	VENTED RUBBER BASE
CV. RBR	COVED RUBBER BASE
CWB	CONTOURED VINYL WALL BASE
WD BASE	WOODASE TRIM
PNT	PAINT
GYP. BD.	GYPSUM WALLBOARD

RFS KEYNOTES

1. PROVIDE ACCENT WALL COLOR THIS ROOM, REFER TO FLOOR PLAN SHEETS A1XX FOR LOCATIONS.
2. PROVIDE 12" SOLID CARPET BORDER
3. GYP. BOARD WALLS IN THIS ROOM SHALL HAVE A KNOCK DOWN TEXTURE FINISH.
4. ROOM SHALL RECEIVE A TWO COLOR VCT ACCENT BORDER.
5. ROOM SHALL RECEIVE A SINGLE COLOR VCT BORDER.
6. BLEND ACCENT VCT COLORS TO 20% OF THE TOTAL FIELD.
7. SCRAPE EXISTING POPCORN CEILING TEXTURE, PREP FOR SMOOTH CEILING FINISH AND PAINT.
8. PROVIDE RUBBER TREADS AND RISERS AT THE STAIRS. (JOHNSONITE CUBIS TEXTURE OR APPROVED EQUAL)
9. PROVIDE CROWN MOLDING CROWN-1, REFER TO TRIM DETAIL 1/A603.
10. PROVIDE CROWN MOLDING CROWN-2, REFER TO TRIM DETAIL 1/A603.

GENERAL NOTES:

- A. REFER TO INTERIOR ELEVATIONS (SHEETS A5XX) FOR CASEWORK FINISHES.
- B. ALL INTERIOR GYPSUM BOARD WALLS SHALL BE A SMOOTH LEVEL 4 FINISH UNLESS NOTED OTHERWISE ON THE RFS, W/ (1) PRIMER COAT AND (2) FINISH COATS. ALL BATHROOM WALLS TO RECEIVE SEMI-GLOSS FINISH. ALL OTHER WALLS SHALL RECEIVE AN EGGSHELL FINISH.
- C. ALL CEILINGS SHALL HAVE A SMOOTH FINISH AND PAINT WITH (1) PRIMER COAT AND (2) FINISH COATS.
- D. ALL EXPOSED DRYWALL SURFACES SHALL BE PAINTED WITH (1) COAT OF PRIMER AND (2) FINISH COATS OF LATEX PAINT ON INTERIOR, AND ACRYLIC ON THE EXTERIOR.
- E. ALL EXPOSED MTL IS TO BE PAINTED IN ROOMS SCHEDULED TO BE PAINTED. EXPOSED MTL INCLUDES, BUT IS NOT LIMITED TO HOLLOW MTL DOORS AND FRAMES, HANDRAILS, DUCTWORK, PIPING, RAILINGS, STAIR STRINGERS, EXPOSED STEEL JOISTS, CONDUIT, STEEL DECK AND LINTELS. COORD. W/ ELEC., MECH., AND PLUMBING CONTRACTOR.
- F. ALL MASONRY WALLS SCHEDULED TO BE PAINTED SHALL BE PAINTED W/ EPOXY PAINT.
- G. PROVIDE BULLNOSE BLOCK FOR ALL EXPOSED OUTSIDE CORNERS (TYP.)
- H. PROVIDE AND INSTALL VINYL TRANSITION STRIP AND METAL TRACK WHERE NEW FLOORS TERMINATE AND BETWEEN DISSIMILAR FLOORING MATERIALS.
- J. ALL GYPSUM BOARD TO BE 5/8" TYPE 'X' UNLESS OTHERWISE NOTED.
- K. ALL NEW MTL STUD PARTITIONS TO BE FILLED WITH 3" SOUND BATT. INSULATION, FULL HT.
- L. CAULK ALL JOINTS BETWEEN DISSIMILAR MATERIALS ON WALLS SCHEDULED TO BE PAINTED.
- M. CAULK ALL AROUND NEW DOOR AND WINDOW FRAMES, EA. SIDE.
- N. PROVIDE ADDITIONAL AC LAY-IN CEILING GRID 'T5' AS REQUIRED FOR MECHANICAL DIFFUSER AND GRILL INSTALLATION.
- O. ALL FINISHED WOOD TO BE STAINED AND VAINISHED UNLESS OTHERWISE NOTED.
- P. FINISHED WOOD TO BE PAINTED SHALL BE POPLAR. FINISHED WOOD STAINED & SEALED (S4S) TO BE MAPLE.
- Q. PROVIDE 'J' TRIM AND CAULK JOINT AT ALL GYP. BD. EGES AGAINST MASONRY WALLS & ADJACENT TO DISSIMILAR MATERIALS.
- R. ALL WOOD DOORS SHALL BE PRE-FINISHED. REFER TO OPENING SCHEDULE.
- S. WOOD TRIM SHALL BE PAINTED THE SAME COLOR AS THE ADJACENT WALLS WITH A SEMI-GLOSS FINISH, UNLESS NOTED OTHERWISE.
- T. ANY WAINSCOT INDICATED ON THE ROOM FINISH SCHEDULE SHALL APPLY TO ALL WALLS IN THE ROOM, EXEPT WHERE THERE IS EXISTING WAINSCOT.

BASE:

- CV RBR MANUF: JOHNSONITE
PRODUCT: STANDARD STRAIGHT BASE (AT CARPET FLOORS)
STANDARD COVE BASE (TYP. ALL LOCATIONS)
HEIGHT: 4" x 6"
COLOR: 4B GREY
GAUGE: 1/8"
- VRBR MANUF: JOHNSONITE
PRODUCT: VENTED RUBBER COVE BASE
HEIGHT: 4" x 3"
COLOR: M900 BLACK
GAUGE: 5/16" X 3/8"
- CWB MANUF: JOHNSONITE
PRODUCT: CONTOURED MILLWORK BASE - EQUINOX PROFILE
HEIGHT: 4 1/2"
COLOR: T.B.D.
GAUGE: VAR.

RUBBER BASE NOTES:

1. RUBBER BASE SHALL BE INSTALLED IN MAXIMUM LENGTH FABRICATED
2. PROVIDE PRE-FORMED FACTORY OUTSIDE CORNERS

ROOM FINISH LEGEND

FLOORING

PORCELAIN TILE:

P. TILE-1 MANUF: FLORIDA TILE
PRODUCT: LEVEL 10
SIZE (FLOOR AND WALL): 18" X 36"; NOMINAL FIELD TILE
SIZE (BASE): 3" X 12"
PATTERN: (ON PLAN)
STONE TILE COLOR: PLATINUM SUITE
JOINT WIDTH: 1/8"
GROUT: MAPAI EPOXY IRON - 107"
SUBSTRATE: CONCRETE SLAB (REFER TO MANUF. FOR PREP RECOMM.)

P. TILE-2

MANUF: FLORIDA TILE
PRODUCT: LEVEL 10
SIZE (FLOOR AND WALL): 18" X 18"; NOMINAL FIELD TILE
SIZE (BASE): 3" X 12"
PATTERN: (ON PLAN)
STONE TILE COLOR: PLATINUM SUITE
JOINT WIDTH: 1/8"
GROUT: MAPAI EPOXY IRON - 107"
SUBSTRATE: CONCRETE SLAB (REFER TO MANUF. FOR PREP RECOMM.)

P. TILE-3

MANUF: FLORIDA TILE
PRODUCT: TIME 2.0
SIZE (FLOOR AND WALL): 12" X 12"; MOSAIC
SIZE (BASE): N/A
PATTERN: HORIZONTAL (STACK BOND)
STONE TILE COLOR: CARBON TEXTURED
JOINT WIDTH: 1/8"
GROUT COLOR: MAPAI EPOXY IRON - 107"
SUBSTRATE: CONCRETE SLAB (REFER TO MANUF. FOR PREP RECOMM.)



VINYL:

LVT

MANUF: PATCRAFT
PRODUCT: GLUE-DOWN LUXURY VINYL FLOORING
COLLECTION: STRATIFIED+
SIZE: 12" X 24"
THICKNESS: 2.5 MM
WEAR LAYER THICKNESS: 20 MILS
COLOR: BLEND FROST (00500) 80%, PEWTER (00550) 20%
INSTALLATION: HALF BASKETWEAVE

VCT

MANUF: ARMSTRONG
PRODUCT: VINYL COMPOSITION TILE
COLLECTION: STANDARD EXCELON (TEXTURE, MULTICOLOR)
SIZE: 12 X 12 X 1/8"
COLOR:

- VCT-1: 51860 SOFT COOL GRAY
- VCT-2: 52500 CARNIVAL WHITE
- VCT-3: 57517 BODACIOUS BLUE
- VCT-4: 57515 HOT UPS
- VCT-5: NOT USED
- VCT-6: 51916 DUTCH DELFT

CARPET TILE:

CPT-1

MANUF: PATCRAFT
STYLE: MODULAR
MODEL LINE: ATMOSPHERIC (I0358)
CONSTRUCTION: MULTI-LEVEL PATTERN LOOP
COLOR: PHOENIX (I00560)
DYE METHOD: SOLUTION DYED
BACKING MATERIAL: ECOWORX TILE
SIZE: 18" X 36"
INSTALLATION: HERRINGBONE

CPT-2

MANUF: PATCRAFT
STYLE: MODULAR
MODEL LINE: ATMOSPHERIC (I0358)
CONSTRUCTION: MULTI-LEVEL PATTERN LOOP
COLOR: PHOENIX (I00560)
DYE METHOD: SOLUTION DYED
BACKING MATERIAL: ECOWORX TILE
SIZE: 18" X 36"
INSTALLATION: MONOLITHIC

CPT-3

MANUF: PATCRAFT
STYLE: MODULAR
MODEL LINE: SHADOWGRAPH (I0393)
CONSTRUCTION: MULTI-LEVEL PATTERN LOOP
COLOR: TIME LAPSE (I00500)
DYE METHOD: SOLUTION DYED
BACKING MATERIAL: ECOWORX TILE
SIZE: 9" X 36"
INSTALLATION: HERRINGBONE

CPT-4

MANUF: PATCRAFT
STYLE: BROADLOOM
MODEL LINE: ESTRADA (I0498)
CONSTRUCTION: MULTI-TUFT TIP SHEAR
COLOR: COBRE (I00500)
DYE METHOD: SOLUTION DYED
BACKING MATERIAL: ULTRALOC
SIZE: 20" ROLL
BORDER: 12" INSIDE STORIES PROVED 43730

EPOXY RESIN:

ERF

MANUF.: STONHARD
PRODUCT: STONTEC TRF
THICKNESS: 5 MM
FINISH COLOR: SMOKEY MOUNTAINS
NOTE: CONTRACTOR SHALL PROVIDE A 48" SQ. MOCK UP SAMPLE FOR APPROVAL BY OWNER/ARCHITECT

RUBBER SPORTS FLOOR:

RBR SF

MANUF: ROBBINS SPORTS SURFACES
PRODUCT: RESILIENT SPORTS FLOORING
COLLECTION: GALAXY CLASSIC
ROLL SIZE: 4W X 40L
THICKNESS: 3/8"
INSTALLATION: GLUE DOWN
COLOR: BLUE GRAY

SEALED CONCRETE:

S.CONC.

MANUF: BEHR
PRODUCT: LOW LUSTER SEALER (2 COATS)

BASE:

WD BASE

MANUF: THE MOULDING SOURCE, INC.
PRODUCT: BASEBOARD MS2407
HEIGHT: 4.375"
MATERIAL: FINGER JOINTED PINE
FINISH: PAINT

CEILING

ACOUSTICAL CEILING TILE:

ACT-1

MANUF: ARMSTRONG COMMERCIAL
STYLE: ULTIMA BEVELED REGULAR
SIZE: #1912 24" X 24"
TILE COLOR: WHITE
GRID STYLE: PRELUDE 9/16" TEE
GRID COLOR: WHITE

ACT-2

MANUF: ARMSTRONG COMMERCIAL
STYLE: CERAMAGUARD
SIZE: #607 24" X 24"
TILE COLOR: WHITE
GRID STYLE: PRELUDE 9/16" TEE
GRID COLOR: WHITE

PAINT:

PNT-7

APPLICATION: CEILING PAINT
MANUF.: SHERWIN WILLIAMS
PRODUCT: LATEX
COLOR: CEILING BRIGHT WHITE (7007)
FINISH: FLAT

WALL FINISHES

PAINT:

PNT-1

APPLICATION: WALL PAINT
MANUF: SHERWIN WILLIAMS
PRODUCT: LATEX
COLOR: REPOSE GRAY (7015)
FINISH: EGGSHELL

PNT-2

APPLICATION: WALL PAINT
MANUF.: SHERWIN WILLIAMS
PRODUCT: LATEX
COLOR: T.B.D.
FINISH: EGGSHELL

PNT-3

APPLICATION: ACCENT WALL PAINT
MANUF.: SHERWIN WILLIAMS
PRODUCT: LATEX
COLOR: JACARANDA (6802)
FINISH: EGGSHELL

PNT-4

APPLICATION: ACCENT WALL PAINT
MANUF.: SHERWIN WILLIAMS
PRODUCT: LATEX
COLOR: HOMBURG GRAY (7622)
FINISH: EGGSHELL

PNT-5

APPLICATION: HM FRAMES/ DOORS
MANUF.: SHERWIN WILLIAMS
PRODUCT: ALKYD
COLOR: T.B.D.
FINISH: SEMI-GLOSS

PNT-6

APPLICATION: HM FRAMES/ DOORS
MANUF.: SHERWIN WILLIAMS
PRODUCT: ALKYD
COLOR: MATCH ADJACENT WALL COLOR
FINISH: SEMI-GLOSS

PNT-8

APPLICATION: CMU WALL PAINT
MANUF.: SHERWIN WILLIAMS
PRODUCT: EPOXY
COLOR: T.B.D.
FINISH: EGGSHELL
NOTE: PROVIDE (2) COATS EPOXY PRIMER AND A 3-5 MIL FINISH COAT

PNT-9

APPLICATION: PROJECTION SCREEN WALL PAINT
MANUF.: SHERWIN WILLIAMS
PRODUCT: PROCLASSIC SMOOTH ENAMEL
COLOR: EXTRA WHITE
FINISH: SATIN
NOTE: PROVIDE MIN. 2 FINISH COATS ON LEVEL 5 DRYWALL FINISH

PNT-10

APPLICATION: BRICK WALL PAINT
MANUF.: SHERWIN WILLIAMS
PRODUCT: EPOXY
COLOR: WHITE
FINISH: GLOSS
NOTE: PROVIDE (2) COATS EPOXY PRIMER AND A 3-5 MIL FINISH COAT

PORCELAIN TILE:

P. TILE-4

MANUF: FLORIDA TILE
PRODUCT: CERAMIC WALL TILE
SIZE: 3" X 6"; NOMINAL FIELD TILE
PATTERN: RUNNING BOND
TILE COLOR: ARCTIC (310)
JOINT WIDTH: 1/16"
GROUT COLOR: OO WHITE
SUBSTRATE: 1/2" DUROCK TILE BACKER (OR EQUAL)
ACCESSORIES: SCHLUTER JOLLY EDGE (@VERT. CORNERS AND TOP EDGE)

P. TILE-5

MANUF: FLORIDA TILE
PRODUCT: CERAMIC WALL TILE
SIZE: 3" X 6"; NOMINAL FIELD TILE
PATTERN: RUNNING BOND, SOLDIER (REFER TO INT. ELEVATIONS)
TILE COLOR: DORIAN (311)
JOINT WIDTH: 1/16"
GROUT COLOR: 107 IRON
SUBSTRATE: 1/2" DUROCK TILE BACKER (OR EQUAL)
ACCESSORIES: SCHLUTER JOLLY EDGE (@VERT. CORNERS AND TOP EDGE)

GYPSUM WALL BOARD:

A. GYPSUM WALLBOARD SUPPORT SYSTEM SHALL CONSIST OF METAL STUDS AS INDICATED ON THE PLANS. STUD SPACING SHALL BE 16" O.C. UNLESS NOTED OTHERWISE ON PLANS.

- B. ALL GYPSUM WALLBOARD SHALL BE TAPED AND SANDED IN A MINIMUM 3 STEP FINISH PROCESS. ALL JOINTS, NAIL/SCREW DEPRESSIONS, ETC. SHALL BE FILED AND OR TAPED WITH A JOINT COMPOUND AS RECOMMENDED BY THE GYPSUM ASSOCIATION. THE GC SHALL TAKE SPECIAL CARE TO LEAVE THE PAPER PANEL FACES UNDISTURBED. INSTALL STANDARD SQUARE EDGE CORNER BEAD AT ALL RETURNS/CORNERS, AT INTERIOR WINDOW OPENINGS. IN ADDITION TO THE STANDARD FINISHING ACCESSORIES. ALL ACCESSORIES SHALL BE INSTALLED AND FINISHED AS RECOMMENDED BY THE GYPSUM ASSOCIATION.

- C. PROVIDE 5/8" GYP. BOARD AT ALL LOCATIONS U.O.N.

GYP. BD.-1


MANUF: NATIONAL GYPSUM
PRODUCT: TYPE 'X' GYPSUM BOARD
THICKNESS: 5/8"

GYP. BD.-2

MANUF: NATIONAL GYPSUM
PRODUCT: HI IMPACT XP
THICKNESS: 5/8"

GYP. BD-3


MANUF: NATIONAL GYPSUM
PRODUCT: MOLD AND MOISTURE RESISTANT XP GYPSUM BOARD
THICKNESS: 5/8"

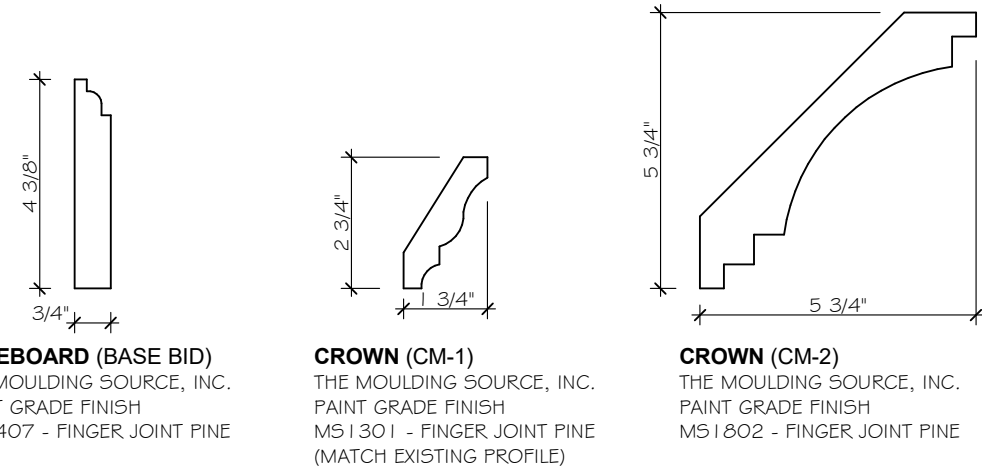

1
A603

FINISH TRIM PROFILES

SCALE: 3" = 1'-0"

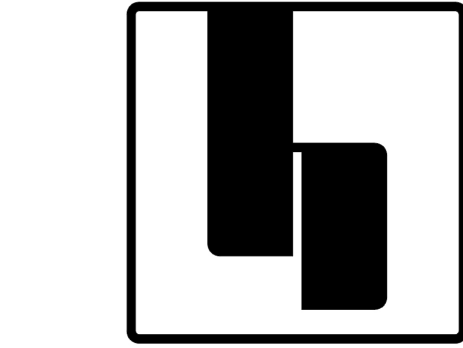

hostetlerarchitecture

■ ARCHITECTURE ■ PLANNING

3967 MARKET STREET
WILMINGTON, NC 28403
PHONE: 910.612.1119

www.hostetlerarchitecture.com

CONSULTANTS

RENOVATIONS TO

GRACE
BAPTIST
CHURCH

WILMINGTON
NORTH CAROLINA

HOSTETLER ARCHITECTURE
STATE REGISTRATION



ARCHITECT OF RECORD
SHAWN E. HOSTETLER
11926



CONSTRUCTION DOCUMENTS : 02.08.19

REVISIONS		
MARK	DATE	DESCRIPTION
2	04.09.19	BIDDER CLARIFICATIONS
DRAWN BY:		PROJ. MGR.
SHEET CONTENT		

SANCTUARY BUILDING ROOM FINISH
SCHED., FINISH LEGEND, DETAIL

JOB NO.
18013

SHEET
A603

©2018