

ROOM FINISH SCHEDULE													
NO.	ROOM	FLOOR	BASE	WAINS	WALLS		CEILING		WOOD	METAL	KEYNOTE	REMARKS	
					MAT	FINISH	MAT.	FINISH					
MESHAW BUILDING 'BASE BID'													
M100	FOYER	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M101	CLOSET	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M102	CLOSET	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M103	WALL STOR.	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M104	FELLOWSHIP HALL	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M105	CORR	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M106	WOMEN	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M107	MEN	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M108A	KITCHEN	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M108B	EQUIPMENT	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M108C	DIETITIAN	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M109	CORRIDOR	VCT-1	4" CV RBR	---	GYP. BD.-2	PNT-1	ACT-1	---	---	PNT-5	3	1	
M110	STORAGE	EXISTING S. CONC.	4" CV RBR	*FRP	GYP. BD.-1	PNT-1	ACT-1	---	**PNT-1	---		*8'-0" HIGH WAINSCOT **PAINT ANY WOOD TRIM TO MATCH ADJ. WALL COLOR IN A SEMI-GLOSS FINISH	
M111A	YOUTH	CORR. EXIST. VCT	4" CV RBR	---	GYP. BD-1	PNT-1, PNT-9	ACT-1	---	---	PNT-5	1,6	*EXISTING VCT TO REMAIN	
M111B	CLOSET	*	*	---	*	---	*	---	---	---		*EXISTING TO REMAIN	
M111C	CLOSET	*	*	---	*	---	*	---	---	---		*EXISTING TO REMAIN	
M112	OFFICE	CPT-2	4" CV RBR	---	GYP. BD.-1	PNT-1	GYP. BD.-1	PNT-7	---	PNT-5			
M113	CORRIDOR	VCT-1	4" CV RBR	---	GYP. BD.-2	PNT-1	ACT-1	---	---	PNT-5	3		
M114	WOMEN	P. TILE-1**	P. TILE-4	P. TILE-4, P. TILE-5*	GP. BD.-3	PNT-1	ACT-2	---	---	PNT-5	3	*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND **DEMO EXISTING FLOOR TILE	
M115	MEN	P. TILE-1**	P. TILE-4	P. TILE-4, P. TILE-5*	GYP. BD.-3	PNT-1	ACT-2	---	---	PNT-5	3	*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND **DEMO EXISTING CERAMIC MOSAIC TILE	
M116	CUSTODIAN	VCT-1	4" CV RBR	---	GYP. BD-3	PNT-1	ACT-1	---	---	PNT-5	3	2	
M117	REFEREE	EXISTING	6" CV RBR	---	GYP. BD-3	PNT-1	ACT-2	---	---	PNT-5	3	EXISTING FIBERGLASS SHOWER SHELL TO REMAIN	
M118A	LOCKER ROOM	ERF	6" CV RBR	---	CMU / GYP. BD.-2	PNT-2, PNT-8	ACT-2	---	STAIN & SEAL	PNT-5	3		
M118B	TOILETS	EXISTING TILE	P. TILE-4	P. TILE-4, P. TILE-5*	EXISTING CMU / GYP. BD.-2	PNT-8, PNT-2	ACT-2**	---	---	---	3	*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND **INSTALL NEW TILE IN EXISTING GRID (PAINT GRID GLOSS WHITE)	
M118C	SHOWERS	*	*	*	*	*	ACT-2**	---	---	---		*EXISTING TO REMAIN **WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND	
M119A	LOCKER ROOM	ERF	6" CV RBR	---	CMU / GYP. BD.-2	PNT-2, PNT-8	ACT-2	---	STAIN & SEAL	PNT-5	3		
M119B	TOILETS	EXISTING TILE	P. TILE-4	P. TILE-4, P. TILE-5*	EXISTING CMU / GYP. BD.-2	PNT-8, PNT-2	ACT-2**	---	---	---	3	*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND **INSTALL NEW TILE IN EXISTING GRID (PAINT GRID GLOSS WHITE)	
M119C	SHOWER	*	*	*	*	*	ACT-2**	---	---	---		*EXISTING TO REMAIN **WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND	
M119D	VEST.	ERF	6" CV RBR	---	CMU / GYP. BD.-2	PNT-8, PNT-2	ACT-1	---	---	PNT-5	3		
M120A	VEST.	VCT-1	4" CV RBR	---	*CMU / GYP. BD.-2	PNT-8, PNT-2	ACT-1	---	---	PNT-5	3	*EXISTING CMU, PREP FOR NEW FINISH	
M120B	PE STORAGE	EXISTING S. CONC.	4" CV RBR	---	*CMU / GYP. BD.-2	PNT-8, PNT-2	ACT-1	---	---	PNT-5	3	*EXISTING CMU, PREP FOR NEW FINISH	
M121	COACH OFFICE	CPT-2	4" CV RBR	---	CMU / GYP. BD.-1	PNT-1	ACT-1	---	---	PNT-5	3		
M122	LOBBY	VCT-1	4" CV RBR	---	GYP. BD.-2	PNT-1	ACT-1	---	---	PNT-5	3,5		
M123A	GYMNASIUM	WD*	4" CV RBR	---	GYP. BD.-2**	PNT-1 (ALL WALLS)	EXISTING	---	PNT-5	PNT-5	3	*\$45 NEW GYM FLOOR SYSTEM; PAINT LINES AS SHOWN ON PLAN **GYP. BD TO 12'-0" A.F.F.	
M124A	LOBBY	EXISTING	3" P. TILE*	---	GYP. BD.-2	PNT-1	GYP. BD.-1 / ACT-1	PNT-7	---	PNT-5	3	*MATCH EXISTING FLOOR TILE	
M124B	STORAGE	EXISTING	3" P. TILE*	---	GYP. BD.-2	PNT-1	ACT-1	---	---	PNT-5	3	*MATCH EXISTING FLOOR TILE	
M124C	STORAGE	EXISTING	3" P. TILE*	---	GYP. BD.-2	PNT-1	ACT-1	---	---	PNT-5	3	*MATCH EXISTING FLOOR TILE	
M125A	LOBBY	VCT-1**	4" CV RBR	---	*	PNT-8	*	*	---	PNT-5	6	*EXISTING TO REMAIN **VCT ACCENT COLORS: VCT-3, VCT-6	
M125B	CLOSET	VCT-1**	4" CV RBR	---	*	*	*	*	---	---	6	*EXISTING TO REMAIN **VCT ACCENT COLORS: VCT-3, VCT-6	
M126A	WEIGHT ROOM	RBR 5F	4" CV RBR	---	*	*	*	*	---	---			
M126B	BALL ROOM	*	*	*	*	*	*	*	*	*		*NOT IN CONTRACT	
M127	LOBBY	VCT-1**	4" CV RBR	---	*	PNT-8	*	*	---	PNT-5	6	*EXISTING TO REMAIN **VCT ACCENT COLORS: VCT-3, VCT-6	
M128A	STAGE	*	*	*	*	*	*	*	*	*		*EXISTING TO REMAIN	
M128B	STAIR	*	*	*	*	*	*	*	*	*		*EXISTING TO REMAIN	
M128C	STAIR	*	*	*	*	*	*	*	*	*		*EXISTING TO REMAIN	

ROOM FINISH SCHEDULE													
NO.	ROOM	FLOOR	BASE	WAINS	WALLS		CEILING		WOOD	METAL	KEYNOTE	REMARKS	
					MAT	FINISH	MAT.	FINISH					
M129	STORAGE	*	*	*	*	*	*	*	*	*		*EXISTING TO REMAIN	
M130	STORAGE	*	*	*	*	*	*	*	*	*		*EXISTING TO REMAIN	
MESHAW BUILDING ALTERNATE 'M-2'													
M117	REFEREE	ERF	4" ERF	~~	GYP. BD-3	PNT-1	ACT-2	~~	~~	PNT-5	3	EXISTING FIBERGLASS SHOWER SHELL TO REMAIN	
M118A	LOCKER ROOM	ERF	4" ERF	~~	CMU / GYP. BD.-2	PNT-2, PNT-8	ACT-2	~~	STAIN & SEAL	PNT-5	3		
M118B	SECURE STOR.	S. CONC.	4" CV RBR	~~	CMU	PNT-8	ACT-1	~~	~~	PNT-5	3		
M118C	TOILETS	CMT	CMTB	P. TILE-4, P. TILE-5*	CMU / GYP. BD.-2	PNT-8, PNT-2	ACT-2	~~	~~	PNT-5	3	*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND AT TOILET WET WALL	
M118D	SHOWER	CMT	CMTB	P. TILE-4, P. TILE-5*	CMU	PNT-8	ACT-2	~~	~~	~~		*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND	
M118E	SHOWER	CMT	CMTB	P. TILE-4, P. TILE-5*	CMU	PNT-8	ACT-2	~~	~~	~~		*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND	
M119A	LOCKER ROOM	ERF	4" ERF	~~	CMU / GYP. BD.-2	PNT-2, PNT-8	ACT-2	~~	STAIN & SEAL	PNT-5	3		
M119B	SECURE STORAGE	S. CONC.	4" CV RBR	~~	CMU / GP. BD.-2	PNT-8, PNT-2	ACT-1	~~	~~	PNT-5	3		
M119C	TOILETS	CMT	CMTB	P. TILE-4, P. TILE-5	EXISTING CMU/ GYP. BD.-2	PNT-8, PNT-2	ACT-2	~~	~~	~~	3	*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND AT TOILET WET WALL	
M119D	SHOWER	CMT	CMTB	P. TILE-4, P. TILE-5*	CMU	PNT-8	ACT-2	~~	~~	~~		*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND	
M119E	SHOWER	CMT	CMTB	P. TILE-4, P. TILE-5*	CMU	PNT-8	ACT-2	~~	~~	~~		*WAINSCOT TO 6'-0" A.F.F. W/ P. TILE-2 ACCENT BAND	
M120	COACH OFFICE	CPT-2	4" CV RBR	~~	GYP. BD.-1 / CMU	PNT-2, PNT-8	ACT-1	~~	~~	PNT-5			
M121	OPEN OFFICE	CPT-2	4" CV RBR	~~	GYP. BD.-1 / CMU	PNT-2, PNT-8	ACT-1	~~	~~	PNT-5			
M122	LOBBY	VCT-1	4" CV RBR	~~	GYP. BD.-2	PNT-1	ACT-1	~~	~~	PNT-5	3,5	REFER TO PLAN FOR SMALLER SIZE	
M123B	DAY STOR.	CPT-1	4" CV RBR	~~	GYP. BD.-2	PNT-1	ACT-1	~~	*	PNT-5	3	*REFER TO CASEWORK ELEVATIONS FOR FINISH	
M123C	PE STORAGE	VCT-2	4" CV RBR	~~	GYP. BD.-2 / CMU	PNT-2, PNT-8	ACT-1	~~	~~	PNT-5	6	VCT ACCENT COLORS: VCT-3, VCT-4	
M128A	STAGE	VCT-2,3,4	4" CV RBR	~~	*	PNT-1	ACT-2	~~	**PNT	~~	4	*EXISTING TO REMAIN **WOOD PAINT FINISH TO MATCH ADJACENT WALL	
M128B	STAIR	VCT-2	4" CV RBR	~~	*GYP. BD.-2	PNT-1	EXISTING	~~	**PNT	~~	8	*EXISTING TO REMAIN **WOOD PNT FINISH TO MATCH ADJACENT WALL	
M128C	STAIR	VCT-2	4" CV RBR	~~	*GYP. BD.-2	PNT-1	EXISTING	~~	**PNT	~~	8	*EXISTING TO REMAIN **WOOD PNT FINISH TO MATCH ADJACENT WALL	
MESHAW BUILDING ALTERNATE 'M-3'													
M123A	GYMNASIUM	WD	4" V RBR	~~	GYP. BD.-2	PNT-1 (ALL WALLS)	VINYL*	~~	\$45, PNT-5	PNT-5	3	*PROVIDE AND INSTALL NEW R-19 UNFACED INSUL. BETWEEN PURLINS AND NEW VINYL LINER SYSTEM.	


RFS ABBREVIATIONS

ACT	2X2 ACOUSTIC LAY-IN CEILING TILE
P. TILE	PORCELAIN TILE
VCT	VINYL COMPOSITION TILE
LVT	LUXURY VINYL TILE FLOORING
S. CONC	SEALED CONCRETE
CPT	CARPET TILE
WD	WOOD GYM FLOOR SYSTEM (SEE DTL 1/A302)
RBR 5F	RUBBER SPORTS FLOOR
CMT	CERAMIC MOSAIC TILE
CMTB	CERAMIC MOSAIC TILE BASE
ERF	EPOXY RESIN FLOORING
3" P.TILE	3" PORCELAIN BASE
VRBR	VENTED RUBBER BASE
CV. RBR	COVED RUBBER BASE
CWB	CONTOURED VINYL WALL BASE
WD BASE	WOODASE TRIM
PNT	PAINT

GYP. BD.	GYPSUM WALLBOARD
FRP	FIBERGLASS REINFORCED PANEL

RFS KEYNOTES

1. PROVIDE ACCENT WALL COLOR THIS ROOM, REFER TO FLOOR PLAN SHEETS A1XX FOR LOCATIONS.
2. PROVIDE 12" SOLID CARPET BORDER
3. GYP. BOARD WALLS IN THIS ROOM SHALL HAVE A KNOCK DOWN TEXTURE FINISH.
4. ROOM SHALL RECEIVE A TWO COLOR VCT ACCENT BORDER.
5. ROOM SHALL RECEIVE A SINGLE COLOR VCT BORDER.
6. BLEND ACCENT VCT COLORS TO 20% OF THE TOTAL FIELD.
7. SCRAPE EXISTING POPCORN CEILING TEXTURE, PREP FOR SMOOTH CEILING FINISH AND PAINT.
8. PROVIDE RUBBER TREADS AND RISERS AT THE STAIRS. (JOHNSONITE CUBIS TEXTURE OR APPROVED EQUAL)
9. PROVIDE CROWN MOLDING CROWN-1, REFER TO TRIM DETAIL 1/A603.
10. PROVIDE CROWN MOLDING CROWN-2, REFER TO TRIM DETAIL 1/A603.

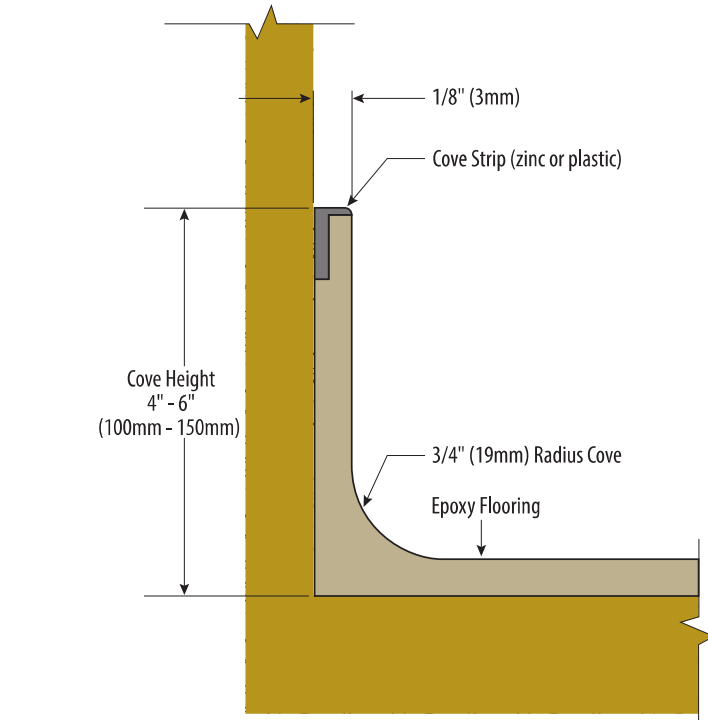


EPOXY RESIN COVED BASE DETAIL

NOT TO SCALE

GENERAL NOTES:

- A. REFER TO INTERIOR ELEVATIONS (SHEETS A5XX) FOR CASEWORK FINISHES.
- B. ALL INTERIOR GYPSUM BOARD WALLS SHALL BE A SMOOTH LEVEL 4 FINISH UNLESS NOTED OTHERWISE ON THE RFS. W/ (1) PRIMER COAT AND (2) FINISH COATS. ALL BATHROOM WALLS TO RECEIVE SEMI-GLOSS FINISH. ALL OTHER WALLS SHALL RECEIVE AN EGGSHELL FINISH.
- C. ALL CEILINGS SHALL HAVE A SMOOTH FINISH AND PAINT WITH (1) PRIMER COAT AND (2) FINISH COATS.
- D. ALL EXPOSED DRYWALL SURFACES SHALL BE PAINTED WITH (1) COAT OF PRIMER AND (2) FINISH COATS OF LATEX PAINT ON INTERIOR, AND ACRYLIC ON THE EXTERIOR.
- E. ALL EXPOSED MTL IS TO BE PAINTED IN ROOMS SCHEDULED TO BE PAINTED. EXPOSED MTL INCLUDES, BUT IS NOT LIMITED TO HOLLOW MTL DOORS AND FRAMES, HANDRAILS, DUCTWORK, PIPING, RAILINGS, STAIR STRINGERS, EXPOSED STEEL JOISTS, CONDUIT, STEEL DECK AND LINTELS. COORD. W/ ELEC., MECH., AND PLUMBING CONTRACTOR.
- F. ALL MASONRY WALLS SCHEDULED TO BE PAINTED SHALL BE PAINTED W/ EPOXY PAINT.
- G. PROVIDE BULLNOSE BLOCK FOR ALL EXPOSED OUTSIDE CORNERS (TYP.)
- H. PROVIDE AND INSTALL VINYL TRANSITION STRIP AND METAL TRACK WHERE NEW FLOORS TERMINATE AND BETWEEN DISSIMILAR FLOORING MATERIALS.
- J. ALL GYPSUM BOARD TO BE 5/8" TYPE 'X' UNLESS OTHERWISE NOTED.
- K. ALL NEW MTL STUD PARTITIONS TO BE FILLED WITH 3" SOUND BATT. INSULATION, FULL HT.
- L. CAULK ALL JOINTS BETWEEN DISSIMILAR MATERIALS ON WALLS SCHEDULED TO BE PAINTED.
- M. CAULK ALL AROUND NEW DOOR AND WINDOW FRAMES, EA. SIDE.
- N. PROVIDE ADDITIONAL AC LAY-IN CEILING GRID 'TS' AS REQUIRED FOR MECHANICAL DIFFUSER AND GRILL INSTALLATION.
- O. ALL FINISHED WOOD TO BE STAINED AND VARNISHED UNLESS OTHERWISE NOTED.
- P. FINISHED WOOD TO BE PAINTED SHALL BE POPLAR. FINISHED WOOD STAINED & SEALED (\$45) TO BE MAPLE.
- Q. PROVIDE 'J' TRIM AND CAULK JOINT AT ALL GYP. BD. EGES AGAINST MASONRY WALLS & ADJACENT TO DISSIMILAR MATERIALS.
- R. ALL WOOD DOORS SHALL BE PRE-FINISHED. REFER TO OPENING SCHEDULE.
- S. WOOD TRIM SHALL BE PAINTED THE SAME COLOR AS THE ADJACENT WALLS WITH A SEMI-GLOSS FINISH, UNLESS NOTED OTHERWISE.
- T. ANY WAINSCOT INDICATED ON THE ROOM FINISH SCHEDULE SHALL APPLY TO ALL WALLS IN THE ROOM, EXEPT WHERE THERE IS EXISTING WAINSCOT.

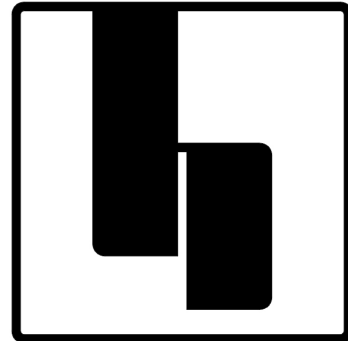

hostellerarchitecture

■ ARCHITECTURE ■ PLANNING

3967 MARKET STREET
WILMINGTON, NC 28403

PHONE: 910.612.1119

www.hostellerarchitecture.com

CONSULTANTS



RENOVATIONS TO

GRACE BAPTIST CHURCH

WILMINGTON
NORTH CAROLINA

HOSTELLER ARCHITECTURE
STATE REGISTRATION



ARCHITECT OF RECORD
SHAWN E. HOSTELLER
11926



CONSTRUCTION DOCUMENTS : 02.08.19

REVISIONS		
MARK	DATE	DESCRIPTION
1	03.19.19	CONTRACTOR CLARIFICATIONS
2	04.09.19	BIDDER CLARIFICATIONS
DRAWN BY:		PROJ. MGR.
SHEET CONTENT		

MESHAW BUILDING ROOM FINISH
SCHEDULE, NOTES, DETAILS

JOB NO.
18013

SHEET
A604