

GENERAL NOTES

- A. UNLESS INDICATED OTHERWISE, ALL COUNTERTOPS:
• 3'-0" AFF OR 3'-0" TO TOP OF RIM AT DROP-IN SINKS AND LAVATORIES WHERE OCCURS
• 2'-6" DEEP
• BLACK EPOXY RESIN, 1" THICK
• BACKPLASHES: 4" HIGH AT PERIMETER AND AS NOTED
- B. UNLESS INDICATED OTHERWISE, ALL BASE CABINET(S):
• 22" DEEP NOMINAL
• TOE KICKS: 4" HIGH AND 3" DEEP
- C. UNLESS INDICATED OTHERWISE, ALL WALL CABINET(S):
• 1'-1" DEEP NOMINAL
• 2'-6" HIGH
• TOP AT 7'-0" AFF
- D. PROVIDE SOLID BLOCKING FOR ALL WALL MOUNTED ITEMS
- E. INSTALL RUBBER BASE ON THE BASE OF ALL CASEWORK
- F. BUILT-IN EQUIPMENT: SIZE OPENING (HEIGHT, WIDTH, AND DEPTH) AND ROUGH-IN REQUIREMENTS AS REQUIRED BASED ON APPROVED MANUFACTURER SUBMITTED.
- G. ALL SHELVES: ADJUSTABLE UNLESS INDICATED OTHERWISE
- H. PROVIDE FINISH END PANELS AT ALL EXPOSED CASEWORK ENDS.
- I. LOCKS: AS INDICATED.
- J. MOUNT ALL WHITE BOARDS AND CHALK BOARDS AT 4'-0" AFF, UNO
- K. TALL STORAGE CABINETS SHALL BE SECURED TO THE WALL TO PREVENT TIPPING
- L. ALL LAB EQUIPMENT IS OFCI
- M. CM SHALL COORDINATE WITH OWNER FOR LOCATIONS OF OFCI PROJECTORS
- N. REFER TO SINK SCHEDULE FOR IDENTIFICATION OF FIXTURES AND ACCESSORIES

SCIENCE CASEWORK KEYNOTES

REPRESENTED BY [n]
APPLIES TO DRAWINGS A7.4.1 - A7.4.n

- 1 RUBBER BASE
- 2 KNEE SPACE
- 3 BACK PANEL
- 4 END PANEL
- 5 SLIDING GLASS DOORS
- 6 FILLER PANEL
- 7 LOCK
- 8 FUME HOOD SHROUD, EXTEND TO CEILING
- 9 UMBILICAL; SEE DETAIL n/A7.4.X
- 10 WALL SHELVING; SEE DETAIL n/A7.4.X
- 11 DRYING RACK; SEE DETAIL n/A7.4.X
- 12 ADJUSTABLE REAGENT SHELVING
- 13 REAGENT SHELVING; SEE DETAIL n/A7.4.X
- 14 ELECTRICAL RACEWAY

Dobo Hall Renovation - Package A

SCO PROJECT NO. 18-19798-01A

UNC Wilmington

4978 CAHILL DR, WILMINGTON, NC 28403


PROJECT NO. 5809999 DATE: MARCH 27, 2019

REVISIONS

DATE DESCRIPTION

ENLARGED LAB
PLANS AND
ELEVATIONS

A7.4.9

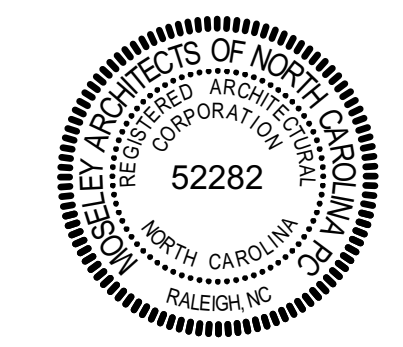

MOSELEYARCHITECTS

911 N. WEST STREET, SUITE 205 RALEIGH, NORTH CAROLINA 27603
PHONE (919) 840-0691
MOSELEYARCHITECTS.COM