


The Wilmington Food Bank

Wilmington, North Carolina

November 10, 2021

Project Manual

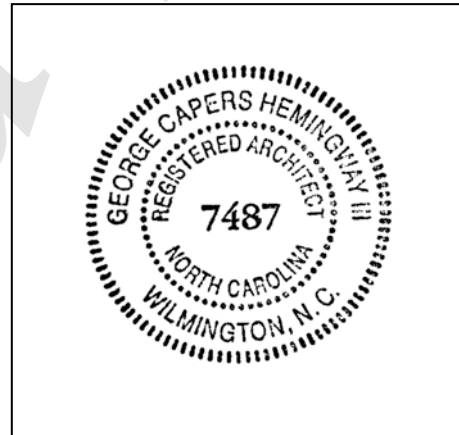

BOWMAN MURRAY HEMINGWAY ARCHITECTS

514 Market Street
Wilmington, North Carolina

The Wilmington Food Bank
Wilmington, North Carolina
TABLE OF CONTENTS

Division	Section Title	Pages

PROCUREMENT AND CONTRACTING DOCUMENTS GROUP

DIVISION 00 - PROCUREMENT AND CONTRACTING REQUIREMENT

A105-2007 Contract.....	12
Amended and Supplementary Conditions	5
G702/G703 Payment Application Forms.....	2
G706A Contractor's Affidavit of Release of Liens	1

SPECIFICATIONS GROUP

General Requirements Subgroup

Facility Construction Subgroup

DIVISION 02 - EXISTING CONDITIONS

02 36 10..... Termite Control	3

DIVISION 03 - CONCRETE

03 30 00..... Cast-in-Place Concrete	18

DIVISION 05 - METALS

05 50 00..... Metal Fabrications	11
05 52 13..... Pipe and Tube Railings.....	4

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES

06 40 20..... Interior Architectural Woodwork	7
06 64 00..... Plastic Paneling	2

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

07 21 00..... Thermal Insulation	7
07 24 19..... Water-Drainage Exterior Insulation and Finish System (EIFS).....	6
07 42 13..... Metal Composite Material Wall Panels.....	5
07 62 00..... Sheet Metal Flashing and Trim	9
07 72 00..... Roof Accessories	5
07 90 00..... Joint Sealants	8

The Wilmington Food Bank
Wilmington, North Carolina
TABLE OF CONTENTS

Division	Section Title	Pages
DIVISION 08 - OPENINGS		
08 11 13.....	Hollow Metal Doors and Frames	8
08 14 16.....	Flush Wood Doors.....	6
08 63 13.....	Sectional Doors	7
08 41 13.....	Aluminum Entrances and Storefronts	10
08 62 23.....	Tubular Daylighting Devices	7
08 71 00.....	Door Hardware	17
08 80 00.....	Glazing	8
DIVISION 09 – FINISHES		
09 30 00.....	Tiling	12
09 51 13.....	Acoustical Panel Ceilings.....	9
09 91 13.....	Exterior Painting.....	4
09 91 23.....	Interior Painting.....	7
DIVISION 10 – SPECIALTIES		
10 14 19.....	Signage	11
10 14 19.....	Dimensional Letter Signage	6
10 21 13.....	Plastic Toilet Compartments	4
10 26 10.....	Stainless Steel Wall Panels.....	3
10 28 00.....	Toilet, Bath, and Laundry Accessories	5
10 44 13.....	Fire Extinguishers Cabinets and Accessories.....	3
10 56 13.....	Metal Storage Shelving	5
10 73 10.....	Overhead Canopies.....	5
DIVISION 11 – EQUIPMENT		
11 13 13.....	Loading Dock Bumpers.....	2
11 13 16.....	Loading Dock Seals & Shelters.....	1
11 31 10.....	Residential and Commercial Appliances	4
DIVISION 12 - FURNISHINGS		
12 21 13.....	Horizontal Louver Blinds	4
12 24 13.....	Roller Shades.....	4

The Wilmington Food Bank
Wilmington, North Carolina
TABLE OF CONTENTS

Division	Section Title	Pages

DIVISION 21 – FIRE SUPPRESSION

21 13 13.....	Wet-Pipe Sprinkler Systems.....	11
21 31 13.....	Electrical-Drive, Centrifugal Fire Pumps.....	6
21 34 13.....	Pressure-Maintenance Pumps.....	3
21 13 13.....	Wet-Pipe Sprinkler Systems.....	11

DIVISION 22 – PLUMBING

22 05 13.....	General Plumbing.....	7
22 05 17.....	Sleeves and Sleeve Seals for Plumbing Piping	3
22 05 18.....	Escutcheons for Plumbing Piping	2
22 05 19.....	Meters and Gages for Plumbing Piping	4
22 05 23.12....	Ball Valves for Plumbing Piping.....	4
22 05 23.14....	Check Valves for HVAC Piping	4
22 05 29.....	Hangers and Supports for HVAC Piping and Equipment.....	7
22 05 53.....	Identification for Plumbing Piping and Equipment	5
22 07 19.....	Plumbing Piping Insulation	11
22 11 16.....	Domestic Water Piping	8
22 11 19.....	Domestic Water Piping Specialties	3
22 11 23.....	Facility Natural-Gas Piping.....	11
22 13 16.....	Storm, Sanitary Waste and Vent Piping.....	7
22 13 19.....	Sanitary Waste Piping Specialties.....	4
22 13 19.13....	Sanitary Drains	2
22 14 23.....	Storm Drainage Piping Specialties.....	2
22 34 00.....	Fuel-Fired, Domestic-Water Heaters	7
22 42 13.13....	Commercial Water Closets.....	3
22 42 13.16....	Commercial Urinals	3
22 42 16.16....	Commercial Sinks	3
22 42 16.13....	Commercial Lavatories	4
22 42 23.....	Commercial Showers	2
22 47 16.....	Pressure Water Coolers	3

DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

23 00 00.....	General Mechanical.....	6
23 05 17.....	Sleeves and Sleeve Seals for HVAC Piping	2
23 05 18.....	Escutcheons for HVAC Piping.....	1
23 05 29.....	Hangers and Supports for HVAC Piping and Equipment.....	6
23 05 48.13....	Vibration Controls for HVAC.....	2
23 05 53.....	Identification for HVAC Piping and Equipment.....	3
23 05 93.....	Testing, Adjusting, and Balancing for HVAC	8
23 07 13.....	Duct Insulation	9

The Wilmington Food Bank
Wilmington, North Carolina
TABLE OF CONTENTS

Division	Section Title	Pages
23 07 19.....	HVAC Piping Insulation	6
23 23 00.....	Refrigerant Piping	4
23 31 13.....	Metal Ducts	13
23 33 00.....	Air Duct Accessories.....	7
23 34 23.....	HVAC Power Ventilators.....	4
23 37 13.....	Diffusers, Registers, and Grilles.....	2
23 74 16.11.....	Packaged, Small-Capacity, Rooftop Air Conditioners.....	5
23 81 26.18.....	Split Ductless Systems	3
23 82 39.16.....	Propeller Unit Heaters	3
23 91 19.....	Fixed Louvers.....	2

DIVISION 26 – ELECTRICAL

26 05 00.....	General Electrical	14
26 05 19.....	Building Wiring and Cable.....	7
26 05 26.....	Grounding and Bonding	7
26 05 29.....	Hangers and Support	4
26 05 33.....	Raceways and Boxes for Electrical Systems.....	13
26 05 53.....	Electrical Identification	3
26 05 80.....	Equipment Wiring Systems.....	6
26 24 16.....	Panelboards	5
26 24 21.....	Utility Service Entrance	2
26 27 26.....	Wiring Devices.....	7
26 27 27.....	Occupancy Sensors.....	5
26 28 16.....	Enclosed Switches	3
26 28 17.....	Enclosed Circuit Breakers	4
26 43 13.....	Surge Protective Devices for Low-Voltage Electrical Power Circuits	4
26 51 00.....	Interior Luminaires.....	5
26 52 00.....	Emergency and Exit Lighting.....	7

DIVISION 27 - COMMUNICATIONS

27 05 00.....	Data and Voice Communications.....	13
27 05 10.....	Telecommunications Pathways	2

END TABLE OF CONTENTS



AIA[®] Document A105[™] – 2017

Standard Short Form of Agreement Between Owner and Contractor

AGREEMENT made as of the _____ day of _____
in the year _____
(In words, indicate day, month and year.)

BETWEEN the Owner:
(Name, legal status, address and other information)

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

and the Contractor:
(Name, legal status, address and other information)

for the following Project:
(Name, location and detailed description)

The Architect:
(Name, legal status, address and other information)

Bowman Murray Hemingway Architects
514 Market St.
Wilmington, NC 28401

The Owner and Contractor agree as follows.

Init.

TABLE OF ARTICLES

1	THE CONTRACT DOCUMENTS
2	DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION
3	CONTRACT SUM
4	PAYMENTS
5	INSURANCE
6	GENERAL PROVISIONS
7	OWNER
8	CONTRACTOR
9	ARCHITECT
10	CHANGES IN THE WORK
11	TIME
12	PAYMENTS AND COMPLETION
13	PROTECTION OF PERSONS AND PROPERTY
14	CORRECTION OF WORK
15	MISCELLANEOUS PROVISIONS
16	TERMINATION OF THE CONTRACT
17	OTHER TERMS AND CONDITIONS

ARTICLE 1 THE CONTRACT DOCUMENTS

The Contractor shall complete the Work described in the Contract Documents for the Project. The Contract Documents consist of

- .1 this Agreement signed by the Owner and Contractor;
- .2 the drawings and specifications prepared by the Architect, dated _____, and enumerated as follows:

Drawings:

See attached Amended and Supplementary Conditions

Specifications:

- .3 addenda prepared by the Architect as follows:

Number	Date	Pages

- .4 written orders for changes in the Work, pursuant to Article 10, issued after execution of this Agreement; and

- .5 other documents, if any, identified as follows:

ARTICLE 2 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

§ 2.1 The Contract Time is the number of calendar days available to the Contractor to substantially complete the Work.

§ 2.2 Date of Commencement:

Unless otherwise set forth below, the date of commencement shall be the date of this Agreement.

(Insert the date of commencement if other than the date of this Agreement.)

§ 2.3 Substantial Completion:

Subject to adjustments of the Contract Time as provided in the Contract Documents, the Contractor shall achieve Substantial Completion, as defined in Section 12.5, of the entire Work:

(Check the appropriate box and complete the necessary information.)



Not later than () calendar days from the date of commencement.



By the following date:

ARTICLE 3 CONTRACT SUM

§ 3.1 The Contract Sum shall include all items and services necessary for the proper execution and completion of the Work. Subject to additions and deductions in accordance with Article 10, the Contract Sum is:

(\$)

§ 3.2 For purposes of payment, the Contract Sum includes the following values related to portions of the Work: *(Itemize the Contract Sum among the major portions of the Work.)*

Portions of the Work

Value

§ 3.3 The Contract Sum is based upon the following alternates, if any, which are described in the Contract Documents and hereby accepted by the Owner:

(Identify the accepted alternates. If the bidding or proposal documents permit the Owner to accept other alternates subsequent to the execution of this Agreement, attach a schedule of such other alternates showing the amount for each and the date when that amount expires.)

§ 3.4 Allowances, if any, included in the Contract Sum are as follows:

(Identify each allowance.)

Item

Price

§ 3.5 Unit prices, if any, are as follows:

(Identify the item and state the unit price and quantity limitations, if any, to which the unit price will be applicable)

Item

Units and Limitations

Price Per Unit (\$0.00)

ARTICLE 4 PAYMENTS

§ 4.1 Based on Contractor's Applications for Payment certified by the Architect, the Owner shall pay the Contractor, in accordance with Article 12, as follows:

(Insert below timing for payments and provisions for withholding retainage, if any.)

§ 4.2 Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at the rate below, or in the absence thereof, at the legal rate prevailing at the place of the Project.

(Insert rate of interest agreed upon, if any.)

%

ARTICLE 5 INSURANCE

§ 5.1 The Contractor shall maintain the following types and limits of insurance until the expiration of the period for correction of Work as set forth in Section 14.2, subject to the terms and conditions set forth in this Section 5.1:

§ 5.1.1 Commercial General Liability insurance for the Project, written on an occurrence form, with policy limits of not less than (\$) each occurrence, (\$) general aggregate, and (\$) aggregate for products-completed operations hazard.

§ 5.1.2 Automobile Liability covering vehicles owned, and non-owned vehicles used, by the Contractor, with policy limits of not less than (\$) per accident, for bodily injury, death of any person, and property damage arising out of the ownership, maintenance, and use of those motor vehicles along with any other statutorily required automobile coverage.

§ 5.1.3 The Contractor may achieve the required limits and coverage for Commercial General Liability and Automobile Liability through a combination of primary and excess or umbrella liability insurance, provided that such primary and excess or umbrella insurance policies result in the same or greater coverage as those required under Section 5.1.1 and 5.1.2, and in no event shall any excess or umbrella liability insurance provide narrower coverage than the primary policy. The excess policy shall not require exhaustion of the underlying limits only through the actual payment by the underlying insurers.

§ 5.1.4 Workers' Compensation at statutory limits.

§ 5.1.5 Employers' Liability with policy limits not less than (\$) each accident, (\$) each employee, and (\$) policy limit.

§ 5.1.6 The Contractor shall provide builder's risk insurance to cover the total value of the entire Project on a replacement cost basis.

§ 5.1.7 Other Insurance Provided by the Contractor

(List below any other insurance coverage to be provided by the Contractor and any applicable limits.)

Coverage

Limits

See attached Amended and Supplementary Conditions for insurance requirements.

§ 5.2 The Owner shall be responsible for purchasing and maintaining the Owner's usual liability insurance and shall provide property insurance to cover the value of the Owner's property. The Contractor is entitled to receive an increase in the Contract Sum equal to the insurance proceeds related to a loss for damage to the Work covered by the Owner's property insurance.

§ 5.3 The Contractor shall obtain an endorsement to its Commercial General Liability insurance policy to provide coverage for the Contractor's obligations under Section 8.12.

§ 5.4 Prior to commencement of the Work, each party shall provide certificates of insurance showing their respective coverages.

§ 5.5 Unless specifically precluded by the Owner's property insurance policy, the Owner and Contractor waive all rights against (1) each other and any of their subcontractors, suppliers, agents, and employees, each of the other; and (2) the Architect, Architect's consultants, and any of their agents and employees, for damages caused by fire or other causes of loss to the extent those losses are covered by property insurance or other insurance applicable to the Project, except such rights as they have to the proceeds of such insurance.

ARTICLE 6 GENERAL PROVISIONS

§ 6.1 The Contract

The Contract represents the entire and integrated agreement between the parties and supersedes prior negotiations, representations or agreements, either written or oral. The Contract may be amended or modified only by a written modification in accordance with Article 10.

§ 6.2 The Work

The term "Work" means the construction and services required by the Contract Documents, and includes all other labor, materials, equipment, and services provided, or to be provided, by the Contractor to fulfill the Contractor's obligations.

§ 6.3 Intent

The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all.

§ 6.4 Ownership and Use of Architect's Drawings, Specifications and Other Documents

Documents prepared by the Architect are instruments of the Architect's service for use solely with respect to this Project. The Architect shall retain all common law, statutory, and other reserved rights, including the copyright. The Contractor, subcontractors, sub-subcontractors, and suppliers are authorized to use and reproduce the instruments of service solely and exclusively for execution of the Work. The instruments of service may not be used for other Projects or for additions to this Project outside the scope of the Work without the specific written consent of the Architect.

§ 6.5 Electronic Notice

Written notice under this Agreement may be given by one party to the other by email as set forth below.

(Insert requirements for delivering written notice by email such as name, title, and email address of the recipient, and whether and how the system will be required to generate a read receipt for the transmission.)

ARTICLE 7 OWNER

§ 7.1 Information and Services Required of the Owner

§ 7.1.1 If requested by the Contractor, the Owner shall furnish all necessary surveys and a legal description of the site.

§ 7.1.2 Except for permits and fees under Section 8.7.1 that are the responsibility of the Contractor, the Owner shall obtain and pay for other necessary approvals, easements, assessments, and charges.

§ 7.1.3 Prior to commencement of the Work, at the written request of the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract. The Contractor shall have no obligation to commence the Work until the Owner provides such evidence.

§ 7.2 Owner's Right to Stop the Work

If the Contractor fails to correct Work which is not in accordance with the Contract Documents, the Owner may direct the Contractor in writing to stop the Work until the correction is made.

§ 7.3 Owner's Right to Carry Out the Work

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a seven day period after receipt of written notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies, correct such deficiencies. In such case, the Architect may withhold or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the cost of correction, provided the actions of the Owner and amounts charged to the Contractor were approved by the Architect.

§ 7.4 Owner's Right to Perform Construction and to Award Separate Contracts

§ 7.4.1 The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and to award separate contracts in connection with other portions of the Project.

§ 7.4.2 The Contractor shall coordinate and cooperate with the Owner's own forces and separate contractors employed by the Owner.

ARTICLE 8 CONTRACTOR

§ 8.1 Review of Contract Documents and Field Conditions by Contractor

§ 8.1.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become familiar with local conditions under which the Work is to be performed, and correlated personal observations with requirements of the Contract Documents.

§ 8.1.2 The Contractor shall carefully study and compare the Contract Documents with each other and with information furnished by the Owner. Before commencing activities, the Contractor shall (1) take field measurements and verify field conditions; (2) carefully compare this and other information known to the Contractor with the Contract Documents; and (3) promptly report errors, inconsistencies, or omissions discovered to the Architect.

§ 8.2 Contractor's Construction Schedule

The Contractor, promptly after being awarded the Contract, shall prepare and submit for the Owner's and Architect's information a Contractor's construction schedule for the Work.

§ 8.3 Supervision and Construction Procedures

§ 8.3.1 The Contractor shall supervise and direct the Work using the Contractor's best skill and attention. The Contractor shall be solely responsible for and have control over construction means, methods, techniques, sequences, and procedures, and for coordinating all portions of the Work.

§ 8.3.2 The Contractor, as soon as practicable after award of the Contract, shall furnish in writing to the Owner, through the Architect, the names of subcontractors or suppliers for each portion of the Work. The Contractor shall not contract with any subcontractor or supplier to whom the Owner or Architect have made a timely and reasonable objection.

§ 8.4 Labor and Materials

§ 8.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work.

§ 8.4.2 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Contract Work. The Contractor shall not permit employment of unfit persons or persons not skilled in tasks assigned to them.

§ 8.5 Warranty

The Contractor warrants to the Owner and Architect that: (1) materials and equipment furnished under the Contract will be new and of good quality unless otherwise required or permitted by the Contract Documents; (2) the Work will be free from defects not inherent in the quality required or permitted; and (3) the Work will conform to the requirements of the Contract Documents. Any material or equipment warranties required by the Contract Documents shall be issued in the name of the Owner, or shall be transferable to the Owner, and shall commence in accordance with Section 12.5.

§ 8.6 Taxes

The Contractor shall pay sales, consumer, use, and similar taxes that are legally required when the Contract is executed.

§ 8.7 Permits, Fees and Notices

§ 8.7.1 The Contractor shall obtain and pay for the building permit and other permits and governmental fees, licenses, and inspections necessary for proper execution and completion of the Work.

§ 8.7.2 The Contractor shall comply with and give notices required by agencies having jurisdiction over the Work. If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume full responsibility for such Work and shall bear the attributable costs. The Contractor shall promptly notify the Architect in writing of any known inconsistencies in the Contract Documents with such governmental laws, rules, and regulations.

§ 8.8 Submittals

The Contractor shall promptly review, approve in writing, and submit to the Architect shop drawings, product data, samples, and similar submittals required by the Contract Documents. Shop drawings, product data, samples, and similar submittals are not Contract Documents.

§ 8.9 Use of Site

The Contractor shall confine operations at the site to areas permitted by law, ordinances, permits, the Contract Documents, and the Owner.

§ 8.10 Cutting and Patching

The Contractor shall be responsible for cutting, fitting, or patching required to complete the Work or to make its parts fit together properly.

§ 8.11 Cleaning Up

The Contractor shall keep the premises and surrounding area free from accumulation of debris and trash related to the Work. At the completion of the Work, the Contractor shall remove its tools, construction equipment, machinery, and surplus material; and shall properly dispose of waste materials.

§ 8.12 Indemnification

To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the Owner, Architect, Architect's consultants, and agents and employees of any of them, from and against claims, damages, losses and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss or expense is caused in part by a party indemnified hereunder.

ARTICLE 9 ARCHITECT

§ 9.1 The Architect will provide administration of the Contract as described in the Contract Documents. The Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

§ 9.2 The Architect will visit the site at intervals appropriate to the stage of construction to become generally familiar with the progress and quality of the Work.

§ 9.3 The Architect will not have control over or charge of, and will not be responsible for, construction means, methods, techniques, sequences, or procedures, or for safety precautions and programs in connection with the Work, since these are solely the Contractor's responsibility. The Architect will not be responsible for the Contractor's failure to carry out the Work in accordance with the Contract Documents.

§ 9.4 Based on the Architect's observations and evaluations of the Contractor's Applications for Payment, the Architect will review and certify the amounts due the Contractor.

§ 9.5 The Architect has authority to reject Work that does not conform to the Contract Documents.

§ 9.6 The Architect will promptly review and approve or take appropriate action upon Contractor's submittals, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents.

§ 9.7 On written request from either the Owner or Contractor, the Architect will promptly interpret and decide matters concerning performance under, and requirements of, the Contract Documents.

§ 9.8 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from the Contract Documents, and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either and will not be liable for results of interpretations or decisions rendered in good faith.

§ 9.9 The Architect's duties, responsibilities, and limits of authority as described in the Contract Documents shall not be changed without written consent of the Owner, Contractor, and Architect. Consent shall not be unreasonably withheld.

ARTICLE 10 CHANGES IN THE WORK

§ 10.1 The Owner, without invalidating the Contract, may order changes in the Work within the general scope of the Contract, consisting of additions, deletions or other revisions, and the Contract Sum and Contract Time shall be adjusted accordingly, in writing. If the Owner and Contractor cannot agree to a change in the Contract Sum, the Owner shall pay the Contractor its actual cost plus reasonable overhead and profit.

§ 10.2 The Architect may authorize or order minor changes in the Work that are consistent with the intent of the Contract Documents and do not involve an adjustment in the Contract Sum or an extension of the Contract Time. Such authorization or order shall be in writing and shall be binding on the Owner and Contractor. The Contractor shall proceed with such minor changes promptly.

§ 10.3 If concealed or unknown physical conditions are encountered at the site that differ materially from those indicated in the Contract Documents or from those conditions ordinarily found to exist, the Contract Sum and Contract Time shall be subject to equitable adjustment.

ARTICLE 11 TIME

§ 11.1 Time limits stated in the Contract Documents are of the essence of the Contract.

§ 11.2 If the Contractor is delayed at any time in progress of the Work by changes ordered in the Work, or by labor disputes, fire, unusual delay in deliveries, unavoidable casualties, or other causes beyond the Contractor's control, the Contract Time shall be subject to equitable adjustment.

§ 11.3 Costs caused by delays or by improperly timed activities or defective construction shall be borne by the responsible party.

ARTICLE 12 PAYMENTS AND COMPLETION

§ 12.1 Contract Sum

The Contract Sum stated in this Agreement, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

§ 12.2 Applications for Payment

§ 12.2.1 At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment for Work completed in accordance with the values stated in this Agreement. The Application shall be supported by data substantiating the Contractor's right to payment as the Owner or Architect may reasonably require, such as evidence of payments made to, and waivers of liens from, subcontractors and suppliers. Payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment stored, and protected from damage, off the site at a location agreed upon in writing.

§ 12.2.2 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment, all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of liens, claims, security interests, or other encumbrances adverse to the Owner's interests.

§ 12.3 Certificates for Payment

The Architect will, within seven days after receipt of the Contractor's Application for Payment, either (1) issue to the Owner a Certificate for Payment in the full amount of the Application for Payment, with a copy to the Contractor; (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Contractor and Owner in writing of the Architect's reasons for withholding certification in part; or (3) withhold certification of the entire Application for Payment, and notify the Contractor and Owner of the Architect's reason for withholding certification in whole. If certification or notification is not made within such seven day period, the Contractor may, upon seven additional days' written notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time and the Contract Sum shall be equitably adjusted due to the delay.

§ 12.4 Progress Payments

§ 12.4.1 After the Architect has issued a Certificate for Payment, the Owner shall make payment in the manner provided in the Contract Documents.

§ 12.4.2 The Contractor shall promptly pay each subcontractor and supplier, upon receipt of payment from the Owner, an amount determined in accordance with the terms of the applicable subcontracts and purchase orders.

§ 12.4.3 Neither the Owner nor the Architect shall have responsibility for payments to a subcontractor or supplier.

§ 12.4.4 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the requirements of the Contract Documents.

§ 12.5 Substantial Completion

§ 12.5.1 Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so the Owner can occupy or utilize the Work for its intended use.

§ 12.5.2 When the Contractor believes that the Work or designated portion thereof is substantially complete, it will notify the Architect and the Architect will make an inspection to determine whether the Work is substantially complete. When the Architect determines that the Work is substantially complete, the Architect shall prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion, establish the responsibilities of the Owner and Contractor, and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 12.6 Final Completion and Final Payment

§ 12.6.1 Upon receipt of a final Application for Payment, the Architect will inspect the Work. When the Architect finds the Work acceptable and the Contract fully performed, the Architect will promptly issue a final Certificate for Payment.

§ 12.6.2 Final payment shall not become due until the Contractor submits to the Architect releases and waivers of liens, and data establishing payment or satisfaction of obligations, such as receipts, claims, security interests, or encumbrances arising out of the Contract.

§ 12.6.3 Acceptance of final payment by the Contractor, a subcontractor or supplier shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

ARTICLE 13 PROTECTION OF PERSONS AND PROPERTY

The Contractor shall be responsible for initiating, maintaining and supervising all safety precautions and programs, including all those required by law in connection with performance of the Contract. The Contractor shall take reasonable precautions to prevent damage, injury, or loss to employees on the Work and other persons who may be affected thereby, the Work and materials and equipment to be incorporated therein, and other property at the site or adjacent thereto. The Contractor shall promptly remedy damage and loss to property caused in whole or in part by the Contractor, or by anyone for whose acts the Contractor may be liable.

ARTICLE 14 CORRECTION OF WORK

§ 14.1 The Contractor shall promptly correct Work rejected by the Architect as failing to conform to the requirements of the Contract Documents. The Contractor shall bear the cost of correcting such rejected Work, including the costs of uncovering, replacement, and additional testing.

§ 14.2 In addition to the Contractor's other obligations including warranties under the Contract, the Contractor shall, for a period of one year after Substantial Completion, correct work not conforming to the requirements of the Contract Documents.

§ 14.3 If the Contractor fails to correct nonconforming Work within a reasonable time, the Owner may correct it in accordance with Section 7.3.

ARTICLE 15 MISCELLANEOUS PROVISIONS

§ 15.1 Assignment of Contract

Neither party to the Contract shall assign the Contract as a whole without written consent of the other.

§ 15.2 Tests and Inspections

§ 15.2.1 At the appropriate times, the Contractor shall arrange and bear cost of tests, inspections, and approvals of portions of the Work required by the Contract Documents or by laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities.

§ 15.2.2 If the Architect requires additional testing, the Contractor shall perform those tests.

§ 15.2.3 The Owner shall bear cost of tests, inspections, or approvals that do not become requirements until after the Contract is executed. The Owner shall directly arrange and pay for tests, inspections, or approvals where building codes or applicable laws or regulations so require.

§ 15.3 Governing Law

The Contract shall be governed by the law of the place where the Project is located, excluding that jurisdiction's choice of law rules.

ARTICLE 16 TERMINATION OF THE CONTRACT

§ 16.1 Termination by the Contractor

If the Work is stopped under Section 12.3 for a period of 14 days through no fault of the Contractor, the Contractor may, upon seven additional days' written notice to the Owner and Architect, terminate the Contract and recover from the Owner payment for Work executed including reasonable overhead and profit, and costs incurred by reason of such termination.

§ 16.2 Termination by the Owner for Cause

§ 16.2.1 The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to subcontractors for materials or labor in accordance with the respective agreements between the Contractor and the subcontractors;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 is otherwise guilty of substantial breach of a provision of the Contract Documents.

§ 16.2.2 When any of the above reasons exist, the Owner, after consultation with the Architect, may without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' written notice, terminate employment of the Contractor and may

- .1 take possession of the site and of all materials thereon owned by the Contractor, and
- .2 finish the Work by whatever reasonable method the Owner may deem expedient.

§ 16.2.3 When the Owner terminates the Contract for one of the reasons stated in Section 16.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

§ 16.2.4 If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, such excess shall be paid to the Contractor. If such costs exceed the unpaid balance, the Contractor shall pay the difference to the Owner. This obligation for payment shall survive termination of the Contract.

§ 16.3 Termination by the Owner for Convenience

The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause. The Contractor shall be entitled to receive payment for Work executed, and costs incurred by reason of such termination, along with reasonable overhead and profit on the Work not executed.

ARTICLE 17 OTHER TERMS AND CONDITIONS

(Insert any other terms or conditions below.)

See attached Amended and Supplementary Conditions.

This Agreement entered into as of the day and year first written above.

(If required by law, insert cancellation period, disclosures or other warning statements above the signatures.)

OWNER (Signature)

(Printed name and title)

CONTRACTOR (Signature)

(Printed name and title)

LICENSE NO.:

JURISDICTION:

CAUTION: You should sign an original AIA Contract Document, on which this text appears in RED. An original assures that changes will not be obscured.

AMENDED AND SUPPLEMENTARY CONDITIONS

Amending the Articles of the AIA Standard Form of Agreement
Between Owner and Contractor for a Residential or Small Commercial Project
AIA Document A105 – 2007

The following amendments modify, change, delete, or add to the General Conditions. Where any article of the General Conditions is modified or any paragraph deleted, subparagraph or clause thereof is modified, or deleted by these amendments, the unaltered provisions of such article, paragraph, subparagraph or clause shall remain in effect. If there is a discrepancy between the General Conditions and these Amended Conditions, the Amended Conditions shall control.

ARTICLE 1, THE CONTRACT DOCUMENTS

- 1.2 Revise paragraph 1.2 and add the following:
Drawings by Bowman Murray Hemingway Architects, PC, Woods Engineering, McFadyen Engineers, PLLC, and CBHF Engineers, PLLC. labeled The Wilmington Food Bank and dated October 19, 2018.

Index of Drawings:

Project Manual by Bowman Murray Hemingway Architects, PC dated November 10, 2021 and entitled: The Wilmington Food Bank.

- 1.5 Delete paragraph 1.5 and substitute the following:

“In the case of discrepancy or disagreement in the contract documents the order of precedence shall be: form of contract, specifications, large architectural drawings, small architectural drawings.”

ARTICLE 3, CONTRACT SUM

- 3.2 Revise paragraph 3.2 and add the following:

“The contractor provided, owner approved schedule of values establishes value for each portion of the work.”

ARTICLE 5, INSURANCE

- 5.1 Delete paragraph 5.1 and substitute the following:

“CONTRACTOR’S LIABILITY INSURANCE

The work under this contract shall not commence until the contractor has obtained all required insurance and verifying certificates of insurance have been approved in writing by the owner. These certificates shall contain a provision that coverages afforded under the policies will not be cancelled, reduced in amount or coverages eliminated until at least thirty (30) days after mailing written notice, by certified mail, return receipt requested, to the insured and the owner of such alteration or cancellation.

a. Worker's Compensation and Employer's Liability

The contractor shall provide and maintain, during the life of the contract, workmen's compensation insurance, as required by law, as well as employer's liability coverage with minimum limits of \$500,000.

b. Public Liability and Property Damage

The contractor shall provide and maintain, during the life of the contract, comprehensive general liability insurance, including coverage for premises operations, independent contractors, completed operations, products and contractual exposures, as shall protect such contractors from claims arising out of any bodily injury, including accidental death, as well as from claims for property damages which may arise from operations under this contract, whether such operations be by the contractor or by any subcontractor, or by anyone directly or indirectly employed by either of them and the minimum limits of such insurance shall be as follows:

Bodily Injury: \$1,000,000 per occurrence

Property Damage: \$1,000,000 per occurrence / \$2,000,000 aggregate

In lieu of limits listed above, a \$500,000 combined single limit shall satisfy both conditions.

Such coverage for completed operations must be maintained for at least two (2) years following final acceptance of the work performed under the contract.

c. Property Insurance (Builder's Risk/Installation Floater)

The contractor shall purchase and maintain property insurance during the life of this contract, upon the entire work at the site to the full insurable value thereof. This insurance shall include the interests of the owner, the contractor, the subcontractors and subsubcontractors in the work and shall insure against the perils of fire, extended coverage, and vandalism and malicious mischief. If the owner is damaged by failure of the contractor to purchase or maintain such insurance, then the contractor shall bear all reasonable costs properly attributable thereto; the contractor shall effect and maintain similar property insurance on portions of the work stored off the site when request for payment per articles so includes such portions.

d. Deductible

Any deductible, if applicable to loss covered by insurance provided, is to be borne by the contractor.

e. Other Insurance

The contractor shall obtain such additional insurance as may be required by the owner or by the General Statutes of North Carolina including motor vehicle insurance, in amounts not less than the statutory limits.

f. Proof of Carriage

The contractor shall furnish the owner with satisfactory proof of carriage of the insurance required before written approval is granted by the owner.”

5.2 Delete paragraph 5.2.

5.3 Delete paragraph 5.3.

5.4 Delete paragraph 5.4.

5.5 Delete paragraph 5.5.

ARTICLE 8, CONTRACTOR

8.1.3 Add the following paragraph:

“All contractors are hereby notified that they must have proper license as required under the North Carolina state laws governing their respective trades.”

8.5.1 Add the following paragraph:

“The contractor shall unconditionally guarantee materials and workmanship against patent defects arising from faulty materials, faulty workmanship or negligence for a period of twelve (12) months following the date of substantial completion of the work and shall replace such defective materials or workmanship without cost to the owner.

Where items of equipment or material carry a manufacturer's warranty for any period in excess of twelve (12) months, then the manufacturer's warranty shall apply for that particular piece of equipment or material. The contractor shall replace such defective equipment or materials, without cost to the owner, within the manufacturer's warranty period.”

8.7.1 Delete paragraph 8.7.1 and substitute the following:

“PERMITS, FEES AND NOTICES – The owner shall be responsible for paying all building permits and governmental fees necessary for the proper execution and completion of the Work, and for all fees, permits and other costs required for the connection of the permanent utilities. Contractor will pay for his own license, inspection and re-inspection fees for his part of the work necessary for the proper execution and completion of the Work. Contractor shall give all notices and comply with all laws, ordinances, rules, regulations and lawful orders of any public authority bearing on the performance of the Work.”

ARTICLE 10, CHANGES IN THE WORK

10.1 Add the following paragraph:

“For the purpose of this contract reasonably overhead and profit is defined as 5% of the change to the contract sum.”

10.4 Add the following paragraph:

“Except in an emergency endangering life or property, no change shall be made by the contractor except upon written change order or architect’s written directive. No claim for adjustments of the contract price shall be valid unless this procedure is followed.”

10.5 Add the following paragraph:

“The allowances for overhead and profit combined shall not exceed five percent (5%).

The "cost" as used herein shall be limited to the following:

1. The actual costs of materials and supplies incorporated or consumed as part of the project;
2. The actual costs of labor expended on the project site;
3. The actual costs of labor burden, limited to costs of social security (FICA) and Medicare/Medicaid taxes; unemployment insurance costs; health/dental/vision insurance premiums; paid employee leave for holidays, vacation, sick leave, and/or petty leave, not to exceed a total of 30 days per year; retirement contributions; worker's compensation insurance premiums; and the costs of general liability insurance when premiums are computed based on payroll amounts; the total of which shall not exceed thirty percent (30%) of the actual costs of labor;
4. The actual costs of rental for tools, excluding hand tools; equipment; machinery; and temporary facilities required for the project;
5. The actual costs of premiums for bonds, insurance, permit fees, and sales or use taxes related to the project.

Overtime and extra pay for holidays and weekends may be a cost item only to the extent approved by the owner.”

ARTICLE 13, PROTECTION OF PERSONS AND PROPERTY

13.1 Add the following paragraph 13.1

“Sedimentation Pollution Control Act of 1973:

Any land-disturbing activity performed by the contractor(s) in connection with the project shall comply with all erosion control measures set forth in the contract documents and any additional measures which may be required in order to ensure that the project is in full compliance with the Sedimentation Pollution Control Act of 1973, as implemented by Title 15, North Carolina Administrative Code, Chapter 4, Sedimentation Control, Subchapters 4A, 4B and 4C, as amended (15 N.C.A.C. 4A, 4B and 4C).

Upon receipt of notice that a land-disturbing activity is in violation of said act, the contractor(s) shall be responsible for ensuring that all steps or actions necessary to bring the project in compliance with said act are promptly taken.

The contractor(s) shall be responsible for defending any legal actions instituted pursuant to N.C.G.S. 113A-64 against any party or persons described in this article.

To the fullest extent permitted by law, the contractor(s) shall indemnify and hold harmless the owner, the designer and the agents, consultants and employees of the owner and designer, from and against all claims, damages, civil penalties, losses and expenses, including, but not limited to, attorneys' fees, arising out of or resulting from the performance of work or failure of performance of work, provided that any such claim, damage, civil penalty, loss or expense is attributable to a violation of the Sedimentation Pollution Control Act. Such obligation shall not be construed to negate, abridge or otherwise reduce any other right or obligation of indemnity which would otherwise exist as to any party or persons described in this article.”

ARTICLE 15, MISCELLANEOUS PROVISIONS

15.2 Delete Section 15.2 TESTS AND INSPECTIONS in its entirety. Reference Drawings for testing requirements.

END AMENDED AND SUPPLEMENTARY CONDITIONS

TO OWNER: PROJECT: FROM CONTRACTOR: VIA ARCHITECT: APPLICATION NO: PERIOD TO: PROJECT NOS: CONTRACT DATE:

Distribution to:

OWNER

ARCHITECT

CONTRACTOR

CONTRACTOR'S APPLICATION FOR PAYMENT

Application is made for payment, as shown below, in connection with the Contract. Continuation Sheet, AIA Document G703, is attached.

1. ORIGINAL CONTRACT SUM \$
2. Net change by Change Orders \$
3. CONTRACT SUM TO DATE (Line 1 + 2) \$
4. TOTAL COMPLETED & STORED TO DATE (Column G on G703) \$
5. RETAINAGE:
a. % of Completed Work (Column D + E - F on G703) \$
b. % of Stored Material (Column F on G703) \$
Total Retainage (Lines 5a + 5b or Total in Column I of G703) \$
6. TOTAL EARNED LESS RETAINAGE (Line 4 Less Line 5 Total) \$
7. LESS PREVIOUS CERTIFICATES FOR PAYMENT (Line 6 from prior Certificate) \$
8. CURRENT PAYMENT DUE \$
9. BALANCE TO FINISH, INCLUDING RETAINAGE (Line 3 less Line 6) \$

ARCHITECT'S CERTIFICATE FOR PAYMENT

In accordance with the Contract Documents, based on on-site observations and the data comprising the application, the Architect certifies to the Owner that to the best of the Architect's knowledge, information and belief the Work has progressed as indicated, the quality of the Work is in accordance with the Contract Documents, and the Contractor is entitled to payment of the AMOUNT CERTIFIED.

AMOUNT CERTIFIED \$

(Attach explanation if amount certified differs from the amount applied. Initial all figures on this Application and on the Continuation Sheet that are changed to conform with the amount certified.) ARCHITECT:

By: Date: This Certificate is not negotiable. The AMOUNT CERTIFIED is payable only to the Contractor named herein. Issuance, payment and acceptance of payment are without prejudice to any rights of the Owner or Contractor under this Contract.

PAGE OF PAGES

APPLICATION NO:

APPLICATION DATE:

APPLICATION DATE:

PERIOD TO:

PERIOD TO:

[illegible]



AIA[®] Document G706A[™] – 1994

Contractor's Affidavit of Release of Liens

PROJECT: *(Name and address)*

ARCHITECT'S PROJECT NUMBER:

OWNER ☐

CONTRACT FOR:

ARCHITECT ☐

CONTRACTOR ☐

TO OWNER: *(Name and address)*

CONTRACT DATED:

SURETY ☐

OTHER ☐

STATE OF:

COUNTY OF:

The undersigned hereby certifies that to the best of the undersigned's knowledge, information and belief, except as listed below, the Releases or Waivers of Lien attached hereto include the Contractor, all Subcontractors, all suppliers of materials and equipment, and all performers of Work, labor or services who have or may have liens or encumbrances or the right to assert liens or encumbrances against any property of the Owner arising in any manner out of the performance of the Contract referenced above.

EXCEPTIONS:

SUPPORTING DOCUMENTS ATTACHED HERETO:

1. Contractor's Release or Waiver of Liens, conditional upon receipt of final payment.
2. Separate Releases or Waivers of Liens from Subcontractors and material and equipment suppliers, to the extent required by the Owner, accompanied by a list thereof.

CONTRACTOR: *(Name and address)*

BY:

(Signature of authorized representative)

(Printed name and title)

Subscribed and sworn to before me
on this date:

Notary Public:

My Commission Expires:

SECTION 023610 - TERMITE CONTROL

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes the following:
 - 1. Soil treatment with termiticide.
- B. See Division 6 Section "Rough Carpentry" for wood preservative treatment by pressure process.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated. Include the EPA-Registered Label.
- B. Product certificates.
- C. Soil Treatment Application Report: Include the following:
 - 1. Date and time of application.
 - 2. Moisture content of soil before application.
 - 3. Brand name and manufacturer of termiticide.
 - 4. Quantity of undiluted termiticide used.
 - 5. Dilutions, methods, volumes, and rates of application used.
 - 6. Areas of application.
 - 7. Water source for application.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: A specialist who is licensed according to regulations of authorities having jurisdiction to apply termite control treatment and products in jurisdiction where Project is located.
- B. Regulatory Requirements: Formulate and apply termiticides according to the EPA-Registered Label.

1.4 WARRANTY

- A. Special Warranty: Manufacturer's standard form, signed by Applicator and Contractor certifying that termite control work, consisting of applied soil termiticide treatment, will prevent infestation of subterranean termites. If subterranean termite activity or damage is discovered during warranty period, re-treat soil and repair or replace damage caused by termite infestation.
 - 1. Warranty Period: One year from date of Substantial Completion.

1.5 MAINTENANCE SERVICE

- A. Continuing Service: Beginning at Substantial Completion, provide 12 months' continuing service including monitoring, inspection, and re-treatment for occurrences of termite activity. Provide a standard continuing service agreement. State services, obligations, conditions, and terms for agreement period; and terms for future renewal options.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Termiticides:
 - a. Aventis Environmental Science USA LP; Termidor.
 - b. Equil, Adonis 2F Insecticide.
 - c. FMC Corporation, Agricultural Products Group; Talstar. P. Professional.

2.2 SOIL TREATMENT

- A. Termiticide: Provide an EPA-registered termiticide complying with requirements of authorities having jurisdiction, in an aqueous solution formulated to prevent termite infestation. Provide quantity required for application at the label volume and rate for the maximum termiticide concentration allowed for each specific use, according to product's EPA-Registered Label.
- B. Termiticide: Provide a termiticide and method of termite protection that is currently approved by the North Carolina Department of Agriculture and Consumer Services – Structural Pest Control Division.

PART 3 - EXECUTION

3.1 PREPARATION

- A. General: Remove all extraneous sources of wood cellulose and other edible materials such as wood debris, tree stumps and roots, stakes, formwork, and construction waste wood from soil within and around foundations.
- B. Soil Treatment Preparation: Loosen, rake, and level soil to be treated except previously compacted areas under slabs and footings. Termiticides may be applied before placing compacted fill under slabs if recommended in writing by termiticide manufacturer.

3.2 APPLYING SOIL TREATMENT

- A. Application: Mix soil treatment termiticide solution to a uniform consistency. Provide quantity required for application at the label volume and rate for the maximum specified concentration of termiticide, according to manufacturer's EPA-Registered Label, to the following so that a continuous horizontal and vertical termiticidal barrier or treated zone is established around and under building construction. Distribute treatment evenly.
 - 1. Slabs-on-Grade: Under ground-supported slab construction, including footings, building slabs, and attached slabs as an overall treatment. Treat soil materials before concrete footings and slabs are placed.
 - 2. Foundations: Adjacent soil including soil along the entire inside perimeter of foundation walls, along both sides of interior partition walls, around plumbing pipes and electric conduit penetrating the slab, and around interior column footers, piers, and chimney bases; also along the entire outside perimeter, from grade to bottom of footing. Avoid soil washout around footings.
 - 3. Masonry: Treat voids.
 - 4. Penetrations: At expansion joints, control joints, and areas where slabs will be penetrated.
- B. Avoid disturbance of treated soil after application. Keep off treated areas until completely dry.
- C. Protect termiticide solution, dispersed in treated soils and fills, from being diluted until ground-supported slabs are installed. Use waterproof barrier according to EPA-Registered Label instructions.
- D. Post warning signs in areas of application.
- E. Reapply soil treatment solution to areas disturbed by subsequent excavation, grading, landscaping, or other construction activities following application.

END OF SECTION 023610

SECTION 033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finishes, for the following:
 - 1. Footings.
 - 2. Foundation walls.
 - 3. Slabs-on-grade.
 - 4. Underslab vapor retarder
- B. Related Sections:
 - 1. See Civil Drawings for concrete paving and walks.
 - 2. See also Structural drawings for footings, foundations, slabs, exterior concrete walls.

1.3 DEFINITIONS

- A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash and other pozzolans, ground granulated blast-furnace slag, and silica fume; subject to compliance with requirements.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Design Mixtures: For each concrete mixture. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.
 - 1. Indicate amounts of mixing water to be withheld for later addition at Project site.
- C. Steel Reinforcement Shop Drawings: Placing drawings that detail fabrication, bending, and placement. Include bar sizes, lengths, material, grade, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement.
- D. Construction Joint Layout: Indicate proposed construction joints required to construct the structure.
 - 1. Location of construction joints is subject to approval of the Architect.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer and manufacturer.
- B. Welding certificates.
- C. Material Certificates: For each of the following, signed by manufacturers:
 - 1. Cementitious materials.
 - 2. Admixtures.
 - 3. Steel reinforcement and accessories.
 - 4. Curing compounds.
 - 5. Bonding agents.
 - 6. Adhesives.
 - 7. Vapor retarders.
 - 8. Semirigid joint filler.
 - 9. Joint-filler strips.
 - 10. Repair materials.
- D. Material Test Reports: For the following, from a qualified testing agency, indicating compliance with requirements:
 - 1. Aggregates. Include service record data indicating absence of deleterious expansion of concrete due to alkali aggregate reactivity.
- E. Floor surface flatness and levelness measurements indicating compliance with specified tolerances.
- F. Field quality-control reports.
- G. Minutes of preinstallation conference.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs on Project personnel qualified as ACI-certified Flatwork Technician and Finisher and a supervisor who is an ACI-certified Concrete Flatwork Technician.
- B. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C 94/C 94M requirements for production facilities and equipment.
 - 1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities."
- C. Source Limitations: Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant, obtain aggregate from single source, and obtain admixtures from single source from single manufacturer.
- D. Welding Qualifications: Qualify procedures and personnel according to AWS D1.4/D 1.4M, "Structural Welding Code - Reinforcing Steel."

- E. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:
 - 1. ACI 301, "Specifications for Structural Concrete," Sections 1 through 5."
 - 2. ACI 117, "Specifications for Tolerances for Concrete Construction and Materials."
- F. Concrete Testing Service: Engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixtures.
 - 1. Testing Agency Qualifications: An independent agency, acceptable to authorities having jurisdiction, qualified according to ASTM C 1077 and ASTM E 329 for testing indicated.
 - a. Personnel conducting field tests shall be qualified as ACI Concrete Field Testing Technician, Grade 1, according to ACI CP-1 or an equivalent certification program.
 - b. Personnel performing laboratory tests shall be ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician - Grade I. Testing Agency laboratory supervisor shall be an ACI-certified Concrete Laboratory Testing Technician - Grade II.
- G. Preinstallation Conference: Conduct conference at Project site.
 - 1. Before submitting design mixtures, review concrete design mixture and examine procedures for ensuring quality of concrete materials. Require representatives of each entity directly concerned with cast-in-place concrete to attend, including the following:
 - a. Contractor's superintendent.
 - b. Independent testing agency responsible for concrete design mixtures.
 - c. Ready-mix concrete manufacturer.
 - d. Concrete subcontractor.
 - e. Special concrete finish subcontractor.
 - 2. Review testing and inspecting agency procedures for field quality control, concrete finishes and finishing, cold- and hot-weather concreting procedures, curing procedures, construction contraction and isolation joints, and joint-filler strips, vapor-retarder installation, anchor rod and anchorage device installation tolerances, steel reinforcement installation, floor and slab flatness and levelness measurement, concrete repair procedures, and concrete protection.
 - 3. Review floor finishes to be installed and coordinate with curing methods to be used.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Steel Reinforcement: Deliver, store, and handle steel reinforcement to prevent bending and damage.

PART 2 - PRODUCTS

2.1 FORM-FACING MATERIALS

- A. Smooth-Formed Finished Concrete: Form-facing panels that will provide continuous, true, and smooth concrete surfaces. Furnish in largest practicable sizes to minimize number of joints.
- B. Rough-Formed Finished Concrete: Plywood, lumber, metal, or another approved material.

Provide lumber dressed on at least two edges and one side for tight fit.

- C. Chamfer Strips: Wood, metal, PVC, or rubber strips, 3/4 by 3/4 inch, minimum.
- D. Rustication Strips: Wood, metal, PVC, or rubber strips, kerfed for ease of form removal.

2.2 STEEL REINFORCEMENT

- A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed.
- B. Plain-Steel Welded Wire Reinforcement: ASTM A 185/A 185M, plain, fabricated from as-drawn steel wire into flat sheets.

2.3 REINFORCEMENT ACCESSORIES

- A. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire reinforcement in place. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete and as follows:
 - 1. For concrete surfaces exposed to view where legs of wire bar supports contact forms, use CRSI Class 1 plastic-protected steel wire or CRSI Class 2 stainless-steel bar supports.

2.4 CONCRETE MATERIALS

- A. Cementitious Material: Use the following cementitious materials, of the same type, brand, and source, throughout Project:
 - 1. Portland Cement: ASTM C 150, Type I/II. Supplement with the following:
 - a. Fly Ash: ASTM C 618, Class F.
- B. Normal-Weight Aggregates: ASTM C 33, Class 3S coarse aggregate or better, graded. Provide aggregates from a single source with documented service record data of at least 10 years' satisfactory service in similar applications and service conditions using similar aggregates and cementitious materials.
 - 1. Maximum Coarse-Aggregate Size: 3/4-inch nominal.
 - 2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.
- C. Water: ASTM C 94/C 94M and potable.

2.5 ADMIXTURES

- A. Air-Entraining Admixture: ASTM C 260.
- B. Chemical Admixtures: Provide admixtures certified by manufacturer to be compatible with other admixtures and that will not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.
 - 1. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
 - 2. Retarding Admixture: ASTM C 494/C 494M, Type B.
 - 3. Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type D.

4. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
 5. High-Range, Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type G.
 6. Plasticizing and Retarding Admixture: ASTM C 1017/C 1017M, Type II.
- C. Set-Accelerating Corrosion-Inhibiting Admixture: Commercially formulated, anodic inhibitor or mixed cathodic and anodic inhibitor; capable of forming a protective barrier and minimizing chloride reactions with steel reinforcement in concrete and complying with ASTM C 494/C 494M, Type C.
1. Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Axim Italcementi Group, Inc.; CATEXOL CN-CI
 - b. BASF Construction Chemicals - Building Systems; Rheocrete CNI
 - c. Euclid Chemical Company (The), an RPM company; ARRMATECT, EUCON BCN, or EUCON CIA
 - d. Grace Construction Products, W. R. Grace & Co.; DCI
 - e. Sika Corporation; Sika CNI
- D. Synthetic Macro-Fiber: Polyolefin macro-fibers engineered and designed for use in concrete, complying with ASTM C 1116/C 1116M, Type III, 1 to 2-1/4 inches long.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Euclid Chemical Company (The), an RPM company; Tuf-Strand SF.
 - b. FORTA Corporation; FORTA FERRO.
 - c. Grace Construction Products, W. R. Grace & Co.; Strux 90/40.
 - d. Nycon, Inc.; XL.
 - e. Propex Concrete Systems Corp.; Fibermesh 650.
 - f. Sika Corporation; Sika Fiber MS.

2.6 VAPOR RETARDERS

- A. Sheet Vapor Retarder: ASTM E 1745, Class A. Include manufacturer's recommended adhesive or pressure-sensitive tape. Maximum perm rating of 0.02.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Fortifiber Building Systems Group; Moistop Ultra 15
 - b. Grace Construction Products, W. R. Grace & Co.; Florprufe 120
 - c. Insulation Solutions, Inc.; Viper VaporCheck II
 - d. Meadows, W. R., Inc.; Perminator 15 mil
 - e. Raven Industries Inc.; Vapor Block 15
 - f. Reef Industries, Inc.; Griffolyn 15 mil Green
 - g. Stego Industries, LLC; Stego Wrap 15 mil Class A
 2. Provide manufacturer's compatible sealer system for penetrations.
- B. Granular Fill: Clean mixture of crushed stone or crushed or uncrushed gravel; ASTM D 448, Size 57, with 100 percent passing a 1-1/2-inch sieve and 0 to 5 percent passing a No. 8 sieve.
- C. Fine-Graded Granular Material: Clean mixture of crushed stone, crushed gravel, and manufactured or natural sand; ASTM D 448, Size 10, with 100 percent passing a 3/8-inch sieve,

10 to 30 percent passing a No. 100 sieve, and at least 5 percent passing No. 200 sieve; complying with deleterious substance limits of ASTM C 33 for fine aggregates.

2.7 CURING MATERIALS

- A. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. BASF Construction Chemicals - Building Systems; Confilm
 - b. ChemMasters; SprayFilm
 - c. Conspec by Dayton Superior; Aquafilm
 - d. Dayton Superior Corporation; Sure Film (J-74)
 - e. Euclid Chemical Company (The), an RPM company; Eucobar
 - f. L&M Construction Chemicals, Inc.; E-CON
 - g. Meadows, W. R., Inc.; EVAPRE
 - h. Sika Corporation; SikaFilm
 - i. Symons by Dayton Superior; Finishing Aid
 - j. Unitex; PRO-FILM
- B. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. when dry.
- C. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap-polyethylene sheet.
- D. Water: Potable.
- E. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B, nondissipating, certified by curing compound manufacturer to not interfere with bonding of floor covering.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Anti-Hydro International, Inc.; AH Clear Cure WB
 - b. BASF Construction Chemicals - Building Systems; Kure-N-Seal WB
 - c. ChemMasters; Safe-Cure & Seal 20
 - d. Conspec by Dayton Superior; Cure and Seal WB
 - e. Cresset Chemical Company; Crete-Trete 309-VOC Cure & Seal
 - f. Dayton Superior Corporation; Safe Cure and Seal (J-18)
 - g. Euclid Chemical Company (The), an RPM company; Aqua Cure VOX; Clearseal WB 150
 - h. L&M Construction Chemicals, Inc.; Dress & Seal WB
 - i. Meadows, W. R., Inc.; Vocomp-20
 - j. Symons by Dayton Superior; Cure & Seal 18 Percent E

2.8 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D 1751, asphalt-saturated cellulosic fiber.

- B. Semirigid Joint Filler: Two-component, semirigid, 100 percent solids, epoxy resin with a Type A shore durometer hardness of 80 per ASTM D 2240.
- C. Bonding Agent: ASTM C 1059/C 1059M, Type II, non-redispersible, acrylic emulsion or styrene butadiene.
- D. Epoxy Bonding Adhesive: ASTM C 881, two-component epoxy resin, capable of humid curing and bonding to damp surfaces, of class suitable for application temperature and of grade to suit requirements, and as follows:
 - 1. Types IV and V, load bearing, for bonding hardened or freshly mixed concrete to hardened concrete.

2.9 REPAIR MATERIALS

- A. Repair Underlayment: Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/8 inch and that can be feathered at edges to match adjacent floor elevations.
 - 1. Cement Binder: ASTM C 150, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
 - 2. Primer: Product of underlayment manufacturer recommended for substrate, conditions, and application.
 - 3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch or coarse sand as recommended by underlayment manufacturer.
 - 4. Compressive Strength: Not less than 4100 psi at 28 days when tested according to ASTM C 109/C 109M.
- B. Repair Overlayment: Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/4 inch and that can be filled in over a scarified surface to match adjacent floor elevations.
 - 1. Cement Binder: ASTM C 150, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
 - 2. Primer: Product of topping manufacturer recommended for substrate, conditions, and application.
 - 3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch or coarse sand as recommended by topping manufacturer.
 - 4. Compressive Strength: Not less than 5000 psi at 28 days when tested according to ASTM C 109/C 109M.

2.10 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.
 - 1. Use a qualified independent testing agency for preparing and reporting proposed mixture designs based on laboratory trial mixtures.
- B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:

1. Fly Ash: 25 percent.
 2. Combined Fly Ash and Pozzolan: 25 percent.
- C. Limit water-soluble, chloride-ion content in hardened concrete to 0.06 percent by weight of cement.
- D. Admixtures: Use admixtures according to manufacturer's written instructions.
1. Use water-reducing, high-range water-reducing or plasticizing admixture in concrete, as required, for placement and workability.
 2. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
 3. Use water-reducing admixture in pumped concrete, concrete for heavy-use industrial slabs and parking structure slabs, concrete required to be watertight, and concrete with a water-cementitious materials ratio below 0.50.
 4. Use corrosion-inhibiting admixture in concrete mixtures where indicated.

2.11 CONCRETE MIXTURES FOR BUILDING ELEMENTS

- A. Footings: Proportion normal-weight concrete mixture as follows:
1. Minimum Compressive Strength: 3000 psi at 28 days.
 2. Maximum Water-Cementitious Materials Ratio: 0.50.
 3. Slump Limit: 4 inches before adding high-range water-reducing admixture or plasticizing admixture, plus or minus 1 inch.
- B. Slabs-on-Grade: Proportion normal-weight concrete mixture as follows:
1. Minimum Compressive Strength – typical interior slab: 3000 psi at 28 days.
 2. Minimum Compressive Strength – typical exterior slab: 4000 psi at 28 days.
 3. Slump Limit: 4 inches, plus or minus 1 inch.
 4. Air Content: For exterior broom finished concrete only; 6 percent, plus or minus 1.5 percent at point of delivery for 3/4-inch nominal maximum aggregate size.
 5. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.
 6. Synthetic Macro-Fiber: Uniformly disperse in concrete mixture at manufacturer's recommended rate, but not less than 3.0 lb/cu. yd.
- C. Supported Slabs: Proportion normal-weight concrete mixture as follows:
1. Minimum Compressive Strength: 3000 psi at 28 days.
 2. Slump Limit: 4 inches, plus or minus 1 inch.
 3. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.
 4. Synthetic Macro-Fiber: Uniformly disperse in concrete mixture at manufacturer's recommended rate, but not less than 3.0 lb/cu. yd.
 5. For one- and two-span supported slabs at openings, ramps, and stairs, reinforce the slab with flat sheets of ASTM A185 plain welded wire reinforcement, in lieu of synthetic fibers.

2.12 FABRICATING REINFORCEMENT

- A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.13 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94/C 94M, and furnish batch ticket information.
 - 1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 FORMWORK

- A. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.
- B. Limit concrete surface irregularities, designated by ACI 347 as abrupt or gradual, as follows:
 - 1. Class A, 1/8 inch for smooth-formed finished surfaces.
- C. Construct forms tight enough to prevent loss of concrete mortar.
- D. Fabricate forms for easy removal without hammering or prying against concrete surfaces. Provide crush or wrecking plates where stripping may damage cast concrete surfaces. Provide top forms for inclined surfaces steeper than 1.5 horizontal to 1 vertical.
 - 1. Install keyways, reglets, recesses, and the like, for easy removal.
 - 2. Do not use rust-stained steel form-facing material.
- E. Set edge forms, bulkheads, and intermediate screed strips for slabs to achieve required elevations and slopes in finished concrete surfaces. Provide and secure units to support screed strips; use strike-off templates or compacting-type screeds.
- F. Provide temporary openings for cleanouts and inspection ports where interior area of formwork is inaccessible. Close openings with panels tightly fitted to forms and securely braced to prevent loss of concrete mortar. Locate temporary openings in forms at inconspicuous locations.
- G. Chamfer exterior corners and edges of permanently exposed concrete.
- H. Form openings, chases, offsets, sinkages, keyways, reglets, blocking, screeds, and bulkheads required in the Work. Determine sizes and locations from trades providing such items.
- I. Clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, and other debris just before placing concrete.
- J. Retighten forms and bracing before placing concrete, as required, to prevent mortar leaks and maintain proper alignment.
- K. Coat contact surfaces of forms with form-release agent, according to manufacturer's written instructions, before placing reinforcement.

3.2 EMBEDDED ITEMS

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 1. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of AISC's "Code of Standard Practice for Steel Buildings and Bridges."

3.3 VAPOR RETARDERS

- A. Sheet Vapor Retarders: Place, protect, and repair sheet vapor retarder according to ASTM E 1643 and manufacturer's written instructions.
 - 1. Following leveling and tamping of granular base for slabs on grade, place vapor barrier sheeting with longest dimension parallel with direction of pour and face laps away from the expected direction of the placement whenever possible.
 - 2. Extend vapor barrier to the perimeter of the slab. If practicable, terminate it at the top of the slab, otherwise (a) at a point acceptable to the structural engineer or (b) where obstructed by impediments, such as dowels, waterstops, or any other site condition requiring early termination of the vapor barrier. At the point of termination, seal vapor barrier to the foundation wall, grade beam or slab itself.
 - 3. Lap joints 6 inches and seal with manufacturer's recommended tape.
 - 4. Apply seam tape to a clean and dry vapor barrier.
 - 5. Seal all penetrations (including pipes) per manufacturer's instructions.
 - 6. Avoid the use of non-permanent stakes driven through vapor retarder.
 - 7. If non-permanent stakes are driven through vapor retarder, repair as recommended by vapor retarder manufacturer.
 - 8. Repair damaged areas with vapor barrier material of similar (or better) permeance, puncture and tensile.

3.4 STEEL REINFORCEMENT

- A. General: Comply with CRSI's "Manual of Standard Practice" for placing reinforcement.
 - 1. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, and other foreign materials that would reduce bond to concrete.
- C. Accurately position, support, and secure reinforcement against displacement. Locate and support reinforcement with bar supports to maintain minimum concrete cover. Do not tack weld crossing reinforcing bars.
 - 1. Weld reinforcing bars according to AWS D1.4/D 1.4M, where indicated.
- D. Set wire ties with ends directed into concrete, not toward exposed concrete surfaces.
- E. Install welded wire reinforcement in longest practicable lengths on bar supports spaced to minimize sagging. Lap edges and ends of adjoining sheets at least one mesh spacing. Offset laps of adjoining sheet widths to prevent continuous laps in either direction. Lace overlaps with wire.

3.5 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.
 - 1. Place joints perpendicular to main reinforcement. Continue reinforcement across construction joints unless otherwise indicated. Do not continue reinforcement through sides of strip placements of floors and slabs.
 - 2. Form keyed joints as indicated. Embed keys at least 1-1/2 inches into concrete.
 - 3. Use a bonding agent at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
- C. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:
 - 1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
 - 2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch- wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks.
- D. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.
 - 1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface unless otherwise indicated.
 - 2. Terminate full-width joint-filler strips not less than 1/2 inch or more than 1 inch below finished concrete surface where joint sealants, specified in Section 079200 "Joint Sealants," are indicated.
 - 3. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.

3.6 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections have been performed.
- B. Do not add water to concrete during delivery, at Project site, or during placement unless approved by Architect.
- C. Before test sampling and placing concrete, water may be added at Project site, subject to limitations of ACI 301.
 - 1. Do not add water to concrete after adding high-range water-reducing admixtures to mixture.

- D. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete will be placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.
1. Deposit concrete in horizontal layers of depth to not exceed formwork design pressures and in a manner to avoid inclined construction joints.
 2. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.
 3. Do not use vibrators to transport concrete inside forms. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least 6 inches into preceding layer. Do not insert vibrators into lower layers of concrete that have begun to lose plasticity. At each insertion, limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.
- E. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.
1. Consolidate concrete during placement operations so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
 2. Maintain reinforcement in position on chairs during concrete placement.
 3. Screed slab surfaces with a straightedge and strike off to correct elevations.
 4. Slope surfaces uniformly to drains where required.
 5. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface. Do not further disturb slab surfaces before starting finishing operations.
- F. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
1. When average high and low temperature is expected to fall below 40 deg F for three successive days, maintain delivered concrete mixture temperature within the temperature range required by ACI 301.
 2. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials.
 3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.
- G. Hot-Weather Placement: Comply with ACI 301 and as follows:
1. Maintain concrete temperature below 90 deg F at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
 2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

3.7 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.

1. Apply to concrete surfaces not exposed to public view.
- B. Smooth-Formed Finish: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch tie holes and defects. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 1. Apply to concrete surfaces exposed to public view or to be covered with a coating or covering material applied directly to concrete.
- C. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.8 FINISHING FLOORS AND SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraighening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
- B. Scratch Finish: While still plastic, texture concrete surface that has been screeded and bull-floated or darbied. Use stiff brushes, brooms, or rakes to produce a profile amplitude of 1/4 inch in one direction.
 1. Apply scratch finish to surfaces indicated and to receive mortar setting beds for bonded cementitious floor finishes.
- C. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraighening until surface is left with a uniform, smooth, granular texture.
 1. Apply float finish to surfaces indicated to receive trowel finish.
- D. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.
 1. Apply a trowel finish to surfaces exposed to view or to be covered with resilient flooring, carpet, ceramic or quarry tile set over a cleavage membrane, paint, or another thin-film-finish coating system.
 2. Finish surfaces to the following tolerances, according to ASTM E 1155, for a randomly trafficked floor surface:
 - a. Specified overall values of flatness, F(F) 25; and of levelness, F(L) 20; with minimum local values of flatness, F(F) 17; and of levelness, F(L) 15.
- E. Trowel and Fine-Broom Finish: Apply a first trowel finish to surfaces where ceramic or quarry tile is to be installed by either thickset or thin-set method. While concrete is still plastic, slightly scarify surface with a fine broom.
 1. Comply with flatness and levelness tolerances for trowel-finished floor surfaces.
- F. Broom Finish: Apply a broom finish to exterior concrete platforms, steps, ramps, and elsewhere as indicated.

1. Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route. Coordinate required final finish with Architect before application.

3.9 MISCELLANEOUS CONCRETE ITEMS

- A. Filling In: Fill in holes and openings left in concrete structures after work of other trades is in place unless otherwise indicated. Mix, place, and cure concrete, as specified, to blend with in-place construction. Provide other miscellaneous concrete filling indicated or required to complete the Work.
- B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and by steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.
- C. Equipment Bases and Foundations: Provide machine and equipment bases and foundations as shown on Drawings. Set anchor bolts for machines and equipment at correct elevations, complying with diagrams or templates from manufacturer furnishing machines and equipment.
- D. Steel Pan Stairs: Provide concrete fill for steel pan stair treads, landings, and associated items. Cast-in inserts and accessories as shown on Drawings. Screed, tamp, and trowel finish concrete surfaces.

3.10 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 301 for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- C. Formed Surfaces: Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces. If forms remain during curing period, moist cure after loosening forms. If removing forms before end of curing period, continue curing for the remainder of the curing period.
- D. Unformed Surfaces: Begin curing immediately after finishing concrete. Cure unformed surfaces, including floors and slabs, concrete floor toppings, and other surfaces.
- E. Cure concrete according to ACI 308.1, by one or a combination of the following methods:
 1. Moisture Curing: Keep surfaces continuously moist for not less than seven days with the following materials:
 - a. Water.
 - b. Continuous water-fog spray.
 - c. Absorptive cover, water saturated, and kept continuously wet. Cover concrete surfaces and edges with 12-inch lap over adjacent absorptive covers.

2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive. Cure for not less than seven days. Immediately repair any holes or tears during curing period using cover material and waterproof tape.
 - a. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive floor coverings.
 - b. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive penetrating liquid floor treatments.
 - c. Cure concrete surfaces to receive floor coverings with either a moisture-retaining cover or a curing compound that the manufacturer certifies will not interfere with bonding of floor covering used on Project.
3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.
 - a. Removal: After curing period has elapsed, remove curing compound without damaging concrete surfaces by method recommended by curing compound manufacturer unless manufacturer certifies curing compound will not interfere with bonding of floor covering used on Project.

3.11 JOINT FILLING

- A. Prepare, clean, and install joint filler according to manufacturer's written instructions.
 1. Defer joint filling until concrete has aged at least one month. Do not fill joints until construction traffic has permanently ceased.
- B. Remove dirt, debris, saw cuttings, curing compounds, and sealers from joints; leave contact faces of joint clean and dry.
- C. Install semirigid joint filler full depth in saw-cut joints and at least 2 inches deep in formed joints. Overfill joint and trim joint filler flush with top of joint after hardening.

3.12 CONCRETE SURFACE REPAIRS

- A. Defective Concrete: Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.
- B. Patching Mortar: Mix dry-pack patching mortar, consisting of one part portland cement to two and one-half parts fine aggregate passing a No. 16 sieve, using only enough water for handling and placing.
- C. Repairing Formed Surfaces: Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.
 1. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch in any dimension to solid concrete. Limit cut depth to 3/4 inch. Make edges of cuts perpendicular to concrete surface. Clean, dampen with water, and brush-coat holes

- and voids with bonding agent. Fill and compact with patching mortar before bonding agent has dried. Fill form-tie voids with patching mortar or cone plugs secured in place with bonding agent.
2. Repair defects on surfaces exposed to view by blending white portland cement and standard portland cement so that, when dry, patching mortar will match surrounding color. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching. Compact mortar in place and strike off slightly higher than surrounding surface.
 3. Repair defects on concealed formed surfaces that affect concrete's durability and structural performance as determined by Architect.
- D. Repairing Unformed Surfaces: Test unformed surfaces, such as floors and slabs, for finish and verify surface tolerances specified for each surface. Correct low and high areas. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.
1. Repair finished surfaces containing defects. Surface defects include spalls, popouts, honeycombs, rock pockets, crazing and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions.
 2. After concrete has cured at least 14 days, correct high areas by grinding.
 3. Correct localized low areas during or immediately after completing surface finishing operations by cutting out low areas and replacing with patching mortar. Finish repaired areas to blend into adjacent concrete.
 4. Correct other low areas scheduled to receive floor coverings with a repair underlayment. Prepare, mix, and apply repair underlayment and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface. Feather edges to match adjacent floor elevations.
 5. Correct other low areas scheduled to remain exposed with a repair topping. Cut out low areas to ensure a minimum repair topping depth of 1/4 inch to match adjacent floor elevations. Prepare, mix, and apply repair topping and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.
 6. Repair defective areas, except random cracks and single holes 1 inch or less in diameter, by cutting out and replacing with fresh concrete. Remove defective areas with clean, square cuts and expose steel reinforcement with at least a 3/4-inch clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding agent. Mix patching concrete of same materials and mixture as original concrete except without coarse aggregate. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
 7. Repair random cracks and single holes 1 inch or less in diameter with patching mortar. Groove top of cracks and cut out holes to sound concrete and clean off dust, dirt, and loose particles. Dampen cleaned concrete surfaces and apply bonding agent. Place patching mortar before bonding agent has dried. Compact patching mortar and finish to match adjacent concrete. Keep patched area continuously moist for at least 72 hours.
- E. Perform structural repairs of concrete, subject to Architect's approval, using epoxy adhesive and patching mortar.
- F. Repair materials and installation not specified above may be used, subject to Architect's approval.

3.13 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Owner will engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Testing and Inspecting: Engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.
- C. Inspections:
 - 1. Steel reinforcement placement.
 - 2. Steel reinforcement welding.
 - 3. Headed bolts and studs.
 - 4. Verification of use of required design mixture.
 - 5. Concrete placement, including conveying and depositing.
 - 6. Curing procedures and maintenance of curing temperature.
 - 7. Verification of concrete strength before removal of shores and forms from beams and slabs.
- D. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
 - 1. Testing Frequency: Samples for strength tests of each class of concrete placed each day shall be taken not less than once a day, nor less than once for each 150 cu. yd. (114 cu. m) of concrete, nor less than once for each 5,000 sq. ft. of surface area for slabs or walls.
 - 2. Slump: ASTM C 143/C 143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
 - 3. Air Content: ASTM C 231, pressure method, for normal-weight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - 4. Concrete Temperature: ASTM C 1064/C 1064M; one test hourly when air temperature is 40 deg F and below and when 80 deg F and above, and one test for each composite sample.
 - 5. Unit Weight: ASTM C 567, fresh unit weight of structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - 6. Compression Test Specimens: ASTM C 31/C 31M.
 - a. Cast and laboratory cure two sets of two standard cylinder specimens for each composite sample.
 - 7. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi.
 - 8. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
 - 9. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.

10. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Architect.
 11. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
 12. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.
- E. Measure floor and slab flatness and levelness according to ASTM E 1155 within 48 hours of finishing.

END OF SECTION 033000

SECTION 055000 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Steel framing and supports for mechanical and electrical equipment.
 - 2. Steel framing and supports for applications where framing and supports are not specified in other Sections.
 - 3. Steel weld plates and angles for casting into concrete not specified in other Sections.
 - 4. Metal ladders for roof hatch.
 - 5. Abrasive aluminum nosing for concrete steps.
- B. Products furnished, but not installed, under this Section include the following:
 - 1. Anchor bolts, steel pipe sleeves, and wedge-type inserts indicated to be cast into concrete or built into unit masonry.
- C. Related Sections include the following:
 - 1. Division 05 Section "Pipe and Tube Railings."
 - 2. See Structural drawings for concrete and steel requirements.

1.3 PERFORMANCE REQUIREMENTS

- A. Structural Performance of Ladders: Provide ladders capable of withstanding the effects of loads and stresses within limits and under conditions specified in ANSI A14.3.
- B. Thermal Movements: Provide exterior metal fabrications that allow for thermal movements resulting from the following maximum change (range) in ambient and surface temperatures by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
 - 1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

1.4 SUBMITTALS

- A. Product Data: For the following:
 - 1. Shop primer paint products.
 - 2. Grout.
- B. Shop Drawings: Show fabrication and installation details for metal fabrications.
 - 1. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items.
 - 2. Provide templates for anchors and bolts specified for installation under other Sections.
 - 3. For installed products indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- C. Mill Certificates: Signed by manufacturers of stainless-steel sheet certifying that products furnished comply with requirements.
- D. Welding certificates.
- E. Qualification Data: For professional engineer.

1.5 QUALITY ASSURANCE

- A. Welding: Qualify procedures and personnel according to the following:
 - 1. AWS D1.1, "Structural Welding Code--Steel."
 - 2. AWS D1.3, "Structural Welding Code--Sheet Steel."
 - 3. AWS D1.6, "Structural Welding Code--Stainless Steel."

1.6 PROJECT CONDITIONS

- A. Field Measurements: Verify actual locations of walls and other construction contiguous with metal fabrications by field measurements before fabrication and indicate measurements on Shop Drawings.
 - 1. Established Dimensions: Where field measurements cannot be made without delaying the Work, establish dimensions and proceed with fabricating metal fabrications without field measurements. Coordinate wall and other contiguous construction to ensure that actual dimensions correspond to established dimensions.
 - 2. Provide allowance for trimming and fitting at site.

1.7 COORDINATION

- A. Coordinate installation of anchorages for metal fabrications. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- B. Coordinate installation of steel weld plates and angles for casting into concrete that are specified in this Section but required for work of another Section. Deliver such items to Project site in time for installation.
- C. Coordinate the installation of elevator hoistway pit ladder provided by elevator manufacturer and installed by metal fabrications installer.

PART 2 - PRODUCTS

2.1 METALS, GENERAL

- A. Metal Surfaces, General: Provide materials with smooth, flat surfaces, unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.

2.2 FERROUS METALS

- A. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.
- B. Stainless-Steel Sheet, Strip, Plate, and Flat Bars: ASTM A 666, Type 304.
- C. Stainless-Steel Bars and Shapes: ASTM A 276, Type 304.
- D. Rolled-Steel Floor Plate: ASTM A 786/A 786M, rolled from plate complying with ASTM A 36/A 36M or ASTM A 283/A 283M, Grade C or D.
- E. Rolled-Stainless-Steel Floor Plate: ASTM A 793.
- F. Steel Tubing: ASTM A 500, cold-formed steel tubing.
- G. Steel Pipe: ASTM A 53/A 53M, standard weight (Schedule 80), unless another weight is indicated or required by structural loads.
- H. Slotted Channel Framing: Cold-formed metal channels with continuous slot complying with MFMA-3.

1. Size of Channels: 1-5/8 by 1-5/8 inches.
 2. Material: Steel complying with ASTM A 1008/A 1008M, commercial steel, Type B; 0.0677-inch minimum thickness; coated with rust-inhibitive, baked-on, acrylic enamel.
- I. Cast Iron: ASTM A 48/A 48M, Class 30, unless another class is indicated or required by structural loads.
 - J. Chain link mesh: Comply with ASTM A 392, fabricated in one-piece widths for fencing 12 feet and less in height to comply with Chain Link Fence Manufacturers Institute CLFMI CLF 2445, and requirements indicated below:
 1. Steel Wire Fabric: Polymer-coated wire with a diameter of 0.148 inch.
 2. Mesh Size: 1 inch (25 mm).
 3. Color: As selected by Architect from manufacturer's full range.

2.3 FASTENERS

- A. General: Unless otherwise indicated, provide Type 304 stainless-steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B 633, Class Fe/Zn 5, at exterior walls and interior wet areas. Provide stainless-steel fasteners for fastening aluminum. Select fasteners for type, grade, and class required.
- B. Steel Bolts and Nuts: Regular hexagon-head bolts, ASTM A 307, Grade A; with hex nuts, ASTM A 563; and, where indicated, flat washers.
- C. Stainless-Steel Bolts and Nuts: Regular hexagon-head annealed stainless-steel bolts, nuts and, where indicated, flat washers; ASTM F 593 for bolts and ASTM F 594 for nuts, Alloy Group 1.
- D. Anchor Bolts: ASTM F 1554, Grade 36.
 1. Provide hot-dip or mechanically deposited, zinc-coated anchor bolts where item being fastened is indicated to be galvanized.
- E. Eyebolts: ASTM A 489.
- F. Machine Screws: ASME B18.6.3.
- G. Lag Bolts: ASME B18.2.1.
- H. Wood Screws: Flat head, ASME B18.6.1.
- I. Plain Washers: Round, ASME B18.22.1.
- J. Lock Washers: Helical, spring type, ASME B18.21.1.

- K. Cast-in-Place Anchors in Concrete: Anchors capable of sustaining, without failure, a load equal to four times the load imposed, as determined by testing according to ASTM E 488, conducted by a qualified independent testing agency.
 - 1. Threaded or wedge type; galvanized ferrous castings, either ASTM A 47/A 47M malleable iron or ASTM A 27/A 27M cast steel. Provide bolts, washers, and shims as needed, hot-dip galvanized per ASTM A 153/A 153M.
- L. Expansion Anchors: Anchor bolt and sleeve assembly with capability to sustain, without failure, a load equal to six times the load imposed when installed in unit masonry and four times the load imposed when installed in concrete, as determined by testing according to ASTM E 488, conducted by a qualified independent testing agency.
 - 1. Material for Anchors in Interior Locations: Carbon-steel components zinc-plated to comply with ASTM B 633, Class Fe/Zn 5.
 - 2. Material for Anchors in Exterior Locations: Alloy Group 1 stainless-steel bolts complying with ASTM F 593 and nuts complying with ASTM F 594.

2.4 ABRASIVE NOSINGS

- A. Cast-Metal Units: Cast iron, with an integral abrasive, as-cast finish.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Safety Tread Co., Inc.
 - b. Balco, Inc.
 - c. Barry Pattern & Foundry Co., Inc.
 - d. Granite State Casting Co.
 - e. Safe-T-Metal Company, Inc.
 - f. Wooster Products Inc.

2.5 MISCELLANEOUS MATERIALS

- A. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.
- B. Shop Primers: Provide primers that comply with Division 09 Section "Special Coatings" and can be used without the application of barrier coats prior to finish painting.
- C. Nonshrink, Metallic Grout: Factory-packaged, ferrous-aggregate grout complying with ASTM C 1107, specifically recommended by manufacturer for heavy-duty loading applications.

- D. Concrete Materials and Properties: Comply with requirements in Division 03 Section "Cast-in-Place Concrete" for normal-weight, air-entrained, ready-mix concrete with a minimum 28-day compressive strength of 3000 psi, unless otherwise indicated.

2.6 FABRICATION, GENERAL

- A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.
- B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch, unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.
 - 1. Steel plate for Campus logo shall be laser or water precision cut. Edges shall be eased as required.
- C. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.
- D. Form exposed work true to line and level with accurate angles and surfaces and straight edges.
- E. Weld corners and seams continuously to comply with the following:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.
- F. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners where possible. Where exposed fasteners are required, use Phillips flat-head (countersunk) screws or bolts, unless otherwise indicated. Locate joints where least conspicuous.
- G. Fabricate seams and other connections that will be exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.
- H. Cut, reinforce, drill, and tap metal fabrications as indicated to receive finish hardware, screws, and similar items.
- I. Provide for anchorage of type indicated; coordinate with supporting structure. Space anchoring devices to secure metal fabrications rigidly in place and to support indicated loads.

1. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors, 1/8 by 1-1/2 inches, with a minimum 6-inch embedment and 2-inch hook, not less than 8 inches from ends and corners of units and 24 inches o.c., unless otherwise indicated.

2.7 MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Provide steel framing and supports not specified in other Sections as needed to complete the Work.
- B. Fabricate units from steel shapes, plates, and bars of welded construction, unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction retained by framing and supports. Cut, drill, and tap units to receive hardware, hangers, and similar items.
 1. Fabricate units from slotted channel framing where indicated.
 2. Furnish inserts if units are installed after concrete is placed.
- C. Fabricate supports for operable partitions from continuous steel beams of sizes indicated with attached bearing plates, anchors, and braces as indicated. Drill bottom flanges of beams to receive partition track hanger rods; locate holes where indicated on operable partition Shop Drawings.
- D. Prime miscellaneous ferrous metal framing and supports with primer specified in Division 09, Section "Special Coatings."

2.8 LOOSE BEARING AND LEVELING PLATES

- A. Provide loose bearing and leveling plates for steel items bearing on masonry or concrete construction. Drill plates to receive anchor bolts and for grouting.
- B. Galvanize plates after fabrication.
- C. Prime exposed plates with zinc-rich primer specified with Division 9, section "Special Coatings."

2.9 STEEL WELD PLATES AND ANGLES

- A. Provide steel weld plates and angles not specified in other Sections, for items supported from concrete construction as needed to complete the Work. Provide each unit with not less than two integrally welded steel strap anchors for embedding in concrete.

2.10 MISCELLANEOUS STEEL TRIM

- A. Unless otherwise indicated, fabricate units from steel shapes, plates, and bars of profiles shown with continuously welded joints and smooth exposed edges. Miter corners and use concealed field splices where possible.
- B. Provide cutouts, fittings, and anchorages as needed to coordinate assembly and installation with other work.
 - 1. Provide with integrally welded steel strap anchors for embedding in concrete or masonry construction.
- C. Galvanize exterior miscellaneous steel trim and finish exposed trim in accordance with Division 09 Special Coatings.
- D. Prime interior miscellaneous steel trim, where indicated with primer specified in Division 09, section "Special Coatings."

2.11 METAL LADDERS

- A. General:
 - 1. Comply with ANSI A14.3, unless otherwise indicated.
 - 2. For elevator pit ladders, comply with ASME A17.1.
 - 3. Space siderails as indicated.
 - 4. Support each ladder at top and bottom and not more than 60 inches o.c. with welded or bolted brackets, made from same metal as ladder.
 - 5. Provide serrated punched plates or grating profiles for landing platforms.
- B. Steel Ladders: Provide in dimensions and profiles indicated.
 - 1. Hot dip galvanize exterior ladders after fabrication.
 - 2. Prime exterior ladders and interior ladders, where indicated, including brackets and fasteners, with specified primer indicated in Division 09, section "Special Coatings."

2.12 FINISHES, GENERAL

- A. Finish metal fabrications after assembly.

2.13 STEEL AND IRON FINISHES

- A. Galvanizing: Hot-dip galvanize items as indicated to comply with applicable standard listed below:

1. ASTM A 123/A 123M, for galvanizing steel and iron products.
 2. ASTM A 153/A 153M, for galvanizing steel and iron hardware.
- B. Preparation for Shop Priming: Prepare uncoated ferrous-metal surfaces to comply with Division 9, "Special Coatings" section. Prepare surfaces as indicated:
1. Exteriors; SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 2. Interiors: SSPC-SP 3, "Power Tool Cleaning."
- C. Shop Priming: Apply shop primer to uncoated surfaces of metal fabrications, except those with galvanized finishes and those to be embedded in concrete, sprayed-on fireproofing, or masonry, unless otherwise indicated. Comply with SSPC-PA 1, "Paint Application Specification No. 1: Shop, Field, and Maintenance Painting of Steel," for shop painting.
1. Stripe paint corners, crevices, bolts, welds, and sharp edges.

2.14 METAL BOLLARDS

- A. Fabricate metal bollards from Schedule 40 steel pipe; size as indicated.
- B. Prime bollards with **zinc-rich primer**.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.
- B. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.
- C. Field Welding: Comply with the following requirements:
1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove welding flux immediately.
 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

- D. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction. Provide threaded fasteners for use with concrete and masonry inserts, toggle bolts, through bolts, lag bolts, wood screws, and other connectors.
- E. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.
- F. Corrosion Protection: Coat concealed surfaces of aluminum that will come into contact with grout, concrete, masonry, wood, or dissimilar metals with a heavy coat of bituminous paint.

3.2 INSTALLING MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings.
- B. Anchor supports for operable partitions securely to and rigidly brace from building structure.
- C. Support steel girders on solid grouted masonry, concrete, or steel pipe columns. Secure girders with anchor bolts embedded in grouted masonry or concrete or with bolts through top plates of pipe columns.
 - 1. Where grout space under bearing plates is indicated for girders supported on concrete or masonry, install as specified in "Installing Bearing and Leveling Plates" Article.
- D. Install pipe columns on concrete footings with grouted baseplates. Position and grout column baseplates as specified in "Installing Bearing and Leveling Plates" Article.
 - 1. Grout baseplates of columns supporting steel girders after girders are installed and leveled.
- E. Install as exposed AESS welded steel framing for structural shapes and tubes where indicated.

3.3 INSTALLING BEARING AND LEVELING PLATES

- A. Clean concrete and masonry bearing surfaces of bond-reducing materials, and roughen to improve bond to surfaces. Clean bottom surface of plates.
- B. Set bearing and leveling plates on wedges, shims, or leveling nuts. After bearing members have been positioned and plumbed, tighten anchor bolts. Do not remove wedges or shims but, if protruding, cut off flush with edge of bearing plate before packing with grout.
 - 1. Use nonshrink grout, either metallic or nonmetallic, in concealed locations where not exposed to moisture; use nonshrink, nonmetallic grout in exposed locations, unless otherwise indicated.
 - 2. Pack grout solidly between bearing surfaces and plates to ensure that no voids remain.

3.4 ADJUSTING AND CLEANING

- A. Touchup Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
 - 1. Apply by brush or spray to provide a minimum 2.0-mil dry film thickness.
- B. Touchup Painting: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Division 09 painting Sections.
- C. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780.
- D. Adjust gate to operate smoothly, easily, and quietly, free of binding, warp, excessive deflection, distortion, nonalignment, misplacement, disruption, or malfunction, throughout entire operational range. Confirm that latches and locks engage accurately and securely without forcing or binding.

END OF SECTION 055000

SECTION 055213 - PIPE AND TUBE RAILINGS

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes the following:

1. Steel pipe railings.

1.2 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide railings capable of withstanding the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:

1. Handrails:

- a. Uniform load of 50 lbf/ ft. applied in any direction.
- b. Concentrated load of 200 lbf applied in any direction.
- c. Uniform and concentrated loads need not be assumed to act concurrently.

2. Top Rails of Guards:

- a. Uniform load of 50 lbf/ ft. applied in any direction.
- b. Concentrated load of 200 lbf applied in any direction.
- c. Uniform and concentrated loads need not be assumed to act concurrently.

- B. Control of Corrosion: Prevent galvanic action and other forms of corrosion by insulating metals and other materials from direct contact with incompatible materials.

1.3 SUBMITTALS

- A. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

1. For installed products indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

PART 2 - PRODUCTS

2.1 METALS

- A. Brackets, Flanges, and Anchors: Cast or formed metal of same type of material and finish as supported rails, unless otherwise indicated.

B. Steel and Iron:

1. Tubing: ASTM A 500 (cold formed).
2. Pipe: ASTM A 53/A 53M, Type F or Type S, Grade A, Standard Weight (Schedule 40), unless another grade and weight are required by structural loads.
3. Plates, Shapes, and Bars: ASTM A 36/A 36M.
4. Castings: Either gray or malleable iron, unless otherwise indicated.
 - a. Gray Iron: ASTM A 48/A 48M, Class 30, unless another class is indicated or required by structural loads.
 - b. Malleable Iron: ASTM A 47/A 47M.

2.2 MISCELLANEOUS MATERIALS

- A. Fasteners: Provide concealed fasteners, unless unavoidable or standard for railings indicated.
1. Steel Railings: Plated steel fasteners complying with ASTM B 633, Class Fe/Zn 25 for electrodeposited zinc coating.
- B. Anchors: Provide torque-controlled expansion anchors, fabricated from corrosion-resistant materials with capability to sustain, without failure, a load equal to six times the load imposed when installed in unit masonry and equal to four times the load imposed when installed in concrete, as determined by testing per ASTM E 488.
- C. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.
- D. Shop Primers: Provide primers that comply with Division 9 painting Sections.
- E. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79.
- F. Zinc-Rich Primer: Complying with SSPC-Paint 20 or SSPC-Paint 29 and compatible with topcoat.
- G. Shop Primer for Galvanized Steel: Zinc-dust, zinc-oxide primer compatible with finish paint systems indicated, and complying with SSPC-Paint 5.
- H. Grout and Anchoring Cement: Factory-packaged, nonshrink, nonmetallic grout complying with ASTM C 1107; or water-resistant, nonshrink anchoring cement; recommended by manufacturer for exterior use.

2.3 FABRICATION

- A. General: Fabricate railings to comply with design, dimensions, and details indicated, but not less than that required to support structural loads.
- B. Welded Connections: Cope components at connections to provide close fit, or use fittings designed for this purpose. Weld all around at connections, including at fittings.

- C. Welded Connections for Aluminum Pipe: Fabricate railings to interconnect members with concealed internal welds, using manufacturer's standard system of sleeve and socket fittings.
- D. Nonwelded Connections: Connect members with concealed mechanical fasteners and fittings.
- E. Form changes in direction by bending or by inserting prefabricated elbow fittings.
- F. Form curves by bending in jigs to produce uniform curvature; maintain cross section of member throughout bend without cracking or otherwise deforming exposed surfaces.
- G. Close exposed ends of railing members with prefabricated end fittings.
- H. Provide wall returns at ends of wall-mounted handrails, unless otherwise indicated.
- I. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors to interconnect railing members to other work, unless otherwise indicated.

2.4 FINISHES

- A. Steel and Iron:
 - 1. Shop-Primed Galvanized Railings: After galvanizing, clean railings, treat with metallic-phosphate process, and apply primer to comply with SSPC-PA 1.
 - 2. Shop-Primed Steel Finish: Prepare to comply with SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning and apply primer to comply with SSPC-PA 1.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Perform cutting, drilling, and fitting required for installing railings. Set railings accurately in location, alignment, and elevation.
 - 1. Set posts plumb within a tolerance of 1/16 inch in 3 feet.
 - 2. Align rails so variations from level for horizontal members and variations from parallel with rake of steps and ramps for sloping members do not exceed 1/4 inch in 12 feet.
- B. Coat concealed surfaces of aluminum that will be in contact with grout, concrete, masonry, wood, or dissimilar metals, with a heavy coat of bituminous paint.
- C. Anchor posts in concrete by inserting into formed or core-drilled holes and grouting annular space.
- D. Anchor posts to metal surfaces with oval flanges.
- E. Anchor railing ends to concrete and masonry with round flanges connected to railing ends and anchored to wall construction with anchors and bolts.

F. Attach handrails to wall with wall brackets.

1. Use type of bracket with predrilled hole for exposed bolt anchorage.
2. For wood stud partitions, use hanger or lag bolts set into wood backing between studs.

G. Adjusting and Cleaning:

1. Immediately after erection, clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with the same material as used for shop painting.
2. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780.

END OF SECTION 055213

SECTION 064020 - INTERIOR ARCHITECTURAL WOODWORK

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes interior woodwork including for the following applications:
 - 1. Plastic-laminate cabinets.
 - 2. Plastic-laminate countertops.
 - 3. Quartz agglomerate countertops and backsplashes.
 - 4. Shop finishing of woodwork.
- B. Interior architectural woodwork includes wood furring, blocking, shims, and hanging strips, unless concealed within other construction before woodwork installation.
- C. See Interior Design drawings for selection of finishes and additional information.

1.2 SUBMITTALS

- A. Product Data: For the following:
 - 1. Cabinet hardware and accessories.
 - 2. Finishing materials and processes.
- B. Shop Drawings:
 - 1. Submit CAD production drawings for casework systems and countertops showing plan view layout of units with relation to surrounding walls, doors, windows, and other building components, elevations, ends, cross-sections, service run spaces and location of services.
 - 2. Coordinate production drawings with other work involved. Casework manufacturer to provide shop drawings for all trades involved in installation of casework.
- C. Samples:
 - 1. Plastic-laminate-clad panel products, for each type, color, pattern, and surface finish.
 - 2. Thermoset decorative-overlay surfaced panel products, for each type, color, pattern, and surface finish.
 - 3. Quartz materials

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer shall show evidence of a minimum of five years experience in providing manufactured casework systems for similar types of projects, produce evidence of financial stability, bonding capacity, and adequate facilities and personnel required to perform on this project.

- B. Quality Standard: Unless otherwise indicated, comply with AWI's "Architectural Woodwork Quality Standards" for grades of interior architectural woodwork, construction, finishes, and other requirements.
 - 1. The contractor must provide if requested AWI certification labels or compliance certificate indicating that woodwork complies with requirements of grades specified. Certification labels or compliance certificates must be provided at no cost.
- C. Warranty: All materials and workmanship covered by this section shall carry a three (3) year warranty from date of substantial completion. This warranty is a warranty of replacement and repair only, whereby the manufacturer will correct defects in material and or workmanship without charge.

1.4 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install woodwork until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at levels planned for building occupants during the remainder of the construction period. Relative humidity range must be stabilized and fall within 20% to 50%. Notify general contractor of humidity requirements prior to delivery.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Wood Products:
 - 1. Hardboard: AHA A135.4, meet or exceed commercial standard CS-251.
 - 2. Medium-Density Fiberboard: ANSI A208.2, Grade MD.
 - 3. Particleboard: ANSI A208.1, Grade M-3.
- B. Thermoset Decorative Overlay: Particleboard or medium-density fiberboard with surface of thermally fused, melamine-impregnated decorative paper complying with LMA SAT-1.
- C. High-Pressure Decorative Laminate: NEMA LD 3.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Formica Corporation.
 - b. Lab Designs
 - c. Laminart.
 - d. Nevamar
 - e. Pionite
 - f. Wilsonart International; Div. of Premark International, Inc.

D. QUARTZ AGGLOMERATE COUNTERTOPS

1. Quartz Agglomerate: Solid sheets consisting of quartz aggregates bound together with a matrix of filled plastic resin and complying with the "Physical Characteristics of Materials" Article of ANSI SS1.
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Cosmos
 - 2) Metroquartz
 - 3) HansStone
 - b. Colors and Patterns: As selected by Architect from manufacturer's full range.

E. Edge Banding:

1. Provide 1 mm PVC banding, machine applied with waterproof hot melt adhesive. This is applicable to all items except for items identified in Note 2 located below.
2. 3mm PVC banding, machine applied waterproof hot melt adhesive with external edges and outside corners of door and drawer fronts, and countertops, machine profiled to 1/8" in radius for safety.
3. PVC banding shall be available in fifty standard colors. All selections color matched to Wilsonart, Nevemar and Formica laminates of the same name.
4. Barbed T-edging or laminate self edge on cabinet components will not be acceptable.

2.2 CABINET HARDWARE AND ACCESSORIES

- A. General: Provide cabinet hardware and accessory materials for a complete installation of architectural woodwork, except for items specified in Division 8 Section "Door Hardware".
- B. Hardware Standard: Comply with BHMA A156.9 for items indicated by referencing BHMA numbers or items referenced to this standard.
- C. Butt Hinges: 2-3/4-inch 5-knuckle steel hinges made from 0.095-inch thick metal. Comply with BHMA A156.9 Grade 1. Doors over 48" shall have three hinges per door.
- D. Wire Pulls: Back mounted, 4 inches long, 5/16 inches in diameter. Pull design shall be compatible with the Americans with Disability Act including paragraph 4.27.4 of the Federal Register Volume 56, No. 144. Provide solid brass, brushed chrome plated.
- E. Catches: Magnetic, BHMA A156.9, B03141.
- F. Adjustable Shelf Standards and Supports: BHMA A156.9, B04071; with shelf rests, B04081.
 1. Supports shall be injection molded polycarbonate, clear color to blend with selected interior finish, friction fit into cabinet end panels and vertical dividers, readily adjustable on 1 1/4" centers. Each shelf support shall have two integral support pins, 5mm diameter, to interface pre-drilled holes, and to prevent accidental rotation of support. The supports shall be automatically adaptable to 3/4" or 1 in. thick shelving and shall provide non-tip feature for

shelving. Supports are designed to readily permit field fixing of shelf if desired. Structural load testing shall show loading to 1,040 pounds without failure.

G. Drawer Slides: Basis of Design Blum BS230M.

1. Side-mounted, full-extension, zinc-plated steel drawer slides with steel ball bearings, BHMA A156.9, B05091 and rated for the following loads:
 - a. Box Drawer Slides: 100 lbf , Basis of Design Blum BS230M.
 - b. File Drawer Slides: 200 lbf.
 - c. Pencil Drawer Slides: 45lbf Basis of Design Blum BS320.
2. Provide positive stop in both directions, with self closing feature.
3. Provide manufacturers standard lifetime warranty.

H. Door and Drawer Locks:

1. Basis of Design: National Lock #M4-7054C.
2. Provide removable core, disc tumbler, cam style lock with strike. Provide two keys for each lock.
3. Locks in each room shall be keyed alike. Manufacturer shall provide a master key.

I. Chain bolts:

1. Provide chain bolts 3” long, each shall have a 18” pull and an angle strike to secure inactive door on cabinets over 72” in height. Elbow catches shall be used on inactive doors up to and including 72” in height.

J. Coat Rods:

1. Coat rods shall be 1 1 /4” diameter 14 gauge chrome plated steel installed in captive mounting hardware.

K. Hanging File Suspension Rails:

1. All file drawers shall include a pair of 14 ga steel hanging file suspension rails, epoxy coated. File followers, or other split bottom hardware shall not be acceptable.

L. Exposed Hardware Finishes: Complying with BHMA A156.18 for BHMA finish number indicated.

1. Satin Chromium Plated: BHMA 626 for brass or bronze base; BHMA 652 for steel base.

2.3 INSTALLATION MATERIALS

- A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln-dried to less than 15 percent moisture content.

2.4 FABRICATION

- A. General: Complete fabrication to maximum extent possible before shipment to Project site. Where necessary for fitting at site, provide allowance for scribing, trimming, and fitting.
1. Interior Woodwork Grade: Custom complying with the referenced quality standard.
 2. Shop cut openings to maximum extent possible. Sand edges of cutouts to remove splinters and burrs.
 3. Seal edges of openings in countertops with a coat of varnish.
 4. Install glass to comply with applicable requirements in Division 8 Section "Glazing" and in GANA's "Glazing Manual." For glass in wood frames, secure glass with removable stops.
 5. For trim items wider than available lumber, use veneered construction. Do not glue for width.
 6. Backout or groove backs of flat trim members and kerf backs of other wide, flat members, except for members with ends exposed in finished work.
 7. Assemble casings in plant except where limitations of access to place of installation require field assembly.
- B. Plastic-Laminate Cabinets:
1. AWI Type of Cabinet Construction: Flush overlay.
 - a. Tops and bottoms shall be joined to cabinet ends and internal cabinet components such as fixed horizontals, rails and verticals using 10mm diameter industrial grade hardwood dowels, laterally fluted with chamfered ends, securely glued and clamped under pressure during assembly to secure joints and cabinet squareness. Use minimum of six dowels at each joint for 24" deep cabinets and minimum of four dowels at each joint for 12" deep cabinets.
 - b. All under-counter units except sink base units, shall be provided with full sub-top. Sink base units shall be provided with open top, front welded steel/epoxy painted sink rail full width at top front edge concealed behind face rail/doors split back removable access panels and bottom panel to have CL20 high pressure cabinet liner both faces, color to match interior color.
 - c. All end panels and vertical dividers, except sink base units, shall be prepared to receive adjustable shelf hardware at 32mm (1 1/4") centers. Door hinges, drawer slides and pull-out shelves shall mount on line boring to maintain vertical alignment of components and provide for future relocation of doors, drawers, shelves and/or pull-out shelves.
 - d. 3mm PVC edge banding available in fifty standard colors.
 2. WIC Construction Style: Style Face Frame.
 3. WIC Construction Type: Type I, multiple self-supporting units rigidly joined together.
 4. WIC Door and Drawer Front Style: Flush overlay. Door width may not exceed 24".
 5. Shelving: Provide mid shelf support when length exceeds 30". Provide 3mm PVC edge banding.
 6. Drawers: The back and sub-front shall be doweled and glued into the sides. Dowels shall be fluted, with chamfered ends and a minimum diameter of 8mm. Top edge is banded with

- 1mm PVC in a matching color. Dead space in excess of 1" from back of drawer to back of cabinet will not be permitted.
 - 7. Drawer Bottom: The bottom shall be screwed directly to the front edge of the drawer box.
 - 8. Laminate Cladding for Exposed Surfaces: High-pressure decorative of grade indicated.
 - a. Horizontal Surfaces Other Than Tops: HGS.
 - b. Postformed Surfaces: HGP.
 - c. Vertical Surfaces: VGS.
 - d. Edges: 3mm PVC banding.
 - 9. Materials for Semiexposed Surfaces Other Than Drawer Bodies: Thermoset decorative overlay.
 - a. Drawer Sides and Backs: Thermoset decorative overlay.
 - b. Drawer Bottoms: Thermoset decorative overlay.
 - 10. Colors, Patterns, and Finishes: As selected from manufacturer's full range.
- C. Plastic-Laminate Countertops:
- 1. High-Pressure Decorative Laminate Grade: HGS.
 - 2. Colors, Patterns, and Finishes: As selected from manufacturer's full range.
 - 3. Edge Treatment: 3 mm PVC available in a minimum of fifty standard colors.
- D. Quartz-Material Countertops:
- 1. Quartz Material Thickness: 3/4"
 - 2. Colors, Patterns, and Finishes: As selected from manufacturer's full range.
 - 3. Fabricate tops in one piece with shop-applied backsplashes and edges, unless otherwise indicated. Comply with solid-surfacing-material manufacturer's written recommendations for adhesives, sealers, fabrication, and finishing.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Inspection: The installer must examine the job site and the conditions under which the work under this section is to be performed, and notify the contractor in writing of unsatisfactory conditions. Do not proceed with work under this section until unsatisfactory conditions have been corrected in a manner acceptable to the installer.
- B. Condition woodwork to average prevailing humidity conditions in installation areas and examine and complete work as required, including removal of packing and back-priming before installation.
- C. Quality Standard: Install woodwork to comply with AWI Section 1700 for the same grade specified in this Section for type of woodwork involved.
- D. Install casework with factory-trained supervision authorized by the manufacturer.

- E. Install woodwork level, plumb, true, and straight to a tolerance of 1/8 inch in 96 inches Shim as required with concealed shims.
- F. Scribe and cut woodwork to fit adjoining work, and refinish cut surfaces and repair damaged finish at cuts.
- G. Anchor woodwork to anchors or blocking built in or directly attached to substrates. Secure with countersunk, concealed fasteners and blind nailing as required for complete installation. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with woodwork and matching final finish if transparent finish is indicated.
- H. Cabinets: Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation.
 - 1. Fasten wall cabinets through back, near top and bottom, at ends and not more than 16 inches o.c. with No. 10 wafer-head sheet metal screws through metal backing or metal framing behind wall finish.
- I. Countertops: Anchor securely by screwing through corner blocks of base cabinets or other supports into underside of countertop. Caulk space between backsplash and wall with sealant specified in Division 7 Section "Joint Sealants."

END OF SECTION 064020

SECTION 066400 - PLASTIC PANELING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes glass-fiber reinforced plastic (FRP) wall paneling and trim accessories.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For plastic paneling and trim accessories.

1.3 QUALITY ASSURANCE

- A. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: 25 or less.
 - 2. Smoke-Developed Index: 450 or less.

PART 2 - PRODUCTS

2.1 PLASTIC SHEET PANELING

- A. General: Gelcoat-finished, glass-fiber reinforced plastic panels complying with ASTM D 5319.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following.
 - a. Kemlite Company Inc.
 - b. Marlite.
 - c. Nudo Products, Inc.
 - 2. Nominal Thickness: Not less than 0.09 inch.
 - 3. Surface Finish: Molded pebble texture.
 - 4. Color: As selected by manufacturer's full range by Architect.

2.2 ACCESSORIES

- A. Trim Accessories: Manufacturer's standard one-piece vinyl extrusions designed to retain and cover edges of panels. Provide division bars, inside corners,[outside corners,] and caps as needed to conceal edges.
 - 1. Color: Match panels.
- B. Adhesive: As recommended by plastic paneling manufacturer.
- C. Sealant: Single-component, mildew-resistant, neutral-curing silicone sealant recommended by plastic paneling manufacturer and complying with requirements in Division 07 Section "Joint Sealants."

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean substrates of substances that could impair bond of adhesive, including oil, grease, dirt, and dust.
- B. Condition panels by unpacking and placing in installation space before installation according to manufacturer's written recommendations.
- C. Lay out paneling before installing. Locate panel joints so that trimmed panels at corners are not less than 12 inches wide.

3.2 INSTALLATION

- A. Install plastic paneling according to manufacturer's written instructions.
- B. Install panels in a full spread of adhesive.
- C. Install trim accessories with adhesive.
- D. Fill grooves in trim accessories with sealant before installing panels and bed inside corner trim in a bead of sealant.
- E. Maintain uniform space between panels and wall fixtures. Fill space with sealant.
- F. Remove excess sealant and smears as paneling is installed. Clean with solvent recommended by sealant manufacturer and then wipe with clean dry cloths until no residue remains.

END OF SECTION 066400

SECTION 072100 – THERMAL INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Foam-plastic board insulation.
 - 2. Glass-fiber blanket insulation.
 - 3. Spray polyurethane foam insulation for penetrations & gaps
 - 4. Insulation accessories.
 - 5. Rigid insulation for assembly: See associated roofing specification.
- B. Related Sections include the following:
 - 1. Division 7 Section "Fire-Resistive Joint Systems" for insulation installed as part of a perimeter fire-resistive joint system.
 - 2. Division 9 Sections "Gypsum Board" for installation in metal-framed assemblies of insulation specified by referencing this Section.
 - 3. Division 26 for mechanical duct and piping insulation.

1.3 DEFINITIONS

- A. Mineral-Fiber Insulation: Insulation composed of rock-wool fibers, slag-wool fibers, or glass fibers; produced in boards and blanket with latter formed into batts (flat-cut lengths) or rolls.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples for Verification: Full-size units for each type of exposed insulation indicated.
- C. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency for insulation products.

1.5 QUALITY ASSURANCE

- A. Source Limitations: Obtain each type of building insulation through one source from a single manufacturer.

- B. Fire-Test-Response Characteristics: Provide insulation and related materials with the fire-test-response characteristics indicated, as determined by testing identical products per test method indicated below by UL or another testing and inspecting agency acceptable to authorities having jurisdiction. Identify materials with appropriate markings of applicable testing and inspecting agency.
 - 1. Surface-Burning Characteristics: ASTM E 84.
 - 2. Fire-Resistance Ratings: ASTM E 119.
 - 3. Combustion Characteristics: ASTM E 136.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect insulation materials from physical damage and from deterioration by moisture, soiling, and other sources. Store inside and in a dry location. Comply with manufacturer's written instructions for handling, storing, and protecting during installation.
- B. Protect plastic insulation as follows:
 - 1. Do not expose to sunlight, except to extent necessary for period of installation and concealment.
 - 2. Protect against ignition at all times. Do not deliver plastic insulating materials to Project site before installation time.
 - 3. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.

2.2 RIGID FOAM BOARD INSULATION

- A. Extruded-Polystyrene Board Insulation: ASTM C 578, Type IV, closed-cell product extruded with an integral skin.
 - 1. Available Manufacturers:
 - a. DiversiFoam Products
 - b. Dow Chemical Company
 - c. Owens Corning
- B. Adhesive: Type recommended by insulation board manufacturer for application indicated.

C. Insulation Accessories:

1. Tape for sealing joints as recommended by the manufacturer.

D. Low-expansion foam sealant: Foam sealant for joints and penetrations in board type insulation: One-part, low expansion (25% by volume or less) polyurethane insulating foam to use as sealant between rigid insulation panel to panel joints, edges, and thru panel penetrations. 1.5 lb/cu.ft. (18 kg/m³) or greater cured density.

1. Provide foam sealant at board-to-board edges, to seal butt joints between boards, penetrations, and perimeter of insulation at changes in plane or materials.

2.3 GLASS-FIBER BLANKET INSULATION

A. Available Manufacturers:

1. CertainTeed Corporation.
2. Johns Manville.
3. Owens Corning.

B. Unfaced, Glass-Fiber Blanket Insulation: ASTM C 665, Type I; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively, per ASTM E 84; passing ASTM E 136 for combustion characteristics.

C. Provide blankets in batt or roll form with thermal resistances indicated:

1. Wall cavities: R-13 minimum unless otherwise noted
2. Thicknesses: In single layer and density to achieve specified R-value by itself and located toward the outside (exterior) side of the stud cavity.
3. Provide additional support to keep insulation in place in accordance with manufacturer's instructions.

2.4 SPRAY POLYURETHANE FOAM INSULATION

A. Closed-Cell Polyurethane Foam Insulation: ASTM C 1029, Type II, with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, per ASTM E 84.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. BASF Corporation.
 - b. Dow Chemical Company (The).
 - c. Henry Company.
2. Minimum density of 1.5 lb/cu. ft., thermal resistivity of 6.2 deg F x h x sq. ft./Btu x in. at 75 deg F.

2.5 INSULATION ACCESSORIES

- A. Vapor-Retarder Tape: Pressure-sensitive tape of type recommended by insulation manufacturers for sealing joints and penetrations in vapor-retarder facings.
- B. Adhesive for Bonding Insulation: Product with demonstrated capability to bond insulation securely to substrates indicated without damaging insulation and substrates. Refer to Division 7 Section "Fluid Applied Air Barriers" for methods used to bond insulation to air / vapor membranes.
- C. Closed Cell Polyurethane Foam for miscellaneous cavity wall insulation as indicated, and penetration and large gap filling applications: Two part, mixed at the applicator, spray applied ASTM E-94 permeance rating of less than 1.0, with total water absorption of less than .03 lbs/cu.ft. (24 hour test). Minimum in place density: no less than 2.4 pcf.
 - 1. "Froth-Pak 180" by Dow Chemical Corporation.
 - 2. "Handi-Foam 205" (2.5 lb/pcf density) by Fomo Products, Inc.
 - 3. "Prozone SCF 2.4" by ProFoam.
 - 4. "Touch n Seal" High Density 3.0 pcf, by Convenience Products.
 - 5. Application includes, but is not limited to concealed locations as follows:
 - a. Tops of walls at roof decking in dry environments to prevent vapor transmission between indoors and exterior wall cavities.
 - b. In-fill gaps around device boxes and conduit routed or scored into rigid roof insulation.
 - c. Fill wall gaps between dissimilar materials or changes in plane, where gaps lead to the cavity space of exterior envelop.
- D. Low-expansion foam sealant: Foam sealant for joints, gaps, and penetrations in board type cavity wall insulation: One part, low expansion (25% by volume or less) polyurethane insulating foam to use as sealant between rigid insulation panel to panel joints, edges, and thru panel penetrations. 1.5 lb/cu.ft. (18 kg/m³) or greater cured density.
 - 1. Application includes, but is not necessarily limited to:
 - a. Miscellaneous non-rated gaps and joints wider than ½ inch and to close gaps between interior and weatherproof enclosure or cavities. Excludes expansion joints with preformed or manufactured metal closure assemblies.
 - b. Gaps ½ inch or less to be sealed in accordance with Division 07 Section "Joint Sealants."
 - c. Foamed joints to be faced sealed with elastomeric sealants, shall be raked back to correct depth for backer rod and sealant.
- E. Do not use non-rated foam sealants where fire resistive joint materials are to be applied in accordance with Division 7 Section "Firestopping."

2.6 INSULATION FASTENERS

- A. Exterior insulation is adhesively attached unless otherwise noted or required by the manufacturer. Insulation applied over air barrier systems must obtain written product approval from the air

barrier manufacturer certifying that proposed adhesives are compatible with, and will not damage, air barrier systems.

- B. Spindle-Type Anchors (at concrete substrates or where required by the insulation manufacturer for the conditions of application): Plates welded to projecting spindle; capable of holding insulation of thickness indicated securely in position indicated with self-locking washer in place; and complying with the following requirements:
 - 1. Available Products:
 - a. AGM Industries, Inc.; Series T TACTOO Insul-Hangers.
 - b. Eckel Industries of Canada; Stic-Klip Type N Fasteners.
 - c. Gemco; Spindle Type.
 - 2. Plate: Perforated galvanized carbon-steel sheet, 0.030 inch thick by 2 inches square.
 - 3. Spindle: Copper-coated, low carbon steel; fully annealed; 0.105 inch in diameter; length to suit depth of insulation indicated.
 - 4. Where spindle type anchors are used with air barrier systems, spindles shall be in place prior to air barrier application.
- C. Anchor Adhesive: Product with demonstrated capability to bond insulation anchors securely to substrates indicated without damaging insulation, fasteners, and substrates.
 - 1. Available Products, subject to approval of air barrier manufacturer:
 - a. AGM Industries, Inc.; TACTOO Adhesive.
 - b. Eckel Industries of Canada; Stic-Klip Type S Adhesive.
 - c. Gemco; Tuff Bond Hanger Adhesive.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements of Sections in which substrates and related work are specified and for other conditions affecting performance.
 - 1. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean substrates of substances harmful to insulation or vapor retarders, including removing projections capable of puncturing vapor retarders or of interfering with insulation attachment.

3.3 INSTALLATION, GENERAL

- A. Comply with insulation manufacturer's written instructions applicable to products and application indicated.

- B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed at any time to ice, rain, and snow.
- C. Extend insulation in thickness indicated to envelop entire area to be insulated. Cut and fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.
- D. For preformed insulating units, provide sizes to fit applications indicated and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units to produce thickness indicated unless multiple layers are otherwise shown or required to make up total thickness.

3.4 INSTALLATION OF FOAM BOARD WALL INSULATION

- A. Coordinate installation of Air & Moisture Barrier.
- B. On units of foam-plastic board insulation, install pads of adhesive spaced approximately 24 inches o.c. both ways on inside face, and as recommended by manufacturer. Fit courses of insulation between wall ties and other obstructions, with edges butted tightly and sealed at joints with polyurethane foam, in both directions. Press units firmly against inside substrates indicated.
 - 1. Supplement adhesive attachment of insulation by securing boards with two-piece wall ties designed for this purpose and specified in Division 4 Section "Unit Masonry Assemblies."
 - 2. Fill cracks and open gaps in insulation with low expansion foam sealant compatible with insulation and masonry.

3.5 INSTALLATION OF GENERAL BUILDING INSULATION

- A. Apply insulation units to substrates by method indicated, complying with manufacturer's written instructions. If no specific method is indicated, bond units to substrate with adhesive or use mechanical anchorage to provide permanent placement and support of units.
- B. Foam-Plastic Board Insulation: Seal joints between units by applying adhesive, mastic, or sealant to edges of each unit to form a tight seal as units are shoved into place. Fill voids in completed installation with adhesive, mastic, or sealant as recommended by insulation manufacturer.
- C. Install board insulation on concrete substrates by adhesively attached, spindle-type insulation anchors as follows:
 - 1. Fasten insulation anchors to concrete substrates with insulation anchor adhesive according to anchor manufacturer's written instructions. Space anchors according to insulation manufacturer's written instructions for insulation type, thickness, and application indicated.
 - 2. After adhesive has dried, install board insulation by pressing insulation into position over spindles and securing it tightly in place with insulation-retaining washers, taking care not to compress insulation below indicated thickness.
 - 3. Where insulation will not be covered by other building materials, apply capped washers to tips of spindles.

- D. Spray-Applied Insulation: Apply spray-applied insulation according to manufacturer's written instructions. Do not apply insulation until installation of pipes, ducts, conduits, wiring, and electrical outlets in walls is completed and windows, electrical boxes, and other items not indicated to receive insulation are masked. After insulation is applied, make flush with face of studs by using method recommended by insulation manufacturer.
- E. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:
 - 1. Spray Polyurethane Insulation: Apply according to manufacturer's written instructions.
- F. Do not stuff glass fiber insulation into cracks and voids in wall, ceiling, floor or window assemblies unless it serves only to provide uniform depth to the overall insulation plane. Fill voids that occur through the insulation plane with the following materials:
 - 1. Gaps between floors: Refer to Division 07 Section "Firestopping."
 - 2. Gaps open to the exterior or wall cavity behind exterior cladding or veneers: Low expansion spray foam.
 - 3. Gaps between the edges of wall (metal, wood or masonry) framing and dissimilar materials to be concealed and covered: Low density foam.

3.6 PROTECTION

- A. Protect installed insulation from damage due to harmful weather exposures, physical abuse, and other causes. Provide temporary coverings or enclosures where insulation is subject to abuse and cannot be concealed and protected by permanent construction immediately after installation.

END OF SECTION 072100

SECTION 072419 - WATER-DRAINAGE EXTERIOR INSULATION AND FINISH SYSTEM (EIFS)

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. EIFS-clad drainage-wall assemblies that are field applied over substrate.
 - a. Assembly using expanded polystyrene insulation (EPS).
2. EIFS manufacturer's Fluid-Applied Membrane Air & Water Barriers.

1.2 PREINSTALLATION MEETINGS

- ##### A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

- ##### A. Product Data: For each EIFS component, trim, accessory, and water-resistive coatings.
1. Air & Water Barrier product information.
- ##### B. Samples: For each exposed product and for each color and texture specified.

1.4 INFORMATIONAL SUBMITTALS

- A. Manufacturer certificates.
- B. Product certificates.
- C. Product test reports.
- D. Manufacturer's standard warranty.
- E. Applicator's industry training credentials.

1.5 CLOSEOUT SUBMITTALS

- ##### A. Maintenance data.

1.6 QUALITY ASSURANCE

- A. **Installer Qualifications:** Engage an experienced installer who has completed a minimum of three (3) projects with systems similar in material, design, and extent to those indicated for this Project and with a record of successful in-service performance. Provide a letter from the manufacturer stating that the installer is qualified to install manufacturer's system.
- B. **Mockups:** Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, to set quality standards for materials and execution, and to set quality standards for fabrication and installation.
 - 1. Mockups may not become part of the completed work.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Basis-of-Design Product EIFS Drainage Wall: Subject to compliance with requirements, provide Sto Corp. StoTherm ci with Classic finish or comparable product by one of the following:
 - 1. Dryvit Systems, Inc.
 - 2. Parex USA, Inc.
 - 3. BASF Wall Systems; Senergy
- B. Fluid-Applied, Vapor-Permeable Membrane Air Barrier: Provide Sto Gold Coat and Sto EmeraldCoat as manufactured by Sto Corp. or comparable product by EIFS system manufacturer selected from list provided in 2.1.A.
 - 1. See drawings for location of product use.
- C. **Source Limitations:** Obtain EIFS from single source from single EIFS manufacturer and from sources approved by EIFS manufacturer as compatible with EIFS components.

2.2 PERFORMANCE REQUIREMENTS

- A. **EIFS Performance:** Comply with ASTM E 2568 and ICC-ES AC219 and with the following:
 - 1. **Weathertightness:** Resistant to uncontrolled water penetration from exterior, with a means to drain water entering EIFS to the exterior.
 - 2. **Impact Performance:** ASTM E 2568, Standard and Ultra High impact resistance, unless otherwise indicated.
 - a. Provide ultra-high impact reinforcement on all EIFS up to 8'-0" AFF. Contractor shall provide feathered, non-visible, transitions between standard and high impact finishes.

3. Bond Integrity: Free from bond failure within EIFS components or between EIFS and substrates, resulting from exposure to fire, wind loads, weather, or other in-service conditions.
 4. All EIFS components including air and moisture barrier shall be certified in writing by the EIFS manufacturer as being fully compatible with the EIFS system and be covered by the EIFS system warranty.
 - a. Warranty period to begin on date of Final Acceptance.
- B. Rigid Insulation Performance: NFPA 268, "Standard Test Method for Determining Ignitability of Exterior Wall Assemblies Using a Radiant Heat Energy Source"
- C. AC235 Acceptance Criteria for EIFS Clad Drainage Wall Assemblies.
- D. Wind Load: EIFS system shall resist wind loads as indicated on Structural drawing #G-001.

2.3 EIFS MATERIALS

- A. Primer/Sealer: EIFS manufacturer's standard substrate conditioner designed to protect substrates from moisture penetration and to improve the bond between substrate and insulation adhesive.
- B. Water-Resistive Coatings: EIFS manufacturer's standard formulation and accessories for use as water-resistive barriers; compatible with substrate and complying with physical and performance criteria of ASTM E 2570.
- C. Flexible-Membrane Flashing: Cold-applied, self-adhering, self-healing, rubberized-asphalt and polyethylene-film composite sheet or tape and primer; EIFS manufacturer's standard or product recommended in writing by EIFS manufacturer.
- D. Insulation Adhesive: EIFS manufacturer's standard formulation designed for indicated use; specifically formulated to be applied to back side of insulation in a manner that creates open vertical channels designed to serve as an integral part of the water-drainage system of the EIFS-clad drainage-wall assembly, compatible with substrate.
- E. Molded, Rigid Cellular Polystyrene Board Insulation: Comply with ASTM C 578, Type I.
 1. Foam Build-Outs: Provide with profiles and dimensions indicated on Drawings.
- F. Reinforcing Mesh: Balanced, alkali-resistant, open-weave, glass-fiber mesh treated for compatibility with other EIFS materials, made from continuous multiend strands with retained mesh tensile strength of not less than 120 lbf/in. according to ASTM E 2098.
- G. Base-Coat Materials: EIFS manufacturer's standard mixture.
- H. Waterproof Adhesive/Base-Coat Materials: EIFS manufacturer's standard waterproof formulation.
- I. Primer: EIFS manufacturer's standard factory-mixed, elastomeric-polymer primer for preparing base-coat surface for application of finish coat.

- J. Finish-Coat Materials: EIFS manufacturer's standard acrylic-based coating.
 - 1. Colors: As selected by Architect from manufacturer's full range.
 - 2. Textures: As selected by Architect from manufacturer's full range.
- K. Trim Accessories: Type as designated or required to suit conditions indicated and to comply with EIFS manufacturer's written instructions; manufactured from UV-stabilized PVC; and complying with ASTM D 1784, manufacturer's standard cell class for use intended, and ASTM C 1063.

PART 3 - EXECUTION

3.1 EIFS INSTALLATION

- A. Comply with ASTM C 1397, ASTM E 2511, and EIFS manufacturer's written instructions for installation of EIFS as applicable to each type of substrate indicated.
- B. Trim: Apply trim accessories at perimeter of EIFS, at expansion joints, at windowsills, and elsewhere as indicated. Coordinate with installation of insulation.
- C. Board Insulation: Adhere insulation to substrate in compliance with ASTM C 1397 and the following:
 - 1. Apply adhesive to insulation by notched-trowel method, with notches oriented vertically to produce drainage channels that remain functional after the insulation is adhered to substrate.
 - 2. Coordinate installation of flashing and insulation to produce wall assembly that does not allow water to penetrate behind flashing and water-resistive barrier.
- D. Expansion Joints: Install at locations indicated and where required by EIFS manufacturer.
- E. Waterproof Adhesive/Base Coat: To exposed surfaces of insulation, apply in minimum thickness recommended in writing by EIFS manufacturer over sloped surfaces, windowsills, foam build-outs, and where indicated on Drawings.
- F. Base Coat: Apply to exposed surfaces of insulation and foam build-outs in minimum thickness recommended in writing by EIFS manufacturer.
- G. Reinforcing Mesh: Embed reinforcing mesh in wet base coat to produce wrinkle-free installation with mesh continuous at corners, overlapped not less than 2-1/2 inches or otherwise treated at joints to comply with ASTM C 1397 and EIFS manufacturer's written instructions. Do not lap reinforcing mesh within 8 inches of corners. Completely embed mesh, applying additional base-coat material if necessary, so reinforcing-mesh color and pattern are invisible.
- H. Double-Layer Reinforcing-Mesh Application: Where indicated or required, apply second base coat and second layer of reinforcing mesh, overlapped not less than 2-1/2 inches or otherwise treated at joints to comply with ASTM C 1397 and EIFS manufacturer's written instructions in same manner as first application. Do not apply until first base coat has cured.

- I. Additional Reinforcing Mesh: Apply strip reinforcing mesh around openings, extending 4 inches (100 mm) beyond perimeter. Apply additional 9-by-12-inch strip reinforcing mesh diagonally at corners of openings (re-entrant corners). Apply 8-inch-wide, strip reinforcing mesh at both inside and outside corners unless base layer of mesh is lapped not less than 4 inches (100 mm) on each side of corners.
- J. Foam Build-Outs: Fully embed reinforcing mesh in base coat.
- K. Double Base-Coat Application: Where indicated, apply second base coat in same manner and thickness as first application, except without reinforcing mesh. Do not apply until first base coat has cured.
- L. Primer: Apply over dry base coat according to EIFS manufacturer's written instructions.
- M. Finish Coat: Apply over dry primed base coat, maintaining a wet edge at all times for uniform appearance, in thickness required by EIFS manufacturer to produce a uniform finish of color and texture matching approved sample and free of cold joints, shadow lines, and texture variations.

3.2 AIR BARRIER MEMBRANE INSTALLATION

A. General:

- 1. Apply air barrier membrane to form a seal with strips and transition strips and to achieve a continuous air barrier according to air barrier manufacturer's written instructions.
- 2. Apply air barrier membrane within manufacturer's recommended application temperature ranges.
- 3. Apply a continuous unbroken air barrier to substrates according to the following minimum thickness. Apply membrane in full contact around protrusions such as masonry ties.
- 4. Do not cover air barrier until it has been tested and inspected by Owner's testing agency.
- 5. Correct deficiencies in or remove air barrier that does not comply with requirements; repair substrates and reapply air barrier components.

B. Surface Preparation

- 1. Clean, prepare, treat, and seal substrate according to manufacturer's written instructions. Provide clean, dust-free, and dry substrate for air barrier application.
- 2. Mask off adjoining surfaces not covered by air barrier to prevent spillage and overspray affecting other construction.
- 3. Remove grease, oil, bitumen, form-release agents, paints, curing compounds, and other penetrating contaminants or film-forming coatings from concrete.
- 4. Remove fins, ridges, mortar, and other projections and fill honeycomb, aggregate pockets, holes, and other voids with substrate patching membrane.
- 5. Remove excess mortar from masonry ties, shelf angles, and other obstructions.
- 6. At changes in substrate plane, apply sealant or termination mastic beads at sharp corners and edges to form a smooth transition from one plane to another.

C. Joint Treatment

1. Concrete and Masonry: Prepare, treat, rout, and fill joints and cracks in substrate according to ASTM C 1193 and air barrier manufacturer's written instructions. Remove dust and dirt from joints and cracks complying with ASTM D 4258 before coating surfaces.
 - a. Prime substrate and apply a single thickness of preparation coat strip extending a minimum of 3 inches along each side of joints and cracks. Apply a double thickness of air barrier membrane and embed a joint reinforcing strip in preparation coat.
2. Gypsum or Plywood Sheathing: Fill joints greater than 1/4 inch with sealant according to ASTM C 1193 and with air barrier manufacturer's written instructions. Apply first layer of fluid air barrier membrane at joints. Tape joints with joint reinforcing strip after first layer is dry. Apply a second layer of fluid air barrier membrane over joint reinforcing strip.

D. Transition Strip Installation

1. Install strips, transition strips, and auxiliary materials according to air barrier manufacturer's written instructions to form a seal with adjacent construction and maintain a continuous air barrier.

3.3 FIELD QUALITY CONTROL

- A. Special Inspections: Owner will engage a qualified special inspector to perform the following special inspections:
 1. Water-Resistive barrier coating complying with ASTM E 2570 installed over a sheathing substrate.
- B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
 1. Inspection of air barrier system including wet mil thickness.
- C. EIFS Tests and Inspections: According to ICC-ES AC235 tests and inspections.
- D. EIFS will be considered defective if it does not pass tests and inspections.

END OF SECTION 072419

SECTION 074213 - METAL COMPOSITE MATERIAL WALL PANELS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes metal composite material wall panels.

1. Soffits and Fascia.
2. Exterior walls.
3. ACM Panel System Wet Seal Type.
4. ACM Panel support girt system.

1.2 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- B. Shop Drawings: Include fabrication and installation layouts of metal composite material panels; details of edge conditions, joints, panel profiles, corners, anchorages, attachment assembly, trim, flashings, closures, and accessories; and special details.

1. Shop drawings shall include installation requirements to meet wind loads; i.e. fastener spacing and type, stud spacing and gauge.
2. Provide method of identifying stud locations when hidden by applied air barriers and other materials.

- C. Samples: For each type of metal composite material panel indicated.

1.4 INFORMATIONAL SUBMITTALS

- A. Product test reports.

- B. Warranties: Samples of special warranties.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance data.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.7 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of metal composite material panel systems that fail in materials or workmanship within specified warranty period.

- 1. Warranty Period: Two years from date of Substantial Completion.

- B. Special Warranty on Panel Finishes: Manufacturer's standard form in which manufacturer agrees to repair finish or replace metal composite material panels that show evidence of deterioration of factory-applied finishes within specified warranty period.

- 1. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide metal composite material panel systems capable of withstanding the effects of the following loads, based on testing according to ASTM E 330:

- 1. Wind Loads: Maximum design pressures that meet or exceed Section 6, ASCE 7.

- a. Reference structural drawing S1.01 for component and cladding design pressure requirements.

- 2. Deflection Limits: For wind loads, no greater than 1/240 of the span.

- B. Air Infiltration: Air leakage of not more than 0.06 cfm/sq. ft. when tested according to ASTM E 283 at the following test-pressure difference:

- 1. Test-Pressure Difference: 6.24 lbf/sq. ft. .

- C. Water Penetration under Static Pressure: No water penetration when tested according to ASTM E 331 at the following test-pressure difference:

- 1. Test-Pressure Difference: 6.24 lbf/sq. ft. .

- D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

- 1. Temperature Change (Range): 120 deg F , ambient; 180 deg F , material surfaces.

- E. Fire-Resistance Ratings: Comply with ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Indicate design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency.
- F. Fire Propagation Characteristics: Metal composite material wall panel system passes NFPA 285 testing.

2.2 METAL COMPOSITE MATERIAL WALL PANELS

- A. Metal Composite Material Wall Panel Systems: Provide factory-formed and -assembled, metal composite material wall panels fabricated from two metal facings that are bonded to a solid, extruded thermoplastic core; formed into profile for installation method indicated. Include attachment assemblies components, panel stiffeners, and accessories required for weathertight system.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide metal panel system "Alucobond ACM" or comparable product by one of the following:
 - a. 3A Composites USA, Inc.; Alucobond.
 - b. Alcoa Inc.; Reynobon PE.
 - c. CENTRIA Architectural Systems; Formabond Wall System.
 - d. Citadel Architectural Products, Inc.; Envelope 2000.
- B. Aluminum-Faced Composite Wall Panels: Formed with 0.020-inch- thick, aluminum sheet facings.
 - 1. Panel Thickness: 0.118 inch (3 mm) (Typical)
 - 2. Core: Standard.
 - 3. Exterior Finish: Two-coat fluoropolymer min.
 - a. Finish system shall meet or exceed specified warranty.
 - b. Color: As selected by Architect from manufacturer's full range.
- C. System Type: Wet Seal.
- D. Attachment Assembly Components: Formed from extruded aluminum.
- E. Attachment Assembly: Manufacturer's standard.

2.3 MISCELLANEOUS MATERIALS

- A. Miscellaneous Metal Subframing and Furring: ASTM C 645, cold-formed, metallic-coated steel sheet ASTM A 653/A 653M, G90 coating designation or ASTM A 792/A 792M, Class AZ50 aluminum-zinc-alloy coating designation unless otherwise indicated. Provide manufacturer's standard sections as required for support and alignment of metal composite material panel system.

- B. Panel Accessories: Provide components required for a complete, weathertight panel system including trim, copings, fasciae, mullions, sills, corner units, clips, flashings, sealants, gaskets, fillers, closure strips, and similar items. Match material and finish of metal composite material panels unless otherwise indicated.
- C. Flashing and Trim: Provide flashing and trim formed from same material as metal composite material panels as required to seal against weather and to provide finished appearance. Locations include, but are not limited to, bases, drips, sills, jambs, corners, endwalls, framed openings, rakes, fasciae, parapet caps, soffits, reveals, and fillers. Finish flashing and trim with same finish system as adjacent metal composite material panels.
- D. Panel Fasteners: Self-tapping screws designed to withstand design loads. Provide exposed fasteners with heads matching color of metal composite material panels by means of plastic caps or factory-applied coating. Provide EPDM or PVC sealing washers for exposed fasteners.
- E. Panel Sealants: ASTM C 920; as recommended in writing by metal composite material panel manufacturer. Provide sealant types recommended by manufacturer that are compatible with panel materials, are nonstaining, and do not damage panel finish.

2.4 FABRICATION

- A. General: Fabricate and finish metal composite material panels and accessories at the factory, by manufacturer's standard procedures and processes, as necessary to fulfill indicated performance requirements demonstrated by laboratory testing. Comply with indicated profiles and with dimensional and structural requirements.
 - 1. Provide single panel for canopy roofs. Roof panel shall be custom formed as shown on drawings. Provide additional panel framing and substrate as necessary to insure that the roof surfaces remain flat and without oil-canning.
 - 2. Provide 40 mil peel-n-stick membrane on substrate under roof panel. Provide proper drainage path to exterior of panel system from underside of roof panel.
- B. Fabricate metal composite material panel joints with factory-installed captive gaskets or separator strips that provide a weathertight seal and prevent metal-to-metal contact, and that minimize noise from movements.
- C. Sheet Metal Flashing and Trim: Fabricate flashing and trim to comply with manufacturer's recommendations and recommendations in SMACNA's "Architectural Sheet Metal Manual" that apply to design, dimensions, metal, and other characteristics of item indicated.

2.5 FINISHES

- A. Panels and Accessories:
 - 1. Two-Coat Fluoropolymer: AAMA 620. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Miscellaneous Supports: Install subframing, furring, and other miscellaneous panel support members and anchorages according to ASTM C 754 and metal composite material panel manufacturer's written recommendations.
- B. Prior to installation of panel system, verify proper stud spacing, gauge, and fastening points are provided.

3.2 METAL COMPOSITE MATERIAL PANEL INSTALLATION

- A. Attachment Assembly, General: Install attachment assembly required to support metal composite material wall panels and to provide a complete weathertight wall system, including subgirts, perimeter extrusions, tracks, drainage channels, panel clips, and anchor channels.
 - 1. Include attachment to supports, panel-to-panel joinery, panel-to-dissimilar-material joinery, and panel-system joint seals.
- B. Installation: Attach metal composite material wall panels to supports at locations, spacings, and with fasteners recommended by manufacturer to achieve performance requirements specified.
 - 1. Dry Seal Systems: Seal horizontal and vertical joints between adjacent metal composite material wall panels with manufacturer's standard gasket system.
- C. Accessory Installation: Install accessories with positive anchorage to building and weathertight mounting, and provide for thermal expansion. Coordinate installation with flashings and other components.
- D. Flashing and Trim: Comply with performance requirements, manufacturer's written installation instructions, and SMACNA's "Architectural Sheet Metal Manual." Provide concealed fasteners where possible, and set units true to line and level as indicated. Install work with laps, joints, and seams that are permanently watertight.

3.3 CLEANING

- A. Remove temporary protective coverings and strippable films, if any, as metal composite material panels are installed, unless otherwise indicated in manufacturer's written installation instructions. On completion of metal composite material panel installation, clean finished surfaces as recommended by metal composite material panel manufacturer. Maintain in a clean condition during construction.

END OF SECTION 074213

SECTION 076200 - SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Manufactured reglets with counterflashing.
2. Formed roof-drainage sheet metal fabrications.
3. Formed wall sheet metal fabrications.

1.2 PREINSTALLATION MEETINGS

- ##### A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

- ##### A. Product Data: For each type of product.

- ##### B. Shop Drawings: For sheet metal flashing and trim.

1. Include plans, elevations, sections, and attachment details.
2. Distinguish between shop- and field-assembled work.
3. Include identification of finish for each item.
4. Include pattern of seams and details of termination points, expansion joints and expansion-joint covers, direction of expansion, roof-penetration flashing, and connections to adjoining work.

- ##### C. Samples: For each exposed product and for each color and texture specified.

1.4 INFORMATIONAL SUBMITTALS

- ##### A. Product certificates.

- ##### B. Product test reports.

- ##### C. Sample warranty.

1.5 CLOSEOUT SUBMITTALS

- ##### A. Maintenance data.

1.6 QUALITY ASSURANCE

- A. Fabricator Qualifications: Employs skilled workers who custom fabricate sheet metal flashing and trim similar to that required for this Project and whose products have a record of successful in-service performance.
 - 1. For copings and roof edge flashings that are SPRI ES-1 tested, shop shall be listed as able to fabricate required details as tested and approved.

1.7 WARRANTY

- A. Special Warranty on Finishes: Manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General: Sheet metal flashing and trim assemblies shall withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight.
- B. Sheet Metal Standard for Flashing and Trim: Comply with NRCA's "The NRCA Roofing Manual" and SMACNA's "Architectural Sheet Metal Manual" requirements for dimensions and profiles shown unless more stringent requirements are indicated.
- C. SPRI Wind Design Standard: Manufacture and install copings and roof edge flashings tested according to SPRI ES-1 and capable of resisting the following design pressure:
 - 1. Design Pressure: As indicated on Structural Drawing S1.1.
- D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.
 - 1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 SHEET METALS

- A. General: Protect mechanical and other finishes on exposed surfaces from damage by applying strippable, temporary protective film before shipping.
- B. Aluminum Sheet: ASTM B 209, alloy as standard with manufacturer for finish required, with temper as required to suit forming operations and performance required.

1. Exposed Coil-Coated Finish:
 - a. Two-Coat Fluoropolymer: AAMA 620. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 2. Color: As selected by Architect from manufacturer's full range.
- C. Stainless-Steel Sheet: ASTM A 240/A 240M, Type 304, dead soft, fully annealed; 2D dull, cold rolled finish.

2.3 UNDERLAYMENT MATERIALS

- A. Self-Adhering, High-Temperature Underlayment: Provide self-adhering, cold-applied, sheet underlayment, a minimum of 40 mils thick, consisting of slip-resistant, polyethylene-film top surface laminated to a layer of butyl or SBS-modified asphalt adhesive, with release-paper backing. Provide primer when recommended by underlayment manufacturer.
1. Thermal Stability: Stable after testing at 240 deg F; ASTM D 1970.
 2. Low-Temperature Flexibility: Passes after testing at minus 20 deg F; ASTM D 1970.
 3. Products: Subject to compliance with requirements, provide one available products that may be incorporated into the Work include, but are not limited to, the following]:
 - a. Carlisle: CCW WIP 300 HT
 - b. Interwrap: Titanium PSU
 - c. Polyguard: Deck Guard HT or Polyglas HT
 - d. MFM Corp: "Wind & Water Shield"
 - e. W.R. Grace: "Ice & Water Shield"
 - f. TAMKO: "TW Tile & Metal Underlayment"
- B. Slip Sheet: Rosin-sized building paper, 3 lb/100 sq. ft. minimum.

2.4 MISCELLANEOUS MATERIALS

- A. General: Provide materials and types of fasteners, solder, protective coatings, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and as recommended by manufacturer of primary sheet metal or manufactured item unless otherwise indicated.
- B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal or manufactured item.
1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.
 - a. Exposed Fasteners: Heads matching color of sheet metal using plastic caps or factory-applied coating. Provide metal-backed EPDM or PVC sealing washers under heads of exposed fasteners bearing on weather side of metal.

- b. Blind Fasteners: High-strength aluminum or stainless-steel rivets suitable for metal being fastened.
 - c. Spikes and Ferrules: Same material as gutter; with spike with ferrule matching internal gutter width.
- 2. Fasteners for Aluminum Sheet: Aluminum or Series 300 stainless steel.
- 3. Fasteners for Stainless-Steel Sheet: Series 300 stainless steel.
- C. Solder:
 - 1. For Stainless Steel: ASTM B 32, Grade Sn96, with acid flux of type recommended by stainless-steel sheet manufacturer.
- D. Sealant Tape: Pressure-sensitive, 100 percent solids, polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch wide and 1/8 inch thick.
- E. Elastomeric Sealant: ASTM C 920, elastomeric silicone polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.
- F. Butyl Sealant: ASTM C 1311, single-component, solvent-release butyl rubber sealant; polyisobutylene plasticized; heavy bodied for hooked-type expansion joints with limited movement.
- G. Bituminous Coating: Cold-applied asphalt emulsion according to ASTM D 1187.

2.5 FABRICATION, GENERAL

- A. General: Custom fabricate sheet metal flashing and trim to comply with details shown and recommendations in cited sheet metal standard that apply to design, dimensions, geometry, metal thickness, and other characteristics of item required. Fabricate sheet metal flashing and trim in shop to greatest extent possible.
 - 1. Obtain field measurements for accurate fit before shop fabrication.
 - 2. Form sheet metal flashing and trim to fit substrates without excessive oil canning, buckling, and tool marks; true to line, levels, and slopes; and with exposed edges folded back to form hems.
 - 3. Conceal fasteners and expansion provisions where possible. Do not use exposed fasteners on faces exposed to view.
- B. Expansion Provisions: Form metal for thermal expansion of exposed flashing and trim.
 - 1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with butyl sealant concealed within joints.
 - 2. Use lapped expansion joints only where indicated on Drawings.
- C. Sealant Joints: Where movable, nonexpansion-type joints are required, form metal to provide for proper installation of elastomeric sealant according to cited sheet metal standard.

- D. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.
- E. Fabricate cleats and attachment devices of sizes as recommended by cited sheet metal standard for application, but not less than thickness of metal being secured.
- F. Seams: Fabricate nonmoving seams with flat-lock seams. Tin edges to be seamed, form seams, and solder.
- G. Seams: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealant. Rivet joints where necessary for strength.
- H. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints where necessary for strength.

2.6 ROOF-DRAINAGE SHEET METAL FABRICATIONS

- A. Hanging Gutters: Fabricate to cross section required, complete with end pieces, outlet tubes, and other accessories as required. Fabricate in minimum 96-inch-long sections. Furnish flat-stock gutter brackets and gutter spacers and straps fabricated from same metal as gutters, of size recommended by cited sheet metal standard but with thickness not less than twice the gutter thickness. Fabricate expansion joints, expansion-joint covers, and gutter accessories from same metal as gutters. Shop fabricate interior and exterior corners.
 - 1. Accessories: Stainless steel wire-ball downspout strainer.
- B. Downspouts: Fabricate rectangular downspouts to dimensions indicated, complete with mitered elbows. Furnish with metal hangers from same material as downspouts and anchors. Shop fabricate elbows.
 - 1. Hanger Style: gutter straps as indicated on drawings.
 - 2. Fabricate from the following materials:
 - a. Stainless steel: 0.0625 inch thick min.
- C. Parapet Scuppers: Fabricate scuppers to dimensions required, with closure flange trim to exterior, 4-inch- wide wall flanges to interior, and base extending 4 inches beyond cant or tapered strip into field of roof. Fabricate from the following materials:
 - 1. Stainless Steel: 0.019 inch thick.
- D. Conductor Heads: Fabricate conductor heads with flanged back and stiffened top edge and of dimensions and shape required, complete with outlet tubes. Fabricate from the following materials:
 - 1. Aluminum: 0.032 inch thick.
- E. Splash Pans: Fabricate to dimensions and shape required and from the following materials:
 - 1. Aluminum: 0.040 inch thick.

2.7 LOW-SLOPE ROOF SHEET METAL FABRICATIONS

- A. Roof Edge Flashing and Fascia Cap: Fabricate in minimum 96-inch-long, but not exceeding 12-foot-long sections. Furnish with 6-inch-wide, joint cover plates. Shop fabricate interior and exterior corners.
 - 1. Fabricate from the Following Materials:
 - a. Aluminum: **0.050 inch** thick.
- B. Copings: Fabricate in minimum 96-inch-long, but not exceeding 12-foot-long, sections. Fabricate joint plates of same thickness as copings. Furnish with continuous cleats to support edge of external leg and interior leg. Miter corners, fasten and seal watertight. Shop fabricate interior and exterior corners.
 - 1. Fabricate from the Following Materials:
 - a. Aluminum: **0.050 inch** thick.
 - b. Stainless Steel: **0.025 inch** thick.
- C. Base Flashing: Shop fabricate interior and exterior corners. Fabricate from the following materials:
 - 1. Stainless Steel: 0.019 inch thick.
- D. Counterflashing and Flashing Receivers: Fabricate from the following materials:
 - 1. Stainless Steel: 0.019 inch thick.
- E. Roof-Penetration Flashing: Fabricate from the following materials:
 - 1. Stainless Steel: 0.019 inch thick.
- F. Roof-Drain Flashing: Fabricate from the following materials:
 - 1. Stainless Steel: 0.016 inch thick.

PART 3 - EXECUTION

3.1 UNDERLAYMENT INSTALLATION

- A. Self-Adhering Sheet Underlayment: Install self-adhering sheet underlayment, wrinkle free. Prime substrate if recommended by underlayment manufacturer. Comply with temperature restrictions of underlayment manufacturer for installation; use primer for installing underlayment at low temperatures. Apply in shingle fashion to shed water, with end laps of not less than 6 inches staggered 24 inches between courses. Overlap side edges not less than 3-1/2 inches. Roll laps and edges with roller. Cover underlayment within 14 days.
 - 1. Coordinate and verify use and compatibility with roofing membrane.

3.2 INSTALLATION, GENERAL

- A. General: Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement. Use fasteners, solder, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.

1. Install sheet metal flashing and trim true to line, levels, and slopes. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
 2. Install sheet metal flashing and trim to fit substrates and to result in watertight performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
 3. Space cleats not more than 12 inches apart. Attach each cleat with at least two fasteners. Bend tabs over fasteners.
 4. Install exposed sheet metal flashing and trim with limited oil canning, and free of buckling and tool marks.
 5. Torch cutting of sheet metal flashing and trim is not permitted.
- B. Metal Protection: Where dissimilar metals contact each other, or where metal contacts pressure-treated wood or other corrosive substrates, protect against galvanic action or corrosion by painting contact surfaces with bituminous coating or by other permanent separation as recommended by sheet metal manufacturer or cited sheet metal standard.
1. Coat concealed side of uncoated-aluminum and stainless-steel sheet metal flashing and trim with bituminous coating where flashing and trim contact wood, ferrous metal, or cementitious construction.
 2. Underlayment: Where installing sheet metal flashing and trim directly on cementitious or wood substrates, install underlayment and cover with slip sheet.
- C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at maximum of 10 feet with no joints within 24 inches of corner or intersection.
1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with sealant concealed within joints.
 2. Use lapped expansion joints only where indicated on Drawings.
- D. Fasteners: Use fastener sizes that penetrate substrate not less than recommended by fastener manufacturer to achieve maximum pull-out resistance.
- E. Conceal fasteners and expansion provisions where possible in exposed work and locate to minimize possibility of leakage. Cover and seal fasteners and anchors as required for a tight installation.
- F. Seal joints as required for watertight construction. Prepare joints and apply sealants to comply with requirements in Section 079200 "Joint Sealants."
- G. Soldered Joints: Clean surfaces to be soldered, removing oils and foreign matter. Pre-tin edges of sheets with solder to width of 1-1/2 inches; however, reduce pre-tinning where pre-tinned surface would show in completed Work.
1. Do not solder metallic-coated steel and aluminum sheet.
 2. Do not use torches for soldering.
 3. Heat surfaces to receive solder, and flow solder into joint. Fill joint completely. Completely remove flux and spatter from exposed surfaces.
 4. Stainless-Steel Soldering: Tin edges of uncoated sheets, using solder for stainless steel and acid flux. Promptly remove acid flux residue from metal after tinning and soldering. Comply with solder manufacturer's recommended methods for cleaning and neutralization.
 5. Copper Soldering: Tin edges of uncoated sheets, using solder for copper.

- H. Rivets: Rivet joints in uncoated aluminum where necessary for strength.

3.3 ROOF-DRAINAGE SYSTEM INSTALLATION

- A. General: Install sheet metal roof-drainage items to produce complete roof-drainage system according to cited sheet metal standard unless otherwise indicated. Coordinate installation of roof perimeter flashing with installation of roof-drainage system.
- B. Hanging Gutters: Join sections with joints sealed with sealant. Provide for thermal expansion. Attach gutters at eave or fascia to firmly anchor them in position. Provide end closures and seal watertight with sealant. Slope to downspouts.
 - 1. Install gutter with expansion joints at locations indicated, but not exceeding, 50 feet apart. Install expansion-joint caps.
- C. Downspouts: Join sections with 1-1/2-inch telescoping joints. Provide hangers with fasteners designed to hold downspouts securely to walls. Locate hangers at top and bottom and at approximately 60 inches o.c.
- D. Splash Pans: Install where downspouts discharge on low-slope roofs. Set in asphalt roofing cement or elastomeric sealant compatible with the substrate.
- E. Parapet Scuppers: Continuously support scupper, set to correct elevation, and seal flanges to interior wall face, over cants or tapered edge strips, and under roofing membrane.
- F. Conductor Heads: Anchor securely to wall, with elevation of conductor head rim at minimum of 1 inch below scupper discharge.

3.4 ROOF FLASHING INSTALLATION

- A. General: Install sheet metal flashing and trim to comply with performance requirements, sheet metal manufacturer's written installation instructions, and cited sheet metal standard. Provide concealed fasteners where possible, and set units true to line, levels, and slopes. Install work with laps, joints, and seams that are permanently watertight and weather resistant.
- B. Roof Edge Flashing: Anchor to resist uplift and outward forces according to recommendations in cited sheet metal standard unless otherwise indicated. Interlock bottom edge of roof edge flashing with continuous cleat anchored to substrate.
- C. Copings: Anchor to resist uplift and outward forces according to recommendations in cited sheet metal standard unless otherwise indicated.
- D. Pipe or Post Counterflashing: Install counterflashing umbrella with close-fitting collar with top edge flared for elastomeric sealant, extending minimum of 4 inches over base flashing. Install stainless-steel draw band and tighten.
- E. Counterflashing: Coordinate installation of counterflashing with installation of base flashing. Insert counterflashing in reglets or receivers and fit tightly to base flashing. Extend counterflashing 4 inches over base flashing. Lap counterflashing joints minimum of 4 inches.

- F. Roof-Penetration Flashing: Coordinate installation of roof-penetration flashing with installation of roofing and other items penetrating roof.

3.5 WALL FLASHING INSTALLATION

- A. General: Install sheet metal wall flashing to intercept and exclude penetrating moisture according to cited sheet metal standard unless otherwise indicated. Coordinate installation of wall flashing with installation of wall-opening components such as windows, doors, and louvers.
- B. Opening Flashings in Frame Construction: Install continuous head, sill, jamb, and similar flashings to extend 4 inches beyond wall openings.

3.6 CLEANING AND PROTECTION

- A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.
- B. Clean and neutralize flux materials. Clean off excess solder.
- C. Clean off excess sealants.
- D. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions.

END OF SECTION 076200

SECTION 077200 - ROOF ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. This Section includes the following:

1. Small equipment curbs.
2. Equipment supports.
3. Roof hatches.
4. Safety rails.

1.2 SUBMITTALS

- A. Product Data: For each type of roof accessory indicated.
- B. Shop Drawings: Show fabrication and installation details for roof accessories.
- C. Samples: For each type of exposed factory-applied color finish required and for each type of roof accessory indicated, prepared on Samples of size to adequately show color.

1.3 QUALITY ASSURANCE

- A. Sheet Metal Standard: Comply with SMACNA's "Architectural Sheet Metal Manual" details for fabrication of units, including flanges and cap flashing to coordinate with type of roofing indicated.
- B. Hatch and curb units shall meet or exceed the fire resistive burning class of the roof assembly.

1.4 WIND RESISTANCE

- A. All equipment installed on roof shall be anchored to resist wind loads indicated on structural drawing S1.1.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers listed in other Part 2 articles.

2.2 METAL MATERIALS

- A. Pre-painted, Metallic-Coated Steel Sheet: Steel sheet metallic coated by hot-dip process and pre-painted by coil-coating process to comply with ASTM A 755/A 755M.
 - 1. Aluminum-Zinc Alloy-Coated Steel Sheet: ASTM A 792/A 792M, Class AZ50 coated.
 - 2. Exposed Finishes: Manufacturer's standard 2-coat, thermocured system consisting of specially formulated inhibitive primer and fluoropolymer color topcoat containing not less than 70 percent polyvinylidene fluoride resin by weight.
- B. Stainless-Steel Shapes or Sheet: ASTM A 240/A 240M or ASTM A 666, Type 304 or Type 316, No. 2D finish.
- C. Galvanized-Steel Tube: ASTM A 500, round tube, hot-dip galvanized according to ASTM A 123/A 123M.
- D. Steel Pipe: ASTM A 53/A 53M, galvanized.

2.3 ROOF CURBS

- A. Roof Curbs: Provide metal roof curbs, internally reinforced and capable of supporting superimposed live and dead loads, including equipment loads and other construction to be supported on roof curbs. Fabricate with welded or sealed mechanical corner joints, with stepped integral metal cant raised the thickness of roof insulation and integral formed mounting flange at perimeter bottom. Coordinate dimensions with rough-in information or Shop Drawings of equipment to be supported.
 - 1. Available Manufacturers:
 - a. Conn-Fab Sales, Inc.
 - b. Custom Curb, Inc.
 - c. LM Curbs.
 - d. ThyCurb; Div. of Thybar Corporation.
 - e. Uni-Curb, Inc.
 - 2. Load Requirements: As indicated for items supported.
 - 3. Material: Aluminum-zinc alloy-coated steel sheet, 0.079 inch thick.
 - 4. Liner: Same material as curb, of manufacturer's standard thickness and finish.
 - 5. Factory install wood nailers at tops of curbs.
 - 6. Factory insulate curbs with 1-1/2-inch- thick, glass-fiber board insulation.
 - 7. Curb height may be determined by adding thickness of roof insulation and minimum base flashing height recommended by roofing membrane manufacturer. Fabricate units to minimum height of 12 inches, unless otherwise indicated.
 - 8. Sloping Roofs: Where slope of roof deck exceeds 1:48, fabricate curb units with water diverter or cricket and with height tapered to match slope to level tops of units.

2.4 EQUIPMENT SUPPORTS

- A. Equipment Supports: Provide metal equipment supports, internally reinforced and capable of supporting superimposed live and dead loads, including equipment loads and other construction to be supported. Fabricate with welded or sealed mechanical corner joints, with stepped integral metal cant raised the thickness of roof insulation and integral formed mounting flange at perimeter bottom. Coordinate dimensions with rough-in information or Shop Drawings of equipment to be supported.
1. Available Manufacturers:
 - a. Conn-Fab Sales, Inc.
 - b. Custom Curb, Inc.
 - c. LM Curbs.
 - d. ThyCurb; Div. of Thybar Corporation.
 2. Load Requirements: As indicated.
 3. Material: Aluminum-zinc alloy-coated steel sheet, 0.079 inch thick.
 4. Factory-install continuous wood nailers 3-1/2 inches wide at tops of equipment supports.
 5. Metal Counterflashing: Manufacturer's standard removable counterflashing, fabricated of same metal and finish as equipment support.
 6. Fabricate units to minimum height of 12 inches, unless otherwise indicated.
 7. Sloping Roofs: Where slope of roof deck exceeds 1:48, fabricate curb units with water diverter or cricket and with height tapered to match slope to level tops of units.

2.5 ROOF HATCHES

- A. Roof Hatches: Fabricate roof hatches with insulated double-wall lids and insulated single-wall curb frame with integral deck mounting flange and lid frame counterflashing. Fabricate with welded or mechanically fastened and sealed corner joints. Provide continuous weathertight perimeter gasketing and equip with corrosion-resistant or hot-dip galvanized hardware.
1. Available Manufacturers:
 - a. Bilco Company (The).
 - b. Metallic Products Corporation.
 - c. Milcor Inc.; a Gibraltar Company.
 - d. Nystrom, Inc.
 - e. O'Keeffe's Inc.
 - f. ThyCurb; Div of Thybar Corporation.
 - g. Wasco Products, Inc.
 2. Loads: Fabricate roof hatches to withstand 40-lbf/sq. ft. external and 20-lbf/sq. ft. internal loads.
 3. Type and Size: Single-leaf lid, size as indicated.
 4. Curb and Lid Material: Aluminum-zinc alloy-coated steel sheet, 0.079 inch thick.
 5. Insulation: Glass-fiber board.
 6. Interior Lid Liner: Manufacturer's standard metal liner of same material and finish as outer metal lid.

7. Exterior Curb Liner: Manufacturer's standard metal liner of same material and finish as metal curb.
 8. Fabricate units to minimum height of 12 inches, unless otherwise indicated.
 9. Hardware: Stainless-steel spring latch with turn handles, butt- or pintle-type hinge system, and padlock hasps inside and outside.
 10. Ladder Safety Post: Manufacturer's standard ladder safety post. Post to lock in place on full extension. Provide release mechanism to return post to closed position.
- B. Safety Railing System: Roof-hatch manufacturer's standard system including rails, clamps, fasteners, safety barrier at railing opening, and accessories required for a complete installation; attached to roof hatch and complying with 29 CFR 1910.23 requirements and authorities having jurisdiction.
1. Height: 42 inches above finished roof deck.
 2. Posts and Rails: Galvanized-steel pipe, 1-1/4 inches in diameter or galvanized-steel tube, 1-5/8 inches in diameter.
 3. Flat Bar: Galvanized steel, 2 inches high by 3/8 inch thick.
 4. Maximum Opening Size: System constructed to prevent passage of a sphere 21 inches in diameter.
 5. Chain Passway Barrier: Galvanized proof coil chain with quick link on fixed end.
 6. Post and Rail Tops and Ends: Weather resistant, closed or plugged with prefabricated end fittings.
 7. Provide weep holes or another means to drain entrapped water in hollow sections of handrail and railing members.
 8. Fabricate joints exposed to weather to be watertight.
 9. Fasteners: Manufacturer's standard, finished to match railing system.
 10. Finish: Manufacturer's standard.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install roof accessories according to manufacturer's written instructions. Anchor roof accessories securely in place and capable of resisting forces specified. Use fasteners, separators, sealants, and other miscellaneous items as required for completing roof accessory installation. Install roof accessories to resist exposure to weather without failing, rattling, leaking, and fastener disengagement.
- B. Install roof accessories to fit substrates and to result in watertight performance.
- C. Metal Protection: Where dissimilar metals will contact each other or corrosive substrates, protect against galvanic action by painting contact surfaces with bituminous coating or by other permanent separation as recommended by manufacturer.
1. Coat concealed side of stainless-steel roof accessories with bituminous coating where in contact with wood, ferrous metal, or cementitious construction.
 2. Bed flanges in thick coat of asphalt roofing cement where required by roof accessory manufacturers for waterproof performance.

- D. Install roof accessories level, plumb, true to line and elevation, and without warping, jogs in alignment, excessive oil canning, buckling, or tool marks.
- E. Seal joints with elastomeric sealant as required by manufacturer of roof accessories.

END OF SECTION 077200

SECTION 079000 – JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Extent of each form and type of joint sealer is indicated on drawings and schedules.

1.3 SYSTEM BY APPLICATION:

A. Sealant A:

1. For exterior joints in vertical surfaces and non-traffic horizontal surfaces as indicated below, use one of the specified one-part, non-sag urethane sealers in a standard or custom color as required to match color of mortar in adjacent masonry work.
2. Control and expansion joints in unit masonry.
3. Joints between cast stone and other materials.
4. Perimeter joints between materials listed above and frames of doors, windows and louvers.
5. Perimeter joints at metal flashing and roofing.
6. Other joints as indicated and as required for a complete weather-tight exterior enclosure system.

B. Sealant B:

1. For interior joints in vertical surfaces and horizontal nontraffic surfaces as indicated below use one of the specified acrylic emulsion sealants or use same sealant used for exterior vertical joints, except as otherwise specified.
2. Perimeter joints of exterior openings.
3. Vertical control joints on exposed surfaces of interior unit masonry walls, and gypsum board partitions.
4. Perimeter joints between interior wall surfaces and frames of interior doors, windows, and borrowed lights.

C. Sealant C:

1. For perimeter joints of toilet fixtures, urinals, and lavatories; use one of the specified mildew-resistant silicone sealants.

1.4 SYSTEM PERFORMANCES

- A. Provide joint sealers that have been produced and installed to establish and maintain watertight and airtight continuous seals.

1.5 SUBMITTALS

- A. Product Data from manufacturers for each joint sealer product required, including instructions for joint preparation and joint sealer application.
- B. Samples for Initial Selection Purposes: Manufacturer's standard bead samples consisting of strips of actual products showing full range of colors available, for each product exposed to view.
- C. Certificates from manufacturers of joint sealers attesting that their products comply with specification requirements and are suitable for the use indicated.
- D. Preconstruction field test reports indicating which products and joint preparation methods demonstrated acceptable adhesion to joint substrates.

1.6 QUALITY ASSURANCE

- A. Single Source Responsibility for Joint Sealer Materials: Obtain joint sealer materials from a single manufacturer for each different product required.
- B. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to Project joint substrates according to the method in ASTM C 1193 that is appropriate for the types of Project joints.

1.7 WARRANTY

- A. Special Installer's Warranty: Installer's standard form in which Installer agrees to repair or replace elastomeric joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Manufacturer's Warranty: Manufacturer's standard form in which elastomeric sealant manufacturer agrees to furnish elastomeric joint sealants to repair or replace those that do not

comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: 10 years from date of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in original unopened containers or bundles with labels informing about manufacturer, product name and designation, color, expiration period for use, pot life, curing time, and mixing instructions for multicomponent materials.
- B. Store and handle materials in compliance with manufacturers' recommendations to prevent their deterioration or damage due to moisture, high or low temperatures, contaminants, or other causes.

1.9 PROJECT CONDITIONS

- A. Environmental Conditions: Do not proceed with installation of joint sealers under the following conditions:
 1. When ambient and substrate temperature conditions are outside the limits permitted by joint sealer manufacturer or below 40 deg F (4.4 deg C).
 2. When joint substrates are wet due to rain, frost, condensation, or other causes.
- B. Joint Width Conditions: Do not proceed with installation of joint sealers where joint widths are less than or greater than allowed by joint sealer manufacturer for application indicated.
- C. Joint Substrate Conditions: Do not proceed with installation of joint sealers until contaminants capable of interfering with their adhesion are removed from joint substrates.

PART 2 - PRODUCTS

2.1 MATERIALS, GENERAL

- A. Compatibility: Provide joint sealers, joint fillers and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
- B. Colors: Provide colors of exposed joint sealers to match color of materials adjacent to joints. Provide the number of different sealant colors including custom colors as required for the color matching as directed by the Architect.

- C. Elastomeric Sealant Standard: Provide manufacturer's standard chemically curing, elastomeric sealant of base polymer indicated which complies with ASTM C 920 requirements, including those referenced for Type, Grade, Class, and Uses.

1. Type S: Single component/one-part.
2. Type M: Multi-component/two or more parts.
3. Grade P: Pourable for horizontal surfaces.
4. Grade NS: Non-sag for vertical surfaces.
5. Class 25: Tested range +/- 25% of joint width.
6. Class 50: Tested range +/- 50% of joint width.
7. Use T: Suitable for surfaces subject to traffic.
8. Use NT: Non-traffic surfaces.

2.2 SEALANT A:

- A. One-Part Nonsag Urethane Sealant for Use NT: Type S; Grade NS; Class 25; use NT, M, A, and, as applicable to joint substrates indicated, O.

1. Acceptable Product: Provide one of the following:
2. Bostik Findley; Chem-Calk 900.
3. Bostik Findley; Chem-Calk 915.
4. Bostik Findley; Chem-Calk 916 Textured.
5. Pecora Corporation; Dynatrol I-XL.
6. Polymeric Systems Inc.; Flexiprene 1000.
7. Polymeric Systems Inc.; PSI-901.
8. Schnee-Morehead, Inc.; Permathane SM7108.
9. Schnee-Morehead, Inc.; Permathane SM7110.
10. Sikaflex-la"; Sika Corp.
11. Sika Corporation, Inc.; Sikaflex - 15LM.
12. Tremco; DyMonic or Dymonic FC.

2.3 SEALANT B:

- A. Acrylic-Emulsion Sealant: Manufacturer's standard, one part, nonsag, mildew-resistant, acrylic-emulsion sealant complying with ASTM C 834, formulated to be paintable and recommended for exposed applications on interior and on protected exterior locations involving joint movement of not more than plus or minus 5 percent.

1. Acceptable Product: Provide one of the following:
2. Bostik Findley; Chem-Calk 600.
3. Pecora Corporation; AC-20+.
4. Schnee-Morehead, Inc.; SM 8200.
5. Sonneborn, Division of ChemRex Inc.; Sonolac.
6. Tremco; Tremflex 834.

2.4 SEALANT C:

- A. One-Part Mildew-Resistant Silicone Sealant: Type S; Grade NS; Class 25; Use NT; intended for sealing interior joints with nonporous substrates and subject to in-service exposure to conditions of high humidity and temperature extremes.
 - 1. Acceptable Products: Wet Area, Non-Food Service. Provide one of the following:
 - 2. Dow Corning Corporation; 786 (wet area, non-food service)
 - 3. GE Silicones; Sanitary 1700 (wet area, non-food service)
 - 4. Tremco; Tremsil 600
 - 5. Tremco; Tremsil 200 (acid cure)
 - 6. Acceptable Products: Wet Area and Food Service. Provide one of the following:
 - 7. American Sealants Incorporated; ASI 502
 - 8. GE Silicones; SCS1200
 - 9. Tremco; Tremsil 600
 - 10. Tremco; Tremsil 200 (acid cure)

2.5 JOINT SEALANT BACKING

- A. General: Provide sealant backings of material and type which are nonstaining; are compatible with joint substrates, sealants, primers and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Plastic Foam Backer Rods: Preformed, compressible, resilient, nonwaxing, nonextruding strips of flexible, nongassing plastic foam of material indicated below; nonabsorbent to water and gas; and of size, shape and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
 - 1. Open-cell polyurethane foam, non-gassing if punctured, subject to approval of sealant manufacturer, for cold-applied sealants only, except use only closed-cell products for sidewalk joints.
 - 2. "Sofrod" by Nomaco, Inc.
- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape as recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.6 MISCELLANEOUS MATERIALS

- A. Primer: Provide type recommended by joint sealer manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint sealer-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Provide nonstaining, chemical cleaners of type which are acceptable to manufacturers of sealants and sealant backing materials, which are not harmful to substrates and adjacent nonporous materials, and which do not leave oily residues or otherwise have a detrimental effect on sealant adhesion or in-service performance.

- C. Masking Tape: Provide nonstaining, nonabsorbent type compatible with joint sealants and to surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealers, with Installer present, for compliance with requirements for compliance with requirements for joint configuration, installation tolerances and other conditions affecting joint sealer performance. Do not proceed with installation of joint sealers until unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealers to comply with recommendations of joint sealer manufacturers and the following requirements:
 - 1. Remove all foreign material from joint substrates which could interfere with adhesion of joint sealer, including dust; paints, except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer; old joint sealers; oil; grease; waterproofing; water repellants; water; surface dirt; and frost.
 - 2. Clean concrete, masonry, unglazed surfaces of ceramic tile and similar porous joint substrate surfaces, by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealers. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air.
 - 3. Remove laitance and form release agents from concrete.
 - 4. Clean metal, glass, porcelain enamel, glazed surfaces of ceramic tile; and other nonporous surfaces by chemical cleaners or other means, which are not harmful to substrates or leave residues capable of interfering with adhesion of joint sealers.
- B. Joint Priming: Prime joint substrates where indicated or where recommended by joint sealer manufacturer based on preconstruction joint sealer-substrate tests or prior experience. Apply primer to comply with joint sealer manufacturer's recommendations. Confine primers to areas of joint sealer bond, do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant with adjoining surfaces which otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALERS

- A. General: Comply with joint sealer manufacturers' printed installation instructions applicable to products and applications indicated, except where more stringent requirements apply.

- B. Elastomeric Sealant Installation Standard: Comply with recommendations of ASTM C 962 for use of joint sealants as applicable to materials, applications and conditions indicated.
- C. Latex Sealant Installation Standard: Comply with requirements of ASTM C 790 for use of latex sealants.
- D. Acoustical Sealant Application Standard: Comply with recommendations of ASTM C 919 for use of joint sealants in acoustical applications as applicable to materials, applications and conditions indicated.
- E. Installation of Sealant Backings: Install sealant backings to comply with the following requirements:
 - 1. Install joint fillers to provide support of sealants during application and at position required to produce the cross-sectional shapes and depths of installed sealants relative to joint widths, which allow optimum sealant movement capability.
 - 2. Do not leave gaps between ends of joint fillers.
 - 3. Do not stretch, twist, puncture, or tear joint fillers.
 - 4. Remove absorbent joint fillers which have become wet prior to sealant application and replace with dry material.
 - 5. Install bond breaker tape between sealants and joint fillers, compression seals, or back of joints where adhesion of sealant to surfaces at back of joints would result in sealant failure.
- F. Installation of Sealants: Install sealants by proven techniques that result in sealants directly contacting and fully wetting joint substrates, completely filling recesses provided for each joint configuration, and providing uniform, cross-sectional shapes and depths relative to joint widths which allow optimum sealant movement capability.
- G. Tooling of Nonsag Sealants: Immediately after sealant application and prior to time skinning or curing begins, tool sealants to form smooth, uniform beads of configuration indicated, to eliminate air pockets, and to ensure contact and adhesion of sealant with sides of joint. Remove excess sealants from surfaces adjacent to joint. Do not use tooling agents which discolor sealants or adjacent surfaces or are not approved by sealant manufacturer.
 - 1. Provide concave joint configuration per Figure 6A in ASTM C 962.
 - 2. Use masking tape to protect adjacent surfaces of recessed tooled joints.
- H. Installation of Compressible Sealants: Size sealant as recommended by manufacturer for width of cavity to be sealed and install in accordance with manufacturer's instructions.

3.4 CLEANING

- A. Clean off excess sealants or sealant smears adjacent to joints as work progresses by methods and with cleaning materials approved by manufacturers of joint sealers and of products in which joints occur.

3.5 PROTECTION

- A. Protect joint sealers during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealers immediately and reseal joints with new materials to produce joint sealer installations with repaired areas indistinguishable from original work.

END OF SECTION 079000

SECTION 081113 - HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Standard hollow metal doors and frames.
2. Extent of steel doors and frames is indicated and scheduled on the drawings.

B. Related Sections:

1. Division 04 Section "Unit Masonry Assemblies" for embedding anchors for hollow metal work into masonry construction.
2. Division 08 Section "Door Hardware" for door hardware for hollow metal doors.
3. Division 09 Section "Painting" for field painting hollow metal doors and frames.
4. Division 26 Sections for electrical connections including conduit and wiring for door controls and operators.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Include frame type and door type elevations, door edge details, frame profiles, metal thicknesses, preparations for hardware, conditions at each opening, and other details.
- C. Indicate coordination of glazing frames and stops with Division 08 Section "Glass and Glazing."
- D. Samples for Initial Selection: For units with factory-applied color finishes.
- E. Samples for Verification: For each type of exposed finish required.
- F. Schedule: Prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings.

1.3 QUALITY ASSURANCE

- A. Fire-Rated Door Assemblies: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency, for fire-protection ratings indicated, based on testing at positive pressure according to NFPA 252.
- B. Fire-Rated, Borrowed-Light Frame Assemblies: Assemblies complying with NFPA 80 that are listed and labeled, by a testing and inspecting agency acceptable to authorities having jurisdiction, for fire-protection ratings indicated, based on testing according to NFPA 257 or UL 9. Label each individual glazed lite.

1. Refer to Division 08 Section “Flush Wood Doors” for products used with frame assemblies specified.
 2. At stairwell enclosures, provide doors that have a Temperature Rise rating required by the governing codes for the project’s geographic location.
- C. Smoke-Control Door Assemblies: Comply with NFPA 105 or UL 1784.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Inspect hollow metal work upon delivery for damage. Minor defects may be repaired provided refinished items are equal in all respects to new work and acceptable to the Architect; otherwise, remove and replace damaged items.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Amweld Builders.
 2. Ceco Door Products; an Assa Abloy Group Company.
 3. Curries Company, an Assa Abloy Group Company.
 4. Mesker Door Inc.
 5. Pioneer Industries, Inc.
 6. Steelcraft; an Ingersoll-Rand company.
 7. Windsor Republic Doors.

2.2 MATERIALS

- A. Cold-Rolled Steel Sheet: ASTM A 1008/A 1008M, CS, Type B; suitable for exposed applications.
- B. Hot-Rolled Steel Sheet: ASTM A 1011/A 1011M, CS, Type B.
- C. Metallic-Coated Steel Sheet: ASTM A 653/A 653M, Commercial Steel (CS), Type B; with minimum A60 metallic coating, mill phosphatized.
1. At doors and frames exposed to Natatorium or chemical storage environments: Hot Dipped Galvanized, G90 (Z275).
- D. Frame Anchors: ASTM A 591/A 591M, Commercial Steel (CS), 40Z coating designation; mill phosphatized.
1. For anchors built into exterior walls, steel sheet complying with ASTM A 1008/A 1008M or ASTM A 1011/A 1011M, hot-dip galvanized according to ASTM A 153/A 153M, Class B.

- E. Inserts, Bolts, and Fasteners: Manufacturer's standard, except Hot-dip galvanized for exterior walls and interior Natatorium and Pool Chemical Room walls according to ASTM A 153/A 153M.
- F. Grout: ASTM C 476, except with a maximum slump of 4 inches, as measured according to ASTM C 143/C 143M.
- G. Mineral-Fiber Insulation: ASTM C 665, Type I.
- H. Glazing: Division 08 Section "Glass and Glazing".
- I. Bituminous Coating: Cold-applied asphalt mastic, SSPC-Paint 12, compounded for 15-mil dry film thickness per coat.
- J. Primer: Rust-inhibitive epoxy primer compatible with Division 09 "Painting".

2.3 STANDARD HOLLOW METAL DOORS

- A. General: Comply with ANSI/SDI A250.8. Fabricate free from defects, warp or buckle. Fully assemble in manufacturer's plant where practical. Clearly identify work that cannot be fully assembled and provide instructions for completion in the field.
 - 1. Design: Flush panel.
 - 2. Core Construction: Manufacturer's standard kraft-paper honeycomb, polystyrene, polyurethane, polyisocyanurate, mineral-board, or vertical steel-stiffener core.
 - a. Fire Door Core: As required to provide fire-protection ratings indicated.
 - b. Thermal-Rated (Insulated) Doors: R-value of not less than 6.0 deg F x h x sq. ft./Btu when tested according to ASTM C 1363.
 - 3. Vertical Edges for Single-Acting Doors: Square edge.
 - 4. Top and Bottom Edges: Closed with flush 0.042-inch- thick, end closures or channels of same material as face sheets.
 - 5. Tolerances: SDI 117, "Manufacturing Tolerances for Standard Steel Doors and Frames".
- B. Exterior Doors: Face sheets fabricated from metallic-coated steel sheet. Comply with ANSI/SDI A250.8 for level and model and ANSI/SDI A250.4 for physical performance level:
 - 1. Level 4, physical performance Level A, Model 2 with thermal insulation, minimum 14-gage faces (seamless with no face or vertical edge seams).
 - 2. Thermally-Rated Assemblies: ASTM C 236, with minimum U-factor of 0.24 BTU/(hr./ft.sq./deg F.) or better.
- C. Interior Doors: Face sheets fabricated from cold-rolled steel sheet or metallic-coated steel sheet. Provide doors complying with requirements indicated below by referencing ANSI/SDI A250.8 for level and model and ANSI/SDI A250.4 for physical performance level:

1. Level 3 or 4, physical performance level A, Model 2 minimum 16-gage faces (seamless with no face or vertical edge seams).
2. Interior doors exposed to Natatorium environment, wet environments, and exposed to caustic chemical rooms to be fabricated with metallic-coated steel sheet.

D. Hardware Reinforcement: ANSI/SDI A250.6.

2.4 STANDARD HOLLOW METAL FRAMES

- A. General: Comply with ANSI/SDI A250.8. Fabricate frames to be rigid, neat in appearance, and free from defects, warp or buckle, including installation. Preassemble frames in manufacturer's plant wherever practical.
- B. Exterior Frames [and interior frames exposed to Natatorium, wet environments, and caustic pool chemical areas]: Fabricated from metallic-coated steel sheet.
1. Fabricate frames with mitered or coped corners.
 2. Fabricate frames as full profile welded unless otherwise indicated. Knock down frames are not acceptable.
 3. Frames for Level 4 Steel Doors: 0.067-inch- thick steel sheet.
- C. Interior Frames: Fabricated from cold-rolled steel sheet.
1. Fabricate frames with mitered or coped corners.
 2. Fabricate frames as full profile welded unless otherwise indicated.
 3. Frames for Level 3 Steel Doors: 0.053-inch- thick steel sheet.
 4. Frames for Level 4 Steel Doors: 0.067-inch- thick steel sheet.
 5. Frames for Borrowed Lights: 0.067-inch- thick steel sheet.
- D. Hardware Reinforcement: ANSI/SDI A250.6.
- E. Door silencers: Except on weatherstripped frames, drill stops to receive silencers on strike side of jambs. [HC]

2.5 FRAME ANCHORS

- A. Jamb Anchors:
1. Masonry Type: Adjustable strap-and-stirrup or T-shaped anchors to suit frame size, not less than 0.042 inch thick, with corrugated or perforated straps not less than 2 inches wide by 10 inches long; or wire anchors not less than 0.177 inch thick.
 2. Stud-Wall Type: Designed to engage stud, welded to back of frames; not less than 0.042 inch thick.
 3. Postinstalled Expansion Type for In-Place Concrete or Masonry: Minimum 3/8-inch-diameter bolts with expansion shields or inserts. Provide pipe spacer from frame to wall, with throat reinforcement plate, welded to frame at each anchor location.
 4. Use stainless steel anchors for frames requiring metallic-coated sheet steel.

- B. Floor Anchors: Formed from same material as frames, not less than 0.042 inch thick, and as follows:

- 1. Monolithic Concrete Slabs: Clip-type anchors, with two holes to receive fasteners.

2.6 STOPS AND MOLDINGS

- A. Moldings for Glazed Lites in Doors: Minimum 0.032-inch thick, same material as door face sheet.
- B. Fixed Frame Moldings: Formed integral with hollow metal frames, a minimum of 5/8 inch high unless otherwise indicated.
- C. Loose Stops for Glazed Lites in Frames: Minimum 0.032-inch thick, same material as frames.

2.7 ACCESSORIES

- A. Mullions and Transom Bars: Join to adjacent members by welding or rigid mechanical anchors.
- B. Grout Guards: Formed from same material as frames, not less than 0.016-inch thick.

2.8 FABRICATION

- A. Tolerances: Fabricate hollow metal work to tolerances indicated in SDI 117.
- B. Hollow Metal Doors:
 - 1. Exterior Doors: Provide weep-hole openings in bottom of exterior doors. Seal joints in top edges of doors against water penetration.
 - 2. Glazed Lites: Factory cut openings in doors.
 - 3. Astragals: Provide overlapping astragal on one leaf of pairs of doors where required by NFPA 80 for fire-performance rating or where indicated.
- C. Hollow Metal Frames: Where frames are fabricated in sections, provide alignment plates or angles at each joint, fabricated of same thickness metal as frames.
 - 1. Welded Frames: Weld flush face joints continuously; grind, fill, dress, and make smooth, flush, and invisible.
 - 2. Sidelight Frames: Provide closed tubular members with no visible face seams or joints, fabricated from same material as doorframe. Fasten members at crossings and to jambs by butt welding.
 - 3. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
 - 4. Grout Guards: Weld guards to frame at back of hardware mortises in frames to be grouted.
 - 5. Floor Anchors: Weld anchors to bottom of jambs and mullions with at least four spot welds per anchor.
 - 6. Jamb Anchors: Provide number and spacing of anchors as follows:

- a. Masonry Type: Locate anchors not more than 18 inches from top and bottom of frame. Space anchors not more than 32 inches o.c. and as follows:
 - 1) Two anchors per jamb up to 60 inches high.
 - 2) Three anchors per jamb from 60 to 90 inches high.
 - 3) Four anchors per jamb from 90 to 120 inches high.
 - 4) Four anchors per jamb plus 1 additional anchor per jamb for each 24 inches or fraction thereof above 120 inches high.
 - b. Stud-Wall Type: Locate anchors not more than 18 inches from top and bottom of frame. Space anchors not more than 32 inches o.c. and as follows:
 - 1) Three anchors per jamb up to 60 inches high.
 - 2) Four anchors per jamb from 60 to 90 inches high.
 - 3) Five anchors per jamb from 90 to 96 inches high.
 - 4) Five anchors per jamb plus 1 additional anchor per jamb for each 24 inches or fraction thereof above 96 inches high.
 - 5) Two anchors per head for frames more than 42 inches wide and mounted in metal-stud partitions.
 - c. Compression Type: Not less than two anchors in each jamb.
 - d. Postinstalled Expansion Type: Locate anchors not more than 6 inches from top and bottom of frame. Space anchors not more than 26 inches o.c.
7. Door Silencers: Except on weather-stripped doors, drill stops to receive door silencers.
- a. Single-Door Frames: Three door silencers.
 - b. Double-Door Frames: Two door silencers per door along head rail.
- D. Hardware Preparation: Factory prepare hollow metal work to receive templated mortised hardware according to the Door Hardware Schedule and templates furnished as specified in Division 08 Section "Door Hardware."
1. Locate hardware as indicated, or if not indicated, according to ANSI/SDI A250.8.
 2. Reinforce doors and frames to receive nontemplated, mortised and surface-mounted door hardware.
 3. Comply with applicable requirements in ANSI/SDI A250.6 and ANSI/DHI A115 Series specifications for preparation of hollow metal work for hardware.
 4. Coordinate locations of conduit and wiring boxes for electrical connections with Division 26 electrical Sections.
- E. Stops and Moldings: Provide stops and moldings around glazed lites where indicated. Form corners of stops and moldings with butted or mitered hairline joints.
1. Single Glazed Lites: Provide fixed stops and moldings welded on secure side of hollow metal work.
 2. Multiple Glazed Lites: Provide fixed and removable stops and moldings so that each glazed lite is capable of being removed independently.
 3. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames.
 4. Provide loose stops and moldings on inside of hollow metal work.

5. Coordinate rabbet width between fixed and removable stops with type of glazing and type of installation indicated.

2.9 STEEL FINISHES

- A. Prime Finish: Apply primer immediately after cleaning and pretreating.
 1. Shop Primer: Meet the performance requirements of Division 09 Section "Painting".
 2. Primer to be compatible with field applied finish coats specified without the need of a barrier coat.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Hollow Metal Frames: Comply with ANSI/SDI A250.11.
 1. Set frames accurately in position, plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces, leaving surfaces smooth and undamaged.
 - a. At fire-protection-rated openings, install frames according to NFPA 80.
 - b. Where frames are fabricated in sections because of shipping or handling limitations, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces.
 - c. Install frames with removable glazing stops located on secure side of opening.
 - d. Install door silencers in frames before grouting.
 - e. Remove temporary braces necessary for installation only after frames have been properly set and secured.
 - f. Check plumbness, squareness, and twist of frames as walls are constructed. Shim as necessary to comply with installation tolerances.
 - g. Field apply bituminous coating to backs of frames that are filled with grout containing antifreezing agents.
 2. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor, and secure with postinstalled expansion anchors.
 - a. Floor anchors may be set with powder-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.
 3. Metal-Stud Partitions: Solidly pack mineral-fiber insulation behind frames.
 4. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with grout.
 5. In-Place Concrete or Masonry Construction: Secure frames in place with postinstalled expansion anchors. Countersink anchors, and fill and make smooth, flush, and invisible on exposed faces.

6. In-Place Gypsum Board Partitions: Secure frames in place with postinstalled expansion anchors through floor anchors at each jamb. Countersink anchors, and fill and make smooth, flush, and invisible on exposed faces.
 7. Installation Tolerances: Adjust hollow metal door frames for squareness, alignment, twist, and plumb to the following tolerances:
 - a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
 - b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
 - c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - d. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.
- B. Hollow Metal Doors: Fit hollow metal doors accurately in frames, within clearances specified below. Shim as necessary.
1. Non-Fire-Rated Standard Steel Doors:
 - a. Jambs and Head: 1/8 inch plus or minus 1/16 inch.
 - b. Between Edges of Pairs of Doors: 1/8 inch plus or minus 1/16 inch.
 - c. Between Bottom of Door and Top of Threshold: Maximum 3/8 inch.
 - d. Between Bottom of Door and Top of Finish Floor (No Threshold): Maximum 3/4 inch.
 2. Fire-Rated Doors: Install doors with clearances according to NFPA 80.
- C. Glazing: Comply with installation requirements in Division 08 Section "Glazing" and with hollow metal manufacturer's written instructions.
1. Secure stops with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

3.2 ADJUSTING AND CLEANING

- A. Final Adjustments: Check and readjust operating hardware items immediately before final inspection. Leave work in complete and proper operating condition. Remove and replace defective work, including hollow metal work that is warped, bowed, or otherwise unacceptable.
- B. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.
- C. Metallic-Coated Surfaces: Clean abraded areas and repair with galvanizing repair paint according to manufacturer's written instructions.

END OF SECTION 081113

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including the General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes solid core wood doors with wood veneer faces.
- B. Factory finishing of flush wood doors.
- C. Factory machining for hardware.

1.3 RELATED SECTIONS

- A. Division 8 Section "Door Hardware" for hardware requirements.
- B. Division 8 Section "Glass and Glazing" for vision panels in doors.

1.4 SUBMITTALS

- A. General: Submit each item in this Article according to the Conditions of the Contract and Division 01 Specification Sections.
- B. Product data for each type of door, including details of core and edge construction, trim for openings and factory-finishing specifications.
- C. Shop drawings indicating location and size of each door, elevation of each kind of door, details of construction, location and extent of hardware blocking, fire ratings, requirements for veneer matching and factory finishing and other pertinent data.
 - 1. For factory-machined doors, indicate dimensions and locations of cutouts for locksets and other cutouts adjacent to light openings.
- D. Samples for initial selection in the form of color charts consisting of actual materials in small sections for the following:
 - 1. Faces of factory-finished doors with transparent finish. Show the full range of colors available for stained finishes.
 - 2. Certification of Veneer to be submitted in writing by Wood Veneer manufacturer that the face veneers are the grade specified. Certification to be submitted accompanied by Door manufacturer statement that doors are faced with specified veneers.

E. Samples for verification - Provide form and size indicated below:

1. Provide 4 sets of two samples of unfinished veneer mounted on plywood approximately 12 inches (300 mm) square illustrating expected range of veneer color and grain illustrating allowable inclusions, mineral streaks, vinemarks, cross bars, birdseye, sugartracks, wormtracks, gumpockets, barkpockets, and other imperfections. Architect shall judge the acceptable variations to be slight or occasional.
2. Provide 4 sets of two samples the Corner sections of doors approximately 12 inches (300 mm) square with door faces depicting door construction and edgings and representing the typical range of door finish color for each species of veneer and solid lumber required. Finish sample with same materials proposed for factory-finished doors.
3. One Approved set of each type of samples shall be retained and serve as range samples for wood veneer grade and finish. Doors delivered to project but not falling within range shall not be acceptable.
4. Frames for light openings, 6 inches (150 mm) long, for each material, type, and finish required.

1.5 QUALITY ASSURANCE

A. Quality Standard: Comply with the following standard:

1. WDMA; "Window and Door Manufacturing Association" WDMA I.S. 1A-04 for grade of door, core, finish, construction, and other requirements.
2. AWI, "Architectural Woodworking Institute" and 7th ed. Architectural Woodwork Quality Standards, Section 1300 for specific doors standards as indicated. AWI Standards to be used with doors in conjunction with wood paneling specified in Division 6 "Interior Architectural Woodwork." Face veneers of doors within blueprinted assemblies shall match the veneer and finish requirements for paneling.

B. Fire-Rated Wood Doors: Provide wood doors that comply with NFPA 252; are identical in materials and construction to units tested in door and frame assemblies per ASTM E 152; and are labeled and listed by UL, Warnock Hersey, or another testing and inspection agency acceptable to authorities having jurisdiction.

1. Oversized, Fire-Rated Wood Doors: For door assemblies exceeding sizes of tested assemblies, provide manufacturer's certificate stating that doors conform to all standard construction requirements of tested and labeled fire-door assemblies except for size.
2. Temperature Rise Rating: At stairwell enclosures, provide doors that have a temperature rise rating of 450 deg F (232 deg C) maximum in 30 minutes of fire exposure.

C. Single-Source Responsibility: Obtain flush wood doors from one source and by a single manufacturer.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Protect doors during transit, storage, and handling to prevent damage, soiling, and deterioration. Comply with requirements of referenced standard and manufacturer's instructions.

- B. Identify each door with individual opening numbers as designated on shop drawings, using temporary, removable, or concealed markings.

1.7 PROJECT CONDITIONS

- A. Conditioning: Do not deliver or install doors until conditions for temperature and relative humidity have been stabilized and will be maintained in storage and installation areas during the remainder of the construction period to comply with the following requirements applicable to Project's geographical location:
 - 1. WDMA I.S. 1A-04: J-1 Job Site Information, and AWI Section 100-S-11 "Moisture and Relative Humidity".

1.8 WARRANTY

- A. General Warranty: Door manufacturer's warranty specified in this Article shall not deprive the Owner of other rights the Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by the Contractor under requirements of the Contract Documents.
- B. Door Manufacturer's Warranty: Submit written agreement on door manufacturer's standard form signed by manufacturer, Installer, and Contractor, agreeing to repair or replace defective doors that have warped (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section or that show telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span, or do not conform to tolerance limitations of referenced quality standards.
 - 1. Warranty shall also include installation and finishing that may be required due to repair or replacement of defective doors where defect was not apparent prior to hanging.
 - 2. Warranty shall be in effect during the Life of Installation after date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturer: Subject to compliance with requirements, provide doors by one of the following manufacturers. Products of listed manufacturers, which do not meet all specified requirements will not be acceptable.
 - 1. Algoma Hardwoods Inc.
 - 2. Eggers Industries; Architectural Door Div.
 - 3. Graham Wood Doors.
 - 4. IPIK Door Company.
 - 5. VT Industries Inc.

2.2 INTERIOR HALF AND FULL LITE DOORS

- A. Manufacturer: Subject to compliance with requirements, provide doors by manufacturer's who will provide a 'Full Lite/Full Warranty for doors with 6 inch wide timber strand core stiles.

2.3 INTERIOR FLUSH WOOD DOORS

- A. Non-Rated Solid Core Doors for Transparent Finish: Comply with the following requirements for WDMA "Heavy Duty" Door WDMA Symbol PC-5.

1. Faces: Plain sliced, 'Select' White Maple.
2. Grade: Premium, Grade 'A' Face Veneer.
3. Construction: Manufacturer's standard 5 plies.
4. Core: Particleboard core.
5. Bonding: Stiles and rails bonded to core, then entire unit abrasive planed before veneering.
6. Edges: Same species (ME) or compatible hardwood (CE).

- B. Fire-Rated Solid Core Doors: Comply with the following requirements:

1. Faces and Grade: Provide faces and grade to match non-fire-rated doors in same area of building, unless otherwise indicated.
2. Construction: Manufacturer's standard core construction as required to provide fire-resistance rating indicated.
3. Blocking: Provide optional composite blocking designed to maintain fire resistance of door but with improved screw-holding capability of same thickness as core. Locate blocking at all hardware points.
4. Coordinate blocking requirements with Hardware Schedule at end of Section 087100.
5. Edge Construction: Provide manufacturer's standard laminated-edge construction for improved screw-holding capability and split resistance as compared to edges composed of a single layer of treated lumber.
6. Pairs: Equip fire-rated pairs receiving exit devices with edges which are labeled and listed for kinds of applications indicated without overlapping astragals.

2.4 VENEER MATCHING

- A. Within Door Faces: Provide doors with the following veneer matching:

1. Book matching.

- B. Pairs and Sets: Provide pair matching and set matching for pairs of doors and for doors hung in adjacent sets.

- C. Doors with Transoms (as occurs): Provide the following matching:

1. Continuous matching.

2.5 LIGHT FRAMES

- A. Metal Frames for Light Openings in Fire Doors: Manufacturer's standard frame formed of 0.0478-inch- (1.2-mm) thick cold-rolled steel sheet, factory primed, and approved for use in doors of fire rating indicated.
- B. Wood Molding for Light Openings in Non-Rated Doors: Provide door manufacturer's standard matching wood door molding.

2.6 FABRICATION

- A. Fabricate flush wood doors to comply with following requirements:
- B. Factory fit doors to suit frame-opening sizes indicated, with the following uniform clearances and bevels:
 - 1. Comply with clearance requirements of referenced quality standard for fitting. Comply with requirements of NFPA 80 for fire-resistance-rated doors.
 - 2. Provide undercut doors where indicated and where not indicated, for ventilation at all toilet, shower, and data closet rooms.
- C. Factory machine doors for hardware that is not surface applied. Locate hardware to comply with DHI-WDHS-3. Comply with final hardware schedules, doorframe shop drawings, DHI A115-W series standards, and hardware templates.
 - 1. Coordinate measurements of hardware mortises in metal frames to verify dimensions and alignment before proceeding with factory machining.
- D. Transom and Side Panels: Fabricate matching panels with same construction, exposed surfaces, and finish as specified for associated doors. Fabricate fixed panels with solid lumber transom bottom rail and door top rail, both rabbeted. Provide factory-installed spring bolts for concealed attachment into jambs of metal doorframes.
- E. Openings: Cut and trim openings through doors to comply with applicable requirements of referenced standards for kind(s) of door(s) required.
 - 1. Light Openings: Trim openings with specified light frames.

2.7 FACTORY FINISHING

- A. General: Comply with referenced quality standard's requirements for factory finishing.
- B. Finish wood doors at factory.
- C. Transparent Finish: Comply with requirements indicated for grade, finish system, staining effect, and sheen.
 - 1. Grade: Premium, Grade 'A' face veneer.
 - 2. Finish: System TR-6 catalyzed polyurethane.
 - 3. Staining: Match Architects sample.

4. Effect: Open-grain finish.
5. Sheen: Satin, no more than 40.
6. Color: As indicated by manufacturer's finish number in Finish and Color Schedules.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine installed doorframes prior to hanging door:
 1. Verify that frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with plumb jambs and level heads.
 2. Reject doors with defects.
 3. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Hardware: For installation see Division 08 Section "Door Hardware."
- B. Manufacturer's Instructions: Install wood doors to comply with manufacturer's instructions and referenced quality standard and as indicated.
 1. Install fire-rated doors in corresponding fire-rated frames according to requirements of NFPA 80.
- C. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.
- D. Factory-Finished Doors: Restore finish before installation, if fitting or machining is required at the job site.

3.3 ADJUSTING AND PROTECTION

- A. Operation: Re-hang or replace doors that do not swing or operate freely.
- B. Finished Doors: Refinish or replace doors damaged during installation.
- C. Protect doors as recommended by door manufacturer to ensure that wood doors will be without damage or deterioration at the time of Substantial Completion.

END OF SECTION 081416

SECTION 083613 - SECTIONAL DOORS

PART 1 - GENERAL

1.1 SUMMARY

- A. Coordinating Contractor to provide electrically operated, insulated sectional doors.
- B. Related Section:
 - 1. Division 05 Section "Metal Fabrications" for miscellaneous steel supports.
- C. Electrical Contractor to provide power and wiring to door operators and controls.

1.2 PERFORMANCE REQUIREMENTS

- A. General Performance: Sectional doors shall meet performance requirements specified without failure due to defective manufacture, fabrication, installation, or other defects in construction and without requiring temporary installation of reinforcing components.
- B. Delegated Design: Design sectional doors, including comprehensive engineering analysis by a qualified professional engineer, using performance requirements and design criteria indicated.
- C. Structural Performance: Exterior sectional doors shall withstand the effects of gravity loads, and wind loading according to ASCE 7. See design pressures provided on structural drawing S1.1 .
- D. Air Infiltration: Maximum rate not more than indicated when tested according to DASMA 105.
 - 1. Air Infiltration: Maximum rate of 0.15 cfm/sq. ft. at 25 mph.
- E. Seismic Performance: Sectional doors shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1.3 SUBMITTALS

- A. Product Data: For each type and size of sectional door and accessory.
- B. Shop Drawings: For each installation and for special components not dimensioned or detailed in manufacturer's product data. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Provide calculations from the manufacturer demonstrating compliance with ASCE 7 or the loading specified within the contract documents (reference drawing S0.01).
- C. Samples: For each exposed product and for each color and texture specified.

- D. Delegated-Design Submittal: For sectional doors indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- E. Seismic Qualification Certificates: For sectional doors, accessories, and components, from manufacturer.
- F. Maintenance data.
- G. Warranties: Sample of special warranties.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for both installation and maintenance of units required for this Project.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Standard for Sectional Doors: Fabricate sectional doors to comply with DASMA 102 unless otherwise indicated.

1.5 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of sectional doors that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Finish Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components that show evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Warranty Period: 10 Insert number years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 STEEL DOOR SECTIONS

- A. Exterior Section Faces and Frames: Fabricate from zinc-coated (galvanized), cold-rolled, commercial steel (CS) sheet, complying with ASTM A 653/A 653M, with indicated zinc coating and thickness.
 - 1. Fabricate section faces from single sheets to provide sections not more than 24 inches high and of indicated thickness. Roll horizontal meeting edges to a continuous, interlocking,

- keyed, rabbeted, shiplap, or tongue-in-groove weathertight seal, with a reinforcing flange return.
 - 2. For insulated doors, provide sections with continuous thermal-break construction, separating the exterior and interior faces of door.
- B. Section Ends and Intermediate Stiles: Enclose open ends of sections with channel end stiles formed from galvanized-steel sheet not less than 0.064-inch- nominal coated thickness and welded to door section. Provide intermediate stiles formed from not less than 0.064-inch- thick galvanized-steel sheet, cut to door section profile, and welded in place. Space stiles not more than 48 inches apart.
 - C. Reinforce bottom section with a continuous channel or angle conforming to bottom-section profile.
 - D. Reinforce sections with continuous horizontal and diagonal reinforcement, as required to stiffen door and for wind loading. Provide galvanized-steel bars, struts, trusses, or strip steel, formed to depth and bolted or welded in place.
 - E. Provide reinforcement for hardware attachment.
 - F. Foamed-in-Place Thermal Insulation: Insulate interior of steel sections with door manufacturer's standard CFC-free polyurethane insulation, foamed in place to completely fill interior of section and pressure bonded to face sheets to prevent delamination under wind load, and with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, according to ASTM E 84. Enclose insulation completely within steel sections that incorporate the following interior facing material, with no exposed insulation:
 - 1. Interior Facing Material: Zinc-coated (galvanized), cold-rolled, commercial steel (CS) sheet, complying with ASTM A 653/A 653M, with indicated thickness.
 - 2. Assembled Panel Thickness: No less than 1 5/8 inches.
 - G. Fabricate sections so finished door assembly is rigid and aligned, with tight hairline joints and free of warp, twist, and deformation.

2.2 TRACKS, SUPPORTS, AND ACCESSORIES

- A. Tracks: Manufacturer's standard, galvanized-steel track system of configuration indicated, sized for door size and weight, designed for lift type indicated and clearances shown on Drawings. Provide complete track assembly including brackets, bracing, and reinforcement for rigid support of ball-bearing roller guides for required door type and size. Slot vertical sections of track spaced 2 inches apart for door-drop safety device. Slope tracks at proper angle from vertical or design tracks to ensure tight closure at jambs when door unit is closed.
- B. Track Reinforcement and Supports: Galvanized-steel track reinforcement and support members. Secure, reinforce, and support tracks as required for door size and weight to provide strength and rigidity without sag, sway, and vibration during opening and closing of doors.
- C. Weatherseals: Replaceable, adjustable, continuous, compressible weather-stripping gaskets of flexible vinyl, rubber, or neoprene fitted to bottom and top of sectional door unless otherwise indicated.

2.3 HARDWARE

- A. General: Provide heavy-duty, corrosion-resistant hardware, with hot-dip galvanized, stainless-steel, or other corrosion-resistant fasteners, to suit door type.
- B. Hinges: Heavy-duty, galvanized-steel hinges at each end stile and at each intermediate stile, according to manufacturer's written recommendations for door size. Attach hinges to door sections through stiles and rails.
- C. Rollers: Heavy-duty rollers with steel ball-bearings in case-hardened steel races, mounted with varying projections to suit slope of track. Provide roller tires sized to track and no less than 2-inch- diameter roller tires for 2-inch- wide track.
- D. Push/Pull Handles: For push-up or emergency-operated doors, provide galvanized-steel lifting handles on each side of door.

2.4 LOCKING DEVICES

- A. Locking Device Assembly: Fabricate with cylinder lock, spring-loaded deadbolt, operating handle, cam plate, and adjustable locking bars to engage through slots in tracks.
 - 1. Lock Cylinders: Provide cylinders specified in Division 08 Section "Door Hardware" and keyed to building keying system.
 - 2. Keys: Two for each cylinder.
- B. Safety Interlock Switch: Equip power-operated doors with safety interlock switch to disengage power supply when door is locked.

2.5 COUNTERBALANCE MECHANISM

- A. Torsion Spring: Counterbalance mechanism consisting of adjustable-tension torsion springs mounted on torsion shaft made of steel tube or solid steel. Provide springs designed for number of operation cycles indicated.
- B. Cable Drums and Shaft for Doors: Cast-aluminum or gray-iron casting cable drums mounted on torsion shaft and grooved to receive door-lifting cables as door is raised. Mount counterbalance mechanism with manufacturer's standard ball-bearing brackets at each end of torsion shaft.
- C. Cables: Galvanized-steel lifting cables.
- D. Cable Safety Device: Include, on each side-edge of door, a device designed to automatically stop door if either lifting cable breaks.
- E. Bracket: Provide anchor support bracket as required to connect stationary end of spring to the wall and to level the shaft and prevent sag.
- F. Provide a spring bumper at each horizontal track to cushion door at end of opening operation.

2.6 ELECTRIC DOOR OPERATORS

- A. General: Electric door operator assembly of size and capacity recommended and provided by door manufacturer for door and "operation cycles" requirement specified, with electric motor and factory-prewired motor controls, starter, gear-reduction unit, solenoid-operated brake, clutch, remote-control stations, control devices, integral gearing for locking door, and accessories required for proper operation.
 - 1. Comply with NFPA 70.
 - 2. Provide control equipment complying with NEMA ICS 1, NEMA ICS 2, and NEMA ICS 6; with NFPA 70, Class 2 control circuit, maximum 24-V ac or dc.
- B. Usage Classification: Electric operator and components capable of operating for not less than 60 cycles per hour.
- C. Door-Operator Type: Unit of type indicated, consisting of electric motor, gears, pulleys, belts, sprockets, chains, and controls needed to operate door and meet required usage classification.
- D. Electric Motors: Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements specified in Division 11 Section "Common Motor Requirements for Equipment" unless otherwise indicated.
 - 1. Electrical Characteristics:
 - 2. Motor Type and Controller: Reversible motor and controller (disconnect switch) for motor exposure indicated.
 - 3. Motor Size: Large enough to start, accelerate, and operate door in either direction from any position, at a speed not less than 8 in./sec. and not more than 12 in./sec., without exceeding nameplate ratings or service factor.
 - 4. Operating Controls, Controllers (Disconnect Switches), Wiring Devices, and Wiring: Manufacturer's standard unless otherwise indicated.
- E. Obstruction Detection Device: Equip motorized door with indicated external automatic safety sensor capable of protecting full width of door opening. Activation of device immediately stops and reverses downward door travel.
 - 1. Sensor Edge: Automatic safety sensor edge, located within astragal or weather stripping mounted to bottom bar. Contact with sensor activates device. Connect to control circuit using manufacturer's standard take-up reel or self-coiling cable.
- F. Remote-Control Station: Momentary-contact, three-button control station with push-button controls labeled "Open," "Close," and "Stop."
 - 1. Interior units, full-guarded, surface-mounted, heavy-duty type, with general-purpose NEMA ICS 6, Type 1 enclosure.
- G. Emergency Manual Operation: Equip each electrically powered door with capability for emergency manual operation. Design manual mechanism so required force for door operation does not exceed 25 lbf.
- H. Emergency Operation Disconnect Device: Equip operator with hand-operated disconnect mechanism for automatically engaging manual operator and releasing brake for emergency

manual operation while disconnecting motor without affecting timing of limit switch. Mount mechanism so it is accessible from floor level. Include interlock device to automatically prevent motor from operating when emergency operator is engaged.

- I. Motor Removal: Design operator so motor may be removed without disturbing limit-switch adjustment and without affecting emergency manual operation.

2.7 DOOR ASSEMBLY

- A. Steel Sectional Door: 20 gauge foamed core insulated door formed with hinged sections.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Series 595 by Overhead Door Corporation or comparable product by one of the following:
 - a. Clopay Building Products; a Griffon company.
 - b. Cookson
 - c. Martin Door Manufacturing.
 - d. Raynor.
 - e. Wayne-Dalton Corp.
- B. Operation Cycles: Not less than 50,000.
- C. R-Value: No less than 14.0 deg F x h x sq. ft./Btu. for the insulated sections of the door.
- D. Door Sections: Flush face, solid panels.
- E. Track Configuration: Standard-lift track.
- F. Weatherseals: Fitted to bottom and top and around entire perimeter of door. Provide combination bottom weatherseal and sensor edge.
- G. Locking Devices: Equip door with locking device assembly.
 - 1. Locking Device Assembly: Cremone type, both jamb sides, locking bars, operable from outside with cylinder.
- H. Electric Door Operator:
 - 1. Usage Classification: Standard duty, up to 60 cycles per hour.
 - 2. Operator Type: Trolley.
 - 3. Motor Exposure: Interior, clean, and dry.
 - 4. Emergency Manual Operation: Push-up type.
 - 5. Obstruction-Detection Device: Automatic electric sensor edge on bottom bar.
 - 6. Remote-Control Station: Exterior.
- I. Door Finish:
 - 1. Powder-Coated Finish: Color and gloss as selected by Architect from manufacturer's full range.
 - 2. Factory Prime Finish: Manufacturer's standard color.
 - 3. Finish of Interior Facing Material: Match finish of exterior section face.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install sectional doors and operating equipment complete with necessary hardware, anchors, inserts, hangers, and equipment supports; according to manufacturer's written instructions and as specified.
- B. Tracks: Provide sway bracing, diagonal bracing, and reinforcement as required for rigid installation of track and door-operating equipment. Repair galvanized coating on tracks according to ASTM A 780.
- C. Adjust hardware and moving parts to function smoothly so that doors operate easily, free of warp, twist, or distortion. Adjust doors and seals to provide weathertight fit around entire perimeter.

3.2 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain sectional doors.

END OF SECTION 08 36 13

SECTION 084113 - ALUMINUM ENTRANCES AND STOREFRONT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following types of aluminum entrance and storefront work:
 - 1. Exterior Storefront.
 - 2. Exterior entrance doors.
 - 3. Interior Storefront.
 - 4. Interior doors.
 - 5. Sidelights.
- B. Related Sections: The following sections contain requirements that relate to this Section:
 - 1. Division 8 Section, "Glass and Glazing" for glazing requirements for aluminum entrances and storefront, including entrances specified to be factory glazed.

1.3 SYSTEM PERFORMANCE REQUIREMENTS

- A. Structural Loading: Aluminum entrances and storefront shall be designed to resist loading as calculated by Section 6, ASCE 7 based upon loading as specified on drawing S1.1.
- B. General: Provide aluminum entrance and storefront assemblies that comply with performance characteristics specified, as demonstrated by testing the manufacturer's corresponding stock assemblies according to test methods indicated:
- C. Air Infiltration Entrance Doors and Frames: Provide aluminum entrance doors with an infiltration rate of not more than 0.5 CFM per lin. ft. of perimeter crack when tested in accordance with ASTM E 283 at an inward test pressure differential of 6.24 psf.
- D. Air Infiltration: Provide aluminum-framed systems with maximum air leakage through fixed glazing and framing areas of 0.06 cfm/sq. ft. of fixed wall area when tested according to ASTM E 283 at a minimum static-air-pressure difference of 6.24 lbf/sq. ft.
- E. Water Penetration under Static Pressure: Provide aluminum-framed systems that do not evidence water penetration through fixed glazing and framing areas when tested according to ASTM E 331 at a minimum static-air-pressure difference of 20 percent of positive wind-load design pressure, but not less than 30 lbf/sq. ft.

1.4 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of the Contract and Division 01 Specification Sections:
1. Provide calculations from the manufacturer supporting the system as designed meets the specified loading per Section 6, ASCE 7 as indicated on drawing S1.1.
 2. Product data for each aluminum entrance and storefront system required, including:
 3. Manufacturer's standard details and fabrication methods.
 4. Data on finishing, hardware and accessories.
 5. Recommendations for maintenance and cleaning of exterior surfaces.
- B. Shop drawings for each aluminum entrance and storefront system required, including:
1. Layout and installation details, including relationship to adjacent work.
 2. Elevations at 1/4-inch scale.
 3. Detail sections of typical composite members.
 4. Anchors and reinforcement.
 5. Hardware mounting heights.
 6. Provisions for expansion and contraction.
 7. Glazing details.
- C. Hardware Schedule: Submit complete hardware schedule organized into sets based on hardware specified. Coordinate hardware with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish. Include item name, name of the manufacturer and complete designations of every item required for each door opening.
1. Final Hardware Schedule Content: Based on hardware indicated, organize schedule into "hardware sets" indicating complete designations of every item required for each door or opening. Include the following information:
 - a. Type, style, function, size, and finish of each hardware item.
 - b. Name and manufacturer of each item.
 - c. Fastenings and other pertinent information.
 - d. Location of each hardware set cross referenced to indications on Drawings both on floor plans and in door and frame schedule.
 - e. Explanation of all abbreviations, symbols, and codes contained in schedule.
 - f. Mounting locations for hardware.
 - g. Door and frame sizes and materials.
 - h. Horizontal schedules will not be accepted.
- D. Samples for Initial Color Selection: Submit pairs of samples of each specified color and finish on 12-inch-long sections of extrusions or formed shapes. Where normal color variations are anticipated, include 2 or more units in each set of samples indicating extreme limits of color variations.
- E. Samples for Verification Purposes: The Architect reserves the right to require additional samples, that show fabrication techniques and workmanship, and design of hardware and accessories.

- F. Test Reports: Provide certified test reports from a qualified independent testing laboratory showing that aluminum entrance and storefront systems have been tested in accordance with specified test procedures and comply with performance characteristics indicated.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Engage an experienced Installer who has completed installations of aluminum storefront and entrances similar in design and extent to those required for the project and whose work has resulted in construction with a record of successful in-service performance.
- B. Manufacturer's Qualifications: Provide aluminum entrances and storefront systems produced by a firm experienced in manufacturing systems that are similar to those indicated for this project and that have a record of successful in-service performance.
- C. Fabricator Qualifications: Provide aluminum entrances and storefront systems fabricated by a firm experienced in producing systems that are similar to those indicated for this project, and that have a record of successful in-service performance. The fabricator shall have sufficient production capacity to produce components required without causing delay in progress of the Work.
- D. Single Source Responsibility: Obtain aluminum entrance and storefront systems from one source and from a single manufacturer.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver aluminum entrance and storefront components in the manufacturer's original protective packaging.
- B. Store aluminum components in a clean dry location away from uncured masonry or concrete. Cover components with waterproof paper, tarpaulin or polyethylene sheeting in a manner to permit circulation of air. Stack framing components in a manner that will prevent bending and avoid significant or permanent damage.

1.7 PROJECT CONDITIONS

- A. Field Measurements: Check openings by accurate field measurement before fabrication. Show recorded measurements on shop drawings. Coordinate fabrication schedule with construction progress to avoid delay of work. Where necessary, proceed with fabrication without field measurements, and coordinate fabrication tolerances to ensure proper fit.
- B. Warranty: Submit a written warranty, executed by the manufacturer, agreeing to repair or replace units that fail in materials or workmanship within the specified warranty period. Failures include, but are not necessarily limited to:
 - 1. Structural failures including excessive deflection, excessive leakage or air infiltration.
 - 2. Faulty operation.
 - 3. Deterioration of metals, metal finishes and other materials beyond normal weathering.

- C. Warranty Period: Storefront - 2 years after the date of Substantial Completion and the Entrance Door corner construction shall carry a Manufacturers Limited Lifetime Warranty. The warranty shall not deprive the College of other rights or remedies the University may have under other provisions of the Contract Documents and is in addition to and runs concurrent with other warranties made by the Contractor under requirements of the Contract Documents.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Swing Doors:

1. Basis of Design: Systems and profiles are based on Kawneer TriFab 451/451T Series. Interior vestibule frames to use same profile as exterior in 1" glazing units and as indicated. Refer to Division 08 Section "Glass and Glazing."
2. Subject to compliance with requirements, provide comparable entrance and storefront systems manufactured by one of the following:
 - a. EFCO
 - b. YKK America

- B. Aluminum Members: Alloy and temper recommended by the manufacturer for strength, corrosion resistance, and application of required finish; comply with ASTM B 221 for aluminum extrusions, ASTM B 209 for aluminum sheet or plate, and ASTM B 221 for aluminum bars, rods and wire.
- C. Carbon steel reinforcement of aluminum framing members shall comply with ASTM A 36 for structural shapes, plates and bars, ASTM A 611 for cold rolled sheet and strip, or ASTM A 570 for hot rolled sheet and strip.
- D. Glass and Glazing Materials: Comply with requirements of "Glass and Glazing" section of these specifications.
- E. Fasteners: Provide fasteners of aluminum, nonmagnetic stainless steel, zinc-plated steel, or other material warranted by the manufacturer to be noncorrosive and compatible with aluminum components, hardware, anchors and other components.
- F. Reinforcement: Where fasteners screw-anchor into aluminum members less than 0.125 inches thick, reinforce the interior with aluminum or nonmagnetic stainless steel to receive screw threads, or provide standard noncorrosive pressed-in splined grommet nuts.
- G. Exposed Fasteners: Do not use exposed fasteners except for application of hardware. For application of hardware, use Phillips flat-head machine screws that match the finish of member or hardware being fastened.
- H. Concealed Flashing: 3/8" thermally broken extruded aluminum of alloy and type selected by manufacturer for compatibility with other components.

- I. Brackets and Reinforcements: Provide high-strength aluminum brackets and reinforcements; where use of aluminum is not feasible provide nonmagnetic stainless steel or hot-dip galvanized steel complying with ASTM A 123.
- J. Concrete and Masonry Inserts: Provide cast iron, malleable iron, or hot-dip galvanized steel inserts complying with ASTM A 123.
- K. Compression Weatherstripping: Manufacturer's standard replaceable compressible weatherstripping gaskets of molded EPDM complying with or molded PVC complying with ASTM D 2287.
- L. Sliding Weatherstripping: Manufacturer's standard replaceable weatherstripping of wool, polypropylene, or nylon woven pile, with nylon fabric or aluminum strip backing, complying with AAMA 701.2.

2.2 HARDWARE

- A. Refer to Division 08 Section "Door Hardware." Hardware to be provided by hardware supplier and installed by aluminum entrance and storefront supplier.

2.3 ENTRANCE DOOR HARDWARE

- A. General: Provide entrance door hardware for each entrance door to comply with requirements in this Section.
 - 1. Entrance Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and products complying with BHMA standard referenced.
 - 2. Opening-Force Requirements:
 - a. Egress Doors: Not more than 15 lbf to release the latch and not more than 30 lbf to set the door in motion and not more than 15 lbf to open the door to its minimum required width.
 - b. Accessible Interior Doors: Not more than 5 lbf to fully open door.
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of entrance door hardware are indicated in "Entrance Door Hardware Sets" Article. Products are identified by using entrance door hardware designations as follows:
 - 1. Named Manufacturers' Products: Manufacturer and product designation are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in "Entrance Door Hardware Sets" Article.
 - 2. References to BHMA Standards: Provide products complying with these standards and requirements for description, quality, and function.
- C. Pivot Hinges: BHMA A156.4, Grade 1.
 - 1. Offset-Pivot Hinges: Provide top, bottom, and intermediate offset pivots at each door leaf.
- D. Mortise Auxiliary Locks: BHMA A156.5, Grade 1.

- E. Cylinders: As specified in Section 087100 "Door Hardware".
- F. Strikes: Provide strike with black-plastic dust box for each latch or lock bolt; fabricated for aluminum framing.
- G. Operating Trim: BHMA A156.6.
- H. Closers: Kawneer standard: Norton 1601BF adjustable surface closer with back-check.
- I. Concealed Overhead Holders: BHMA A156.8, Grade 1.
- J. Panic Exit Devices: Kawneer 1786 rim latch.
 - 1. Door pull: Kawneer #CO-12.
- K. Door Stops: BHMA A156.16, Grade 1, floor or wall mounted, as appropriate for door location indicated, with integral rubber bumper.
- L. Weather Stripping: Manufacturer's standard replaceable components.
- M. Weather Sweeps: Manufacturer's standard exterior-door bottom sweep with concealed fasteners on mounting strip.
- N. Silencers: BHMA A156.16, Grade 1.
- O. Thresholds: BHMA A156.21, raised thresholds beveled with a slope of not more than 1:2, with maximum height of 1/2 inch.
- P. Finger Guards: Manufacturer's standard collapsible neoprene or PVC gasket anchored to frame hinge-jamb at center-pivoted doors.

2.4 COMPONENTS

- A. Storefront Framing System: Provide storefront and entrance framing systems fabricated from extruded aluminum members of size and profile indicated. Include reinforcing members required for complete installation. Provide for flush glazing storefront from the interior on all sides without projecting stops. Shop-fabricate and pre-assemble frame components where possible. Provide storefront frame sections without exposed seams.
 - 1. Provide optional snap-in flat thermal fillers at jamb and head framing members.
- B. Any design changes do to requirements of reinforcing shall be brought to the Architects attention and reviewed with the Architect for approval prior to fabrication.
- C. Mullion Configurations: Provide pockets at the inside glazing face to receive resilient elastomeric glazing. Make provisions to drain moisture accumulation to the exterior.
- D. Muntins: Aluminum extruded rectangular units in grid frame indicated, mounted inside the air space of the insulating glass units. Refer to drawings for frame elevations and muntin patterns.

- E. Entrance Door Frames: Provide tubular and channel frame entrance doorframe assemblies, as indicated, with welded or mechanical joints in accordance with manufacturer's standards. Reinforce as necessary to support required loads.
- F. Stile-and-Rail Type Entrance Doors: Provide tubular frame members, fabricated with mechanical joints using heavy inserted reinforcing plates and fully welded corners.
- G. Glazing: Fabricate doors to facilitate replacement of glass or panels, without disassembly of stiles and rails. Provide snap-on extruded aluminum glazing stops, with exterior stops anchored for non-removal.
- H. Design Criteria: The drawings indicate the size, profile, and dimensional requirements of aluminum entrance and storefront work required and are based on:
 - 1. Aluminum entrance and storefront systems by other manufacturers may be considered, provided deviations in dimensions and profiles are minor and do not change the design concept as judged by the Architect. The burden of proof of equality is on the proposer. Use of other manufacturers' products must be approved by the architect 10 days prior to the bid date.
- I. Entrance and Vestibule Doors:
 - 1. Door construction: 1-3/4" thick overall thickness with minimum 0.125 inch thick, extruded-aluminum tubular rail and stile members. Mechanically fasten corners with reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.
 - 2. Door Design: Wide stile; 5-inch nominal width.
 - a. Bottom rail; provide 10-1/4" high bottom rail.
 - 3. Sub-frames: Provide Kawneer 450-079 Sub-frame profile at head with stop adapter at jambs for entrances in curtainwall assemblies. Transom face width no greater than 1-7/8 inch.
- J. Lights: Provide glazed openings as indicated, with aluminum moldings and stops. Provide non-removable stops on the exterior.

2.5 FABRICATION

- A. General: Fabricate aluminum entrance and storefront components to designs, sizes and thicknesses indicated and to comply with indicated standards. Sizes and profile requirements are indicated on the drawings. Variable dimensions are indicated, with maximum and minimum dimensions required, to achieve design requirements and coordination with other work.
- B. Prefabrication: Complete fabrication, assembly, finishing, hardware application, and other work to the greatest extent possible before shipment to the Project site. Disassemble components only as necessary for shipment and installation.

- C. Perform fabrication operations, including cutting, fitting, forming, drilling and grinding of metal work to prevent damage to exposed finish surfaces. Complete these operations for hardware prior to application of finishes.
- D. Do not drill and tap for surface-mounted hardware items until time of installation at project site.
- E. Pre-glaze door and frame units to greatest extent possible.
- F. Welding: Comply with AWS recommendations. Grind exposed welds smooth to remove weld spatter and welding oxides. Restore mechanical finish.
- G. Welding behind finished surfaces shall be performed in such a manner as to minimize distortion and discoloration on the finished surface.
- H. Reinforcing: Install reinforcing as required for hardware and as necessary for performance requirements, sag resistance and rigidity.
- I. Dissimilar Metals: Separate dissimilar metals with bituminous paint, or a suitable sealant, or a non-absorptive plastic or elastomeric tape, or a gasket between the surfaces. Do not use coatings containing lead.
- J. Continuity: Maintain accurate relation of planes and angles with hairline fit of contacting members.
- K. Uniformity of Metal Finish: Abutting extruded aluminum members shall not have an integral color or texture variation greater than half the range indicated in the sample pair submittal.
- L. Fasteners: Conceal fasteners wherever possible.
- M. Weatherstripping: For exterior doors, provide compression weatherstripping against fixed stops. At other edges, provide sliding weatherstripping retained in adjustable strip mortised into door edge.
- N. Provide EPDM-blade gasket weatherstripping in bottom door rail, adjustable for contact with threshold.
- O. At interior doors and other locations without weatherstripping, provide neoprene silencers on stops to prevent metal-to-metal contact.

2.6 FINISHES

- A. High-Performance Organic Finish: 3-coat fluoropolymer finish complying with AAMA 2605 and containing not less than 70 percent PVDF resin by weight in both color coat and clear topcoat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 - 1. Color and Gloss: As selected by Architect from manufacturer's full range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and supports, with the Installer present, for compliance with requirements indicated, installation tolerances, and other conditions that affect installation of aluminum entrances and storefronts. Correct unsatisfactory conditions before proceeding with the installation.
- B. Do not proceed with installation until unsatisfactory conditions are corrected.

3.2 INSTALLATION

- A. Comply with manufacturer's instructions and recommendations for installation.
- B. Set units plumb, level, and true to line, without warp or rack of framing members, doors, or panels. Install components in proper alignment and relation to established lines and grades indicated. Provide proper support and anchor securely in place.
- C. Construction Tolerances: Install aluminum entrance and storefront to comply with the following tolerances:
 - 1. Variation from Plane: Do not exceed 1/8 inch in 12 feet of length or 1/4 inch in any total length.
 - 2. Offset from Alignment: The maximum offset from true alignment between two identical members abutting end to end in line shall not exceed 1/16 inch.
 - 3. Diagonal Measurements: The maximum difference in diagonal measurements shall not exceed 1/8 inch.
 - 4. Offset at Corners: The maximum out-of-plane offset of framing at corners shall not exceed 1/32 inch.
 - 5. Separate aluminum and other corrodible metal surfaces from sources of corrosion or electrolytic action at points of contact with other materials.
- D. Zinc or cadmium plate steel anchors and other unexposed fasteners after fabrication.
- E. Paint dissimilar metals where drainage from them passes over aluminum.
- F. Paint aluminum surfaces in contact with mortar, concrete or other masonry with alkali resistant coating.
- G. Paint wood and similar absorptive material in contact with aluminum and exposed to the elements or otherwise subject to wetting, with two coats of aluminum house paint. Seal joints between the materials with sealant.
- H. Drill and tap frames and doors and apply surface mounted hardware items. Comply with hardware manufacturer's instructions and template requirements. Use concealed fasteners wherever possible.

- I. Set sill members and other members in bed of sealant as indicated, or with joint fillers or gaskets as indicated to provide weathertight construction. Comply with requirements of Division 7 for sealants, fillers, and gaskets.
- J. Refer to "Glass and Glazing" Section of Division 8 for installation of glass and other panels indicated to be glazed into doors and framing, and not pre-glazed by manufacturer.

3.3 ADJUSTING

- A. Adjust operating hardware to function properly, for smooth operation without binding, and for weathertight closure.

3.4 CLEANING

- A. Clean the completed system, inside and out, promptly after installation, exercising care to avoid damage to coatings.
- B. Clean glass surfaces after installation, complying with requirements contained in the "Glass and Glazing" Section for cleaning and maintenance. Remove excess glazing and sealant compounds, dirt and other substances from aluminum surfaces.

3.5 PROTECTION

- A. Institute protective measures required throughout the remainder of the construction period to ensure that aluminum entrances and storefronts will be without damage or deterioration, other than normal weathering, at time of acceptance.

END OF SECTION 084113

SECTION 086223 - TUBULAR DAYLIGHTING DEVICES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Tubular daylighting devices and accessories.

1.2 RELATED SECTIONS

- A. Section 07 54 00 - Thermoplastic Membrane Roofing: Flashing of skylight base.
- B. Section 07 60 00 - Flashing and Sheet Metal: Metal curb flashings.

1.3 REFERENCES

- A. ASTM B 209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
- B. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- C. ASTM A 463/A 463M - Standard Specification for Steel Sheet, Aluminum Coated, by the Hot Dip Process.
- D. ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc Coated (Galvanized), by the Hot Dip Process.
- E. ASTM A 792/A 792M - Standard Specification for Steel Sheet, 55 percent Aluminum-Zinc Alloy-Coated by the Hot-Dip Process.
- F. ASTM E 108 - Standard Test Methods for Fire Tests of Roof Coverings.
- G. ASTM E 283 - Test Method for Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen.
- H. ASTM E 330 - Structural Performance of Exterior Windows, Curtain Walls and Doors.
- I. ASTM E 547 - Test Method for Water Penetration of Exterior Windows, Skylights, Doors and Curtain walls by Cyclic Air Pressure Difference.
- J. ASTM E 1886 - Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials.
- K. ASTM E 1996 - Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricane.
- L. ASTM D 635 - Test Method for Rate of Burning and/or Extent of Time of Burning of Self-Supporting Plastics in a Horizontal Position.
- M. ASTM D 1929 - Test Method for Ignition Properties of Plastics.
- N. ASTM D 2843 - Standard Test Method for Density of Smoke from the Burning or Decomposition of Plastics.

- O. ASTM F 1642 - Standard Test Method for Glazing and Glazing Systems Subject to Airblast Loading.
- P. ASTM F 2912 - Standard Specification for Glazing and Glazing Systems Subject to Airblast Loading.
- Q. AAMA/WDMA/CSA 101/I.S.2/A440 - Standard/Specification for Windows, Doors, and Unit Skylights; 2011.
- R. IBC Section 1710 - Load Test Procedure for Wind Load Testing on Rooftop Daylight Collecting System - Structural Performance Testing - Devised by ATI PE); 2012.
- S. IBC Section 2606.7.2 - Installation - Diffuser Fall Out Test (Devised by PE); 2012.
- T. OSHA 29 CFR - 1910.23 (e)(8) (Guarding Requirements for Skylights); 1926 Subpart M (Fall Protection); 1926.501(b)(4)(i); 1926.501(i)(2); 1926.501(b)(4)(ii).

1.4 PERFORMANCE REQUIREMENTS

- A. Basis of Design SOLAMASTER 300 DS Daylighting System: (Suspended or Open Ceilings)
 - 1. AAMA/WDMA/CSA 101/IS2/A440, Class CW-PG70 size tested 14 inch (350 mm), Type TDDCC.
 - a. Air Infiltration Test: Air infiltration will not exceed 0.30 cfm/sf aperture with a pressure delta of 1.57 psf across the tube when tested in accordance with ASTM E 283.
 - b. Water Resistance Test:
 - 1) Passes water resistance; no uncontrolled water leakage with a pressure differential of 10.7 psf (512 Pa) or 15 percent of the design load (whichever is greater) and a water spray rate of 5 gallons/hour/sf for 24 minutes when tested in accordance with ICC-ES AC-16, ASTM E 547 and ASTM E 331.
 - c. Uniform Load Test: All units tested with a safety factor of (3) for positive pressure and (2) for negative pressure, acting normal to plane of roof in accordance with ASTM E 330.
 - 1) No breakage, permanent damage to fasteners, hardware parts, or damage to make system inoperable or cause excessive permanent deflection of any section when tested at a Positive Load of 150 psf (7.18 kPa) or Negative Load of 60 psf (2.87 kPa) in accordance with ICC AC-16 Section A, or Negative Load of 70 psf (3.35 kPa) if tested per ICC AC-16 Section B.

1.5 SUBMITTALS

- A. Submit under provisions of Section 01 30 00.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Data sheets showing roof dome assembly, flashing base, reflective tubes, diffuser assembly, and accessories.
 - 4. Installation requirements.

- C. Shop Drawings. Submit shop drawings showing layout, profiles and product components, including rough opening and framing dimensions, anchorage, roof flashings and accessories.
- D. Electrical wiring diagrams and recommendations for power and control wiring.
- E. Verification Samples: As requested by Architect.
- F. Test Reports: Independent testing agency or evaluation service reports verifying compliance with specified performance requirements.
- G. Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting requirements, listings, service conditions, photometric performance, installed accessories, and ceiling compatibility; include model number nomenclature clearly marked with all proposed features:

1.6 QUALITY ASSURANCE

- A. Manufacturer Qualifications: All primary products specified in this section will be supplied by a single manufacturer with a minimum of twenty years experience in the top lighting industry. Secondary products shall be acceptable to the primary manufacturer.
- B. Installer Qualifications: All products shall be installed by a single installer with a minimum of five years demonstrated experience, with adequate equipment, skilled workers, and practical experience to meet the project schedule.
- C. Skylights shall conform with authorities having jurisdiction and be designed to meet design criteria of the project location and the following:
 - 1. Skylights must be certified by NFRC.
 - 2. Skylights must be Tested and labeled in accordance with AAMA/WDMA/CSA 101/I.S.2/A440.
 - 3. Meet or exceed OSHA 200 pound (90 kg) Drop Tests expressed in 29 CFR 1910.23(e)(8)
 - 4. Skylights shall provide minimum 69 psf (3.30 kPa) design load.

1.7 Pre-Installation Meeting:

- A. Contractor shall convene a pre-installation meeting on the project site minimum one week before beginning work of this Section. The meeting shall include the Architect or Owner's Representative and representatives of all related trades to:
 - 1. Coordinate between the at least the following trades.
 - a. Roofing to install the flashing, cut holes in roof deck, flash curb to deck
 - b. Ensure clear paths for TDD units and coordinate with mechanical so as not to interfere with pathways
 - 2. Verify project requirements and site logistics.
 - 3. Assess integrity of the roofing system and building structure.
 - 4. Review manufacturer's installation instructions and warranty requirements.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products in a cool dry location protected from the weather and in the manufacturer's original unopened containers until ready for installation.

- B. Store products in manufacturer's unopened packaging until ready for installation.

1.9 PROJECT CONDITIONS

- A. Coordinate delivery schedule with the Contractor and project schedule to minimize on site storage.
- B. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.
- C. Store materials in a dry area, protected from freezing, staining, contamination or damage.

1.10 WARRANTY

- A. Daylighting Device: Manufacturer's standard warranty for 10 years.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Basis of Design: Solatube Model 300 DS as manufactured by Solatube International, Inc. or comparable product by one of the following;

2.2 TUBULAR DAYLIGHTING DEVICES

- A. Tubular Daylighting Devices General: Transparent roof-mounted skylight dome and self-flashing curb, reflective tube, and ceiling level diffuser assembly, transferring sunlight to interior spaces; complying with ICC AC-16.
- B. SolaMaster Series: Solatube Model 300 DS: 14 Inch (350 mm) Daylighting System:
 - 1. Model:
 - a. Solatube Model 300 DS-C Closed (Penetrating) Ceiling, AAMA Type TDDCC.
 - 2. Capture Zone:
 - a. Roof Dome Assembly: Transparent, UV and impact resistant dome with flashing base supporting dome and top of tube.
 - 1) Acrylic Dome Plus Shock Inner Dome Glazing: Type DAI, Inner Dome is 0.115 inch (2.9 mm) minimum thickness classified as CC1 material. High impact resistant injection molded acrylic required for high velocity wind zones.
 - 2) Tube Ring: Attached to top of base section; 0.090 inch (2.3 mm) nominal thickness injection molded high impact acrylic; to prevent thermal bridging between base flashing and tubing and channel condensed moisture out of tubing.
 - 3) Dome Seal: Polyethylene foam seal, black, 0.13 inch (3.2 mm) thick by 14.62 (371 mm) diameter, 2 PCF polyethylene foam.
 - 4) LightTracker Reflector, made of aluminum sheet, thickness 0.015 inch (0.4 mm) with Spectralight Infinity. Positioned in the dome to capture low angle sunlight.

- b. Flashings:
 - 1) Roof Flashing Base:
 - a) One Piece: One piece, seamless, leak-proof flashing functioning as base support for dome and top of tube. Sheet steel, corrosion resistant conforming to ASTM A 653/A 653M or ASTM A 463/A 463M or ASTM A 792/A 792M, 0.028 inch (0.7 mm) plus or minus .006 inch (.015 mm) thick.
 - 1) Base Style: Type FC, Curb Cap, with inside dimensions of 27 inches by 27 inches (685 mm by 685 mm) to cover curb as specified in Section 07 60 00.
 - c. Curbs: Metal Insulated Roof Curb: Corrosion resistant 18 Gauge hot-dipped galvanized steel conforming to ASTM A 653 G90 with continuous welded seams, integrated base plate for water tightness and extra strength, lined with 1-1/2 inch fiberglass fireproof sound attenuating thermal insulation, factory installed 2 by 2 treated wood nailer secured to top ledge of curb. Curb designed for single-ply roofing, lightweight fill or tapered insulation low slope roof types.
 - 1) CXX Metal insulated curb with a custom curb height as determined by the installer.
 - 2) Flashing Options:
 - a) Curb Cap Insulation: Type CCI, nominal 1 inch thick thermal isolation pad to reduce thermal conduction between curb-cap and tubing and thermal convection between room air and curb-cap. Rated R-6 (OFxft2xh/Btu) Insulation is Polyisocyanurate foam utilizing CFC, HCFC, & HFC free blowing agent. Type-1 Class-1 per ASTM C 1289; Passes UL 1715 (15-minute thermal barrier per IBC 2603.4); Attic ventilation may be required per IBC 1203.2(OFxft2xh/Btu). For use with Type FC flashing.
3. Transfer Zone:
- a. Extension Tubes: Aluminum sheet, thickness 0.015 inch (0.4 mm).
 - 1) Reflective Tubes:
 - a) Reflective Extension Tubes: Type EXX, extension tubes with total length of run as indicated on the Drawings.
 - b) Reflective angle adapter tube (standard top and bottom tubes), providing up to a 30-degree angle adjustment.
 - c) Interior Finish: Spectralight Infinity with INFRAREDuction Technology combining ultra-high Visible Light reflectance with Ultra-low Infrared (IR) reflectance.
4. Delivery Zone:
- a. Ceiling Ring: Injection molded impact resistant acrylic. Nominal thickness is 0.110 inches (2.8 mm).
 - b. Ceiling Ring Seal: Polyethylene foam seal, white, 0.25 inch (6.4 mm) wide by 0.19 inch (4.8 mm) high, 2 PCF polyethylene foam with low-tack pressure sensitive adhesive. Upper glazing: PET GAG plastic with EPDM low density sponge seal to minimize condensation and bug, dirt, and air infiltration per ASTM E283. The nominal thickness is 0.039 inches (0.99 mm).
 - 1) Natural Effect Lens: Type LN.
 - c. Diffuser Assemblies for Tubes Penetrating Ceilings: Ceiling mounted box transitioning from round tube to square ceiling assembly, supporting light

transmitting surface at bottom termination of tube 23.8 inches by 23.8 inches (605 mm by 605 mm) square frame to fit standard suspended ceiling grids or hard ceilings.

- 1) Metal Transition Box: Type TM, Round to Square transition box comprised of Spectralight Infinity SoftLight material with structured finish on exposed reflective surface, .015in (0.4mm) thick. Color: a* and b* (defined by CIE L*a*b* color model) shall not exceed plus 2 or be less than minus 2 as determined in accordance to ASTM E 308.
- 2) Lens: Type L5 (Wide), OptiView Micro-replicated lens design to maximize light output and diffusion with extruded aluminum frame and EPDM foam seal to minimize condensation and bug, dirt and air infiltration per ASTM E 283. Visible Light Transmission shall be greater than 90 percent at 0.022 inch (0.6 mm) thick.

2.3 ACCESSORIES

- A. Fasteners: Same material as metals being fastened, non-magnetic steel, non-corrosive metal of type recommended by manufacturer, or injection molded nylon.
- B. Suspension Wire: Steel, annealed, galvanized finish, size and type for application and ceiling system requirement.
- C. Sealant: Polyurethane or copolymer based elastomeric sealant as provided or recommended by manufacturer.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Do not begin installation until substrates have been properly prepared.
- B. Examine openings, substrates, structural support, anchorage, and conditions for compliance with requirements for installation tolerances and other conditions.
- C. If substrate and rough opening preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Coordinate requirements for power supply, conduit and wiring.
- C. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's printed instructions.
- B. Coordinate installation with substrates, air and vapor retarders, roof insulation, roofing membrane, and flashing to ensure that each element of the Work performs properly and that finished installation is weather tight.
 1. Install flashing to produce weatherproof seal with curb and overlap with roofing

- system termination at top of curb.
- 2. Provide thermal isolation when components penetrate or disrupt building insulation. Pack fibrous insulation in rough opening to maintain continuity of thermal barriers.
- 3. Coordinate attachment and seal of perimeter air and vapor barrier material.
- C. Where metal surfaces of tubular unit skylights will contact incompatible metal or corrosive substrates, including preservative-treated wood, provide permanent separation as recommended by manufacturer
- D. Align device free of warp or twist, maintain dimensional tolerances.
- E. Inspect installation to verify secure and proper mounting. Test each fixture to verify operation, control functions, and performance. Correct deficiencies.

3.4 FIELD QUALITY CONTROL

- A. Provide independent testing and inspection as specified in Section 01 45 23. Inspect installation to verify secure and proper mounting.
 - 1. Test for water leaks in accordance with AAMA 502 after installation and curing of sealants but prior to installation if interior finishes.
 - 2. Perform test for total area of each unit skylight.
 - 3. Notify the Architect and the Contractor of any failed tests.

3.5 CLEANING

- A. Clean exposed surfaces according to manufacturer's written instructions. Touch up damaged metal coatings and finishes. Remove excess sealants, glazing materials, dirt, and other substances.

3.6 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

SECTION 08 71 00 – DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes:
 - 1. Mechanical door hardware for:
 - a. Swinging doors.
 - 2. Field verification, preparation and modification of existing doors and frames to receive new door hardware.
 - 3. Lead-lining door hardware items required for radiation protection at door openings.
 - 4. The intent of the hardware specification is to specify the hardware for interior and exterior doors, and to establish a type, continuity, and standard of quality. However, it is the door hardware supplier's responsibility to thoroughly review existing conditions, schedules, specifications, drawings, and other Contract Documents to verify the suitability of the hardware specified.
- B. Exclusions: Unless specifically listed in hardware sets, hardware is not specified in this section for:
 - 1. Windows
 - 2. Cabinets (casework), including locks in cabinets
 - 3. Signage
 - 4. Toilet accessories
 - 5. Overhead doors
- C. Related Sections:
 - 1. Division 07 Section "Joint Sealants" for sealant requirements applicable to threshold installation specified in this section.
 - 2. Division 09 sections for touchup, finishing or refinishing of existing openings modified by this section.
 - 3. Division 26 sections for connections to electrical power system and for low-voltage wiring.
 - 4. Division 28 sections for coordination with other components of electronic access control system.

1.3 REFERENCES

A. UL - Underwriters Laboratories

1. UL 10B - Fire Test of Door Assemblies
2. UL 10C - Positive Pressure Test of Fire Door Assemblies
3. UL 1784 - Air Leakage Tests of Door Assemblies
4. UL 305 - Panic Hardware

B. DHI - Door and Hardware Institute

1. Sequence and Format for the Hardware Schedule
2. Recommended Locations for Builders Hardware
3. Key Systems and Nomenclature

C. ANSI - American National Standards Institute

1. ANSI/BHMA A156.1 - A156.29, and ANSI/BHMA A156.31 - Standards for Hardware and Specialties

1.4 SUBMITTALS

A. General:

1. Submit in accordance with Conditions of Contract and Division 01 requirements.
2. Highlight, encircle, or otherwise specifically identify on submittals deviations from Contract Documents, issues of incompatibility or other issues which may detrimentally affect the Work.
3. Prior to forwarding submittal, comply with procedures for verifying existing door and frame compatibility for new hardware, as specified in PART 3, "EXAMINATION" article, herein.

B. Action Submittals:

1. Product Data: Technical product data for each item of door hardware, installation instructions, maintenance of operating parts and finish, and other information necessary to show compliance with requirements.
2. Riser and Wiring Diagrams: After final approval of hardware schedule, submit details of electrified door hardware, indicating:
 - a. Wiring Diagrams: For power, signal, and control wiring and including:
 - 1) Details of interface of electrified door hardware and building safety and security systems.
 - 2) Schematic diagram of systems that interface with electrified door hardware.
 - 3) Point-to-point wiring.
 - 4) Risers.
3. Samples for Verification: If requested by Architect, submit production sample of requested door hardware unit in finish indicated, and tagged with full description for coordination with schedule.

- a. Samples will be returned to supplier. Units that are acceptable to Architect may, after final check of operations, be incorporated into Work, within limitations of key coordination requirements.
4. Door Hardware Schedule: Submit schedule with hardware sets in vertical format as illustrated by Sequence of Format for the Hardware Schedule as published by the Door and Hardware Institute. Indicate complete designations of each item required for each door or opening, include:
 - a. Door Index; include door number, heading number, and Architects hardware set number.
 - b. Opening Lock Function Spreadsheet: List locking device and function for each opening.
 - c. Quantity, type, style, function, size, and finish of each hardware item.
 - d. Name and manufacturer of each item.
 - e. Fastenings and other pertinent information.
 - f. Location of each hardware set cross-referenced to indications on Drawings.
 - g. Explanation of all abbreviations, symbols, and codes contained in schedule.
 - h. Mounting locations for hardware.
 - i. Door and frame sizes and materials.
 - j. Name and phone number for local manufacturer's representative for each product.
 - k. Operational Description of openings with any electrified hardware (locks, exits, electromagnetic locks, electric strikes, automatic operators, door position switches, magnetic holders or closer/holder units, and access control components). Operational description should include operational descriptions for: egress, ingress (access), and fire/smoke alarm connections.
 - 1) Submittal Sequence: Submit door hardware schedule concurrent with submissions of Product Data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate fabrication of other work that is critical in Project construction schedule.
5. Key Schedule:
 - a. After Keying Conference, provide keying schedule listing levels of keying as well as explanation of key system's function, key symbols used and door numbers controlled.
 - b. Use ANSI/BHMA A156.28 "Recommended Practices for Keying Systems" as guideline for nomenclature, definitions, and approach for selecting optimal keying system.
 - c. Provide 3 copies of keying schedule for review prepared and detailed in accordance with referenced DHI publication. Include schematic keying diagram and index each key to unique door designations.
 - d. Index keying schedule by door number, keyset, hardware heading number, cross keying instructions, and special key stamping instructions.
 - e. Provide one complete bitting list of key cuts and one key system schematic illustrating system usage and expansion.
 - 1) Forward bitting list, key cuts and key system schematic directly to Owner, by means as directed by Owner.

- f. Prepare key schedule by or under supervision of supplier, detailing Owner's final keying instructions for locks.
 6. Templates: After final approval of hardware schedule, provide templates for doors, frames and other work specified to be factory or shop prepared for door hardware installation.
- C. Informational Submittals:
1. Qualification Data: For Supplier, Installer and Architectural Hardware Consultant.
 2. Product data for electrified door hardware:
 - a. Certify that door hardware approved for use on types and sizes of labeled fire-rated doors complies with listed fire-rated door assemblies.
 3. Certificates of Compliance:
 - a. UL listings for fire-rated hardware and installation instructions if requested by Architect or Authority Having Jurisdiction.
 - b. Installer Training Meeting Certification: Letter of compliance, signed by Contractor, attesting to completion of installer training meeting specified in "QUALITY ASSURANCE" article, herein.
 - c. Electrified Hardware Coordination Conference Certification: Letter of compliance, signed by Contractor, attesting to completion of electrified hardware coordination conference, specified in "QUALITY ASSURANCE" article, herein.
 4. Warranty: Special warranty specified in this Section.
- D. Closeout Submittals:
1. Operations and Maintenance Data: Provide in accordance with Division 01 and include:
 - a. Complete information on care, maintenance, and adjustment; data on repair and replacement parts, and information on preservation of finishes.
 - b. Catalog pages for each product.
 - c. Final approved hardware schedule, edited to reflect conditions as-installed.
 - d. Final keying schedule
 - e. As-installed wiring diagrams for each opening connected to power, both low voltage and 110 volts.
 - f. Copy of warranties including appropriate reference numbers for manufacturers to identify project.

1.5 QUALITY ASSURANCE

- A. Supplier Qualifications and Responsibilities: Recognized architectural hardware supplier with record of successful in-service performance for supplying door hardware similar in quantity, type, and quality to that indicated for this Project.
1. Warehousing Facilities: In Project's vicinity.
 2. Scheduling Responsibility: Preparation of door hardware and keying schedules.

3. Coordination Responsibility: Assist in coordinating installation of electronic security hardware with Architect and electrical engineers and provide installation and technical data to Architect and other related subcontractors.
 - a. Upon completion of electronic security hardware installation, inspect and verify that all components are working properly.
 4. Installation of electrified hardware with Architect and electrical engineers.
- B. Single Source Responsibility: Obtain each type of door hardware from single manufacturer.
- C. Fire-Rated Door Openings: Provide door hardware for fire-rated openings that complies with NFPA 80 and requirements of authorities having jurisdiction. Provide only items of door hardware that are listed products tested by Underwriters Laboratories, Intertek Testing Services, or other testing and inspecting organizations acceptable to authorities having jurisdiction for use on types and sizes of doors indicated, based on testing at positive pressure and according to NFPA 252 or UL 10C and in compliance with requirements of fire-rated door and door frame labels.
- D. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, Article 100, by testing agency acceptable to authorities having jurisdiction.
- E. Accessibility Requirements: For door hardware on doors in an accessible route, comply with governing accessibility regulations cited in “REFERENCES” article, herein.
- F. Keying Conference
1. Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including:
 - a. Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
 - b. Preliminary key system schematic diagram.
 - c. Requirements for key control system.
 - d. Requirements for access control.
 - e. Address for delivery of keys.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for hardware delivered to Project site.
- B. Tag each item or package separately with identification coordinated with final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package.
1. Deliver each article of hardware in manufacturer’s original packaging.
- C. Project Conditions:

1. Maintain manufacturer-recommended environmental conditions throughout storage and installation periods.
 2. Provide secure lock-up for door hardware delivered to Project. Control handling and installation of hardware items so that completion of Work will not be delayed by hardware losses both before and after installation.
- D. Protection and Damage:
1. Promptly replace products damaged during shipping.
 2. Handle hardware in manner to avoid damage, marring, or scratching. Correct, replace or repair products damaged during Work.
 3. Protect products against malfunction due to paint, solvent, cleanser, or any chemical agent.
- E. Deliver keys to manufacturer of key control system for subsequent delivery to Owner.
- F. Deliver keys to Owner by registered mail or overnight package service.

1.7 COORDINATION

- A. Installation Templates: Distribute for doors, frames, and other work specified to be factory or shop prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- B. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.
- C. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.

1.8 WARRANTY

- A. Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.
 1. Warranty Period: Beginning from date of Substantial Completion, for durations indicated.
 - a. Closers:
 - 1) Mechanical: 20 years
 - 2) Electrified: 2 years.
 - b. Locksets:
 - 1) Mechanical: 3 years
 - 2) Electrified: 1 year.
 - c. Key Blanks: Lifetime
 2. Warranty does not cover damage or faulty operation due to improper installation, improper use or abuse.

1.9 MAINTENANCE

- A. Maintenance Tools: Furnish complete set of special tools required for maintenance and adjustment of hardware, including changing of cylinders.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Fasteners

1. Provide hardware manufactured to conform to published templates, generally prepared for machine screw installation.
2. Furnish screws for installation with each hardware item. Finish exposed (exposed under any condition) screws to match hardware finish, or, if exposed in surfaces of other work, to match finish of this other work including prepared for paint surfaces to receive painted finish.
3. Provide concealed fasteners for hardware units exposed when door is closed except when no standard units of type specified are available with concealed fasteners. Do not use thru-bolts for installation where bolt head or nut on opposite face is exposed in other work unless thru-bolts are required to fasten hardware securely. Review door specification and advise Architect if thru-bolts are required.
4. Install hardware with fasteners provided by hardware manufacturer.

2.2 HINGES

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product: Stanley FBB Series
2. Acceptable Manufacturers and Products: Hager BB series, Ives 5BB Series

B. Requirements:

1. Provide hinges conforming to ANSI/BHMA A156.1.
2. 1-3/4 inch (44 mm) thick doors, up to and including 36 inches (914 mm) wide:
 - a. Exterior: Standard weight, bronze or stainless steel, 4-1/2 inches (114 mm) high
 - b. Interior: Standard weight, steel, 4-1/2 inches (114 mm) high
3. 1-3/4 inch (44 mm) thick doors over 36 inches (914 mm) wide:
 - a. Exterior: Heavy weight, bronze/stainless steel, 5 inches (127 mm) high
 - b. Interior: Heavy weight, steel, 5 inches (127 mm) high
4. Provide three hinges per door leaf for doors 90 inches (2286 mm) or less in height, and one additional hinge for each 30 inches (762 mm) of additional door height.
5. Where new hinges are specified for existing doors or existing frames, provide new hinges of identical size to hinge preparation present in existing door or existing frame.
6. Hinge Pins: Except as otherwise indicated, provide hinge pins as follows:

- a. Steel Hinges: Steel pins
 - b. Non-Ferrous Hinges: Stainless steel pins
 - c. Out-Swinging Exterior Doors: Non-removable pins
7. Width of hinges: 4-1/2 inches (114 mm) at 1-3/4 inch (44 mm) thick doors, and 5 inches (127 mm) at 2 inches (51 mm) or thicker doors. Adjust hinge width as required for door, frame, and wall conditions to allow proper degree of opening.
 8. Provide spring hinges where specified. Provide two spring hinges and one bearing hinge per door leaf for doors 90 inches (2286 mm) or less in height. Provide one additional bearing hinge for each 30 inches (762 mm) of additional door height.

2.3 CYLINDRICAL LOCKS – GRADE 2

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product: Best 73K
2. Acceptable Manufacturers and Products: Dorma CL700, Schalge AL

B. Requirements:

1. Provide cylindrical locks conforming to ANSI/BHMA A156.2 Series 4000, Grade 2, and UL Listed for 3 hour fire doors.
2. Cylinders: Refer to “KEYING” article, herein.
3. Provide locks with standard 2-3/4 inches (70 mm) backset, unless noted otherwise, with 1/2 inch latch throw. Provide proper latch throw for UL listing at pairs.
4. Provide locksets with separate anti-rotation thru-bolts, and no exposed screws.
5. Provide independently operating levers with two external return spring cassettes mounted under roses to prevent lever sag.
6. Provide standard ASA strikes unless extended lip strikes are necessary to protect trim.
7. Lever Trim: Solid cast levers without plastic inserts and wrought roses on both sides.

2.4 CYLINDERS

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product: Best
2. Acceptable Manufacturers and Products: No Substitution

B. Requirements:

1. Provide cylinders/cores, from the same manufacturer of locksets, compliant with ANSI/BHMA A156.5; latest revision; cylinder face finished to match lockset, manufacturer’s series as indicated. Refer to “KEYING” article, herein.

2.5 DOOR CLOSERS

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product: Dorma 7414

2. Acceptable Manufacturers and Products: LCN 4050 series, Norton 8500

B. Requirements:

1. Provide door closers conforming to ANSI/BHMA A156.4 Grade 1 requirements by BHMA certified independent testing laboratory. ISO 9000 certify closers. Stamp units with date of manufacture code.
2. Provide door closers with fully hydraulic, full rack and pinion action with aluminum cylinder.
3. Closer Body: 1-1/2 inch (38 mm) diameter with 5/8 inch (16 mm) diameter heat-treated pinion journal.
4. Hydraulic Fluid: Fireproof, passing requirements of UL10C, and requiring no seasonal closer adjustment for temperatures ranging from 120 degrees F to -30 degrees F.
5. Spring Power: Continuously adjustable over full range of closer sizes, and providing reduced opening force as required by accessibility codes and standards.
6. Hydraulic Regulation: By tamper-proof, non-critical valves, with separate adjustment for latch speed, general speed, and backcheck.
7. Pressure Relief Valve (PRV) Technology: Not permitted.
8. Provide special templates, drop plates, mounting brackets, or adapters for arms as required for details, overhead stops, and other door hardware items interfering with closer mounting.

2.6 DOOR TRIM

A. Manufacturers:

1. Scheduled Manufacturer: Trimco
2. Acceptable Manufacturers: Ives, Rockwood.

B. Requirements:

1. Provide push plates 4 inches (102 mm) wide by 16 inches (406 mm) high by 0.050 inch (1 mm) thick and beveled 4 edges. Where width of door stile prevents use of 4 inches (102 mm) wide plate, adjust width to fit.
2. Provide push bars of solid bar stock, diameter and length as scheduled. Provide push bars of sufficient length to span from center to center of each stile. Where required, mount back to back with pull.
3. Provide offset pulls of solid bar stock, diameter and length as scheduled. Where required, mount back to back with push bar.
4. Provide flush pulls as scheduled. Where required, provide back-to-back mounted model.
5. Provide pulls of solid bar stock, diameter and length as scheduled. Where required, mount back to back with push bar.
6. Provide pull plates 4 inches (102 mm) wide by 16 inches (406 mm) high by 0.050 inch (1 mm) thick, beveled 4 edges, and prepped for pull. Where width of door stile prevents use of 4 inches (102 mm) wide plate, adjust width to fit.
7. Provide wire pulls of solid bar stock, diameter and length as scheduled.
8. Provide decorative pulls as scheduled. Where required, mount back to back with pull.

2.7 PROTECTION PLATES

A. Manufacturers:

1. Scheduled Manufacturer: Trimco.
2. Acceptable Manufacturers: Ives, Rockwood.

B. Requirements:

1. Provide kick plates, mop plates, and armor plates minimum of 0.050 inch (1 mm) thick, beveled four edges as scheduled. Furnish with sheet metal or wood screws, finished to match plates.
2. Sizes of plates:
 - a. Kick Plates: 8 inches (254 mm) high by 2 inches (51 mm) less width of door on single doors, 1 inch (25 mm) less width of door on pairs
 - b. Mop Plates: 4 inches (102 mm) high by 2 inches (51 mm) less width of door on single doors, 1 inch (25 mm) less width of door on pairs
 - c. Armor Plates: 36 inches (914 mm) high by 2 inches (51 mm) less width of door on single doors, 1 inch (25 mm) less width of door on pairs

2.8 OVERHEAD STOPS AND OVERHEAD STOP/HOLDERS

A. Manufacturers:

1. Scheduled Manufacturers: ABH
2. Acceptable Manufacturers: Rixson, Glynn Johnson.

B. Requirements:

1. Provide heavy duty concealed mounted overhead stop or holder as specified for exterior and interior vestibule single acting doors.
2. Provide medium duty surface mounted overhead stop or holder for interior doors as specified. Provide medium duty surface mounted overhead stop for interior doors and at any door that swings more than 140 degrees before striking wall, open against equipment, casework, sidelights, and where conditions do not allow wall stop or floor stop presents tripping hazard.
3. Where overhead holders are specified provide friction type at doors without closer and positive type at doors with closer.

2.9 DOOR STOPS AND HOLDERS

A. Manufacturers:

1. Scheduled Manufacturer: Trimco
2. Acceptable Manufacturers: Ives, Rockwood.

B. Provide door stops at each door leaf:

1. Provide wall stops wherever possible. Provide convex type where mortise type locks are used and concave type where cylindrical type locks are used.
2. Where a wall stop cannot be used, provide universal floor stops for low or high rise options.
3. Where wall or floor stop cannot be used, provide medium duty surface mounted overhead stop.

2.10 SILENCERS

A. Manufacturers:

1. Scheduled Manufacturer: Trimco
2. Acceptable Manufacturers: Ives, Rockwood.

B. Requirements:

1. Provide "push-in" type silencers for hollow metal or wood frames.
2. Provide one silencer per 30 inches (762 mm) of height on each single frame, and two for each pair frame.
3. Omit where gasketing is specified.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Prior to installation of hardware, examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Field verify existing doors and frames receiving new hardware and existing conditions receiving new openings. Verify that new hardware is compatible with existing door and frame preparation and existing conditions.
- C. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Mount door hardware units at heights to comply with the following, unless otherwise indicated or required to comply with governing regulations.
 1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
 2. Custom Steel Doors and Frames: HMMA 831.
 3. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."

- B. Install each hardware item in compliance with manufacturer's instructions and recommendations, using only fasteners provided by manufacturer.
- C. Do not install surface mounted items until finishes have been completed on substrate. Protect all installed hardware during painting.
- D. Set units level, plumb and true to line and location. Adjust and reinforce attachment substrate as necessary for proper installation and operation.
- E. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- F. Install operating parts so they move freely and smoothly without binding, sticking, or excessive clearance.
- G. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than quantity recommended by manufacturer for application indicated or one hinge for every 30 inches (750 mm) of door height, whichever is more stringent, unless other equivalent means of support for door, such as spring hinges or pivots, are provided.
- H. Door Closers: Mount closers on room side of corridor doors, inside of exterior doors, and stair side of stairway doors from corridors. Mount closers so they are not visible in corridors, lobbies and other public spaces unless approved by Architect.
- I. Closer/Holders: Mount closer/holders on room side of corridor doors, inside of exterior doors, and stair side of stairway doors.
- J. Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings or in equipment room, or alternate location as directed by Architect.
- K. Thresholds: Set thresholds in full bed of sealant complying with requirements specified in Division 07 Section "Joint Sealants."
- L. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they may impede traffic or present tripping hazard.
- M. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
- N. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
- O. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.

3.3 FIELD QUALITY CONTROL

- A. Engage qualified manufacturer trained representative to perform inspections and to prepare inspection reports.

1. Representative will inspect door hardware and state in each report whether installed work complies with or deviates from requirements, including whether door hardware is properly installed and adjusted.

3.4 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 1. Spring Hinges: Adjust to achieve positive latching when door is allowed to close freely from an open position of 30 degrees.
 2. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.
- B. Occupancy Adjustment: Approximately three to six months after date of Substantial Completion, Installer's Architectural Hardware Consultant must examine and readjust each item of door hardware, including adjusting operating forces, as necessary to ensure function of doors and door hardware.

3.5 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.6 DOOR HARDWARE SCHEDULE

- A. Hardware items are referenced in the following hardware. Refer to the above specifications for special features, options, cylinders/keying, and other requirements.
- B. Hardware Sets: (see next page)

Heading: 01

103, 104, 135A, 135B

Each Opening To Have:

1	MORTISE CYLINDER	90J02	626	DOR
BALANCE OF HARDWARE BY ALUM SUPPLIER				

Heading: 02

100, 114B

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBB191NRP 4-1/2 X 4-1/2	32D	STA
1	RIM EXIT DEVICE	9300B	630	DOR
1	CLOSER	7414 S-DS	689	DOR
1	SEAL	152VA X 36 X 84	A	NAT
1	DOOR SWEEP	200NA X 36	A	NAT
1	THRESHOLD	425E X 36	MILL	NAT

Heading: 03

116, 141A, 142A

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBB191NRP 4-1/2 X 4-1/2	32D	STA
1	RIM EXIT DEVICE	9300B YR08C	630	DOR
1	CLOSER	7414 S-DS	689	DOR
1	SEAL	152VA X 36 X 84	A	NAT
1	DOOR SWEEP	200NA X 36	A	NAT
1	THRESHOLD	425E X 36	MILL	NAT

Heading: 04

140B

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBB191NRP 4-1/2 X 4-1/2	32D	STA
1	CYLINDRICAL LOCK	C580D-LRC	626	DOR
1	CLOSER	7414 ARP	689	DOR
1	SEAL	152VA X 36 X 84	A	NAT
1	DOOR SWEEP	200NA X 36	A	NAT
1	THRESHOLD	425E X 36	MILL	NAT

Heading: 05

102, 105, 106, 107, 108, 111, 112, 113, 124, 125, 131, 132, 133, 143, 144, 145

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBF179 4-1/2 X 4-1/2	26D	STA
1	CYLINDRICAL LOCK	C553D-LRC	626	DOR
1	WALL STOP	1270WV	630	TRI
3	SILENCER	1229A	GREY	TRI

Heading: 06

101, 117, 119

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBF179 4-1/2 X 4-1/2	26D	STA
1	PRIVACY SET	C540-LRC	626	DOR
1	WALL STOP	1270WV	630	TRI
3	SILENCER	1229A	GREY	TRI

Heading: 07

114A, 120B, 123, 128, 129, 130, 137A, 138, 139

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBF179 4-1/2 X 4-1/2	26D	STA
1	PUSH PLATE	1001-3	630	TRI
1	PULL PLATE	1017-3B	630	TRI
1	CLOSER	7414 ARP	689	DOR
1	KICK PLATE	K0050 X 8 X 34	630	TRI
1	WALL STOP	1270WV	630	TRI
3	SILENCER	1229A	GREY	TRI

Heading: 8

121, 122

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBF179 4-1/2 X 4-1/2	26D	STA
1	CYLINDRICAL LOCK	C580D-LRC	626	DOR
1	FLOOR STOP	1211	626	TRI
3	SILENCER	1229A	GREY	TRI

Heading: 09

126

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBB179 4-1/2 X 4-1/2	26D	STA
1	CYLINDRICAL LOCK	C580D-LRC	626	DOR
1	CLOSER	7414 S-DS	689	DOR
1	SEAL	5050B X 17'	B	NAT

Heading: 10

120A, 120D, 137B, 137C, 140D

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBB179 4-1/2 X 4-1/2	26D	STA
1	CYLINDRICAL LOCK	C553D-LRC	626	DOR
1	CLOSER	7414 S-DS	689	DOR
1	KICK PLATE	K0050 X 8 X 34	630	TRI
1	SEAL	5050B X 17'	B	NAT

Heading: 11

114C, 127

Each Opening To Have:

3	HINGE, 4 1/2, STD WT	FBB179 4-1/2 X 4-1/2	26D	STA
1	RIM EXIT DEVICE	F8300A R03- X D-CMK	626/689 W/630 TB	DOR
1	CLOSER	7414 S-DS	689	DOR
1	KICK PLATE	K0050 X 8 X 34	630	TRI
1	SEAL	5050B X 17'	B	NAT

Heading: 12

118

Each Opening To Have:

6	HINGE, 4 1/2, STD WT	FBB179 4-1/2 X 4-1/2	26D	STA
2	FLUSH BOLT	3917-12	626	TRI
1	CYLINDRICAL LOCK	C580D-LRC	626	DOR
2	OVERHEAD STOP	4434	US32D	ABH
2	SILENCER	1229A	GREY	TRI

Heading: 13

115

Each Opening To Have:

6	HINGE, 4 1/2, STD WT	FBB179 4-1/2 X 4-1/2	26D	STA
2	SVR EXIT DEVICE	F8400A R03- X D-CMK	626/689 W/630 TB	DOR
2	CLOSER	7414 ARP	689	DOR
2	WALL STOP	1270WV	630	TRI
2	KICK PLATE	K0050 X 8 X 34	630	TRI
1	SEAL	5050B X 17'	B	NAT

END OF SECTION

SECTION 088000 – GLAZING

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes glazing for the following products and applications:

1. Interior Aluminum Storefront.
2. Interior doors.
3. Exterior doors.
4. Fire resistant glazing.

1.2 PERFORMANCE REQUIREMENTS

- A. General: Provide glazing systems capable of withstanding normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to the following: defective manufacture, fabrication, and installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.

1. Structural Loads:

- a. Wind Loads: Maximum design pressures that meet or exceed Section 6, ASCE 7.
- b. Reference structural drawing S1.1 for component and cladding design pressure requirements. Minimum design loads of 32 psf acting inward and outward required.

- B. Glass Design: Glass thicknesses indicated are minimums and are for detailing only. Confirm glass thicknesses by analyzing Project loads and in-service conditions. Provide glass lites for various size openings in nominal thicknesses indicated, but not less than thicknesses and in strengths (annealed or heat treated) required to meet or exceed the following criteria:

1. Glass Thicknesses: Select minimum glass thicknesses to comply with ASTM E 1300, according to the following requirements:
 - a. Indicate design wind loads on Drawings if more than one load applies to Project depending location of glass lites.
 - b. Design Wind Loads: Glazing shall be designed to resist loading as calculated by ASCE 7 based upon wind loading delineated in the structural drawings, #S1.1.
 - c. Probability of breakage value specified in subparagraph below for sloped glazing is based on a design factor of 5.
 - d. Minimum Glass Thickness for Exterior Lites: Not less than 6 mm.
 - e. Thickness of Tinted and Heat-Absorbing Glass: Provide the same thickness for each tint color indicated throughout Project.
2. Sloped Glazing: For glass surfaces sloped more than 15 degrees from vertical, design glass to resist each of the following combinations of loads:

- a. Outward design wind pressure minus the weight of the glass. Base design on glass type factors for short-duration load.
 - b. Inward design wind pressure plus the weight of the glass plus half of the design snow load. Base design on glass type factors for short-duration load.
 - c. Half of the inward design wind pressure plus the weight of the glass plus the design snow load. Base design on glass type factors for long-duration load.
- C. Thermal Movements: Provide glazing that allows for thermal movements resulting from a maximum change (range) of 120 deg F, in ambient and surface temperatures, respectively, acting on glass framing members and glazing components. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
- D. Thermal and Optical Performance Properties: Provide glass with performance properties specified based on manufacturer's published test data, as determined according to procedures indicated below:
 - 1. For monolithic-glass lites, properties are based on units with lites 6 mm thick.
 - 2. For insulating-glass units, properties are based on units with lites 6 mm thick and a nominal 1/2-inch- wide interspace.
 - 3. Center-of-Glass U-Values: NFRC 100 methodology using LBL-35298 WINDOW 4.1 computer program, expressed as Btu/ sq. ft. x h x deg F.
 - 4. Center-of-Glass Solar Heat Gain Coefficient: NFRC 200 methodology using LBL-35298 WINDOW 4.1 computer program.
 - 5. Solar Optical Properties: NFRC 300.

1.3 SUBMITTALS

- A. Product Data: For each glass product and glazing material indicated.
- B. Samples: 12-inch- square, for each type of glass product indicated.
- C. Glazing Schedule: Use same designations indicated on Drawings.
- D. Sealant compatibility and adhesion test reports.

1.4 QUALITY ASSURANCE

- A. Sealant Compatibility and Adhesion Testing: Use sealant manufacturer's standard test methods to determine whether priming and other specific joint preparation techniques are required to obtain rapid, optimum adhesion of joint sealants to joint substrates.
- B. Glazing Publications: Comply with recommendations of the following, unless more stringent requirements are indicated.
 - 1. GANA Publications: "Glazing Manual."
- C. Insulating-Glass Certification Program: Permanently marked with certification label of Insulation Glass Certification Council.

1.5 WARRANTY

- A. Special Warranty: Manufacturer's standard form, made out to Owner and signed by manufacturer, in which manufacturer agrees to furnish replacements for units that deteriorate from normal use by developing defects attributable to the manufacturing process, f.o.b. the nearest shipping point to Project site, within warranty period.
 - 1. Coated Glass:
 - a. Defects: Peeling, cracking, and other indications of degradation of metallic coating.
 - b. Warranty Period: 10 years from date of Final Acceptance.
 - 2. Insulating Glass:
 - a. Deterioration: Failure of hermetic seal resulting in obstruction of vision by dust, moisture, or film on interior surfaces of glass.
 - b. Warranty Period: 10 years from date of Final Acceptance.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other articles including schedules where subparagraph titles below introduce lists, the following requirements apply for product selection:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by the manufacturers specified.

2.2 GLASS MATERIALS

- A. Insulating-Glass Units: Preassembled units consisting of sealed lites of glass separated by a dehydrated interspace, and complying with ASTM E 774 for Class CBA units and with requirements specified in this Article and in the Insulating-Glass Schedule at the end of Part 3.
 - 1. Provide Kind HS (heat-strengthened) float glass in place of annealed glass where needed to resist thermal stresses induced by differential shading of individual glass lites and to comply with glass design requirements specified in "Performance Requirements" Article.
 - a. Provide Kind FT (fully tempered) as required by the North Carolina State Building Code for Safety Glazing.
 - b. Provide Kind FT (fully tempered) as required by the North Carolina State Building Code as required to meet wind loading requirements.
 - 2. Overall Unit Thickness and Thickness of Each Lite: Dimensions indicated in the Insulating-Glass Schedule at the end of Part 3 are nominal and the overall thicknesses of units are measured perpendicularly from outer surfaces of glass lites at unit's edge.
 - 3. Sealing System: Dual seal with manufacturers standard primary and secondary sealants.

4. Spacer: Manufacturer's standard.
5. Corner Construction: Manufacturer's standard.
6. Overall Unit Thickness and Thickness of Each Lite: 25 and 6 mm.
7. Interspace Content: As indicated in schedule.

2.3 FIRE-RATED GLAZING SYSTEMS

- A. Fire-Protection Rating: As indicated on the drawings for the entire assembly in which glazing material is installed and considered a system. The system must be permanently labeled by a testing and inspecting agency acceptable to authorities having jurisdiction.
- B. Laminated Ceramic Glazing Material: Proprietary Category II safety glazing product in the form of 2 lites of clear ceramic glazing material laminated together to produce a laminated lite of 5/16-inch nominal thickness; polished on both surfaces; weighing 4 lb/sq. ft.; and as follows:
 1. Glazing System Requirements:
 - a. Standard Clarity Glazing requirement with a contractor option to provide Premium Clarity Glazing as an additional voluntary alternate for owner consideration.
 - b. Provide Window System and Door with Transom System as indicated on drawings.
 2. Available Product System:
 - a. "FireLite Plus" glazing in "Designer Series" frame by Nippon Electric Glass Co., Ltd./Technical Glass Products.
 - b. "Keralite FR-L" glazing in "VDS Series" frame by Saint-Gobain/Vetrotech.
 3. Product Availability Based On Framing Profile Acceptance:
 - a. Pyran Platinum F" glazing in "SaftiFirst" frame by Shotte North America/SaftiFirst.
 - b. FireLite Plus" glazing in rated frame by Nippon Electric Glass Co., Ltd./Stiles Custom Metals, Inc.

2.4 GLAZING SEALANTS

- A. General: Provide products of type indicated, complying with the following requirements:
 1. Compatibility: Select glazing sealants that are compatible with one another and with other materials they will contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
 2. Colors of Exposed Sealants: As selected by the Architect.

2.5 GLAZING GASKETS

- A. Compression Gaskets: Molded or extruded gaskets of type and material indicated below and of profile and hardness required to maintain watertight seal:
 - 1. EPDM dense compression gaskets complying with ASTM C 846.

2.6 MISCELLANEOUS GLAZING MATERIALS

- A. General: Provide products of material, size, and shape complying with referenced glazing standard, requirements of manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.
- B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.
- C. Setting Blocks: Elastomeric material with a Shore A durometer hardness of 85, plus or minus 5.
- D. Spacers: Elastomeric blocks or continuous extrusions with a Shore A durometer hardness required by glass manufacturer to maintain glass lites in place for installation indicated.
- E. Edge Blocks: Elastomeric material of hardness needed to limit glass lateral movement (side walking).
- F. Cylindrical Glazing Sealant Backing: ASTM C 1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.
- G. Perimeter Insulation for Fire-Resistive Glazing: Identical to product used in test assembly to obtain fire-resistance rating.

2.7 FABRICATION OF GLASS AND OTHER GLAZING PRODUCTS

- A. Fabricate glass and other glazing products in sizes required to glaze openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing standard, to comply with system performance requirements.

PART 3 - EXECUTION

3.1 GLAZING, GENERAL

- A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.
 - 1. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.

2. Protect glass edges from damage during handling and installation. Remove glass with edge damage or other imperfections that, when installed, could weaken glass and impair performance and appearance from Project site and legally dispose of off Project site.
3. Apply primers to joint surfaces where required for adhesion of sealants, as determined by sealant compatibility and adhesion testing.
4. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
5. Provide spacers for glass lites where the length plus width is larger than 50 inches unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances.

B. Protection:

1. Protect exterior glass from damage immediately after installation by attaching crossed streamers to framing held away from glass. Do not apply markers to glass surface.
2. Protect glass from contact with contaminating substances resulting from construction operations, including weld splatter.

C. Remove and replace glass that is broken, chipped, cracked, abraded, or damaged, including natural causes, accidents, and vandalism, during construction period.

3.2 GLASS SCHEDULE (Non-Fire Rated)

A. General:

1. All exterior glazing and insulated units shall be provided by single source and same manufacturer.

B. Manufacturers:

1. Guardian Industries.
2. Pilkington.
3. PPG Industries, Inc.

C. Insulated Glass – Non-Tempered:

1. Solar Control Low-E Insulating-Glass Units:
2. Basis of Design: SunGuard SNX 62/27 by Guardian Industries. Subject to compliance with requirements provide comparable high performance insulating units by one of the following:
 - a. Viracon.
 - b. PPG Industries, Inc.
3. Glass Unit Characteristics:
 - a. Overall Unit Thickness and Thickness of Each Lite: 6.0 mm.
 - b. Interspace Content: Air.
 - c. Airspace: 12 mm.
4. Outboard Lite: SNX 62/27 (2) on CrystalGray.
 - a. Float glass.
5. Inboard Lite: Class 1 (clear) float glass.

- a. Float glass.
- 6. Glass Unit Performance Characteristics:
 - a. Visible Light Transmittance: 44 percent
 - b. Visible Light Reflectance Outdoors: 8 percent
 - c. Direct Solar Energy Transmittance: 16 percent
 - d. Direct Solar Energy Reflectance Outdoors: 19 percent
 - e. Winter U-Value Nighttime: 0.29
 - f. Summer U-Value Daytime: 0.27
 - g. Solar Heat Gain Coefficient: 0.22
 - h. Summer Relative Heat Gain: 54
- D. Insulated Glass – Tempered:
 - 1. Solar Control Low-E Insulating-Glass Units:
 - 2. Basis of Design: Solarban 90 by PPG. Subject to compliance with requirements provide comparable high performance insulating units by one of the following:
 - a. Viracon.
 - b. PPG Industries, Inc.
 - 3. Glass Unit Characteristics:
 - a. Overall Unit Thickness and Thickness of Each Lite: 6.0 mm.
 - b. Interspace Content: Air.
 - c. Airspace: 12 mm.
 - 4. Outboard Lite: SNX 62/27 (2) on CrystalGray.
 - a. Kind FT (fully tempered).
 - 5. Inboard Lite: Class 1 (clear) float glass.
 - a. Kind FT (fully tempered).
 - 6. Glass Unit Performance Characteristics:
 - a. Visible Light Transmittance: 44 percent
 - b. Visible Light Reflectance Outdoors: 8 percent
 - c. Direct Solar Energy Transmittance: 16 percent
 - d. Direct Solar Energy Reflectance Outdoors: 19 percent
 - e. Winter U-Value Nighttime: 0.29
 - f. Summer U-Value Daytime: 0.27
 - g. Solar Heat Gain Coefficient: 0.22
 - h. Summer Relative Heat Gain: 54
- E. Uncoated Tempered Glass (Interior single pane): 1/4” Kind FT fully tempered, clear.

3.3 FIRE-RESISTANT GLAZING SCHEDULE

- A. Glass Type: 20-minute fire-protection-rated glazing with hose-stream test; laminated ceramic glazing.
 - 1. Location: Doors & Windows in 1-hour rated corridors as indicatd on schedule.
- B. Glass Type: 45-minute fire-protection-rated glazing; laminated ceramic glazing.
 - 1. Location: Doors as indicated on schedule.
- C. Glass Type: 90-minute fire-protection-rated glazing with 450 deg F (250 deg C) temperature-rise limitation; laminated glass with intumescent interlayers.
 - 1. Location: Doors as indicated on schedule.

END OF SECTION 088000

SECTION 093000 - TILING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Paver tile.
 - 2. Stone thresholds installed as part of tile installations.
 - 3. Crack-suppression membrane for thin-set tile installations.
 - 4. Combination crack suppression and waterproof membranes for suspended slabs.
 - 5. Metal edge strips installed as part of tile installations.
 - 6. Ceramic Tile
- B. Related Sections include the following:
 - 1. Division 03 Section "Cast-in-Place Concrete" for monolithic slab finishes specified for tile substrates.
 - 2. Division 07 Section "Joint Sealants" for sealing of expansion, contraction, control, and isolation joints in tile surfaces.
 - 3. Division 09 Section "Gypsum Board" for cementitious backer units and glass-mat, water-resistant backer board.

1.3 DEFINITIONS

- A. Facial Dimension: Nominal tile size as defined in ANSI A137.1.
- B. Rectified tile: Tile provided from manufacturer with ground edges, dimensionally uniform, square and true edges; with or without bevel edge features.

1.4 PERFORMANCE REQUIREMENTS

- A. Static Coefficient of Friction: For tile installed on walkway surfaces, provide products with the following values as determined by testing identical products per ASTM C 1028:
 - 1. Level Surfaces: Minimum 0.6.
 - 2. Step Treads: Minimum 0.6.
 - 3. Ramp Surfaces: Minimum 0.8.

1.5 SUBMITTALS

- A. Product Data: For each type of product indicated.

- B. Shop Drawings: Show locations of each type of tile and tile pattern. Show widths, details, and locations of expansion, contraction, control, and isolation joints in tile substrates and finished tile surfaces.
- C. Samples for Initial Selection: For each type of tile and grout indicated. Include Samples of accessories involving color selection.
- D. Samples for Verification:
 - 1. Full-size sample of each color and finish of tile.
 - 2. Full-size units of each type of trim and accessory for each color and finish required.
 - 3. Stone thresholds in 6-inch lengths.
 - 4. Metal edge strips in 6-inch lengths.
- E. Master Grade Certificates: For each shipment, type, and composition of tile, signed by tile manufacturer and Installer.
- F. Product Certificates: For each type of product, signed by product manufacturer.
- G. Qualification Data: For Installer.
- H. Material Test Reports: For each tile-setting and -grouting product and special-purpose tile.

1.6 QUALITY ASSURANCE

- A. Source Limitations for Tile: Obtain all tile of same type and color or finish from one source or producer.
 - 1. Obtain tile from same production run and of consistent quality in appearance and physical properties for each contiguous area.
- B. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar, adhesive, and grout component from a single manufacturer and each aggregate from one source or producer.
- C. Source Limitations for Other Products: Obtain each of the following products specified in this Section through one source from a single manufacturer for each product:
 - 1. Stone thresholds.
 - 2. Waterproofing.
 - 3. Joint sealants.
 - 4. Cementitious backer units.
 - 5. Metal edge strips.
- D. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination."
- E. Maintain one copy on site, of the latest edition of the TCA (Tile Council of America) Handbook and ANSI Standards series A108 / A118.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirement in ANSI A137.1 for labeling sealed tile packages.
- B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.
- D. Store liquid latexes in unopened containers and protected from freezing.
- E. Handle tile that has temporary protective coating on exposed surfaces to prevent coated surfaces from contacting backs or edges of other units. If coating does contact bonding surfaces of tile, remove coating from bonding surfaces before setting tile.

1.8 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

1.9 EXTRA MATERIALS

- A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed, for each type, composition, color, pattern, and size indicated.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply for product selection:
 - 1. Products: Subject to compliance with requirements, provide one of the products specified.
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 PRODUCTS, GENERAL

- A. ANSI Ceramic Tile Standard: Provide tile that complies with ANSI A137.1, "Specifications for Ceramic Tile," for types, compositions, and other characteristics indicated.
 - 1. Provide tile complying with Standard grade requirements, unless otherwise indicated.
 - 2. For facial dimensions of tile, comply with requirements relating to tile sizes specified in Part 1 "Definitions" Article.

- B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI standards referenced in "Setting and Grouting Materials" Article.
- C. Colors, Textures, and Patterns: Where manufacturer's standard products are indicated for tile, grout, and other products requiring selection of colors, surface textures, patterns, and other appearance characteristics, provide specific products or materials complying with the following requirements:
 - 1. As indicated in Finish and Color Schedules.
- D. Factory Blending: For tile exhibiting color variations within ranges selected during Sample submittals, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.
- E. Mounting: For factory-mounted tile, provide back- or edge-mounted tile assemblies as standard with manufacturer, unless otherwise indicated.
 - 1. Where tile is indicated for installation in areas continually exposed to moisture, do not use back- or edge-mounted tile assemblies unless tile manufacturer specifies in writing that this type of mounting is suitable for installation indicated and has a record of successful in-service performance.

2.3 TILE PRODUCTS

- A. Ceramic Tile Manufacturers (See Interior Design drawings):
- B. Quarry Tile Manufacturers (Floor tile - 6x6 matte finish; Trim tile – 5x6 matte finish round top cove base and associated corner units)
 - 1. American Olean; Div. of Dal-Tile International Corp.
 - 2. Daltile; Div. of Dal-Tile International Inc.
 - 3. United State Ceramic Tile
- C. Tile products general:
 - 1. Tile types, sizes, finishes and colors are indicated by manufacturer's names and numbers in Finish and Color schedules. Where specified products are not available, similar products by listed manufacturers will be considered. The Architect will make the final determination of acceptable alternate products.
- D. The project includes the following tile products:
 - 1. Quarry Tile
 - 2. Glazed Wall Tile:
 - 3. Glazed Wall Tile Trim Units: Matching characteristics of adjoining flat tile and coordinated with sizes and coursing of adjoining flat tile where applicable. Provide shapes as follows, selected from manufacturer's standard shapes:
 - 4. Unglazed ceramic tile

2.4 THRESHOLDS

- A. General: Fabricate to sizes and profiles indicated or required to provide transition between adjacent floor finishes.
 - 1. Bevel edges at 1:2 slope, aligning lower edge of bevel with adjacent floor finish. Limit height of bevel to 1/2 inch or less, and finish bevel to match face of threshold.

- B. Marble Thresholds: ASTM C 503 with a minimum abrasion resistance of 10 per ASTM C 1353 or ASTM C 241 and with honed finish.
 - 1. Description: Uniform, fine- to medium-grained white stone with gray veining.

2.5 CRACK-SUPPRESSION MEMBRANES FOR THIN-SET TILE INSTALLATIONS

- A. General: Manufacturer's standard product that complies with ANSI A118.10 (cement based) or ANSI A118.12 (non-cement based systems), selected from the following for condition indicated:
- B. Crack suppression: ANSI A118.12 One or two part systems consisting of latex rubber modified mortars or adhesives with polyethene sheet or fabric reinforcing laid prior to setting bed:
 - 1. Provide full coverage crack suppression membranes for thin set tiles 12 x 12 inches or greater.
 - a. Use combination crack isolation / waterproofing membrane for wet area tile on suspended slabs.
 - 2. Subject to compliance with requirements, provide products by one of the following manufacturers:
 - a. NAC Products, Inc.; ECB Anti-Fracture Membrane
 - b. Schluter Systems, Inc.: Ditra polyethene sheet
 - c. LATICRETE International Inc.; Blue 92
 - d. Approved equals.
- C. Control joint and random cracking strip coverage at slab on grade for tiles less than 12 x 12 or where full coverage is not required; ASTM A118.12.
 - 1. Follow manufacturer's recommendations for sheet and / or suitable latex-mortar products to be applied at 3x the tile width.
- D. Extend sheet or mortar based crack suppression up walls to height of cove or other base tile.

2.6 WATERPROOFING MEMBRANES FOR THIN AND MUD SET TILES

- A. Combination waterproofing and crack suppression membrane: ANSI 118.10 Fabric-Reinforced, Fluid-Applied Product: System consisting of liquid-latex modified rubber, with a VOC content of 65 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24), and fabric reinforcement (horizontal and vertical applications).
 - 1. Products:
 - a. Custom Building Products; Trowel & Seal Waterproofing and Anti-Fracture Membrane.
 - b. LATICRETE International Inc.; Laticrete 9235 Waterproof Membrane.
 - c. MAPEI Corporation; PRP M19.
 - d. MerKrete; HydraGuard 2000
 - 2. Use Full coverage at suspended slabs in wet areas.
- B. Latex-Portland Cement Product: (Vertical Applications only.) Flexible mortar consisting of cement-based mix and acrylic-latex additive for use as waterproof membrane.
 - 1. Products:

- a. MAPEI Corporation; Mapelastic HPG or 315.
- b. TEC Specialty Products Inc.; TA-324, Triple Flex.

2.7 SETTING AND GROUTING MATERIALS

- A. Manufacturers:
 - 1. Custom Building Products.
 - 2. LATICRETE International Inc.
 - 3. MAPEI Corporation.
 - 4. MerKrete
 - 5. TEC Specialty Products Inc.
- B. Portland Cement Mortar (Thickset) Installation Materials: ANSI A108.1A and as specified below:
 - 1. Reinforcing Wire Fabric: Galvanized, welded wire fabric, 2 by 2 inches by 0.062-inch diameter; comply with ASTM A 185 and ASTM A 82 except for minimum wire size.
 - 2. Expanded Metal Lath: Diamond-mesh lath complying with ASTM C 847.
 - a. Base Metal and Finish for Interior Applications: Uncoated or zinc-coated (galvanized) steel sheet, with uncoated steel sheet painted after fabrication into lath.
 - b. Configuration over Solid Surfaces: Self-furring.
 - c. Weight: 3.4 lb/sq. yd..
 - 3. Latex Additive: Manufacturer's standard acrylic resin water emulsion, serving as replacement for part or all of gaging water, of type specifically recommended by latex-additive manufacturer for use with field-mixed portland cement and aggregate mortar bed.
- C. Latex-Portland Cement Mortar (Thin Set): ANSI A118.4, consisting of the following:
 - 1. Prepackaged dry-mortar mix combined with acrylic resin liquid-latex additive.
 - a. For wall applications, provide nonsagging mortar that complies with Paragraph F-4.6.1 in addition to the other requirements in ANSI A118.4.
- D. Medium-Bed, Latex-Portland Cement Mortar (vertical and horizontal applications): Provide materials composed as follows, with physical properties equaling or exceeding those required for thin-set mortars based on testing of medium-bed specimens according to ANSI A118.4:
 - 1. Prepackaged dry-mortar mix combined with acrylic resin liquid-latex additive.
- E. Mastic Adhesive: ANSI A136.1, Type I, with a VOC content of 65 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 1. For all substrate surfaces excluding steel.
 - 2. Light color tiles, use white only adhesives similar in performance to "Double Duty Plus" by Tec Specialties.
- F. Epoxy setting mortar: ANSI 118.3, 100% epoxy modified mortar
 - 1. For properly prepared steel at stairs and other ferrous metals:
 - a. Comparable to Kerapoxy or Kerapoxy 410 by Mapei Corporation.
 - b. Acceptable for white and light color tiles.
 - 2. For medium bed vertical, large dimension tile application: Non-sag, high early strength 100% solids epoxy mortar.

- a. Comparable to Laticrete; Latapoxy 310 or approved equals.
- G. Polymer-Modified Tile Grout: ANSI A118.7, color as indicated.
 - 1. Polymer Type: Ethylene vinyl acetate, in dry, redispersible form, prepackaged with other dry ingredients, acrylic resin in liquid-latex form for addition to prepackaged dry-grout mix.
 - a. Unsanded grout mixture for joints 1/8 inch and narrower.
 - b. Sanded grout mixture for joints 1/8 inch and wider.
- H. Use only white thin-set with installation of translucent and transparent glass tile or stone.

2.8 ELASTOMERIC SEALANTS

- A. General: Provide manufacturer's standard chemically curing, elastomeric sealants of base polymer and characteristics indicated that comply with applicable requirements in Division 07 Section "Joint Sealants."
 - 1. Use sealants that have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- B. Colors: Provide colors of exposed sealants to match colors of grout in tile adjoining sealed joints, unless otherwise indicated.

2.9 CEMENTITIOUS BACKER UNITS

- A. Cementitious backer units: Refer to Division 9, Section "Gypsum Board" for cementitious backer units installed for tile work.

2.10 MISCELLANEOUS MATERIALS

- A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.
- B. Metal Edge Strips: Height to match tile and setting-bed thickness, metallic designed specifically for flooring applications, exposed-edge material.
 - 1. Sheine-Strip by Schluter or approved equal in profile, material, and finish to types indicated
- C. Temporary Protective Coating: Product indicated below that is formulated to protect exposed surfaces of tile against adherence of mortar and grout; compatible with tile, mortar, and grout products; and easily removable after grouting is completed without damaging grout or tile.
 - 1. Grout release in form of manufacturer's standard proprietary liquid coating that is specially formulated and recommended for use as temporary protective coating for tile.
 - a. Grout Release by Aqua Mix or approved equal.

- D. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.

2.11 MIXING MORTARS AND GROUT

- A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.
- B. Add materials, water, and additives in accurate proportions.
- C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of installed tile.
 - 1. Verify that substrates for setting tile are firm; dry; clean; free of oil, waxy films, and curing compounds; and within flatness tolerances required by referenced ANSI A108 Series of tile installation standards for installations indicated.
 - 2. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed before installing tile.
 - 3. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove coatings, including curing compounds and other substances that contain soap, wax, oil, or silicone, that are incompatible with tile-setting materials.
- B. Provide concrete substrates for tile floors installed with thin-set mortar that comply with flatness tolerances specified in referenced ANSI A108 Series of tile installation standards.
 - 1. Fill cracks, holes, and depressions with trowelable leveling and patching compound according to tile-setting material manufacturer's written instructions. Use product specifically recommended by tile-setting material manufacturer.
 - 2. Remove protrusions, bumps, and ridges by sanding or grinding.
- C. Tile to vertical steel preparation: Remove any painted coatings down to bare metal. Scarify surface.

- D. Blending: For tile exhibiting color variations within ranges selected during Sample submittals, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.
- E. Field-Applied Temporary Protective Coating: Where indicated under tile type or needed to prevent grout from staining or adhering to exposed tile surfaces, precoat them with continuous film of temporary protective coating, taking care not to coat unexposed tile surfaces.

3.3 INSTALLATION, GENERAL

- A. ANSI Tile Installation Standards: Comply with parts of ANSI A108 Series "Specifications for Installation of Ceramic Tile" that apply to types of setting and grouting materials and to methods indicated in ceramic tile installation schedules.
- B. TCA Installation Guidelines: TCA's "Handbook for Ceramic Tile Installation." Comply with TCA installation methods indicated in ceramic tile installation schedules and complying with the following:
 - 1. Floor tile 12 x 12 inch or greater: Finish tolerance of 1/8 inch in 10 feet (non-cumulative.)
 - a. Tile exceeding 18 x 18 inches: finish tolerance to 1/16 inch in 10 feet.
 - 2. Installer shall review F-number test reports and identify in writing where concrete slab floor flatness tolerances will prevent meeting finish tolerances specified herein. Arrange with Contractor to have missing F-number tests completed and correct any substrate deficiencies prior to commencing tile installation.
- C. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions, unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
- D. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
- E. Jointing Pattern: Lay tile in grid pattern, unless otherwise indicated. Align joints when adjoining tiles on floor, base, walls, and trim are same size. Lay out tile work and center tile fields in both directions in each space or on each wall area. Adjust to minimize tile cutting. Provide uniform joint widths, unless otherwise indicated.
 - 1. For tile mounted in sheets, make joints between tile sheets same width as joints within tile sheets so joints between sheets are not apparent in finished work.
 - 2. Refer to tile patterns indicated.
- F. Lay out tile wainscots to next full tile; Refer to patterns and details indicated.
- G. Expansion Joints: Locate expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.
 - 1. Locate joints in tile surfaces directly above joints in concrete substrates.
 - 2. Prepare joints and apply sealants to comply with requirements in Division 07 Section "Joint Sealants."

- H. Grout tile to comply with requirements of the following tile installation standards:
 - 1. For ceramic tile grouts (sand-portland cement; dry-set, commercial portland cement; and latex-portland cement grouts), comply with ANSI A108.10.

3.4 WATERPROOFING AND /OR CRACK-SUPPRESSION MEMBRANE INSTALLATION

- A. Install waterproofing to comply with ANSI A108.13 and waterproofing manufacturer's written instructions to produce waterproof membrane of uniform thickness bonded securely to substrate.
- B. Install crack-suppression membrane to comply with manufacturer's written instructions to produce membrane of uniform thickness bonded securely to substrate.
- C. Do not install tile over waterproofing until waterproofing has cured and been tested to determine that it is watertight.

3.5 FLOOR TILE INSTALLATION

- A. General: Install tile to comply with requirements in the Floor Tile Installation Schedule, including those referencing TCA installation methods and ANSI A108 Series of tile installation standards.
 - 1. Follow TCA procedures for 95% mortar coverage.
- B. Joint Widths: Install tile on floors with the following joint widths:
 - 1. Paver Tile: 1/4 inch for tiles 12" x 12" or larger.
 - 2. Rectified tiles: 1/8" or less.
- C. Stone Thresholds: Install stone thresholds at locations indicated; set in same type of setting bed as abutting field tile, unless otherwise indicated.
 - 1. Set thresholds in latex-portland cement mortar for locations where mortar bed would otherwise be exposed above adjacent nontile floor finish.
- D. Metal Edge Strips: Install at locations indicated or where exposed edge of tile flooring meets carpet, wood, or other flooring that finishes flush with top of tile.
- E. At tiled stairs: install preformed steel abrasive nosings where indicated, or if not indicated, provide where special tile shaped nosings are not available from the manufacturer.

3.6 WALL TILE INSTALLATION

- A. Install types of tile designated for wall installations to comply with requirements in the Wall Tile Installation Schedule, including those referencing TCA installation methods and ANSI setting-bed standards.
- B. Install metal lath and scratch coat for walls to comply with ANSI A108.1A, Section 4.1.
- C. Install 12 x 12 or greater size wall tile over medium-bed latex modified mortar. Adjust grout joint widths with the prior approval of the Architect, if needed to improve tile edge to edge alignment of standard and rectified tiles.

- D. Install Stair riser tiles, where indicated, with epoxy modified setting mortar, with setting bed in accordance with manufacturers instructions. Isolate riser tile from treads with a soft joint.
- E. Joint Widths: Install tile on walls with the following joint widths:
 - 1. Unglazed or glazed ceramic tiles: 1/16" maximum.
 - 2. Paver Tile: 1/4 inch for tiles 12" x 12" or larger.
 - 3. Rectified tiles: 1/8" or less.
 - 4. Glass Tiles: as per manufacturer's [recommendation](#).

3.7 CLEANING AND PROTECTING

- A. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.
 - 1. Remove latex-portland cement grout residue from tile as soon as possible.
 - 2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions, but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.
 - 3. Remove temporary protective coating by method recommended by coating manufacturer that is acceptable to tile and grout manufacturer. Trap and remove coating to prevent it from clogging drains.
- B. For unglazed tiles and stone products apply coat of neutral protective cleaner grout release to completed tile walls and floors. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear.
- C. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.
- D. Before final inspection, remove protective coverings and rinse neutral cleaner from tile surfaces.

3.8 FLOOR TILE INSTALLATION SCHEDULE

- A. Tile Installation: Interior floor installations sloped to drain on concrete; cement mortar bed (thickset) with cleavage membrane; TCA F111-09 and ANSI A108.1A.
 - 1. Tile Type: As indicated in Finish and Color Schedules
 - 2. Thin-Set Mortar: Latex- portland cement mortar.
 - 3. Grout: Polymer-modified sanded grout.
- B. Tile Installation: Interior floor installation on concrete; thin-set mortar; TCA 125A-09 and ANSI A118.4.
 - 1. Tile Type: As indicated in Finish and Color Schedules.
 - 2. Thin-Set Mortar: Latex- portland cement mortar.
 - 3. Grout: Polymer-modified sanded or Polymer-modified unsanded grout per joint size and tile type indicated.
 - 4. Tiles exceeding 12 inches x 12 inches nominal; provide medium mortar bed.
- C. Tile Installation : Interior floor installation on waterproof crack-suppression membrane ANSI A118.10, over concrete; cement mortar bed (thickset); TCA F121-09 and ANSI A108.1A.

1. Tile Type: As indicated in Finish and Color Schedules.
 2. Thin-Set Mortar: Latex- portland cement mortar.
 3. Grout: Polymer-modified sanded grout.
- D. Tile Installation: Interior floor installation on waterproof crack-suppression membrane ANSI A118.10, over concrete; thin-set mortar; TCA F122-09 and ANSI A118.4 and ANSI A118.6
1. Tile Type: As indicated in Finish and Color Schedules.
 2. Thin-Set Mortar: Latex-portland cement mortar.
 3. Grout: Polymer-modified sanded or unsanded grout per joint size and tile type indicated.
 4. For tiles greater than 12 inches by 12 inches nominal, provide medium mortar bed.

3.9 WALL TILE INSTALLATION SCHEDULE

- A. Tile Installation: Interior wall installation over sound, dimensionally stable masonry or concrete; thin-set mortar; TCA W202-09 and ANSI A118.4 and ANSI A118.6.
1. Tile Type: As indicated in Finish and Color Schedules.
 2. Thin-Set Mortar: Latex- portland cement mortar.
 3. Medium bed Mortar for large format tiles.
 4. Grout: Polymer-modified sanded or Polymer-modified unsanded grout per joint size and tile type indicated.
- B. Tile Installation: Interior wall installation over cementitious backer units; thin-set mortar; TCA W244-09 and ANSI A108.5.
1. Tile Type: As indicated in Finish and Color Schedules.
 2. Thin-Set Mortar: Latex- portland cement mortar.
 3. Grout: Polymer-modified sanded or Polymer-modified unsanded grout per joint size for tile types indicated.
 4. Confirm waterproof membrane is installed at face of studs before proceeding. When waterproof membrane is not present behind cementitious backer units (at face of studs) provide ANSI 118.10 latex-cement membrane to face of backer units prior to installing thin set mortar.
- C. Tile Installation: Interior wall installation over glass-mat, water-resistant backer board; thin-set mortar; TCA W245-09.
1. Tile Type: As indicated in Finish and Color Schedules.
 2. Thin-Set Mortar: Latex- portland cement mortar.
 3. Grout: Polymer-modified sanded or Polymer-modified unsanded grout per joints sizes for tile types indicated.

END OF SECTION 09 30 00

SECTION 095113 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes acoustical panels and exposed suspension systems for ceilings.
- B. Products furnished, but not installed under this Section, include anchors, clips, and other ceiling attachment devices to be cast in concrete.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each exposed product and for each color and texture specified, 6 inches in size.
- C. Samples for Initial Selection: For components with factory-applied color finishes.
- D. Samples for Verification: For each component indicated and for each exposed finish required, prepared on Samples of size indicated below.
 - 1. Acoustical Panel: Set of 6-inch-square samples of each type, color, pattern, and texture.
 - 2. Exposed Suspension-System Members, Moldings, and Trim: Set of 6-inch-long samples of each type, finish, and color.
- E. Warranty: Provide manufacturer's written warranty for type of product.

1.5 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:
 - 1. Suspended ceiling components.
 - 2. Structural members to which suspension systems will be attached.
 - 3. Size and location of initial access modules for acoustical panels.

4. Items penetrating finished ceiling including the following:

- a. Lighting fixtures.
- b. Air outlets and inlets.
- c. Speakers.
- d. Sprinklers.
- e. Access panels.

- A. Product Test Reports: For each acoustical panel ceiling, for tests performed by An independent testing laboratory or an NVLAP-accredited laboratory.
- B. Evaluation Reports: For each acoustical panel ceiling suspension system and anchor and fastener type, from ICC-ES.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For finishes to include in maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Acoustical Ceiling Panels: Full-size panels equal to 2 percent of quantity installed.
 2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed.
 3. Hold-Down Clips: Equal to 2 percent of quantity installed.
 4. Impact Clips: Equal to 2 percent of quantity installed.

1.8 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Qualified according to NVLAP for testing indicated.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver acoustical panels, suspension-system components, and accessories to Project site in original, unopened packages and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.
- B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.
- C. Handle acoustical panels carefully to avoid chipping edges or damaging units in any way.

1.10 FIELD CONDITIONS

- A. Environmental Limitations: Do not install acoustical panel ceilings until spaces are enclosed and weatherproof, wet work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.
 - 1. Pressurized Plenums: Operate ventilation system for not less than 48 hours before beginning acoustical panel ceiling installation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Acoustical ceiling shall be installed in accordance with Cisca publication "Seismic (Zones 0-2) Recommendations for Direct-hung Acoustical Tile and Lay-in Panel Ceilings".
- B. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: Comply with ASTM E 1264 for Class A materials; 25 or less.
 - 2. Smoke-Developed Index: 50 or less.
- C. Fire-Resistance Ratings: Comply with ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Indicate design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency.

2.2 ACOUSTICAL PANELS, GENERAL

- A. Source Limitations: Obtain each type of acoustical ceiling panel and supporting suspension system from single source from single manufacturer.
- B. Glass-Fiber-Based Panels: Made with binder containing no urea formaldehyde.
- C. Acoustical Panel Standard: Provide manufacturer's standard panels of configuration indicated that comply with ASTM E 1264 classifications as designated by types, patterns, acoustical ratings, and light reflectances unless otherwise indicated.
- D. Acoustical Panel Colors and Patterns: Match appearance characteristics indicated for each product type.
 - 1. Where appearance characteristics of acoustical panels are indicated by referencing pattern designations in ASTM E 1264 and not manufacturers' proprietary product designations, provide products selected by Architect from each manufacturer's full range that comply with requirements indicated for type, pattern, color, light reflectance, acoustical performance, edge detail, and size.

2.3 ACOUSTICAL PANELS – EGAP #1

- A. Basis-of-Design Product: Subject to compliance with requirements, provide “DUNE Tegular” as manufactured by Armstrong or comparable product by one of the following:
1. CertainTeed Corp.
 2. USG Interiors, Inc.; Subsidiary of USG Corporation.
- B. Classification: Provide panels complying with ASTM E 1264 for type, form, and pattern as follows:
1. Type and Form: Type III, mineral base with painted finish; Form 2, water felted.
 2. Pattern: CE (perforated, small holes and lightly textured).
- C. Color: White.
- D. LR: Not less than 0.83.
- E. NRC: Not less than 0.50.
- F. CAC: Not less than 30.
- G. Edge/Joint Detail: Armstrong “Angled Tegular.”
- H. Thickness: 5/8 inch.
- I. Modular Size: As indicated in room Finish Schedule and ceiling plans.
- J. Broad Spectrum Antimicrobial Fungicide and Bactericide Treatment: Provide acoustical panels treated with manufacturer's standard antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D 3273 and evaluated according to ASTM D 3274 or ASTM G 21.

2.4 ACOUSTICAL PANELS – EGAP #X (For use with Fire Rated Assemblies)

- A. Basis-of-Design Product: Subject to compliance with requirements, provide “DUNE Tegular FireGuard” as manufactured by Armstrong or comparable product by one of the following:
1. CertainTeed Corp.
 2. USG Interiors, Inc.; Subsidiary of USG Corporation.
- B. Classification: Provide fire-resistance-rated panels complying with ASTM E 1264 for type, form, and pattern as follows:
1. Type and Form: Type III, mineral base with painted finish; Form 2, water felted.
 2. Pattern: CE (perforated, small holes and lightly textured).
- C. Color: White.
- D. LR: Not less than 0.83.

- E. NRC: Not less than 0.50.
- F. CAC: Not less than 35.
- G. Edge/Joint Detail: Armstrong "Angled Tegular."
- H. Thickness: 5/8 inch.
- I. Modular Size: As indicated in room Finish Schedule and ceiling plans.
- J. Broad Spectrum Antimicrobial Fungicide and Bactericide Treatment: Provide acoustical panels treated with manufacturer's standard antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D 3273 and evaluated according to ASTM D 3274 or ASTM G 21.

2.5 METAL SUSPENSION SYSTEMS, GENERAL

- A. Metal Suspension-System Standard: Provide manufacturer's standard direct-hung metal suspension systems of types, structural classifications, and finishes indicated that comply with applicable requirements in ASTM C 635/C 635M.
- B. Attachment Devices: Size for five times the design load indicated in ASTM C 635/C 635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.
- C. Wire Hangers, Braces, and Ties: Provide wires complying with the following requirements:
 - 1. Zinc-Coated, Carbon-Steel Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper.
 - 2. Stainless-Steel Wire: ASTM A 580/A 580M, Type 304, nonmagnetic.
 - 3. Size: Select wire diameter so its stress at three times hanger design load (ASTM C 635/C 635M, Table 1, "Direct Hung") will be less than yield stress of wire, but provide not less than 0.106-inch-diameter wire.
- D. Hold-Down Clips: Where indicated, provide manufacturer's standard hold-down clips spaced 24 inches o.c. on all cross tees.
- E. Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that fit acoustical tile edge details and suspension systems indicated; formed from sheet metal of same material and finish as that used for exposed flanges of suspension system runners.

2.6 METAL SUSPENSION SYSTEM

- A. Basis-of-Design Product: Subject to compliance with requirements, provide "Prelude XL" and "Prelude XL Fire Guard" as manufactured by Armstrong or comparable product by one of the following:
 - 1. CertainTeed Corp.
 - 2. USG Interiors, Inc.; Subsidiary of USG Corporation.

- B. Wide-Face, Capped, Double-Web, Fire-Rated when indicated, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet, prepainted, electrolytically zinc coated, or hot-dip galvanized according to ASTM A 653/A 653M, not less than G30 coating designation, with prefinished 15/16-inch- wide metal caps on flanges.
1. Structural Classification: Intermediate-duty system.
 2. End Condition of Cross Runners: Butt edge type.
 3. Face Design: Flat, flush.
 4. Cap Material: Steel or aluminum cold-rolled sheet.

2.7 METAL EDGE MOLDINGS AND TRIM

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. Armstrong World Industries, Inc.
 2. CertainTeed Corp.
 3. Chicago Metallic Corporation.
 4. Fry Reglet Corporation.
 5. USG Interiors, Inc.; Subsidiary of USG Corporation.
- B. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.
1. Provide manufacturer's standard edge moldings that fit acoustical panel edge details and suspension systems indicated and that match width and configuration of exposed runners unless otherwise indicated.
 2. For lay-in panels with reveal edge details, provide stepped edge molding that forms reveal of same depth and width as that formed between edge of panel and flange at exposed suspension member.
 3. For circular penetrations of ceiling, provide edge moldings fabricated to diameter required to fit penetration exactly.
- C. Extruded-Aluminum Edge Moldings and Trim: Where indicated, provide manufacturer's extruded-aluminum edge moldings and trim of profile indicated or referenced by manufacturer's designations, including splice plates, corner pieces, and attachment and other clips, complying with seismic design requirements and the following:
1. Aluminum Alloy: Alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated, and with not less than the strength and durability properties of aluminum extrusions complying with ASTM B 221 for Alloy and Temper 6063-T5.
 2. Clear Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker.
 3. Baked-Enamel or Powder-Coat Finish: Minimum dry film thickness of 1.5 mils. Comply with ASTM C 635/C 635M and coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

2.8 INTERIOR SUSPENDED CEILING EXPANSION CONTROL SYSTEMS

1. General: Aluminum extrusion with elastomeric accordion fold insert specifically designed for acoustical panel suspension grid applications. Prefinished to match grid. Locations as indicated.
- B. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated or a comparable product by one of the following:
 1. Architectural Art Mfg., Inc.; Division of Pittcon Industries.
 2. Balco, Inc.
 3. Construction Specialties, Inc.
 4. JointMaster/InPro Corporation.
 5. MM Systems Corporation.
- C. Source Limitations: Obtain expansion control systems from single source from single manufacturer.
- D. Ceiling-to-Ceiling:
 1. Basis-of-Design Product: Model DX by MM Systems, Inc.
 2. Design Criteria:
 - a. Nominal Joint Width: As indicated on Drawings.
 - b. Fire-Resistance Rating: Provide expansion control system and fire-barrier assembly with a rating not less than that of adjacent construction.
 3. Type: Accordion.
 4. Seal Material: Manufacturer's standard.
 - a. Color: White.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.
- B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders, and comply with layout shown on reflected ceiling plans.

3.3 INSTALLATION

- A. General: Install acoustical panel ceilings to comply with ASTM C 636/C 636M and seismic design requirements indicated, according to manufacturer's written instructions and CISCA's "Ceiling Systems Handbook."

1. Fire-Rated Assembly: Install fire-rated ceiling systems according to tested fire-rated design.
2. Seismic Installation: Follow CISCA publication "Seismic (Zones 0-2) Recommendations for Direct-hung Acoustical Tile and Lay-in Panel Ceilings".

- B. Suspend ceiling hangers from building's structural members and as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
2. Splay hangers only where required and, if permitted with fire-resistance-rated ceilings, to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly either to structures or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
5. Do not support ceilings directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts, postinstalled mechanical or adhesive anchors, or power-actuated fasteners that extend through forms into concrete.
6. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
7. Do not attach hangers to steel deck tabs.
8. Do not attach hangers to steel roof deck. Attach hangers to structural members.
9. Space hangers not more than 48 inches o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches from ends of each member.
10. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards and publications.

- C. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.

1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.

2. Screw attach moldings to substrate at intervals not more than 16 inches o.c. and not more than 3 inches from ends, leveling with ceiling suspension system to a tolerance of 1/8 inch in 12 feet. Miter corners accurately and connect securely.
 3. Do not use exposed fasteners, including pop rivets, on moldings and trim.
- D. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.
- E. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide a neat, precise fit.
1. Arrange directionally patterned acoustical panels as follows:
 - a. As indicated on reflected ceiling plans.
 2. For square-edged panels, install panels with edges fully hidden from view by flanges of suspension-system runners and moldings.
 3. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
 4. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.
 5. Install hold-down clips in areas indicated, in areas required by authorities having jurisdiction, and for fire-resistance ratings; space as recommended by panel manufacturer's written instructions unless otherwise indicated.
 6. Protect lighting fixtures and air ducts to comply with requirements indicated for fire-resistance-rated assembly.

3.4 CLEANING

- A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095113

SECTION 099113 - EXTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes surface preparation and the application of paint systems on the following exterior substrates:
 - 1. Galvanized metal.
 - 2. Concrete.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For each finish and for each color and texture required.
- C. Product List: Printout of current "MPI Approved Products List" for each product category specified in Part 2, with the proposed product highlighted.

1.3 QUALITY ASSURANCE

- A. MPI Standards:
 - 1. Products: Complying with MPI standards indicated and listed in "MPI Approved Products List."
 - 2. Preparation and Workmanship: Comply with requirements in "MPI Architectural Painting Specification Manual" for products and paint systems indicated.
- B. Mockups: Apply benchmark samples of each paint system indicated and each color and finish selected to verify preliminary selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Architect will select one surface to represent surfaces and conditions for application of each paint system specified in Part 3.
 - a. Vertical and Horizontal Surfaces: Provide samples of at least 100 sq. ft..
 - b. Other Items: Architect will designate items or areas required.
 - 2. Final approval of color selections will be based on benchmark samples.
 - a. If preliminary color selections are not approved, apply additional benchmark samples of additional colors selected by Architect at no added cost to Owner.

1.4 EXTRA MATERIALS

- A. Furnish extra materials described below that are from same production run (batch mix) as materials applied and that are packaged for storage and identified with labels describing contents.
 - 1. Quantity: Furnish an additional 5 percent, but not less than 1 gal. of each material and color applied.

PART 2 - PRODUCTS

2.1 PAINT, GENERAL

- A. Material Compatibility:
 - 1. Provide materials for use within each paint system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 - 2. For each coat in a paint system, provide products recommended in writing by manufacturers of topcoat for use in paint system and on substrate indicated.
- B. Colors: Match Architect's samples.

2.2 BLOCK FILLERS

- A. Interior/Exterior Latex Block Filler: MPI #4.
 - 1. VOC Content: E Range of E2.

2.3 PRIMERS/SEALERS

- A. Alkali-Resistant Primer: MPI #3.
 - 1. VOC Content: E Range of E2.
- B. Bonding Primer (Water Based): MPI #17.
 - 1. VOC Content: E Range of E2.

2.4 METAL PRIMERS

- A. Alkyd Anticorrosive Metal Primer: MPI #79.
 - 1. VOC Content: E Range of E2.
- B. Waterborne Galvanized-Metal Primer: MPI #134.

1. VOC Content: E Range of E2.
2. Environmental Performance Rating: EPR 2.

2.5 EXTERIOR LATEX PAINTS

- A. Exterior Alkyd Enamel (Semigloss): MPI #11 (Gloss Level 5).
 1. VOC Content: E Range of E2.

2.6 EXTERIOR ALKYD PAINTS

- A. Exterior Alkyd Enamel (Semigloss): MPI #94 (Gloss Level 5).
 1. VOC Content: E Range of E2.

2.7 FLOOR COATINGS

- A. Exterior Clear Concrete Floor Sealer (Water Based): MPI #99.
 1. VOC Content: E Range of E2.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 1. Concrete: 12 percent.
 2. Masonry (Clay and CMU): 12 percent.
 3. Wood: 15 percent.
 4. Plaster: 12 percent.
 5. Gypsum Board: 12 percent.
- C. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- D. Begin coating application only after unsatisfactory conditions have been corrected and surfaces are dry.
 1. Beginning coating application constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION AND APPLICATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual" applicable to substrates and paint systems indicated.
- B. Clean substrates of substances that could impair bond of paints, including dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and reprime substrate with compatible primers as required to produce paint systems indicated.
- C. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.
- D. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- E. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.3 EXTERIOR PAINTING SCHEDULE

- A. Galvanized-Metal Substrates:
 - 1. Latex System: MPI EXT 5.3A.
 - a. Prime Coat: Cementitious galvanized-metal primer.
 - b. Intermediate Coat: Exterior latex matching topcoat.
 - c. Topcoat: Exterior latex (semigloss).
 - 2. Latex Over Water-Based Primer System: MPI EXT 5.3H.
 - a. Prime Coat: Waterborne galvanized-metal primer.
 - b. Intermediate Coat: Exterior latex matching topcoat.
 - c. Topcoat: Exterior latex (semigloss).

END OF SECTION 099113

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes surface preparation and the application of paint systems on the following interior substrates:
 - 1. Concrete.
 - 2. Concrete masonry units (CMU).
 - 3. Steel.
 - 4. Galvanized metal.
 - 5. Wood.
 - 6. Gypsum board.
 - 7. Cotton or canvas insulation covering.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For each finish and for each color and texture required.
- C. Product List: Printout of current "MPI Approved Products List" for each product category specified in Part 2, with the proposed product highlighted.

1.3 QUALITY ASSURANCE

- A. MPI Standards:
 - 1. Products: Complying with MPI standards indicated and listed in "MPI Approved Products List."
 - 2. Preparation and Workmanship: Comply with requirements in "MPI Architectural Painting Specification Manual" for products and paint systems indicated.
- B. Mockups: Apply benchmark samples of each paint system indicated and each color and finish selected to verify preliminary selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Architect will select one surface to represent surfaces and conditions for application of each paint system specified in Part 3.
 - a. Wall and Ceiling Surfaces: Provide samples of at least 100 sq. ft..
 - b. Other Items: Architect will designate items or areas required.
 - 2. Apply benchmark samples after permanent lighting and other environmental services have been activated.

3. Final approval of color selections will be based on benchmark samples.
 - a. If preliminary color selections are not approved, apply additional benchmark samples of additional colors selected by Architect at no added cost to Owner.

1.4 EXTRA MATERIALS

- A. Furnish extra materials described below that are from same production run (batch mix) as materials applied and that are packaged for storage and identified with labels describing contents.
 1. Quantity: Furnish an additional 5 percent, but not less than 1 gal. of each material and color applied.

PART 2 - PRODUCTS

2.1 PAINT, GENERAL

- A. Material Compatibility:
 1. Provide materials for use within each paint system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 2. For each coat in a paint system, provide products recommended in writing by manufacturers of topcoat for use in paint system and on substrate indicated.
- B. VOC Content of Field-Applied Interior Paints and Coatings: Provide products that comply with the following limits for VOC content, exclusive of colorants added to a tint base, when calculated according to 40 CFR 59, Subpart D (EPA Method 24); these requirements do not apply to paints and coatings that are applied in a fabrication or finishing shop:
 1. Flat Paints, Coatings, and Primers: VOC content of not more than 50 g/L.
 2. Nonflat Paints, Coatings, and Primers: VOC content of not more than 150 g/L.
 3. Anti-Corrosive and Anti-Rust Paints Applied to Ferrous Metals: VOC not more than 250 g/L.
 4. Floor Coatings: VOC not more than 100 g/L.
 5. Shellacs, Clear: VOC not more than 730 g/L.
 6. Shellacs, Pigmented: VOC not more than 550 g/L.
 7. Flat Topcoat Paints: VOC content of not more than 50 g/L.
 8. Nonflat Topcoat Paints: VOC content of not more than 150 g/L.
 9. Anti-Corrosive and Anti-Rust Paints Applied to Ferrous Metals: VOC not more than 250 g/L.
 10. Floor Coatings: VOC not more than 100 g/L.
 11. Shellacs, Clear: VOC not more than 730 g/L.
 12. Shellacs, Pigmented: VOC not more than 550 g/L.
 13. Primers, Sealers, and Undercoaters: VOC content of not more than 200 g/L.
 14. Dry-Fog Coatings: VOC content of not more than 400 g/L.
 15. Zinc-Rich Industrial Maintenance Primers: VOC content of not more than 340 g/L.

16. Pre-Treatment Wash Primers: VOC content of not more than 420 g/L.

C. Chemical Components of Field-Applied Interior Paints and Coatings: Provide topcoat paints and anti-corrosive and anti-rust paints applied to ferrous metals that comply with the following chemical restrictions; these requirements do not apply to paints and coatings that are applied in a fabrication or finishing shop:

1. Aromatic Compounds: Paints and coatings shall not contain more than 1.0 percent by weight of total aromatic compounds (hydrocarbon compounds containing one or more benzene rings).
2. Restricted Components: Paints and coatings shall not contain any of the following:
 - a. Acrolein.
 - b. Acrylonitrile.
 - c. Antimony.
 - d. Benzene.
 - e. Butyl benzyl phthalate.
 - f. Cadmium.
 - g. Di (2-ethylhexyl) phthalate.
 - h. Di-n-butyl phthalate.
 - i. Di-n-octyl phthalate.
 - j. 1,2-dichlorobenzene.
 - k. Diethyl phthalate.
 - l. Dimethyl phthalate.
 - m. Ethylbenzene.
 - n. Formaldehyde.
 - o. Hexavalent chromium.
 - p. Isophorone.
 - q. Lead.
 - r. Mercury.
 - s. Methyl ethyl ketone.
 - t. Methyl isobutyl ketone.
 - u. Methylene chloride.
 - v. Naphthalene.
 - w. Toluene (methylbenzene).
 - x. 1,1,1-trichloroethane.
 - y. Vinyl chloride.

D. Colors: As selected by Architect from manufacturer's full range and as indicated in a color schedule.

2.2 BLOCK FILLERS

A. Interior/Exterior Latex Block Filler: MPI #4.

1. VOC Content: E Range of E2.

2.3 PRIMERS/SEALERS

- A. Interior Latex Primer/Sealer: MPI #50.
 - 1. VOC Content: E Range of E2.
 - 2. Environmental Performance Rating: EPR 2.
- B. Interior Alkyd Primer/Sealer: MPI #45.
 - 1. VOC Content: E Range of E2.
- C. Wood-Knot Sealer: Sealer recommended in writing by topcoat manufacturer for use in paint systems indicated.

2.4 METAL PRIMERS

- A. Alkyd Anticorrosive Metal Primer: MPI #79.
 - 1. VOC Content: E Range of E2.
- B. Rust-Inhibitive Primer (Water Based): MPI #107.
 - 1. VOC Content: E Range of E2.
 - 2. Environmental Performance Rating: EPR 2.
- C. Waterborne Galvanized-Metal Primer: MPI #134.
 - 1. VOC Content: E Range of E2.
 - 2. Environmental Performance Rating: EPR 2.

2.5 WOOD PRIMERS

- A. Interior Latex-Based Wood Primer: MPI #39.
 - 1. VOC Content: E Range of E2.
 - 2. Environmental Performance Rating: EPR 2.

2.6 LATEX PAINTS

- A. Institutional Low-Odor/VOC Latex (Low Sheen): MPI #144 (Gloss Level 2).
 - 1. VOC Content: E Range of E3.
 - 2. Environmental Performance Rating: EPR 4.5.
- B. Institutional Low-Odor/VOC Latex (Semigloss): MPI #147 (Gloss Level 5).
 - 1. VOC Content: E Range of E3.
 - 2. Environmental Performance Rating: EPR 3.

C. High-Performance Architectural Latex (Satin): MPI #140 (Gloss Level 4).

1. VOC Content: E Range of E3.
2. Environmental Performance Rating: EPR 4.5.

2.7 FLOOR COATINGS

A. Interior/Exterior Clear Concrete Floor Sealer (Water Based): MPI #99.

1. VOC Content: E Range of E2.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
1. Concrete: 12 percent.
 2. Masonry: 12 percent.
 3. Wood: 15 percent.
 4. Gypsum Board: 12 percent.
- C. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- D. Begin coating application only after unsatisfactory conditions have been corrected and surfaces are dry.
1. Beginning coating application constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION AND APPLICATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual" applicable to substrates indicated.
- B. Clean substrates of substances that could impair bond of paints, including dirt, oil, grease, and incompatible paints and encapsulants.
1. Remove incompatible primers and reprime substrate with compatible primers as required to produce paint systems indicated.

- C. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.
- D. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- E. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.3 INTERIOR PAINTING

A. CMU Substrates”

- 1. Institutional Low-Odor/VOC Latex System: MPI INT 4.2E.
 - a. Prime Coat: Interior/exterior latex block filler.
 - b. Intermediate Coat: Institutional low-odor/VOC interior latex matching topcoat.
 - c. Topcoat: Institutional low-odor/VOC interior latex (low sheen).
- 2. Latex Over Alkyd Primer System: MPI INT 5.1Q.
 - a. Prime Coat: Alkyd anticorrosive metal primer.
 - b. Intermediate Coat: Interior latex matching topcoat.
 - c. Topcoat: Interior latex (semigloss).

B. Galvanized-Metal Substrates:

- 1. Institutional Low-Odor/VOC Latex System: MPI INT 5.3N.
 - a. Prime Coat: Waterborne galvanized-metal primer.
 - b. Intermediate Coat: Institutional low-odor/VOC interior latex matching topcoat.
 - c. Topcoat: Institutional low-odor/VOC interior latex (low sheen).

C. Institutional Low-Odor/VOC Latex System: MPI INT 6.3V

- a. Prime Coat: Interior latex-based wood primer.
- b. Intermediate Coat: Institutional low-odor/VOC interior latex matching topcoat.
- c. Topcoat: Institutional low-odor/VOC interior latex (low sheen).

D. Dressed Lumber Substrates: Including architectural woodwork.

- 1. Institutional Low-Odor/VOC Latex System: MPI INT 6.4T.
 - a. Prime Coat: Interior latex-based wood primer.
 - b. Intermediate Coat: Institutional low-odor/VOC interior latex matching topcoat.
 - c. Topcoat: Institutional low-odor/VOC interior latex (low sheen).

E. Gypsum Board Substrates:

1. Institutional Low-Odor/VOC Latex System: MPI INT 9.2M.
 - a. Prime Coat: Interior latex primer/sealer.
 - b. Intermediate Coat: Institutional low-odor/VOC interior latex matching topcoat.
 - c. Topcoat: Institutional low-odor/VOC interior latex (low sheen).

F. Cotton or Canvas Insulation-Covering Substrates: Including pipe and duct coverings.

1. Latex System: MPI INT 10.1A.
2. Institutional Low-Odor/VOC Latex System: MPI INT 10.1D.
 - a. Prime Coat: Interior latex primer/sealer.
 - b. Intermediate Coat: Institutional low-odor/VOC interior latex matching topcoat.
 - c. Topcoat: Institutional low-odor/VOC interior latex (low sheen).

END OF SECTION 099123

SECTION 101400 - SIGNAGE

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes the following:
 - 1. Room identification signs

1.2 DEFINITIONS

- A. ADA-ABA Accessibility Guidelines: U.S. Architectural & Transportation Barriers Compliance Board's "Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines."

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show fabrication and installation details for signs.
 - 1. Show sign mounting heights, locations of supplementary supports to be provided by others, and accessories.
 - 2. Provide message list, typestyles, graphic elements including tactile characters and Braille, and layout for each sign.
 - a. Prior to the installation, the contractor shall supply in duplicate the signage finish schedule and shop drawings showing the colors, words, number and other information to be included on the signage as it is to be installed.
- C. Samples: Submit sample of each type of sign in the specified color and size, and a sample of the message holder grip-strip showing its attachment to the appropriate sign type.

1.4 QUALITY ASSURANCE

- A. Regulatory Requirements: Comply with applicable provisions in ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

PART 2 - PRODUCTS

2.1 PANEL SIGNS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. ASI Sign Systems, Inc.
 2. Best Sign Systems Inc.
 3. Corum Signs, Inc.
 4. Signature Signs, Incorporated.
 5. 2/90 Sign Systems.
- B. Interior Panel Signs: Provide smooth sign panel surfaces constructed to remain flat under installed conditions within a tolerance of plus or minus 1/16 inch measured diagonally from corner to corner, complying with the following requirements:
1. Laminated, Photomechanical etched: Raised graphics with Braille 1/32 inch above surface with finished with a professional coat of acrylic polyurethane enamel in the specified color and laminated to a 1/8" opaque acrylic back.
 2. Edge Condition: Beveled.
 3. Corner Condition: Square with no border.
 4. Finished sign thickness: 1/4".
 5. Mounting: Unframed.
 - a. Wall mounted with two faced tape.
 - 1) Mounting tape must allow easy removal of sign without damage to wall material or finish.
 - b. Exterior Wall mounted: Use exterior rated adhesive recommended by manufacturer.
 6. Color: Specified color shall be available within the manufacturers full range.
 7. Tactile Characters: Characters and Grade 2 Braille raised 1/32 inch above surface with contrasting colors as specified.
- C. Graphic Content and Style:
1. Graphic content and layout shall be as shown on drawings.
 - a. Letter Style is to be: Helvetica Medium – Upper Case Letters
 - b. Room Numbers are to be 1" high
 - c. Text is to be 3/4" high
- D. Tactile and Braille Sign: Manufacturer's standard process for producing text and symbols complying with ADA-ABA Accessibility Guidelines and with ICC/ANSI A117.1. Text shall be accompanied by Grade 2 Braille. Produce precisely formed characters with square-cut edges free from burrs and cut marks; Braille dots with domed or rounded shape.

1. Raised-Copy Thickness: Not less than 1/32 inch.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Locate signs and accessories where indicated, using mounting methods of types described and complying with manufacturer's written instructions.
 1. Install signs level, plumb, and at heights indicated, with sign surfaces free of distortion and other defects in appearance.
 2. Interior Wall Signs: Install signs on walls adjacent to latch side of door where applicable. Where not indicated or possible, such as double doors, install signs on nearest adjacent walls. Locate to allow approach within 3 inches of sign without encountering protruding objects or standing within swing of door.
- B. Wall-Mounted Signs: Comply with sign manufacturer's written instructions except where more stringent requirements apply.
 1. Two-Face Tape: Mount signs to smooth, nonporous surfaces. Do not use this method for vinyl-covered rough surfaces or exterior conditions.
 - a. Installation accessories shall be furnished by the signage manufacturer. Do not use installation materials from any other source.
 - 1) Mounting tape must allow easy removal of sign without damage to wall material or finish.
 2. Exterior Conditions: Use adhesive approved by manufacturer for exterior conditions.
 2. Signs Mounted on Glass: Provide matching opaque plate on opposite side of glass to conceal mounting materials.
 - a. The color of the blank plate is to match the sign color. The size of the blank plate is to match the size of the sign.

C. Signage Schedule:

Reference Room No.	Permanent Text	Type	Qty
Mens Restrooms	MENS (PICTOGRAM)	D	2
Womens Restrooms	WOMENS	E	2
Unisex Restrooms	UNISEX (PICTOGRAM)	F	2
Offices	(TO BE DETERMINED)	B	14
Breakroom	BREAKROOM	A	1
Kitchen	KITCHEN	A	1
Unisex Room	UNISEX TOILET (PICTOGRAM)	F	2
Mechanical Room	MECHANICAL	A	1
Electrical Room	ELECTRICAL	A	1



D. Signage Schedule Notes:



1. Allow for a minimum of 10 signs installed on glass.
2. All signage on the project that falls under the jurisdiction of the American with Disabilities Act is to be provided as required to comply with all applicable requirements of ADA. It is the responsibility of the contractor and the signage manufacturer to ensure that all signage complies with ADA.
3. Text in Type B Sign slides to be determined by owner during construction.
4. All text to be verified by owner prior to shop drawing submittal.


PART 4 - GUARANTEE


- 4.1 Any signs that do not remain securely bonded to the substrate for a period of 1 year after acceptance of the project shall be removed and properly reinstalled by the contractor at no additional cost to the owner.

A. Signage Drawings: Attached.

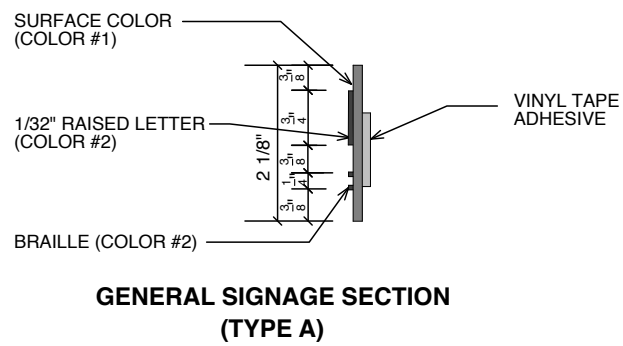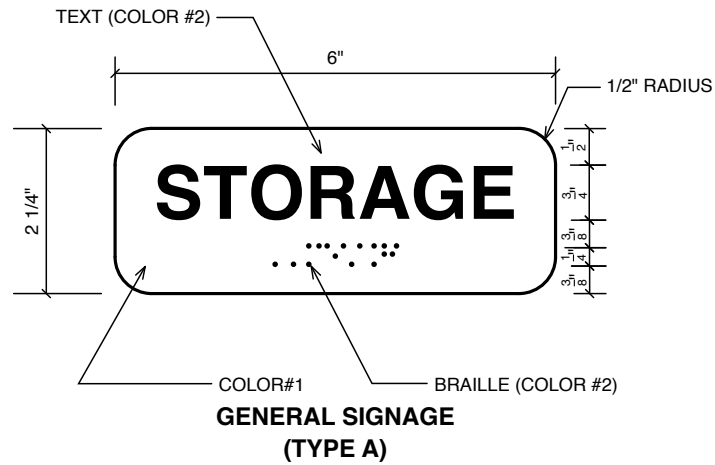


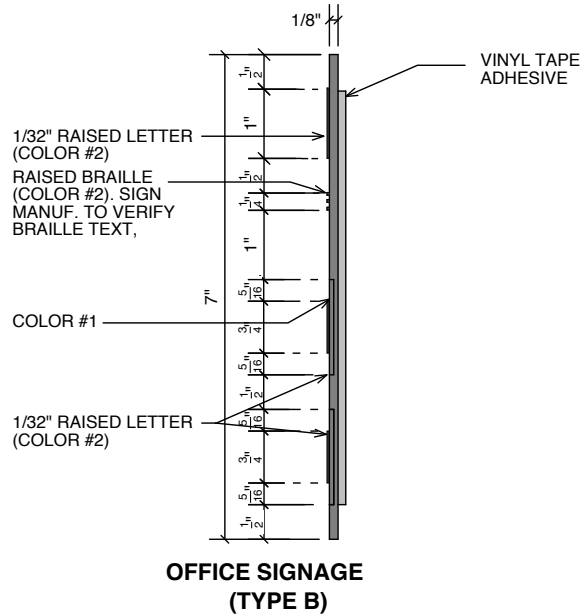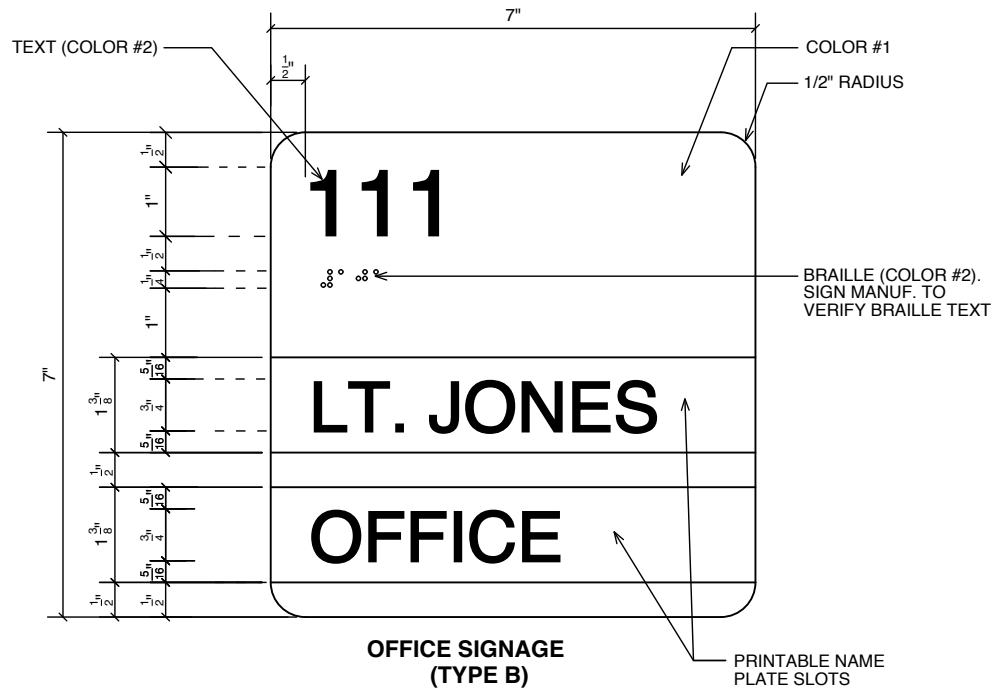

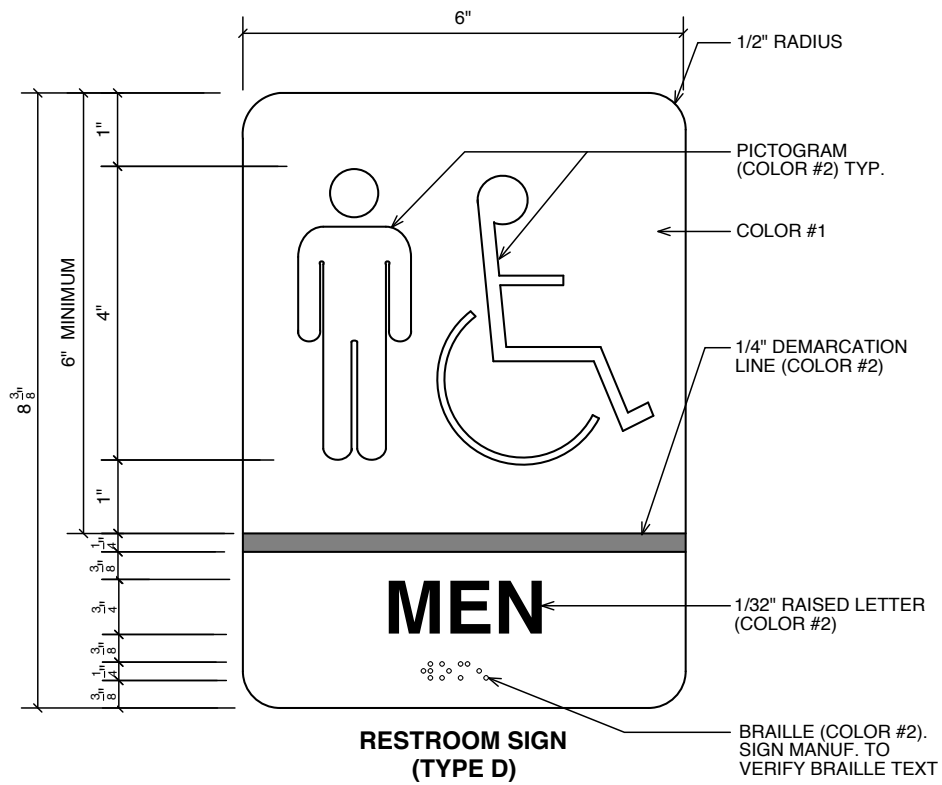

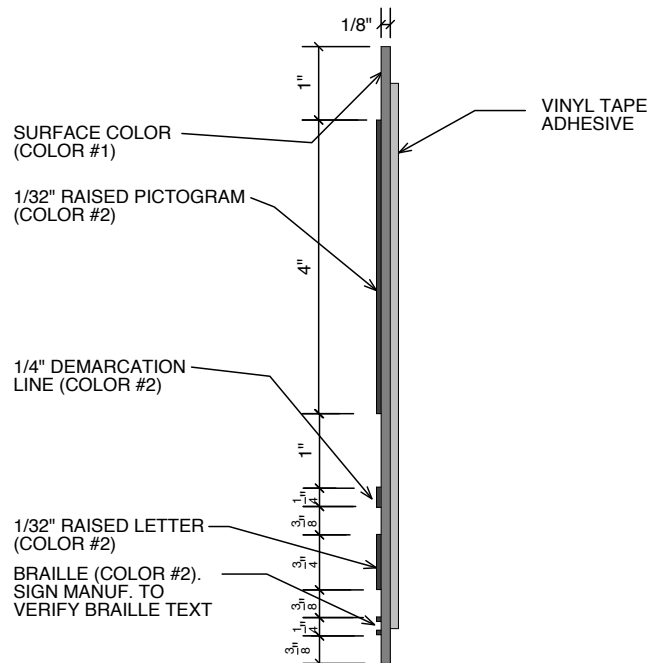

**RESTROOM SIGN SECTION
(TYPE D & E)**

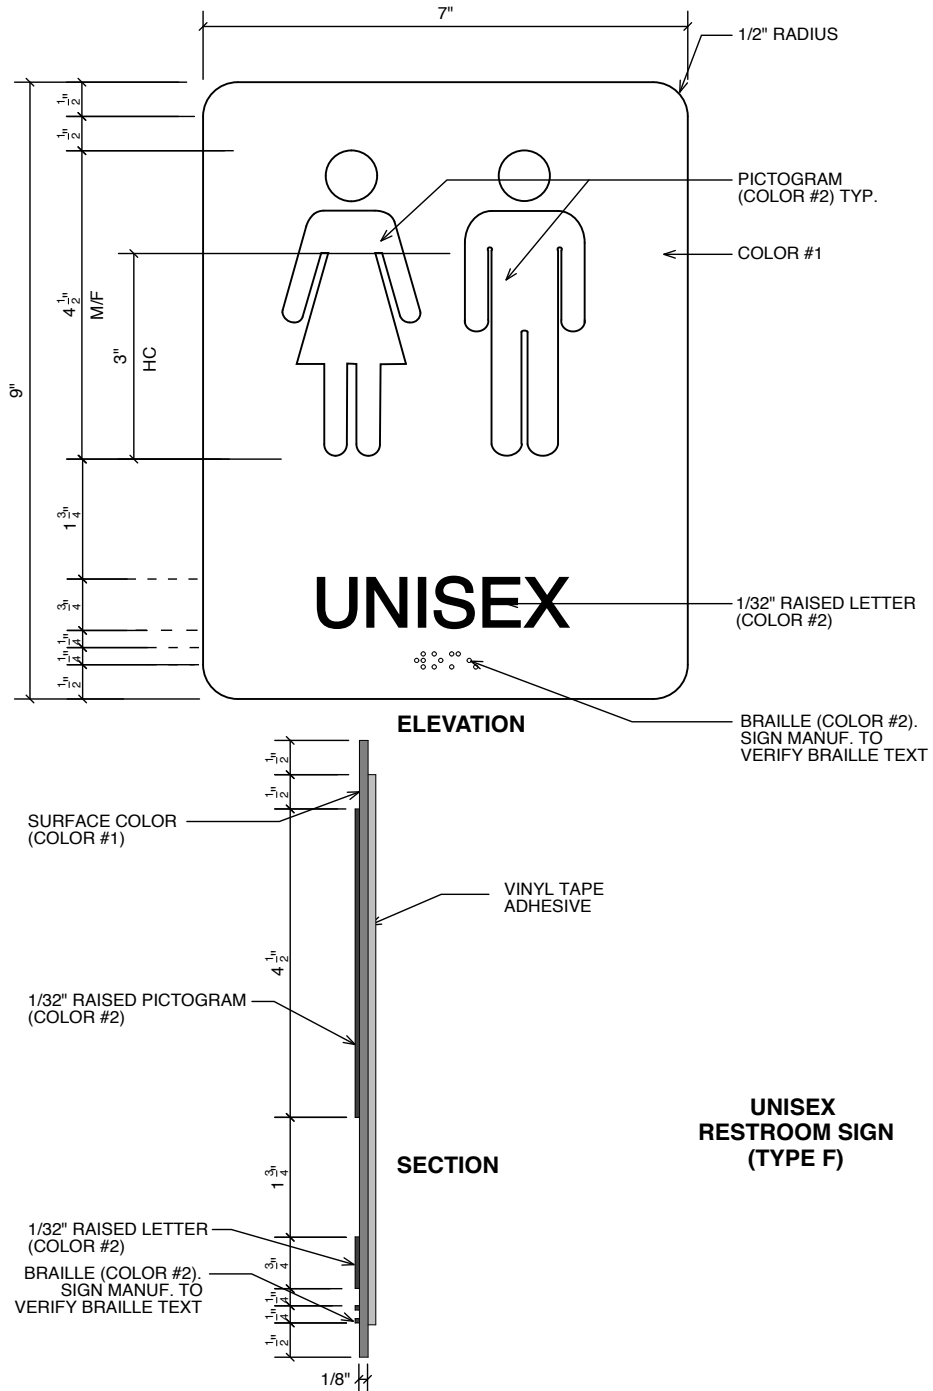

END OF SECTION 101400

Note: Final Signage Design pending. Specification provided is assist in pricing.

SECTION 101419 - DIMENSIONAL LETTER SIGNAGE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cast dimensional characters.
2. Fabricated channel dimensional characters.
3. Illuminated, fabricated channel dimensional characters.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For dimensional letter signs.

1. Include fabrication and installation details and attachments to other work.
2. Show sign mounting heights, locations of supplementary supports to be provided by others, and accessories.
3. Show message list, typestyles, graphic elements, and layout for each sign at least half size.
4. Show locations of electrical service connections.
5. Include diagrams for power, signal, and control wiring.

C. Samples: For each exposed product and for each color and texture specified.

D. Sign Schedule: Use same designations specified or indicated on Drawings or in a sign schedule.

E. Delegated-Design Submittal: For exterior "Wilmington Food Bank" and tenant space "Market" signage.

1. Include structural analysis calculations for signs indicated to comply with design loads; signed and sealed by the qualified professional engineer responsible for their preparation.

1.3 INFORMATIONAL SUBMITTALS

A. Sample warranty.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance data.

Note: Final Signage Design pending. Specification provided is assist in pricing.

1.5 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 DIMENSIONAL LETTER SIGNS, GENERAL

- A. Regional Materials: Dimensional letter signs shall be manufactured within 500 miles of Project site.

2.2 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design sign structure and anchorage of signage indicated in paragraph 1.2.E to withstand design loads as indicated on structural drawing S1.1.
- B. Thermal Movements: For exterior fabricated channel dimensional characters, allow for thermal movements from ambient and surface temperature changes.
1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.3 DIMENSIONAL CHARACTERS

- A. Cast Characters: Characters with uniform faces, sharp corners, and precisely formed lines and profiles, and as follows:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:
- a. ACE Sign Systems, Inc.
 - b. Allen Markings International.
 - c. APCO Graphics, Inc.
 - d. A. R. K. Ramos Signage Systems.
 - e. ASI Sign Systems, Inc.
 - f. Diskey Sign Company.
 - g. Gemini Incorporated.
 - h. Matthews International Corporation; Bronze Division.
 - i. Metal Arts; Division of L & H Mfg. Co.
 - j. Metallic Arts.
 - k. Seton Identification Products.

Note: Final Signage Design pending. Specification provided is assist in pricing.

- I. Southwell Company (The).
2. Character Material: Cast aluminum.
3. Character Height: As indicated.
4. Finishes:
 - a. Baked-Enamel or Powder-Coat Finish: Manufacturer's standard, in color as selected by Architect from manufacturer's full range.
5. Mounting: Concealed studs –(to be determined).
- B. Fabricated Channel Characters: Metal face and side returns and Translucent face with metal **side** returns, formed free from warp and distortion; with uniform faces, sharp corners, and precisely formed lines and profiles; internally braced for stability and for securing fasteners; and as follows.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ACE Sign Systems, Inc.
 - b. Allen Industries, Inc.; Architectural Division.
 - c. APCO Graphics, Inc.
 - d. A. R. K. Ramos Signage Systems.
 - e. ASI Sign Systems, Inc.
 - f. Diskey Sign Company.
 - g. Gemini Incorporated.
 - h. Metallic Arts.
 - i. Nelson-Harkins Industries.
 - j. Poblocki Sign Company, LLC.
 - k. Steel Art Company.
 2. Illuminated Characters: Backlighting character construction with LED lighting including transformers, insulators, and other accessories for operability, with provision for servicing and concealing connections to building electrical system. Use tight or sealed joint construction to prevent unintentional light leakage. Space lamps apart from each other and away from character surfaces as needed to illuminate evenly.
 - a. Power: 120 V, 60 Hz, 1 phase, 15 A.
 3. Character Material: Sheet or plate aluminum.
 4. Translucent Face Sheet: Acrylic sheet with integral color as selected by Architect from manufacturer's full range.
 5. Character Height: As indicated.
 6. Character Depth: 6" unless noted otherwise..
 7. Finishes:
 - a. Baked-Enamel or Powder-Coat Finish: Manufacturer's standard, in color as selected by Architect from manufacturer's full range.

Note: Final Signage Design pending. Specification provided is assist in pricing.

8. Mounting: Manufacturer's standard for size and design of character.

a. Hold characters at 2-inch from wall surface.

C. Acrylic Sheet: ASTM D 4802, Type UVF (UV filtering).

2.4 ACCESSORIES

A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signage, noncorrosive and compatible with each material joined, and complying with the following:

1. Use concealed fasteners and anchors unless indicated to be exposed.
2. For exterior exposure, furnish stainless-steel or hot-dip galvanized unless otherwise indicated.
3. Exposed Metal-Fastener Components, General:

a. Fabricated from same basic metal and finish of fastened metal unless otherwise indicated.

4. Sign Mounting Fasteners:

- a. Concealed Studs: Concealed (blind), threaded studs welded or brazed to back of sign material, screwed into back of sign assembly, or screwed into tapped lugs cast integrally into back of cast sign material, unless otherwise indicated.
- b. Projecting Studs: Threaded studs with sleeve spacer, welded or brazed to back of sign material, screwed into back of sign assembly, or screwed into tapped lugs cast integrally into back of cast sign material, unless otherwise indicated.
- c. Through Fasteners: Exposed metal fasteners matching sign finish, with type of head indicated, installed in predrilled holes.

B. Adhesives: As recommended by sign manufacturer and with a VOC content of **70 g/L** or less for adhesives used inside the weatherproofing system and applied on-site when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

C. Adhesives: As recommended by sign manufacturer and that comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

D. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D 1187.

2.5 FABRICATION

A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.

1. Mill joints to a tight, hairline fit. Form assemblies and joints exposed to weather to resist water penetration and retention.
2. Provide welds and brazes behind finished surfaces without distorting or discoloring exposed side. Clean exposed welded and brazed connections of flux, and dress exposed and contact surfaces.

Note: Final Signage Design pending. Specification provided is assist in pricing.

3. Conceal connections if possible; otherwise, locate connections where they are inconspicuous.
 4. Internally brace signs for stability and for securing fasteners.
 5. Provide rebates, lugs, and brackets necessary to assemble components and to attach to existing work. Drill and tap for required fasteners. Use concealed fasteners where possible; use exposed fasteners that match sign finish.
 6. Castings: Fabricate castings free of warp, cracks, blowholes, pits, scale, sand holes, and other defects that impair appearance or strength. Grind, wire brush, sandblast, and buff castings to remove seams, gate marks, casting flash, and other casting marks before finishing.
- B. Brackets: Fabricate brackets, fittings, and hardware for bracket-mounted signs to suit sign construction and mounting conditions indicated. Modify manufacturer's standard brackets as required.
1. Aluminum Brackets: Factory finish brackets with baked-enamel or powder-coat finish to match sign-background color unless otherwise indicated.
 2. Stainless-Steel Brackets: Factory finish brackets with No. 4 finish unless otherwise indicated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.
1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
 2. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.
 3. Corrosion Protection: Coat concealed surfaces of exterior aluminum in contact with grout, concrete, masonry, wood, or dissimilar metals, with a heavy coat of bituminous paint.
- B. Mounting Methods:
1. Concealed Studs: Using a template, drill holes in substrate aligning with studs on back of sign. Remove loose debris from hole and substrate surface.
 - a. Masonry Substrates: Fill holes with adhesive. Leave recess space in hole for displaced adhesive. Place sign in position and push until flush to surface, embedding studs in holes. Temporarily support sign in position until adhesive fully sets.
 - b. Thin or Hollow Surfaces: Place sign in position and flush to surface, install washers and nuts on studs projecting through opposite side of surface, and tighten.
 2. Projecting Studs: Using a template, drill holes in substrate aligning with studs on back of sign. Remove loose debris from hole and substrate surface.

Note: Final Signage Design pending. Specification provided is assist in pricing.

- a. Masonry Substrates: Fill holes with adhesive. Leave recess space in hole for displaced adhesive. Place spacers on studs, place sign in position, and push until spacers are pinched between sign and substrate, embedding the stud ends in holes. Temporarily support sign in position until adhesive fully sets.
 - b. Thin or Hollow Surfaces: Place spacers on studs, place sign in position with spacers pinched between sign and substrate, and install washers and nuts on stud ends projecting through opposite side of surface, and tighten.
 3. Through Fasteners: Drill holes in substrate using predrilled holes in sign as template. Countersink holes in sign if required. Place sign in position and flush to surface. Install through fasteners and tighten.
 4. Back Bar and Brackets: Remove loose debris from substrate surface and install backbar or bracket supports in position so that signage is correctly located and aligned.
 5. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position, and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.
- C. Remove temporary protective coverings and strippable films as signs are installed.

END OF SECTION 101419

SECTION 102113 - PLASTIC TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes solid-plastic toilet compartments configured as toilet enclosures and urinal screens.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For toilet compartments. Include plans, elevations, sections, details, and attachment details.
- C. Samples for each type of toilet compartment material indicated.

1.3 INFORMATIONAL SUBMITTALS

- A. Product certificates.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance data.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: 25 or less.
 - 2. Smoke-Developed Index: 450 or less.
- B. Regulatory Requirements: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines for Buildings and Facilities and ICC A117.1 for toilet compartments designated as accessible.

2.2 SOLID-PLASTIC TOILET COMPARTMENTS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Bobrick Washroom Equipment, Inc.
 - 2. Bradley Corporation; Mills Partitions.
 - 3. Global Steel Products Corp.
 - 4. Metpar Corp.
 - 5. PSiSC.
 - 6. Sanymetal; a Crane Plumbing Company.
- B. Toilet-Enclosure Style: Overhead braced, Floor anchored.
- C. Urinal-Screen Style: Wall hung, Floor anchored.
- D. Door, Panel, and Pilaster Construction: Solid, high-density polyethylene (HDPE) panel material, not less than 1 inch thick, seamless, with eased edges, and with homogenous color and pattern throughout thickness of material.
 - 1. Color and Pattern: One color and pattern in each room as selected by Architect from manufacturer's full range.
- E. Pilaster Shoe and Sleeves (Caps): Manufacturer's standard design; stainless steel.
- F. Urinal-Screen Post: Manufacturer's standard post design of material matching the thickness and construction of pilasters; with shoe and sleeve (cap) matching that on the pilaster.
- G. Brackets (Fittings):
 - 1. Full-Height (Continuous) Type: Manufacturer's standard design; stainless steel.

2.3 HARDWARE AND ACCESSORIES

- A. Hardware and Accessories: Manufacturer's standard operating hardware and accessories.
 - 1. Material: Stainless steel.
 - 2. Provide units that comply with regulatory requirements for accessibility at compartments designated as accessible.
- B. Hardware and Accessories: Manufacturer's heavy-duty stainless-steel operating hardware and accessories.
 - 1. Provide units that comply with regulatory requirements for accessibility at compartments designated as accessible.
- C. Overhead Bracing: Manufacturer's standard continuous, extruded-aluminum head rail with antigrip profile and in manufacturer's standard finish.
- D. Anchorages and Fasteners: Manufacturer's standard exposed fasteners of stainless steel, finished to match the items they are securing, with theft-resistant-type heads. Provide sex-type bolts for through-bolt applications. For concealed anchors, use stainless-steel, hot-dip galvanized-steel, or other rust-resistant, protective-coated steel compatible with related materials.

2.4 FABRICATION

- A. Fabrication, General: Fabricate toilet compartment components to sizes indicated. Coordinate requirements and provide cutouts for through-partition toilet accessories where required for attachment of toilet accessories.
- B. Overhead-Braced Units: Provide manufacturer's standard corrosion-resistant supports, leveling mechanism, and anchors at pilasters to suit floor conditions. Provide shoes at pilasters to conceal supports and leveling mechanism.
- C. Floor-Anchored Units: Provide manufacturer's standard corrosion-resistant anchoring assemblies with leveling adjustment nuts at pilasters for structural connection to floor. Provide shoes at pilasters to conceal anchorage.
- D. Urinal-Screen Posts: Provide manufacturer's standard corrosion-resistant anchoring assemblies with leveling adjustment nuts at bottoms of posts. Provide shoes and sleeves (caps) at posts to conceal anchorage.
- E. Door Size and Swings: Unless otherwise indicated, provide 24-inch-wide, in-swinging doors for standard toilet compartments and 36-inch-wide, out-swinging doors with a minimum 32-inch wide, clear opening for compartments designated as accessible.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Comply with manufacturer's written installation instructions. Install units rigid, straight, level, and plumb. Secure units in position with manufacturer's recommended anchoring devices.
 - 1. Maximum Clearances:
 - a. Pilasters and Panels: 1/2 inch.
 - b. Panels and Walls: 1 inch.
 - 2. Stirrup Brackets: Secure panels to walls and to pilasters with no fewer than two brackets attached near top and bottom of panel.
 - a. Locate wall brackets so holes for wall anchors occur in masonry or tile joints.
 - b. Align brackets at pilasters with brackets at walls.
 - 3. Full-Height (Continuous) Brackets: Secure panels to walls and to pilasters with full-height brackets.
 - a. Locate bracket fasteners so holes for wall anchors occur in masonry or tile joints.
 - b. Align brackets at pilasters with brackets at walls.

3.2 ADJUSTING

- A. Hardware Adjustment: Adjust and lubricate hardware according to hardware manufacturer's written instructions for proper operation. Set hinges on in-swinging doors to hold doors open approximately 30 degrees from closed position when unlatched. Set hinges on out-swinging doors to return doors to fully closed position.

END OF SECTION 102113

SECTION 102610 – STAINLESS STEEL WALL PANELS - KITCHEN

PART 1 - GENERAL

1.1 SUMMARY

- A. Note: Use this section if stainless steel wall paneling (backsplash) is not provided with new kitchen hood as provided by kitchen hood manufacturer.
- B. Section Includes:
 - 1. Commercial kitchen stainless steel wall panels (Backsplash)
 - 2. Stainless steel trim
 - 3. Adhesives

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For each impact-resistant wall protection unit. Include sections, details, and attachments to other work.
- C. Samples: For each exposed product and for each color and texture specified, 3”x3”.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: Installer qualifications: Engage an installer who has no less than 3 years’ experience in installation of systems similar in complexity to those required for this project.
- B. Single source responsibility: Provide all components of the wall protection system manufactured by the same company to ensure compatibility of color, texture and physical properties.
- C. Preinstallation Conference: Conduct conference at Project site.

1.4 Delivery, Storage and Handling

- A. Deliver materials to the project site in unopened original factory packaging clearly labeled to show manufacturer.
- B. Materials must be stored flat.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Stainless Steel: Material to be 20-gauge type 430 alloy with #4 satin finish.

2.2 WALL COVERING

- A. Stainless Steel Sheet: 20-gauge thick stainless steel sheet with standard Smooth texture.
 - 1. Supplied in 48" wide sheet in height to fit between top of floor tile base to bottom of kitchen exhaust hood.

2.3 FABRICATION

- A. General: Fabricate wall protection products to comply with requirements indicated for design, dimensions, detail, finish and sizes.

2.4 FINISHES

- A. General: Comply with NAAMM "Metal Finishes Manual" for recommendations relative to applications and designations of finishes.

2.5 ACCESSORIES

- A. Stainless steel edge and seam trim.

2.6 MOUNTING

- A. Stainless steel wall protection shall be furnished as a complete packaged system, including appropriate adhesive or mechanical fasteners.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install impact-resistant wall protection units level, plumb, and true to line without distortions. Do not use materials with chips, cracks, voids, stains, or other defects that might be visible in the finished Work.
- B. Preparation

1. Surface preparation: Prior to installation, clean substrate to remove dirt, debris and loose particles. Perform additional preparation procedures as required by manufacturer's instructions.
2. Protection: Take all necessary steps to prevent damage to material during installation as required in manufacturer's installation instructions.

C. Installation

1. Install the work of this section in strict accordance with the manufacturer's recommendations using only approved hardware and locating all components firmly into position, level and plumb.

D. Cleaning

1. General: Immediately upon completion of installation, clean wall protection products and accessories in accordance with manufacturer's recommended cleaning method.
2. Remove surplus materials, rubbish and debris resulting from installation as work progresses and upon completion of work.

E. Protection

1. Protect installed materials to prevent damage by other trades. Use materials that may be easily removed without leaving residue or permanent stains.

END OF SECTION 102610

SECTION 102800 - TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Public-use washroom accessories.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product indicated.

B. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.

1. Identify products using designations indicated.

1.3 INFORMATIONAL SUBMITTALS

A. Warranty: Sample of special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance data.

1.5 QUALITY ASSURANCE

A. Accessory Locations: Coordinate accessory locations with other work to avoid interference and to assure proper operation and servicing of accessory unit.

B. Products: Provide products of same manufacturer for each type of accessory unit and for units exposed in same areas, unless otherwise acceptable to Architect.

1.6 WARRANTY

A. Special Mirror Warranty: Manufacturer's standard form in which manufacturer agrees to replace mirrors that develop visible silver spoilage defects and that fail in materials or workmanship within specified warranty period.

1. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PUBLIC-USE WASHROOM ACCESSORIES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. A & J Washroom Accessories, Inc.
 2. American Specialties, Inc.
 3. Bobrick Washroom Equipment, Inc.
 4. Bradley Corporation.
 5. GAMCO Specialty Accessories; a division of Bobrick Washroom Equipment, Inc.
 6. Tubular Specialties Manufacturing, Inc.
- B. Grab Bar #T1: (36" Horizontal)
1. Basis-of-Design Product: Bobrick #B-6806 Series
 2. Mounting: Flanges with concealed fasteners.
 3. Material: Stainless steel, 0.05 inch thick.
 - a. Finish: Smooth, No. 4 finish (satin) on ends and slip-resistant texture in grip area.
 4. Outside Diameter: 1-1/2 inches.
 5. Configuration and Length: Straight, 36 inches long.
- C. Grab Bar #T2 (42" Horizontal):
1. Basis-of-Design Product: Bobrick #B-6806 Series
 2. Mounting: Flanges with concealed fasteners.
 3. Material: Stainless steel, 0.05 inch thick.
 - a. Finish: Smooth, No. 4 finish (satin) on ends and slip-resistant texture in grip area.
 4. Outside Diameter: 1-1/2 inches.
 5. Configuration and Length: Straight, 42 inches long.
- D. Grab Bar #T3: (18" Vertical)
1. Basis-of-Design Product: Bobrick #B-6806 Series
 2. Mounting: Flanges with concealed fasteners.
 3. Material: Stainless steel, 0.05 inch thick.
 - a. Finish: Smooth, No. 4 finish (satin) on ends and slip-resistant texture in grip area.
 4. Outside Diameter: 1-1/2 inches.
 5. Configuration and Length: Straight, 18 inches long.
- E. Grab Bar #T4: (Shower) Two Wall
1. Basis-of-Design Product: Bobrick #B-6861 Series
 2. Mounting: Flanges with concealed fasteners.
 3. Material: Stainless steel, 0.05 inch thick.

- a. Finish: Smooth, No. 4 finish (satin) on ends and slip-resistant texture in grip area.
- 4. Outside Diameter: 1-1/2 inches.
- 5. Configuration and Length: Straight, 18 inches long.
- F. Folding Seat – Transfer-L type #T5:
 - 1. Basis-of-Design Product: Bobrick #B-5181
 - 2. Material: 304 Stainless steel frame and fasteners.
- G. Toilet Tissue (Roll) Dispenser #T6:
 - 1. Basis-of-Design Product: Bobrick #B-2740
 - 2. Description: Double-roll dispenser (Non-controlled delivery).
 - 3. Mounting: Surface mounted.
 - 4. Operation: Spindles removed by special key. Theft resistant
 - 5. Capacity: Designed for standard core tissue rolls up to 6” in diameter.
 - 6. Material and Finish: Cast aluminum, satin finish
- H. Soap Dispenser #T7: Wall Mounted
 - 1. Basis-of-Design Product: Bobrick #B-2111
 - 2. Material: Stainless steel.
 - a. Finish: Smooth, No. 4 finish (satin)
- I. Paper Towel Dispenser #T8: (Fully Recessed)
 - 1. Basis-of-Design Product: Bobrick #B-359
 - 2. Mounting: Recessed
 - 3. Material: Stainless steel.
 - a. Finish: Smooth, No. 4 finish (satin)
- J. Paper Towel Dispenser #T8: (Surface Mounted)
 - 1. Basis-of-Design Product: Bobrick #B-262
 - 2. Mounting: Recessed
 - 3. Material: Stainless steel.
 - a. Finish: Smooth, No. 4 finish (satin)

K. Mirror Units #T10A & T10B:

1. Basis-of-Design Product: Bobrick #B-2908 Series Custom Tempered Glass
2. Frame: Stainless-steel angle, 0.05 inch thick.
 - a. Corners: Welded and ground smooth.
3. Hangers: Produce rigid, tamper- and theft-resistant installation, using method indicated below.
 - a. One-piece, galvanized-steel, wall-hanger device with spring-action locking mechanism to hold mirror unit in position with no exposed screws or bolts.
 - b. Wall bracket of galvanized steel, equipped with concealed locking devices requiring a special tool to remove.
4. Size: As indicated on Drawings.

L. Coat Hook #T11: For Mounted on Doors

1. Basis-of-Design Product: Bobrick #B-6707
2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel.
 - a. Finish: Smooth, No. 4 finish (satin)

M. Coat Hook #T12: Near Shower

1. Basis-of-Design Product: Bobrick #B-6827
2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel.
 - a. Finish: Smooth, No. 4 finish (satin)

N. Shower Curtain and Rod #T13: (Shower) for 36" wide opening.

1. Basis-of-Design Product: Bobrick #B-6107 Rod, #B-204 Hooks & Curtain (white).
2. Material: Stainless steel rod and hooks, vinyl curtain.

O. Sanitary Napkin Disposal #T14:

1. Basis-of-Design Product: Bobrick #B-5270
2. Mounting: Flanges with concealed fasteners.
3. Material: ABS, hi-gloss grey
 - a. Finish: Smooth

P. Wall shelf with Mop/Broom holders and hooks #T15:

1. Basis-of-Design Product: Bobrick #B-239
2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel.
 - a. Finish: Smooth, No. 4 finish (satin)

2.2 FABRICATION

- A. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner's representative.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install accessories according to manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.
- B. Grab Bars: Install to withstand a downward load of at least 250 lbf when tested according to ASTM F 446.

3.2 ADJUSTING AND CLEANING

- A. Adjust toilet accessories for proper operation and verify that mechanisms function smoothly. Replace damaged or defective items.
- B. Remove temporary labels and protective coatings.
- C. Clean and polish all exposed surfaces after removing protective coatings.

END OF SECTION 102800

SECTION 104413 - FIRE EXTINGUISHERS CABINETS AND ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division 01 Specification sections, apply to work of this section.

1.2 DESCRIPTION OF WORK

- A. Extent of fire extinguishers, cabinets and accessories is indicated on drawings.
- B. Definition: "Fire extinguishers" as used in this section refers to units which can be hand-carried as opposed to those which are equipped with wheels or to fixed fire extinguishing systems.
- C. Types of products required include:
 - 1. Fire extinguishers with enclosed cabinets.
 - 2. Fire extinguishers with surface mounted brackets.

1.3 QUALITY ASSURANCE

- A. Single Source Responsibility: Obtain products in this section from one manufacturer.
- B. UL-Listed Products: Provide new portable fire extinguishers which are UL-listed and bear UL "Listing Mark" for type, rating, and classification of extinguisher indicated.

1.4 SUBMITTALS

- A. Product Data: Submit product data for each type of product included in this section. For fire extinguisher cabinets include roughing-in dimensions and details showing mounting methods, relationships of box and trim to surrounding construction, door hardware, cabinet type and materials, trim style and door construction, and panel style and materials.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Basis of Design: Cabinets as indicated are "Cosmopolitan" series cabinets as manufactured by J-L Industries (Activar Construction Products Group Inc.). Subject to compliance with requirements, products of a similar style, trim and finish will be considered by the following:
 - 1. Larsen Manufacturing.
 - 2. Potter-Roemer – Alta Series.
- B. Provide clear acrylic or tempered glass vertical "slot" lite.

2.2 FIRE EXTINGUISHERS

- A. General: Provide fire extinguishers for each extinguisher cabinet.
- B. Multi-Purpose Dry Chemical Type: UL-rated 4-A:60-B: C, 10 lb. nominal capacity, in enameled steel container, for Class A, Class B and Class C fires.

2.3 FIRE EXTINGUISHER CABINETS

- A. General: Provide fire extinguisher cabinets where indicated, of suitable size for housing fire extinguishers of types and capacities indicated.
- B. Cabinet Construction: Manufacturer's standard colored anodized or enameled steel box depending on style indicated, with trim, frame, door and hardware to suit cabinet type, trim style, and door style indicated. Weld all joints and grind smooth. Miter and weld perimeter door frames.
- C. Cabinets suitable for mounting conditions indicated, of the following types as indicated.
- D. Semi-Recessed: Cabinet box partially recessed with face frame projecting from finished wall.
 - 1. Partial lite door, 2 1/2 inch rolled edge one piece trim, mitered corners.
 - 2. Glazing: Clear tempered glass
 - 3. Cabinet trim and door material: Steel.
 - 4. Finish: Powder-coat, white.
- E. Lettering: Engraved in door. Red color fill. (JL Industries accessory option #16.)
- F. Door Material and Construction: Manufacturer's standard door construction of stainless steel.
- G. Steel or aluminum tubs: Manufacturer's standard folded and seamed construction, powder coated finish.
- H. Door Hardware: Provide manufacturer's standard door operating hardware of proper type for cabinet type, trim style, and door material and style indicated. Provide either lever handle with cam action latch, or door pull, exposed or concealed, and friction latch. Provide concealed or continuous type hinge permitting door to open 180 degrees.
- I. Finish: Match door and trim finish.

2.3 ACCESSORIES

- A. Mounting Brackets: Manufacturer's standard steel, designed to secure extinguisher, of sizes required for types and capacities of extinguishers indicated, with plated or baked-enamel finish.
 - 1. Provide brackets for extinguishers not located in cabinets.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Confirm location and mounting height with authority having jurisdiction prior to installation.
- B. Install items included in this section in locations and at mounting heights indicated, if approved by applicable regulations of governing authorities.
- C. Prepare recesses in walls for fire extinguisher cabinets as required by type and size of cabinet and style of trim and to comply with manufacturer's instructions.

END OF SECTION 104413

SECTION 105613 - METAL STORAGE SHELVING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes post-and-beam metal storage shelving.

1.2 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Design metal storage shelving, including comprehensive engineering analysis by a qualified professional engineer, using performance requirements and design criteria indicated.
- B. Structural Performance for Post-and-Beam Metal Storage Shelving: Capable of withstanding the loads indicated according to MH 28.2.
- C. Seismic Performance: Metal storage shelving shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 - 1. See Structural sheet #S1.1 for design loads.
 - 2. Seismic Component Importance Factor: 1.5.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For customized metal storage shelving. Include plans, elevations, sections, details, and attachments to other work. Include installation details of connectors, lateral bracing, and special bracing.
 - 1. Coordinate wall anchoring with concrete wall panel fabrication and required embedment's.
- C. Samples: For each exposed product and for each color and texture specified.
- D. Delegated-Design Submittal: For metal storage shelving indicated to comply with performance requirements, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
 - 1. Design Calculations: Calculate requirements for seismic restraints.

1.4 INFORMATIONAL SUBMITTALS

- A. Seismic Qualification Certificates: For metal storage shelving, accessories, and components, from manufacturer.

- B. Product certificates.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance data.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation of units required for this Project.
- B. Preinstallation Conference: Conduct conference at Project site.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Floor Anchors: Galvanized-steel, post-installed expansion anchors. Provide number per unit recommended by manufacturer unless additional anchors are indicated in calculations.

2.2 POST-AND-BEAM METAL STORAGE SHELVING

- A. General: Factory-formed, field-assembled, freestanding, post-and-beam metal storage shelving system, designed for shelves to be supported by beams that span between and are supported by corner posts, with beams adjustable over the entire height of shelving unit. Fabricate initial shelving unit with a post at each corner. Fabricate additional shelving units as add-on units, designed to share two corner posts with initial shelving unit. Provide adjustable beams and accessories indicated.

- 1. Basis-of-Design Product: Subject to compliance with requirements, provide Husky Rack & Wire "Invincible" storage racks or comparable product by, but not limited to, one of the following:

- a. Borroughs Corporation.
 - b. Durham Manufacturing Company (The).
 - c. Lyon Workspace Products, LLC.
 - d. Mecalux.
 - e. Penco Products, Inc.
 - f. Rousseau Metal Inc.
 - g. Safco Products; a division of LDI.
 - h. Schaefer Systems International, Inc.
 - i. Tennsco.
 - j. Unicor; Federal Prison Industries, Inc.

- B. Load-Carrying Capacity per Shelf: 5,047 lbs.

- C. Posts: Fabricated from cold-rolled steel of thickness required for load-carrying capacity per shelf and number of shelves; in manufacturer's standard shape; with perforations at 1-1/2 inches o.c. to receive beam-to-post connectors.
 - 1. Add-On Shelf Posts: Fabricated from hot-rolled steel, T-shape; perforated to match main posts and of same thickness.
 - 2. Post Base: Cold-rolled steel floor plate, drilled for floor anchors.
- D. Beams: Fabricated from cold-rolled steel of thickness required for load-carrying capacity per shelf; in manufacturer's standard shape; with projecting manufacturer's standard beam-to-post connectors at each end designed to engage posts. Provide beam at each side of each shelf, with center supports as required for load-carrying capacity of shelf.
 - 1. Provide top, bottom, and intermediate shelf beams with double beam-to-post connectors.
 - 2. Provide beams for the number of shelves required.
- E. Wire Shelves: Welded steel wire; with Manufacturer's standard openings.
- F. Unit Dimensions and Number of Shelves or Beams Without Shelves:
 - 1. All shelves shall be 42" x 96".
 - 2. Number of shelves shall be as follows;
 - a. Four shelves in warehouse. (Warehouse ceiling height is 25ft clear minimum.)
 - b. Three shelves in walk-in boxes. (Walk-in box ceiling height is 23'-4".)
- G. Accessories:
 - 1. Tie Plates: Cold-rolled steel, finished to match posts; designed for joining posts of adjacent shelving units.
 - 2. Supports: Back-to-wall and back-to-back type that bolt to posts; as required for shelving unit stability.
- H. Finish: Baked enamel.
 - 1. Color and Gloss: As indicated by manufacturer's designations.

2.3 FABRICATION

- A. Shop Fabrication: Prefabricate shelving components in shop to greatest extent possible to minimize field fabrication.
- B. Fabricate metal storage shelving square and rigid, with posts plumb and true and shelves flat and free of dents or distortion. Fabricate connections to form a rigid structure, free of buckling and warping.
 - 1. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners where possible. Locate joints where least conspicuous.
 - 2. Cut, reinforce, drill, and tap metal fabrications to receive hardware, fasteners, and similar items.

- C. Form metal in maximum lengths to minimize joints.
- D. Form edges and corners free of sharp edges or rough areas. Remove burrs.
- E. Weld corners and seams continuously to develop strength, minimize distortion, and maintain the corrosion resistance of base metals. At exposed locations, finish welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface. Weld before finishing components to greatest extent possible.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Examine walls and ceilings to which metal storage shelving will be attached for properly located blocking, grounds, or other solid backing for attachment of support fasteners.
- B. Install metal storage shelving level, plumb, square, rigid, true, and with shelves flat and free of dents or distortion. Make connections to form a rigid structure, free of buckling and warping.
 - 1. Install exposed connections with hairline joints, flush and smooth, using concealed fasteners where possible.
 - 2. Install braces, straps, plates, brackets, and other reinforcements as needed to support shelf loading and as required for stability.
 - 3. Anchor shelving units to floor with floor anchors through floor plate. Shim floor plate to achieve level and plumb installation.
 - 4. Install seismic restraints.
 - 5. Connect side-to-side and back-to-back shelving units together.
 - 6. Install shelves in each shelving unit at spacing indicated on Drawings or, if not indicated, at equal spacing.
 - a. Post-and-Beam Metal Storage Shelving: Install beams with beam-to-post connectors fully engaged in post perforations.
- C. Accessories:
 - 1. Install finished end panels and trim at exposed ends of shelving units.
 - 2. Back Ledges: Install one per shelf.

3.2 ERECTION TOLERANCES

- A. Erect post-and-beam metal storage shelving to a maximum tolerance from vertical of 1/4 inch in 84 inches of height.

3.3 ADJUSTING

- A. Adjust metal storage shelving so that connectors and other components engage accurately and securely.

- B. Replace metal storage shelving that has been damaged or has deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 105613

SECTION 107310 – OVERHEAD CANOPIES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Pre-Fabricated, Custom Designed Fixed Protective Canopies and Covers: Extruded and roll-formed for overhead canopies.
 - 1. Design scope includes but is not limited to the following;
 - a. Overhead canopies.

1.2 RELATED SECTIONS

- A. Section 076200 – Sheet Metal Flashing and Trim

1.3 REFERENCES

- A. ASTM International (ASTM):
 - 1. ASTM A307 - Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength.
 - 2. ASTM A792 - Standard Specification for Steel Sheet, 55 percent Aluminum-Zinc Alloy-Coated by the Hot-Dip Process.
 - 3. ASTM B209 - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
 - 4. ASTM B221 - Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
 - 5. ASTM E2950 - Standard Specification for Metal Canopy Systems.
- B. American Society of Civil Engineers (ASCE):
 - 1. ASCE 7 - Minimum Design Loads and Associated Criteria for Buildings and Other Structures.
- C. American Welding Society (AWS):
 - 1. AWS D1.1 - Structural Welding Code..
- D. American Architectural Manufacturer's Association
 - 1. AAMA 2603 - Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels (with Coil Coating Appendix).

1.4 SUBMITTALS

- A. Submit under provisions of Section 01 30 00 - Administrative Requirements.
- B. Product Data:
 - 1. Manufacturer's data sheets on each product to be used.
 - 2. Preparation instructions and recommendations.
 - 3. Storage and handling requirements and recommendations.
 - 4. Typical installation methods.
 - 5. Include information for factory finish, accessories and other required components.

- 6. Include color charts for finish indicating manufacturer's standard colors available for selection.
- C. Verification Samples: Samples of Aluminum finishes for roof panels and all support structures will be provided as needed.
- D. Drawings: Details of materials, construction and finish. Include relationship with adjacent construction. Layout of each canopy or shelter, showing location of supporting members. Include elevations and details.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section with a minimum five years documented experience.
 - 1. Designer Qualifications: Engineer experienced in design of this type of work and licensed in North Carolina.
 - a. Comply with applicable local code for submission of design calculations, reviewed shop and erection drawings, and 2018 NCBC as required for acquiring permits.
- B. Installer Qualifications: Company specializing in performing Work of this section with minimum three years documented experience with projects of similar scope and complexity.
- C. Source Limitations: Provide each type of product from a single manufacturing source to ensure uniformity.

1.6 PRE-INSTALLATION CONFERENCE

- A. Convene a conference approximately two weeks before scheduled commencement of the Work. Attendees shall include Architect, Contractor and trades involved. Agenda shall include schedule, responsibilities, critical path items and approvals.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to project site ready for installation whenever possible.
- B. Store and handle in strict compliance with manufacturer's written instructions and recommendations.
- C. Protect from damage due to weather, excessive temperature, and construction operations.

1.8 PROJECT CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's recommended limits.

1.9 WARRANTIES

- A. Manufacturer's standard limited warranty. Correct defective work within a three year period after Date of Substantial Completion.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
 - 1. Eastern Metal Supply
 - 2. Mapes

2.2 PERFORMANCE AND DESIGN REQUIREMENTS

- A. Pre-Engineered Metal Protective Covers.
 - 1. Standards compliance: Pre-engineered system complying with ASTM E2950 and in accordance with ASCE 7.
 - a. Loading: As indicated on Structural Drawing S1.1 and in compliance with local authorities having jurisdiction.
 - b. Deflection Limit: $L/120$ of span.
 - 2. Thermal Movement: No buckling, joint seal failure, fastener failure, or component failure.
 - a. Ambient Temperature Range: Up to 120 degrees F (49 degrees C)
 - b. Surface Temperature Range: Up to 180 degrees F (82 degrees C)
 - 3. Shop fabricate to the greatest extent possible; disassemble if necessary for shipping.
 - a. Complete system ready for erection at project site.
 - b. Perform welding in accordance with AWS D1.1.
- B. Roll-Formed Canopy Components:
 - 1. Sheet Metal Decking Panels: Interlocking metal panels
 - a. Flat Panel (Depth x Width): 3 x 12 inch section.
 - 2. Extruded Fascia/Gutter (Width x Height x Thickness): 4.00 x 12 inches.
 - a. Aluminum: 0.160 inch wall thickness.
- C. Beams and Columns:
 - 1. Overhead Hangers: Extruded aluminum tubing 6005-T5 alloy.
 - a. Dimensions (Width x Depth x Wall Thickness): 1-1/2 x 1-1/2 x 0.125 inch.
- D. Material:
 - 1. Smooth aluminum:
 - a. Extrusions: Meeting requirements of ASTM B221, alloy 6061-T6, 6063-T5, or 6063-T6.
 - b. Sheets: Meeting requirements of ASTM B209, alloy 3105-H28 or 3004-H34.
 - 2. Sealants: Single component clear 100 percent silicone.
 - 3. Accessories: Flashings, brackets, and other items as necessary for complete system.
 - 4. Fasteners: Non-structural:
 - a. Stainless steel. ASTM F593.
 - b. Carbon steel. ASTM A307.
- E. Anchorage Devices, Clips and Fasteners: Manufacturer's standard type, compatible with materials being secured, of size and spacing sufficient to resist indicated loads.
 - 1. Above roof deck, utilize fasteners with neoprene washers.

2. Anchor Bolts: ASTM A307 or ASTM A572.
 3. Provide nuts and washers as required for column leveling and plumbing.
- F. Exposed Gutters and Downspouts: Aluminum with baked enamel finish, color to match canopy covering, manufacturer's recommended size for canopy specified.

2.3 FABRICATION

- A. Roof Panels: Roll-formed or extruded panels with interlocking seams.
- B. Fascias, columns and beams: Extrusions and roll formed sections.
1. Fabricated, bored and notched for mechanical connection.
 2. Provide notches, cut out, and internal deflectors in members as noted to act as internal water drainage system.

2.4 FINISHES

- A. Factory Applied Polyester Paint Finish: Comply with AAMA 2603, chemically cleaned, conversion coated primer, followed by factory applied baked polyester enamel coating.
1. Color: As selected from manufacturer's standard colors.
- B. Clear anodized.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Do not begin installation until substrates have been properly constructed and prepared.
- B. If substrate preparation is the responsibility of another installer, notify Architect in writing of unsatisfactory preparation before proceeding.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions approved submittals and in proper relationship with adjacent construction.
1. Install members plumb and square, free from warp or twist, securely anchored to substrates with appropriate fasteners and accessories.
 2. Maintain dimensional tolerances and alignment with adjacent work.
 3. Ensure joints are hairline tight and surfaces flush with adjacent components.

3.4 FIELD QUALITY CONTROL

- A. Field Inspection: Coordinate field inspection in accordance with appropriate sections in Division 01.

- B. Manufacturer's Services: Coordinate manufacturer's services in accordance with appropriate sections in Division 01.

3.5 CLEANING AND PROTECTION

- A. Clean products in accordance with the manufacturers recommendations.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

SECTION 111313 - LOADING DOCK BUMPERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes loading dock bumpers.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of loading dock bumper.
- B. Shop Drawings: For dock bumpers. Include plans, elevations, sections, details, and attachments to other work.

PART 2 - PRODUCTS

2.1 DOCK BUMPERS

- A. General: Surface-mounted bumpers; of type, size, and construction indicated; designed to absorb kinetic energy and minimize damage to loading dock structure.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Durable Corporation.
 - b. Blue Giant
 - c. Kelley; 4Front Engineered Solutions, Inc.
 - d. McGuire
 - e. Pioneer Dock Equipment.
 - f. Rite-Hite Holding Corporation.
 - g. Super Seal Mfg. Ltd.
 - h. Vestil Manufacturing Corp.
- B. Laminated-Tread Dock Bumper: Fabricated from multiple, uniformly thick plies cut from fabric-reinforced rubber tires.
 - 1. Thickness: 4-1/2 inches.
 - 2. Vertical Style: 26 inches high by 12 inches wide.
 - a. Install/weld bumper on 10" High Riser Bracket with Half Cutout.
 - b. Galvanized steel, painted.
- C. Materials: ASTM 36/A 36M for steel plates, shapes, and bars. Hot-dip galvanize according to ASTM A 123/A 123M.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Attach dock bumpers to face of loading dock in a manner that complies with requirements indicated for spacing, arrangement, and position relative to top of platform and anchorage.
 - 1. Welded Attachment: Plug-weld anchor holes in contact with steel inserts and fillet weld at other locations.
 - 2. Bolted Attachment: Attach dock bumpers to preset anchor bolts embedded in concrete or to cast-in-place inserts or threaded studs welded to embedded-steel plates or angles. If preset anchor bolts, cast-in-place inserts, or threaded studs welded to embedded-steel plates or angles are not provided, attach dock bumpers by drilling and anchoring with expansion anchors and bolts.
 - 3. Screw Attachment: Attach dock bumpers to wood construction with lag bolts as indicated.
- B. After completing installation of exposed, factory-finished dock bumpers, inspect exposed finishes and repair damaged finishes.

END OF SECTION 111313

SECTION 111316 - LOADING DOCK SEALS AND SHELTERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Frame-type dock shelters.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings:
 - 1. Include plans, elevations, sections, details, and attachments to other work.
- C. Samples: For each exposed product and for each color and texture specified.

PART 2 - PRODUCTS

2.1 FRAME-TYPE DOCK SHELTERS

- A. General: Dock shelters designed to form a seal with sides and top of truck body while leaving entire width and height of truck's rear opening unobstructed.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Series 2000 Rigid Dock Shelter by Fairborn or comparable product by one of the following:
 - a. Beacon Industries, Inc.
 - b. Chalfant Sewing Fabricators, Inc.
 - c. DLM.
 - d. Fairborn U.S.A., Inc.
 - e. Hugger Dock Equipment Company; Division of Columbus Foam Products, Inc.
 - f. Kelley; 4Front Engineered Solutions, Inc.
 - g. McGuire; a division of Systems, Inc.
 - h. Nordock.
 - i. NOVA Technology International.
 - j. Pentalift Equipment Corporation.
 - k. Pioneer Dock Equipment.
 - l. Rite-Hite Holding Corporation.
 - m. Rotary Products Inc.
 - n. Serco; 4Front Engineered Solutions, Inc.
 - o. Super Seal Mfg. Ltd.
 - p. Vestil Manufacturing Corp.

- B. Rigid-Frame Type: Fabricated from fiberglass side and top panels attached to fixed supporting framework. Provide head and side curtains with built-in flexible stays, wind straps between head curtain and side frame, pleated protectors on head curtain, and a yellow aim patch on side curtains. Slope head frame from center for drainage. Provide replaceable, fabric-covered, tapered, foam-bottom pads and protective steel bumpers of size and type required for application shown.
- C. Construction: Fabricate to sizes and shapes indicated or required to fit door-opening sizes shown, and allow for not less than 18 inches of truck-body penetration when truck is docked.
 - 1. Steel Framework: Zinc-plated steel tubing of size and thickness standard with manufacturer, with joints welded.
 - 2. Top and Side Panels: White, translucent fiberglass, 0.045 inch thick, weighing 6 oz./sq. ft.
 - 3. Top and Side Panels: White, translucent vinyl, weighing 14 oz./sq. ft. .
- D. Materials:
 - 1. Cover Fabric: Manufacturer's proprietary cover fabric.
 - 2. Fabric Color: Black
 - 3. Pleated Protectors: Overlapping layers of same fabric as cover.
- E. Steel Finish: Hot-dip galvanize components to comply with the following:
 - 1. ASTM A 123/A 123M for iron and steel support framing.
 - 2. ASTM A 153/A 153M or ASTM F 2329 for iron and steel hardware and anchors.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Dock Seals: Attach dock-seal support frames securely to building structure in proper relation to openings, dock bumpers, and dock levelers to ensure compression of dock seals when trucks are positioned against dock bumpers.
- B. Dock Shelters: Attach dock shelters securely to building structure in proper relation to openings, dock bumpers, and dock levelers to ensure an effective seal of dock-shelter curtains with sides and top of truck body when trucks are positioned against dock bumpers.
- C. After completing installation, inspect exposed factory finishes and repair damaged finishes.

END OF SECTION 111316

SECTION 113110 - RESIDENTIAL APPLIANCES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Cooking appliances.
 - 2. Refrigeration appliances.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For each exposed product and for each color and texture.

1.3 INFORMATIONAL SUBMITTALS

- A. Product certificates.
- B. Field quality-control reports.
- C. Warranties: Sample of special warranties.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and maintenance data.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An employer of workers trained and approved by manufacturer for installation and maintenance of units required for this Project.
- B. Preinstallation Conference: Conduct conference at Project site.

1.6 WARRANTY

- A. Special Warranties: Manufacturer's standard form in which manufacturer agrees to repair or replace residential appliances or components that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide product indicated or comparable product by one of the following:

1. Amana; a division of Whirlpool Corporation.
2. BOSCH Home Appliances.
3. Electrolux Home Products (Frigidaire).
4. General Electric Company (GE).
5. Jenn-Air; a division of Whirlpool Corporation.
6. KitchenAid; a division of Whirlpool Corporation.
7. LG Appliances.
8. Samsung.

2.2 SMALL COOKING APPLIANCES

- A. Microwave Oven:

1. Basis-of-Design Product: GE 2.0 C.F. Countertop
2. Model #: JES2051DNWW
3. Mounting: Countertop.
4. Capacity: 2.0 cu. ft.
5. Exhaust Fan: n/a
6. Microwave Power Rating: Manufacturer's standard.
7. Material: Manufacturer's standard.
8. Color: White

- B. Toaster Oven:

1. Basis-of-Design Product: GE Calrod Convection Toaster Oven
2. Model #: G9OCAASSPSS
3. Mounting: Countertop.
4. Capacity: 0.88 cu. ft.
5. Exhaust Fan: n/a
6. Microwave Power Rating: Manufacturer's standard.
7. Material: Manufacturer's standard.
8. Color: Stainless Steel

2.3 REFRIGERATOR/FREEZERS

- A. Refrigerator/Freezer: One-door refrigerator/freezer with freezer on bottom model

1. Basis-of-Design Product: GE 21.0 1Cu.Ft. Refrigerator # GDE21EGKWW.
2. Type: Freestanding, Counter Depth
3. Storage Capacity:
 - a. Refrigeration Compartment Volume: 14.93 cu. ft.

- b. Freezer Volume: 6.04 cu. ft.
- 4. General Features:
 - a. Interior light in refrigeration compartment.
 - b. Automatic defrost.
 - c. Interior light in freezer compartment.
 - d. Automatic icemaker and storage bin.
 - e. Door alarm
- 5. Energy Performance, ENERGY STAR: Provide appliances that qualify for the EPA/DOE ENERGY STAR product labeling program.
- 6. Front Panel(s): Manufacturer's standard
- 7. Color: White

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Built-in Equipment: Securely anchor units to supporting cabinets or countertops with concealed fasteners. Verify that clearances are adequate for proper functioning and that rough openings are completely concealed.
- B. Freestanding Equipment: Place units in final locations after finishes have been completed in each area. Verify that clearances are adequate to properly operate equipment.
- C. Range Anti-Tip Device: Install at each range according to manufacturer's written instructions.
- D. Utilities: Comply with plumbing and electrical requirements.

3.2 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
 - 1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
- B. Tests and Inspections:
 - 1. Perform visual, mechanical, and electrical inspection and testing for each appliance according to manufacturers' written recommendations. Certify compliance with each manufacturer's appliance-performance parameters.
 - 2. Leak Test: After installation, test for leaks. Repair leaks and retest until no leaks exist.
 - 3. Operational Test: After installation, start units to confirm proper operation.
 - 4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and components.
- C. Prepare test and inspection reports.

END OF SECTION 113110

SECTION 122113 - HORIZONTAL LOUVER BLINDS

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes the following:
 - 1. Horizontal louver blinds with aluminum slats.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show fabrication and installation details for horizontal louver blinds and layout plan.
- C. Samples: For each exposed finish.
- D. Product certificates.
- E. Maintenance data.

1.3 QUALITY ASSURANCE

- A. Fire-Test-Response Characteristics: Provide horizontal louver blinds with the fire-test-response characteristics indicated, as determined by testing identical products per test method indicated below by UL or another testing and inspecting agency acceptable to authorities having jurisdiction. Identify materials with appropriate markings of applicable testing and inspecting agency.
 - 1. Flame-Resistance Ratings: Passes NFPA 701.
- B. Product Standard: Provide horizontal louver blinds complying with WCSC A 100.1.
- C. Mockups: Build mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

PART 2 - PRODUCTS

2.1 HORIZONTAL LOUVER BLINDS, ALUMINUM SLATS

- A. Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Hunter Douglas; Aluminum Horizontal Blinds
 - 2. Levolor, a Newell Rubbermaid Company; Aluminum Horizontal Blinds
 - 3. Springs Window Fashions Division, Inc.; Aluminum Horizontal Blinds
- B. Slats: Aluminum; alloy and temper recommended by producer for type of use and finish indicated; with crowned profile and radiused corners.
 - 1. Width: 1 inch (25 mm)
 - 2. Finish: 112 Alabaster as specified or approved equal submitted to Interior Designer
 - a. Ionized Coating: Antistatic, dust-repellent, baked polyester finish.
 - b. Reflective Coating: Manufacturer's special coating enhancing the reflection of solar energy on the outside-facing slat surface.
 - 3. Perforated Slats: Openness factor of 6 percent.
- C. Headrail: Formed steel or extruded aluminum; long edges returned or rolled; fully enclosing operating mechanisms on three sides and end plugs.
- D. Bottom Rail: Formed-steel or extruded-aluminum tube, with plastic or metal capped ends.
- E. Maximum Light-Blocking Blinds: Designed for eliminating all visible light gaps if slats are tilted closed and with minimal-sized rout holes for ladders hidden and placed near back edge for maximum slat overlap; with headrail and bottom rail extended and formed for light-tight joints between rail and adjacent slats or construction.
 - 1. Finish: Match color, texture, pattern, and gloss of slats.
- F. Ladders: Evenly spaced to prevent long-term slat sag.
 - 1. For Blinds with Nominal Slat Width 1 Inch or Less: Braided string.
 - a. Tape Color, Texture, and Pattern: Color, texture, and pattern as selected by Architect from manufacturer's full range
- G. Lift Cords: Manufacturer's standard.
- H. Tilt Control: Enclosed worm-gear mechanism, detachable wand preventing over-rotation, and linkage rod.
- I. Lift Operation: Manual.
- J. Mounting: As indicated on architectural drawings.

- K. Hold-Down Brackets and Hooks or Pins: Manufacturer's standard.
- L. Side Channels and Perimeter Light Gap Seals: Manufacturer's standard.
- M. Colors, Textures, Patterns, and Gloss: As selected by Architect from manufacturer's full range

2.2 HORIZONTAL LOUVER BLIND FABRICATION

- A. Concealed Components: Noncorrodible or corrosion-resistant-coated materials.
 - 1. Lift-and-Tilt Mechanisms: With permanently lubricated moving parts.
- B. Unit Sizes: Obtain units fabricated in sizes to fill window and other openings as follows:
 - 1. Blind Units Installed between (inside) Jambs: Width equal to 1/4 inch per side or 1/2 inch total, plus or minus 1/8 inch, less than jamb-to-jamb dimension of opening in which each blind is installed. Length equal to 1/4 inch, plus or minus 1/8 inch, less than head-to-sill dimension of opening in which each blind is installed.
 - 2. Blind Units Installed outside Jambs: Width and length as indicated, with terminations between blinds of end-to-end installations at centerlines of mullion or other defined vertical separations between openings.
- C. Installation Brackets: Designed for easy removal and reinstallation of blind, for supporting headrail, and operating hardware, and for hardware position and blind mounting method indicated.
- D. Installation Fasteners: No fewer than two fasteners per bracket, fabricated from metal noncorrosive to blind hardware and adjoining construction; type designed for securing to supporting substrate; and supporting blinds and accessories under conditions of normal use.
- E. Color-Coated Finish:
 - 1. Metal: For components exposed to view, apply manufacturer's standard baked finish.
- F. Component Color: Provide rails, cords, ladders, and exposed-to-view metal and plastic matching or coordinating with slat color, unless otherwise indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, operational clearances, and other conditions affecting performance.
 - 1. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install horizontal louver blinds level and plumb and aligned with adjacent units according to manufacturer's written instructions, and located so exterior slat edges in any position are not closer than 1 inch to interior face of glass. Install intermediate support as required to prevent deflection in headrail. Allow clearances between adjacent blinds and for operating glazed opening's operation hardware if any.
- B. Adjust horizontal louver blinds to operate smoothly, easily, safely, and free of binding or malfunction throughout entire operational range.
- C. Clean horizontal louver blind surfaces after installation, according to manufacturer's written instructions.

END OF SECTION 12 21 13

SECTION 122413 – ROLLER SHADES

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes

1. Manual roller shades; shading fabrics, as indicated.

1.2 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Include plans, elevations, sections, details, details of installation, operational clearances, wiring diagrams, controllers and mounting locations, and relationship to adjoining Work.
1. Verify dimensions by field measurements before fabrication and indicate measurements on Shop Drawings.
- C. Coordination Drawings: Drawn to scale and coordinating penetrations and ceiling-mounted items. Provide templates to General Contractor for preparing drapery or shade pockets.
- D. Samples: For each fabric indicated in schedules.
- E. Window Treatment Schedule: Use same designations indicated on Drawings.
- F. Maintenance data.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: Minimum of 5 years successful experience installing electrically operated roller shade products of similar size and scope.
- B. Fire-Test-Response Characteristics: Provide products passing flame-resistance testing according to NFPA 701.
- C. Comply with WCMA A 100.1.

PART 2 - PRODUCTS

2.1 MANUAL ROLLER SHADES

- A. Acceptable manufacturers include Lutron, Mecho and Draper.

- B. All shades, manual or electrically operated, shall be provided by the same manufacturer in compatible styles and enclosures.
- C. Operator: Clutch / Gear mounted at roller with continuous steel chain with sill mounted tensioned keeper on pulley or gear.
- D. Enclosures are to match electrically operated units with housing color to match the adjacent window framing.

2.2 ROLLER SHADE FABRICATION

- A. Unit Sizes: Obtain units fabricated in sizes to fill window and other openings as follows, measured at 74 deg F:
 - 1. Shade Units Installed between (Inside) Jambs: Edge of shade not more than 1/4 inch from face of jamb. Length equal to head to sill dimension of opening in which each shade is installed.
- B. Rollers: Extruded-aluminum tube of diameter and wall thickness required to support and fit internal components of operating system and the weight and width of shade band material without sagging; designed to be easily removable from support brackets. Provide capacity for one roller shade band(s) per roller.
 - 1. Direction of Roll: Regular, from back of roller.
- C. Mounting Brackets: Provide types as needed for installations detailed.
- D. Fascia: L-shaped, formed-steel sheet or extruded aluminum; long edges returned or rolled; continuous panel concealing front and bottom of shade roller, brackets, and operating hardware and operators; length as indicated on Drawings; removable design for access.
 - 1. Finish aluminum to match adjacent window framing system.
- E. Top/Back Cover: L-shaped; material and finish to match fascia; combining with fascia and end caps to form a six-sided headbox enclosure sized to fit shade roller and operating hardware inside.
 - 1. Provide completely enclosed and pre-finished extruded aluminum enclosure for surface mounted, exposed locations where indicated. No exposed fasteners with mounting.
- F. Hem Bar: Extruded aluminum, with plastic or metal capped ends. Provide concealed type, thermally sealed within the shade fabric.
- G. Mounting: Mounting varies with both inside jamb and face mounting applications, as indicated.

2.3 MANUAL SHADE OPERATORS

A. Clutch Brake system

1. General

- a. Clutch Roller Shades shall be a ball chain-operated system utilizing a bidirectional wrap spring clutch.
- b. The system must be capable of raising and lowering the shade to any desired height and maintaining that position.
- c. The shade shall operate by the chain only. Hem bar will not disengage the clutch.
- d. The system will provide a maximum fabric gap of 0.75" per side.

B. Clutch and Tube Specifications

1. Bi-directional wrap spring clutch, self adjusting.
2. Shade stop upon release of clutch.
3. Clutch mounted on either the right or left end of the roller tube and fabric may be forward or reverse rolled. Mount clutch the same within the same room or area.
 - a. Clutch is fabricated of high-strength fiberglass reinforced polyester with high carbon steel springs.
 - b. Manufacturer shall size the appropriate shade tube and clutch size based on shade size, fabric type, and application requirements to avoid deflection along length of tube.
 - c. Fabric shall be connected to tube with double-sided adhesive strip or retaining slot engaging edge of fabric.

C. Clutch Control Loop

1. Chain: Cast steel, aluminum or plastic beads. Color: As selected by Architect from manufacturers standard colors.
2. Chain connector to be fitted with upper and lower ball stops.
3. Extend chain full length of window opening and to within 2 inches of sill. Remove excess length that does not allow chain to hang freely.

D. Clutch Idle End Cap: Two-piece unit consisting of an outside sleeve and center bearing shaft made of high-strength fiberglass reinforced polyester.

E. Clutch Mounting Brackets

1. Material: Manufacturer's standard.
2. Universal mount for inside, outside or ceiling, with the clutch on either the right or left side of the roller.
3. The clutch mounts flush to the face of the bracket.

2.4 FABRICS

A. Fabrics: As indicated in Finish and Color Schedules.

- B. Shade Band Material: Fiberglass and acrylic blend.
 - 1. Fabrics for shading.
 - 2. Fabrics for room darkening with blackout tracks.
- C. Fabric characteristics and Colors are described by products listed in the Finish and Color Schedule. Architect will be the final judge of acceptable color and finish of comparable fabrics by listed manufacturers.

PART 3 - EXECUTION

3.1 ROLLER SHADE INSTALLATION

- A. Install roller shades level, plumb, and aligned with adjacent units according to manufacturer's written instructions and located so shade band is not closer than 2 inches to interior face of glass. Allow clearances for window operation hardware.
- B. Adjust and balance roller shades to operate smoothly, easily, safely, and free from binding or malfunction throughout entire operational range.
- C. Clean roller shade surfaces after installation, according to manufacturer's written instructions.

3.2 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain roller shades. Refer to Division 1 Section Demonstration and Training."

END OF SECTION 122413

SECTION 211313 - WET-PIPE SPRINKLER SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Pipes, fittings, and specialties.
 - 2. Specialty valves.
 - 3. Sprinklers.
 - 4. Alarm devices.
 - 5. Pressure gages.

- B. Related Requirements:

- 1. Section 213113 "Electric-Drive, Centrifugal Fire Pumps" for fire pump.
 - 2. Section 211413 "Pressure-Maintenance Pumps" for jockey pump.

1.3 DEFINITIONS

- A. Standard-Pressure Sprinkler Piping: Wet-pipe sprinkler system piping designed to operate at working pressure of 175-psig (1200-kPa) maximum.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- 1. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

- B. Shop Drawings: For wet-pipe sprinkler systems.

- 1. Include plans, elevations, sections, and attachment details.

- C. Hydraulic Calculations

- D. Seismic Bracing Calculations

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer and Designer.
- B. Welding certificates.
- C. Field Test Reports:
 - 1. Indicate and interpret test results for compliance with performance requirements and as described in NFPA 13. Include "Contractor's Material and Test Certificate for Aboveground Piping."
 - 2. Fire-hydrant flow test report.
- D. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For wet-pipe sprinkler systems and specialties to include in emergency, operation, and maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Sprinkler Cabinets: Finished, wall-mounted, steel cabinet with hinged cover, and with space for minimum of six spare sprinklers plus sprinkler wrench. Include number of sprinklers required by NFPA 13 and sprinkler wrench. Include separate cabinet with sprinklers and wrench for each type of sprinkler used on Project.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Installer's responsibilities include designing, fabricating, and installing sprinkler systems and providing professional engineering services needed to assume engineering responsibility. Base calculations on results of fire-hydrant flow test.
 - a. Engineering Responsibility: Preparation of working plans, calculations, and field test reports by a qualified professional engineer.
- B. Welding Qualifications: Qualify procedures and operators according to 2010 ASME Boiler and Pressure Vessel Code.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Sprinkler system equipment, specialties, accessories, installation, and testing shall comply with the following:
 - 1. NFPA 13, 2013 edition.
- B. Standard-Pressure Piping System Component: Listed for 175-psig (1200-kPa) minimum working pressure.
- C. Delegated Design: Design wet-pipe sprinkler systems.
 - 1. Available fire-hydrant flow test records indicate the following conditions:
 - a. Date: July 30, 2021
 - b. Time: 9:00 a.m.
 - c. Performed by: David Cole/Mary Wilson.
 - d. Location of Residual Fire Hydrant R: Greenfield Street
 - e. Location of Flow Fire Hydrant F: Greenfield Street
 - f. Static Pressure at Residual Fire Hydrant R: 72 psig.
 - g. Measured Flow at Flow Fire Hydrant F: 855.74 gpm.
 - h. Residual Pressure at Residual Fire Hydrant R: 60 psig.
 - i. Note: contractor shall obtain an additional flow test if necessary such that waterflow test is conducted no more than 12 months prior to working plan submittal.
 - 2. Sprinkler system design shall be approved by authorities having jurisdiction.
 - a.
 - b. Sprinkler Occupancy Hazard Classifications: Refer to Drawings
 - c. Minimum Density for Automatic-Sprinkler Piping Design: Refer to Drawings
- D. Seismic Performance: Sprinkler piping shall withstand the effects of earthquake motions determined according to NFPA 13 for Seismic Design Category "C".

2.2 STEEL PIPE AND FITTINGS

- A. Standard-Pressure Piping System Component: Listed for 175-psig (1200-kPa) minimum working pressure.
- B. Delegated Design: Design wet-pipe sprinkler systems.
 - 1. Available fire-hydrant flow test records indicate the following conditions:
 - a. Date: July 30, 2021
 - b. Time: 9:00 a.m.
 - c. Performed by: David Cole/Mary Wilson.
 - d. Location of Residual Fire Hydrant R: Greenfield Street
 - e. Location of Flow Fire Hydrant F: Greenfield Street

- f. Static Pressure at Residual Fire Hydrant R: 72 psig.
 - g. Measured Flow at Flow Fire Hydrant F: 855.74 gpm.
 - h. Residual Pressure at Residual Fire Hydrant R: 60 psig.
 - i. Note: contractor shall obtain an additional flow test if necessary, such that waterflow test is conducted no more than 12 months prior to working plan submittal.
- 2. Sprinkler system design shall be approved by authorities having jurisdiction.
 - a.
 - b. Sprinkler Occupancy Hazard Classifications: Refer to Drawings
 - c. Minimum Density for Automatic-Sprinkler Piping Design: Refer to Drawings
- C. Seismic Performance: Sprinkler piping shall withstand the effects of earthquake motions determined according to NFPA 13 for Seismic Design Category "C".

2.3 SPECIALTY VALVES

- A. Listed in UL's "Fire Protection Equipment Directory" or FM Global's "Approval Guide."
- B. Pressure Rating:
 - 1. Standard-Pressure Piping Specialty Valves: 175-psig (1200-kPa) minimum.
- C. Body Material: Cast or ductile iron.
- D. Size: Same as connected piping.
- E. End Connections: Flanged or grooved.
- F. Alarm Valves:
 - 1.
 - 2. Standard: UL 193.
 - 3. Design: For horizontal or vertical installation.
 - 4. Include trim sets for bypass, drain, electrical sprinkler alarm switch, pressure gages, and fill-line attachment with strainer.
 - 5. Drip Cup Assembly: Pipe drain without valves and separate from main drain piping.
 - 6. Drip Cup Assembly: Pipe drain with check valve to main drain piping.
 - 7. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- G. Automatic (Ball Drip) Drain Valves:
 - 1.
 - 2. Standard: UL 1726.
 - 3. Pressure Rating: 175-psig (1200-kPa) minimum.
 - 4. Type: Automatic draining, ball check.
 - 5. Size: NPS 3/4 (DN 20).
 - 6. End Connections: Threaded.

2.4 SPRINKLER PIPING SPECIALTIES

- A. Branch Outlet Fittings:
 - 1.
 - 2. Standard: UL 213.
 - 3. Pressure Rating: 175-psig (1200-kPa) minimum.
 - 4. Body Material: Ductile-iron housing with EPDM seals and bolts and nuts.
 - 5. Type: Mechanical-tee and -cross fittings.
 - 6. Configurations: Snap-on and strapless, ductile-iron housing with branch outlets.
 - 7. Size: Of dimension to fit onto sprinkler main and with outlet connections as required to match connected branch piping.
 - 8. Branch Outlets: Grooved, plain-end pipe, or threaded.
- B. Flow Detection and Test Assemblies:
 - 1.
 - 2. Standard: UL's "Fire Protection Equipment Directory" or FM Global's "Approval Guide."
 - 3. Pressure Rating: 175-psig (1200-kPa) minimum.
 - 4. Body Material: Cast- or ductile-iron housing with orifice, sight glass, and integral test valve.
 - 5. Size: Same as connected piping.
 - 6. Inlet and Outlet: Threaded or grooved.
- C. Branch Line Testers:
 - 1.
 - 2. Standard: UL 199.
 - 3. Pressure Rating: 175 psig (1200 kPa).
 - 4. Body Material: Brass.
 - 5. Size: Same as connected piping.
 - 6. Inlet: Threaded.
 - 7. Drain Outlet: Threaded and capped.
 - 8. Branch Outlet: Threaded, for sprinkler.
- D. Sprinkler Inspector's Test Fittings:
 - 1.
 - 2. Standard: UL's "Fire Protection Equipment Directory" or FM Global's "Approval Guide."
 - 3. Pressure Rating: 175-psig (1200-kPa) minimum.
 - 4. Body Material: Cast- or ductile-iron housing with sight glass.
 - 5. Size: Same as connected piping.
 - 6. Inlet and Outlet: Threaded.
- E. Adjustable Drop Nipples:
 - 1.
 - 2. Standard: UL 1474.
 - 3. Pressure Rating: 250-psig (1725-kPa) minimum
 - 4. Body Material: Steel pipe with EPDM-rubber O-ring seals.
 - 5. Size: Same as connected piping.
 - 6. Length: Adjustable.
 - 7. Inlet and Outlet: Threaded.
- F. Flexible Sprinkler Hose Fittings:
 - 1.

2. Standard: UL 1474.
3. Type: Flexible hose for connection to sprinkler, and with bracket for connection to ceiling grid.
4. Pressure Rating: 175-psig (1200-kPa) minimum
5. Size: Same as connected piping, for sprinkler.

2.5 SPRINKLERS

- A. Listed in UL's "Fire Protection Equipment Directory" or FM Global's "Approval Guide."
- B. Pressure Rating for Automatic Sprinklers: 175-psig (1200-kPa) minimum.
- C. Automatic Sprinklers with Heat-Responsive Element:
 1. Early-Suppression, Fast-Response Applications: UL 1767.
 2. Nonresidential Applications: UL 199.
 3. Characteristics: Nominal 1/2-inch (12.7-mm) orifice with Discharge Coefficient K of 5.6, and for "Ordinary" temperature classification rating unless otherwise indicated or required by application.
- D. Sprinkler Finishes: Refer to Drawings
- E. Sprinkler Escutcheons: Materials, types, and finishes for the following sprinkler mounting applications. Escutcheons for concealed, flush, and recessed-type sprinklers are specified with sprinklers.
 1. Ceiling Mounting: Plastic, white finish, one piece, flat.
 2. Sidewall Mounting: Plastic, white finish, one piece, flat.
- F. Sprinkler Guards:
 - 1.
 2. Standard: UL 199.
 3. Type: Wire cage with fastening device for attaching to sprinkler.

2.6 ALARM DEVICES

- A. Alarm-device types shall match piping and equipment connections.
- B. Electrically Operated Alarm Bell:
 - 1.
 2. Standard: UL 464.
 3. Type: Vibrating, metal alarm bell.
 4. Size: 6-inch (150-mm) minimum diameter.
 5. Finish: Red-enamel factory finish, suitable for outdoor use.
 6. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Water-Flow Indicators:

- 1.
2. Standard: UL 346.
3. Water-Flow Detector: Electrically supervised.
4. Components: Two single-pole, double-throw circuit switches for isolated alarm and auxiliary contacts, 7 A, 125-V ac and 0.25 A, 24-V dc; complete with factory-set, field-adjustable retard element to prevent false signals and tamperproof cover that sends signal if removed.
5. Type: Paddle operated.
6. Pressure Rating: 250 psig (1725 kPa).
7. Design Installation: Horizontal or vertical.

D. Valve Supervisory Switches:

- 1.
2. Standard: UL 346.
3. Type: Electrically supervised.
4. Components: Single-pole, double-throw switch with normally closed contacts.
5. Design: Signals that controlled valve is in other than fully open position.
6. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.7 PRESSURE GAGES

- A. Standard: UL 393.
- B. Dial Size: 3-1/2- to 4-1/2-inch diameter.
- C. Pressure Gage Range: 0- to 250-psig minimum.
- D. Label: Include "WATER" label on dial face.

2.8 BACKFLOW PREVENTER

- A. Standard: ASSE 1013
- B. Type: Double Check Valve listed for Fire Protection

PART 3 - EXECUTION

3.1 PREPARATION

- A. Perform fire-hydrant flow test according to NFPA 13 and NFPA 291. Use results for system design calculations required in "Quality Assurance" Article.
- B. Report test results promptly and in writing.

3.2 SERVICE-ENTRANCE PIPING

- A. Connect sprinkler piping to water-service piping for service entrance to building.
- B. Install shutoff valve, backflow preventer, pressure gage, drain, and other accessories indicated at connection to water-service piping. Refer to drawings.
- C. Install shutoff valve, check valve, pressure gage, and drain at connection to water service.

3.3 PIPING INSTALLATION

- A. Locations and Arrangements: Drawing plans, schematics, and diagrams indicate general location and arrangement of piping. Install piping as indicated on approved working plans.
 - 1. Deviations from approved working plans for piping require written approval from authorities having jurisdiction. File written approval with Architect before deviating from approved working plans.
 - 2. Coordinate layout and installation of sprinklers with other construction that penetrates ceilings, including light fixtures, HVAC equipment, and partition assemblies.
- B. Piping Standard: Comply with NFPA 13 requirements for installation of sprinkler piping.
- C. Install seismic restraints on piping. Comply with NFPA 13 requirements for seismic-restraint device materials and installation.
- D. Use listed fittings to make changes in direction, branch takeoffs from mains, and reductions in pipe sizes.
- E. Install unions adjacent to each valve in pipes NPS 2 (DN 50) and smaller.
- F. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 (DN 65) and larger end connections.
- G. Install "Inspector's Test Connections" in sprinkler system piping, complete with shutoff valve, and sized and located according to NFPA 13.
- H. Install sprinkler piping with drains for complete system drainage.
- I. Install sprinkler control valves, test assemblies, and drain risers adjacent to standpipes when sprinkler piping is connected to standpipes.
- J. Install automatic (ball drip) drain valve at each check valve for fire-department connection, to drain piping between fire-department connection and check valve. Install drain piping to and spill over floor drain or to outside building.
- K. Install alarm devices in piping systems.
- L. Install hangers and supports for sprinkler system piping according to NFPA 13. Comply with requirements for hanger materials in NFPA 13.

- M. Install pressure gages on riser or feed main and at each sprinkler test connection. Include pressure gages with connection not less than NPS 1/4 (DN 8) and with soft-metal seated globe valve, arranged for draining pipe between gage and valve. Install gages to permit removal, and install where they are not subject to freezing.
- N. Fill sprinkler system piping with water.
- O. Install sleeves for piping penetrations of walls, ceilings, and floors.
- P. Install sleeve seals for piping penetrations of concrete walls and slabs.
- Q. Install escutcheons for piping penetrations of walls, ceilings, and floors.

3.4 JOINT CONSTRUCTION

- A. Install couplings, flanges, flanged fittings, unions, nipples, and transition and special fittings that have finish and pressure ratings same as or higher than system's pressure rating for aboveground applications unless otherwise indicated.
- B. Install unions adjacent to each valve in pipes NPS 2 (DN 50) and smaller.
- C. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 (DN 65) and larger end connections.
- D. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- E. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
- F. Flanged Joints: Select appropriate gasket material in size, type, and thickness suitable for water service. Join flanges with gasket and bolts according to ASME B31.9.
- G. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
- H. Welded Joints: Construct joints according to AWS D10.12M/D10.12, using qualified processes and welding operators according to "Quality Assurance" Article.
 - 1. Shop weld pipe joints where welded piping is indicated. Do not use welded joints for galvanized-steel pipe.
- I. Steel-Piping, Cut-Grooved Joints: Cut square-edge groove in end of pipe according to AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join steel pipe and grooved-end fittings according to AWWA C606 for steel-pipe joints.

- J. Steel-Piping, Roll-Grooved Joints: Roll rounded-edge groove in end of pipe according to AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join steel pipe and grooved-end fittings according to AWWA C606 for steel-pipe grooved joints.
- K. Dissimilar-Material Piping Joints: Make joints using adapters compatible with materials of both piping systems.

3.5 VALVE AND SPECIALTIES INSTALLATION

- A. Install listed fire-protection valves, trim and drain valves, specialty valves and trim, controls, and specialties according to NFPA 13 and authorities having jurisdiction.
- B. Install listed fire-protection shutoff valves supervised open, located to control sources of water supply except from fire-department connections. Install permanent identification signs indicating portion of system controlled by each valve.
- C. Install check valve in each water-supply connection. Install backflow preventers instead of check valves in potable-water-supply sources.
- D. Specialty Valves:
 - 1. Install valves in vertical position for proper direction of flow, in main supply to system.
 - 2. Install alarm valves with bypass check valve and retarding chamber drain-line connection.

3.6 SPRINKLER INSTALLATION

- A. Install sprinklers in suspended ceilings in center of acoustical ceiling panels.
- B. Install dry-type sprinklers with water supply from heated space. Do not install pendent or sidewall, wet-type sprinklers in areas subject to freezing.
- C. Install sprinklers into flexible, sprinkler hose fittings, and install hose into bracket on ceiling grid.

3.7 IDENTIFICATION

- A. Install labeling and pipe markers on equipment and piping according to requirements in NFPA 13.
- B. Identify system components, wiring, cabling, and terminals.

3.8 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
 - 1. Leak Test: After installation, charge systems and test for leaks. Repair leaks and retest until no leaks exist.

2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
3. Flush, test, and inspect sprinkler systems according to NFPA 13, "Systems Acceptance" Chapter.
4. Energize circuits to electrical equipment and devices.
5. Coordinate with fire-alarm tests. Operate as required.
6. Coordinate with fire-pump tests. Operate as required.
7. Verify that equipment hose threads are same as local fire department equipment.

B. Sprinkler piping system will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

3.9 CLEANING

A. Clean dirt and debris from sprinklers.

B. Only sprinklers with their original factory finish are acceptable. Remove and replace any sprinklers that are painted or have any other finish than their original factory finish.

3.10 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain specialty valves and pressure-maintenance pumps.

3.11 PIPING SCHEDULE

A. Piping between Fire Department Connections and Check Valves: Galvanized, standard-weight steel pipe.

B. Sprinkler specialty fittings may be used, downstream of control valves, instead of specified fittings.

C. Black steel piping:

1. Schedule 10 for pipe sizes greater than 2 inches.
2. Schedule 40 for pipe sizes 2 inches or less

3.12 SPRINKLER SCHEDULE

1. Refer to Drawings

END OF SECTION 211313

SECTION 213113 - ELECTRIC-DRIVE, CENTRIFUGAL FIRE PUMPS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Horizontally mounted, single-stage, split-case fire pumps.
 - 2. Fire-pump accessories and specialties.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include rated capacities, operating characteristics, performance curves, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings: For fire pumps, motor drivers, and fire-pump accessories and specialties.
 - 1. Include plans, elevations, sections, and mounting and attachment details.
 - 2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 3. Include diagrams for power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

- A. Seismic Qualification Certificates: For fire pumps, accessories, and components, from manufacturer.
 - 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 - 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 - 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- B. Product Certificates: For each type of fire pump, from manufacturer.
- C. Source quality-control reports.
- D. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fire pumps to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. NFPA Compliance: Comply with NFPA 20.
- B. Seismic Performance: Fire pumps shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 - 1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified."
 - 2. Component Importance Factor: 1.5.
- C. Pump Equipment, Accessory, and Specialty Pressure Rating: 175 psig (1200 kPa) minimum unless higher pressure rating is indicated.
- D. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 GENERAL REQUIREMENTS FOR CENTRIFUGAL FIRE PUMPS

- A. Description: Factory-assembled and -tested fire-pump and driver unit.
- B. Base: Fabricated and attached to fire-pump and driver unit, with reinforcement to resist movement of pump during seismic events when base is anchored to building substrate.
- C. Finish: Red paint applied to factory-assembled and -tested unit before shipping.

2.3 HORIZONTALLY MOUNTED, SINGLE-STAGE, SPLIT-CASE FIRE PUMPS

- A. Pump:
 - 1. Standard: UL 448, for split-case pumps for fire service.
 - 2. Casing: Axially split case, cast iron, with ASME B16.1 pipe-flange connections.
 - 3. Impeller: Double suction, cast bronze, statically and dynamically balanced, and keyed to shaft.
 - 4. Wear Rings: Replaceable bronze.
 - 5. Shaft and Sleeve: Alloy steel shaft with bronze sleeve.
 - a. Shaft Bearings: Grease-lubricated ball bearings in cast-iron housing.
 - b. Seals: Stuffing box with minimum of four rings of graphite-impregnated braided yarn and bronze packing gland.

6. Mounting: Pump and driver shafts are horizontal, with pump and driver on same base.
- B. Coupling: Flexible and capable of absorbing torsional vibration and shaft misalignment. Include metal coupling guard.
- C. Driver:
 1. Standard: UL 1004A.
 2. Type: Electric motor; NEMA MG 1, polyphase Design B.
- D. Capacities and Characteristics:
 1. Rated Capacity: 1,000 GPM
 2. Total Rated Head: 50 PSI
 3. Inlet Flange: Class 125.
 4. Outlet Flange: Class 250.
 5. Motor Horsepower: 50 hp.
 6. Electrical Characteristics:
 - a. Volts: 460 V.
 - b. Phase: Three.
 - c. Hertz: 60.
 7. Rotation Clockwise.

2.4 FIRE-PUMP ACCESSORIES AND SPECIALTIES

- A. Automatic Air-Release Valves: Comply with NFPA 20 for installation in fire-pump casing.
- B. Circulation Relief Valves: UL 1478, brass, spring loaded; for installation in pump discharge piping.
- C. Relief Valves:
 1. Description: UL 1478, bronze or cast iron, spring loaded; for installation in fire-suppression water-supply piping.
- D. Inlet Fitting: Eccentric tapered reducer at pump suction inlet.
- E. Outlet Fitting: Concentric tapered reducer at pump discharge outlet.
- F. Hose Valve Manifold Assembly:
 1. Standard: Comply with requirements in NFPA 20.
 2. Header Pipe: ASTM A 53/A 53M, Schedule 40, galvanized steel, with ends threaded according to ASME B1.20.1.
 3. Header Pipe Fittings: ASME B16.4, galvanized cast-iron threaded fittings.
 4. Automatic Drain Valve: UL 1726.
 5. Manifold:

- a. Test Connections: Comply with UL 405; however, provide outlets without clappers instead of inlets.
- b. Body: Exposed type, brass, with number of outlets required by NFPA 20.
- c. Escutcheon Plate: Brass or bronze; round.
- d. Hose Valves: UL 668, bronze, with outlet threaded according to NFPA 1963 and matching local fire-department threads. Include caps and chains.
- e. Escutcheon Plate Marking: Equivalent to "FIRE PUMP TEST."

2.5 GROUT

- A. Standard: ASTM C 1107, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- B. Characteristics: Nonshrink and recommended for interior and exterior applications.
- C. Design Mix: 5000-psi (34-MPa), 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

2.6 SOURCE QUALITY CONTROL

- A. Testing: Test and inspect fire pumps according to UL 448 requirements for "Operation Test" and "Manufacturing and Production Tests."
 - 1. Verification of Performance: Rate fire pumps according to UL 448.
- B. Fire pumps will be considered defective if they do not pass tests and inspections.
- C. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine equipment bases and anchorage provisions, with Installer present, for compliance with requirements for installation tolerances, and other conditions affecting performance of fire pumps.
- B. Examine roughing-in for fire-suppression piping systems to verify actual locations of piping connections before fire-pump installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Fire-Pump Installation Standard: Comply with NFPA 20 for installation of fire pumps, relief valves, and related components.

B. Equipment Mounting:

1. Install fire pumps on cast-in-place concrete equipment bases.
- C. Install fire-pump suction and discharge piping equal to or larger than sizes required by NFPA 20.
- D. Support piping and pumps separately, so weight of piping does not rest on pumps.
- E. Install valves that are same size as connecting piping. Comply with requirements for fire-protection valves specified in Section 211313 "Wet-Pipe Sprinkler Systems."
- F. Install pressure gages on fire-pump suction and discharge flange pressure-gage tappings. Comply with requirements for pressure gages specified in Section 211313 "Wet-Pipe Sprinkler Systems."
- G. Install piping hangers and supports, anchors, valves, gages, and equipment supports according to NFPA 20.
- H. Electrical Wiring: Install electrical devices furnished by equipment manufacturers but not factory mounted. Furnish copies of manufacturers' wiring diagram submittals to electrical Installer.
- I. Wiring Method: Conceal conductors and cables in accessible ceilings, walls, and floors where possible.

3.3 ALIGNMENT

- A. Align split-case pump and driver shafts after complete unit has been leveled on concrete base, grout has set, and anchor bolts have been tightened.
- B. After alignment is correct, tighten anchor bolts evenly. Fill baseplate completely with grout, with metal blocks and shims or wedges in place. Tighten anchor bolts after grout has hardened. Check alignment and make required corrections.
- C. Align piping connections.
- D. Align pump and driver shafts for angular and parallel alignment according to HI 1.4 and to tolerances specified by manufacturer.

3.4 CONNECTIONS

- A. Comply with requirements for piping and valves specified in Section 211313 "Wet-Pipe Sprinkler Systems." Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to pumps and equipment to allow service and maintenance.
- C. Connect relief-valve discharge to drainage piping or point of discharge.
- D. Connect fire pumps to their controllers.

3.5 IDENTIFICATION

- A. Identify system components. Comply with requirements for fire-pump marking according to NFPA 20.

3.6 FIELD QUALITY CONTROL

- A. Test each fire pump with its controller as a unit. Comply with requirements for electric-motor-driver fire-pump controllers specified in Section 262933 "Controllers for Fire-Pump Drivers."
- B. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- C. Perform the following tests and inspections with the assistance of a factory-authorized service representative.
 - 1. After installing components, assemblies, and equipment, including controller, test for compliance with requirements.
 - 2. Test according to NFPA 20 for acceptance and performance testing.
 - 3. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
 - 4. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
 - 5. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- D. Components, assemblies, and equipment will be considered defective if they do not pass tests and inspections.
- E. Prepare test and inspection reports.
- F. Furnish fire hoses in number, size, and length required to reach storm drain or other acceptable location to dispose of fire-pump test water. Hoses are for tests only and do not convey to Owner.

3.7 STARTUP SERVICE

- A. Engage a factory-authorized service representative to perform startup service.
 - 1. Complete installation and startup checks according to manufacturer's written instructions.

3.8 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain fire pumps.

END OF SECTION 213113

SECTION 213413 - PRESSURE-MAINTENANCE PUMPS

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Vertical, multistage, pressure-maintenance pumps.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include rated capacities, operating characteristics, performance curves, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings: For pumps, accessories, and specialties.
 - 1. Include plans, elevations, sections, and attachment details.
 - 2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 3. Include diagrams for power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For pumps to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 VERTICAL, MULTISTAGE, PRESSURE-MAINTENANCE PUMPS

- A. Description: Factory-assembled and -tested, multistage, barrel-type vertical pump as defined in HI 2.1-2.2 and HI 2.3; designed for surface installation with pump and motor direct coupled and mounted vertically.
- B. Pump Construction:

1. Barrel: Stainless steel.
 2. Suction and Discharge Chamber: Cast iron with flanged inlet and outlet.
 3. Pump Head/Motor Mount: Cast iron.
 4. Impellers: Stainless steel, balanced, and keyed to shaft.
 5. Pump Shaft: Stainless steel.
 6. Seal: Mechanical type with carbon rotating face and silicon-carbide stationary seat.
 7. Wear Rings: Teflon.
 8. Intermediate Chamber Bearings: Aluminum-oxide ceramic or bronze.
 9. Chamber-Base Bearing: Tungsten carbide.
 10. O-Rings: EPDM, NBR, or Viton.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- D. Motor: Single speed with permanently lubricated ball bearings and rigidly mounted to pump head. Comply with requirements in Section 210513 "Common Motor Requirements for Fire Suppression Equipment."
- E. Nameplate: Permanently attached to pump and indicating capacity and characteristics.
- F. Capacities and Characteristics:
1. Rated Capacity: 10 GPM.
 2. Rated Pressure: 65 PSIG.
 3. Working Pressure: 175 psig (1200 kPa) minimum.
 4. Inlet and Outlet Size: NPS 1-1/4 (DN 32).
 5. Discharge and Suction Flanges: Class 250.
 6. Electrical Characteristics: Refer to Electrical Engineer Drawings

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION

- A. NFPA Standard: Comply with NFPA 20 for installation of pressure-maintenance pumps.
- B. Equipment Mounting:
1. Install multistage, pressure-maintenance pumps according to HI 1.4.
 2. Install base-mounted pumps on cast-in-place concrete equipment base(s).
 - a. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete floor.
 - b. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - c. Install anchor bolts to elevations required for proper attachment to supported equipment.
 - d. Attach pumps to equipment base using anchor bolts.
 - e. Shim pumps as needed to make them level.

3. Install isolation valves in both inlet and outlet pipes near the pump. Comply with requirements for valves specified in Section 211313 "Wet-Pipe Sprinkler Systems."

3.2 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- B. Perform the following tests and inspections:
 1. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
 3. Pressure-maintenance pumps will be considered defective if they do not pass tests and inspections.
- C. Prepare test and inspection reports.

3.3 ADJUSTING

- A. Lubricate pumps as recommended by manufacturer.
- B. Set field-adjustable pressure-switch ranges as indicated.

END OF SECTION 213413

SECTION 220000 - GENERAL PLUMBING

PART 1 - GENERAL

1.1 SCOPE OF WORK

- A. Instructions to Bidders, General Conditions of the Contract, Supplementary General Conditions and Division 01 Specifications Sections bound herewith are a component part of Division 22 specifications. Comply with all provisions, details and instructions of these sections in the accomplishment of work covered under Division 22.
- B. Furnish all labor, materials and equipment and incidentals required to make ready for use complete plumbing systems as shown on the Drawings and specified herein.
- C. Where Sub-Contracts are used to perform portions of the work, division of labor between sub trades is the responsibility of the Contractor.
- D. Furnish all labor, materials and equipment and incidentals required to make ready for use complete plumbing systems as shown on the Drawings and specified herein.
- E. Work includes furnishing, installing and testing the equipment and materials specified in other sections of the Division Specifications and shown on the Plumbing Drawings. It is the intent of these Specifications that the plumbing systems shall be suitable in every way for the intended usage. All material and all work which may be reasonably implied as being incidental to the work of this Division shall be furnished at no extra cost.
- F. The general scope work includes, but is not limited to, furnishing, coordinating, and installing the following.
 - 1. Sanitary waste and vent systems with connection to site utilities.
 - 2. Domestic water distribution systems with connection to site utilities.
 - 3. Roof drainage systems with connections to site utilities.
 - 4. Fuel gas piping with connection to site gas supply.
 - 5. Plumbing fixtures, specialties and equipment.
- G. Visit all areas of the existing site, buildings and structures (as applicable) in which work under these sections is to be performed. Inspect carefully the existing conditions prior to bidding. Bid submission is evidence that the Contractor has examined the site and existing conditions, understands conditions under which the work will be performed, and takes full responsibility for complete knowledge of all factors governing the work.
- H. Schedule all service interruptions in existing facilities at the Owner's convenience with 72 hours (minimum) notice. Obtain prior approval for each interruption.
- I. Thoroughly test all plumbing systems after installation and make any minor corrections, changes or adjustments necessary for proper functioning of the systems and equipment. All workmanship shall be of the highest quality; substandard work will be rejected.

1.2 SUBMITTALS

- A. Procedures for submittals: Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 01 Specifications Sections.

Transmit each shop drawing submittal with provided Shop Drawing Submittal Cover Form, attached herewith for each item of equipment/material or each specification section/paragraph.

- B. Clearly indicate proposed equipment and/or materials substitutions in shop drawings. Summarize all deviations from the specified quality, functionality, appearance or performance of proposed equipment and/or materials in the preface of each submittal. Include documentation to support deviations.
- C. Provide descriptive data on all materials and equipment as required to ascertain compliance with Specifications.
- D. Design layout shown on drawings is based on physical sizes of reputable equipment manufacturers. If equipment other than models indicated is installed, any resulting conflicts with space, maintenance access, clearances or codes are the responsibility of the Contractor to correct at his expense.
- E. Where specific models and manufacturers of materials and equipment are specified, substitutions as allowed by the specifications and State law will be considered. Substitutions must be equivalent in quality, function, suitability and arrangement to specified equipment. Architect/Engineer to have final authority as to equivalency of substitutions.
- F. Equipment model numbers noted in these specifications or on the drawings are intended to establish a minimum standard of quality and do not necessarily relate to specific options or arrangement as shown. Provide equipment with all standard features and optional features as stated and arranged as shown on the drawings.

1.3 REGULATORY REQUIREMENTS

- A. Perform Work in accordance with all applicable state and local codes, standards and regulations.
- B. Furnish all materials and labor which is be required for compliance with codes, standards and regulations, whether specifically mentioned in these specifications or shown on the drawings.
- C. Obtain required construction permit from the authority having jurisdiction and arrange, at the proper time, for all inspections required by such authority. Pay all permit and inspection costs required.

1.4 COORDINATION OF WORK

- A. Contractor is responsible for coordination of work between trades. Provide fully complete and functional systems.
- B. Compare plumbing drawings and specifications with the drawings and specifications for other trades.

- C. Coordinate plumbing installation with the work of other trades. Report any pertinent discrepancies to the Architect/Engineer and obtain written instructions for any necessary revisions. Before starting any construction, make proper provisions to avoid interferences in a manner approved by the Architect/Engineer. No extras will be allowed for rework of uncoordinated installations.
- D. Determine exact route and location of each plumbing item prior to fabrication and/or installation. Adjust location of piping and equipment, etc., to accommodate interferences anticipated and encountered.
- E. Right of Way: General priority for right of way is as follows:
 - 1. Items located per regulatory requirement.
 - 2. Piping with pitch requirement (plumbing drains, etc.).
 - 3. Ductwork.
 - 4. Piping without pitch requirement.
 - 5. Electrical wiring (conduits, etc.).
- F. Arrange all work to permit removal (without damage to other parts) of any equipment requiring periodic replacement.
- G. Provide clearance and easy access to any equipment which requires periodic maintenance. Arrange ducts, piping and equipment to permit ready access to valves, cocks, traps, starters, motors, control components, etc., and to clear the opening of swinging doors and access panels.

1.5 EQUIPMENT AND MATERIALS (GENERAL)

- A. Provide all new materials unless specifically indicated otherwise.
- B. Manufacturers and models listed in drawings and specifications are used for layout and to convey to bidders the general style, type, character and quality of product desired. Listed examples are used only to denote the quality standard of product desired and are not intended to restrict bidders to a specific brand, make, manufacturer or specific name.
- C. Adjust layout, system connections and coordinate with other trades as required to properly install equivalent products.
- D. Where equivalent products are submitted, include all associated costs related to substitution in bid.
- E. Furnish materials bearing the manufacturer's name and trade name. Provide UL label where a UL standard has been established for the particular material.
- F. Furnish standard products of manufacturers regularly engaged in production of equipment types required for the work. Use the manufacturer's latest approved design.
- G. Use the same manufacturer for equipment and materials of the same general type throughout the work to obtain uniform appearance, operation and maintenance.
- H. Protect equipment and materials from dirt, water, chemical or mechanical injury and theft at all times during construction. Provide covers or shelter as required.

- I. If materials or equipment are damaged at any time prior to final acceptance of the work, repair such damage at no additional cost. If materials or equipment are damaged by water, provide replacement no additional cost.
- J. Follow manufacturer's directions completely in the delivery, storage, protection and installation of all equipment and materials. Notify the Architect/Engineer in writing of any conflicts between any requirements of the contract documents and manufacturer's directions. Obtain written instructions before proceeding with the work. The Contractor is responsible for correction of any work that does not comply with the manufacturer's directions or written instructions from the Architect/Engineer at no additional cost.
- K. Repair any damage to factory applied paint finish using touch-up paint furnished by the equipment manufacturer. Repaint entire damaged panel or section per the field painting specifications in Division 09 at no additional cost.

1.6 OPERATION AND MAINTENANCE MANUALS

- A. Refer to individual plumbing sections and Division 01.

1.7 PAINTING

- A. Refer to Division 09.
- B. Protect fixtures, valves, trim, etc. from field painting operations. Do not install escutcheons and trim until painting is complete.

1.8 LOCATIONS AND MEASUREMENTS

- A. Location of plumbing work is shown on the drawings as accurately as possible. Field-verify all measurements to insure that the work suits the surrounding trim, finishes and/or construction. Provide adjustment as necessary.
- B. Make minor relocations of work prior to installation as required or as directed by the Architect/Engineer at no additional cost.

1.9 SUPERVISION

- A. Contractor to provide an authorized and competent representative to constantly supervise the work from the beginning to completion and final acceptance. Insofar as possible, keep the same foreman and workmen throughout the project duration.
- B. Representatives of Architect/Engineer, Owner, and local inspection authorities will make inspections during the progress of the work. Contractor to accommodate such inspections and correct deficiencies noted.

1.10 QUALITY AND WORKMANSHIP

- A. Contractor to employ skilled tradesmen, laborers and supervisors. Final product to be a neat, well finished, and professional installation.
- B. Remove and replace any work considered substandard quality in the judgment of the Architect/Engineer.

1.11 EXCAVATION, TRENCHING AND BACKFILLING

- A. Provide all excavation, trenching and backfilling as required to complete the work under this Division.
- B. Contractor is responsible for investigating conditions prior to excavating and to exercise care during the excavation to avoid any utilities or other objects which may or may not be shown on the drawings.
- C. Excavate so as not to endanger or damage existing utilities and structures. If damage occurs, repair damage to the satisfaction of the Architect/Engineer at no additional cost.
- D. Lay out location of all ditching at grade and obtain approval from the Architect/Engineer prior excavating.
- E. Remove and dispose of all surplus earth from the site.
- F. Provide suitable backfill materials as required.
- G. Perform excavation, trenching and shoring in accordance with rules and regulations set forth in Article XXI, Bulletin 1 "Trenching" as published in a separate bulletin by the North Carolina Department of Labor, Division of Standards and Inspection Construction Bureau.
- H. Bid excavation work as unclassified with no extra payment for removal of rock, unsuitable soils, etc.

1.12 CLOSING IN WORK

- A. Do not cover up or enclose work until it has been inspected, tested and approved by authorities having jurisdiction over the work. Uncover any such work for inspection and/or test at no additional cost. Restore the work to its original condition after inspection and/or test at no additional cost.

1.13 CUTTING AND PATCHING

- A. Perform all cutting and patching necessary to install work under this Division.
- B. Perform cutting and patching in professional, workmanlike manner.
- C. Arrange work to minimize cutting and patching.
- D. Do not cut joists, beams, girders, columns or any other structural members without written permission from the Architect/Engineer.
- E. Cut opening only large enough to allow easy installation of piping, wiring or ductwork.
- F. Patching material to match material removed.
- G. Restore patched surface to its original appearance at completion of patching.
- H. Where waterproofed surfaces are patched, maintain integrity of waterproofing.

- I. Remove rubble and excess patching materials from the premises.

1.14 INTERPRETATION OF DRAWINGS

- A. Drawings and specifications under this Division are complementary each to the other. Provide any work specified herein and/or indicated on the drawings.
- B. Drawings are diagrammatic and indicate generally the location of fixtures, piping, devices, equipment, etc. Follow drawings as closely as possible, but arrange work to suit the finished surroundings and/or trim.
- C. The words “furnish”, “provide”, and/or “install” as used in these drawings and specifications are interpreted to include all material and labor necessary to complete the particular item, system, equipment, etc.
- D. Any omissions from either the drawings or specifications are unintentional. Contractor is responsible for notifying the Architect/Engineer of any pertinent omissions before submitting a bid. Complete and working systems are required, whether every small item of material is shown and specified or not.

1.15 ACCESSIBILITY

- A. Locate all equipment which must be serviced, operated, or maintained in fully accessible positions. Equipment to include, but not be limited to, valves, traps, cleanouts, motors, controllers and drain points. If required for accessibility, furnish access doors for this purpose. Minor deviations from drawings may be made to allow for better accessibility.
- B. Coordinate exact locations and size of access panels for each concealed device requiring service.
- C. Access panels: Steel construction with 16 gauge frames and 18 gauge panels, factory primed with rust inhibiting paint, finish paint by Contractor. Provide suitable UL listed doors where installed in rated construction.
- D. Coordinate access panel locations with architectural construction.
- E. Access panels are not required for access to work located above a lift-out “T” bar type ceiling.

1.16 ELECTRICAL WORK IN CONNECTION WITH PLUMBING WORK

- A. Comply with Division 26.

1.17 PLUMBING WORK IN CONNECTION WITH OTHER CONTRACTS

- A. Provide plumbing services as required for items furnished by other contractors or vendors as shown on the plumbing drawings. Include rough-ins and final connections to equipment. Locations of connections shown on the drawings are approximate and some adjustment of actual connection locations should be anticipated. Coordinate exact connection requirements. Make final connections only after approval of the other contractor or vendor, in the contractor's or vendor's presence.

1. Natural Gas System- Provide complete gas piping supply from natural gas meter. Coordinate equipment gas requirements with supplier. Contractor is responsible for contacting natural gas supplier and complying with supplier connection and service piping requirements. Provide all required valves, regulators, accessories as shown on drawings.
2. Site Utilities- In general, work under this Division covers work to five feet outside buildings. Extend and connect work under this Division to site utilities as required.
3. Owner Furnished Equipment- Obtain exact plumbing requirements and rough-in locations for Owner furnished equipment. Provide complete plumbing installation for proper operation of equipment.
4. Kitchen Equipment- Obtaining exact plumbing requirements and rough-in locations for kitchen equipment. Provide complete plumbing installation for proper operation of equipment.

1.18 ALTERNATE BIDS

- A. Alternate Bids are described in relevant sections of the General and Supplemental General Conditions and Division 01 Specification Sections.

1.19 PROJECT RECORD DRAWINGS

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 01 Specification Sections.
- B. As the work progresses, legibly record all field changes on a set of project contract drawings, herein after called the "record drawings."
- C. Accurately show the installed condition of plumbing work on record drawings.

1.20 PHASING OF THE WORK

- A. Schedule work in accordance with the relevant sections of the General and Supplemental General Conditions and Division 01 Specifications Sections.

1.21 PROJECT CLOSEOUT

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 01 Specifications Sections.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 220000

SECTION 220517 - SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Sleeves.
 - 2. Grout.
 - 3. Silicone sealants.

- B. Related Requirements:

- 1. Section 078413 "Penetration Firestopping" for penetration firestopping installed in fire-resistance-rated walls, horizontal assemblies, and smoke barriers, with and without penetrating items.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, anti-corrosion coated, with plain ends and integral welded waterstop collar.
- B. Galvanized-Steel Sheet Sleeves: 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint.
- C. PVC Pipe Sleeves: ASTM D 1785, Schedule 40.

2.2 GROUT

- A. Description: Non-shrink, recommended for interior and exterior sealing openings in non-fire-rated walls or floors.

- B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

2.3 SILICONE SEALANTS

- A. Silicone, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant, ASTM C 920, Type S, Grade NS, Class 25, use NT.
- B. Silicone, S, P, 25, T, NT: Single-component, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade P, Class 25, Uses T and NT. Grade P Pourable (self-leveling) formulation is for opening in floors and other horizontal surfaces that are not fire rated.
- C. Silicone Foam: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
 - 1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors and concrete walls as new slabs and walls are constructed.
 - 1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
 - 2. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
 - 3. Using grout or silicone sealant, seal space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 - 3. Seal annular space between sleeve and piping or piping insulation; use sealants appropriate for size, depth, and location of joint.

- E. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke-Barrier Penetrations: Maintain indicated fire or smoke rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping and fill materials specified in Section 078413 "Penetration Firestopping."

3.2 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
 - 1. Leak Test: After allowing for a full cure, test sleeves for leaks. Repair leaks and retest until no leaks exist.
- B. Sleeves will be considered defective if they do not pass tests and inspections.

3.3 SLEEVE SCHEDULE

- A. Use sleeves for the following piping-penetration applications:
 - 1. Exterior Concrete Walls Above Grade:
 - a. Piping Smaller Than NPS 6: Steel pipe sleeves.
 - b. Piping NPS 6 and Larger: Steel pipe sleeves.
 - 2. Concrete Slabs Above Grade:
 - a. Piping Smaller Than NPS 6: Steel pipe sleeves.
 - b. Piping NPS 6 and Larger: Steel pipe sleeves.
 - 3. Interior Partitions:
 - a. Piping Smaller Than NPS 6: PVC-pipe sleeves.
 - b. Piping NPS 6 and Larger: PVC-pipe sleeves.

END OF SECTION 220517

SECTION 220518 - ESCUTCHEONS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Escutcheons.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

- A. One-Piece, Cast-Brass Type: With polished, chrome-plated or polished brass finish and setscrew fastener.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with polished, chrome-plated finish and spring-clip fasteners.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
 - 1. Escutcheons for New Piping:
 - a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep pattern.
 - b. Insulated Piping: One-piece cast brass with polished, chrome-plated finish.
 - c. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece cast brass with polished, chrome-plated finish.
 - d. Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece cast brass with polished, chrome-plated finish.
 - e. Bare Piping in Unfinished Service Spaces: One-piece cast brass with rough-brass finish.

- f. Bare Piping in Equipment Rooms: One-piece cast brass with rough-brass finish.

3.2 FIELD QUALITY CONTROL

- A. Using new materials, replace broken and damaged escutcheons and floor plates.

END OF SECTION 220518

SECTION 220519 - METERS AND GAGES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Liquid-in-glass thermometers.
 - 2. Thermowells.
 - 3. Dial-type pressure gages.
 - 4. Gage attachments.
 - 5. Test plugs.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of meter and gage.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For meters and gages to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 LIQUID-IN-GLASS THERMOMETERS

- A. Metal-Case, Industrial-Style, Liquid-in-Glass Thermometers:
 - 1. Standard: ASME B40.200.
 - 2. Case: Cast aluminum; 9-inch nominal size unless otherwise indicated.
 - 3. Case Form: Adjustable angle unless otherwise indicated.
 - 4. Tube: Glass with magnifying lens and blue or red organic liquid.
 - 5. Tube Background: Nonreflective aluminum with permanently etched scale markings graduated in deg F.
 - 6. Window: Glass.
 - 7. Stem: Aluminum and of length to suit installation.
 - a. Design for Air-Duct Installation: With ventilated shroud.
 - b. Design for Thermowell Installation: Bare stem.

8. Connector: 1-1/4 inches, with ASME B1.1 screw threads.
9. Accuracy: Plus or minus 1 percent of scale range or one scale division, to a maximum of 1.5 percent of scale range.

2.2 THERMOWELLS

A. Thermowells:

1. Standard: ASME B40.200.
2. Description: Pressure-tight, socket-type fitting made for insertion in piping tee fitting.
3. Material for Use with Copper Tubing: CNR or CUNI.
4. Material for Use with Steel Piping: CRES.
5. Type: Stepped shank unless straight or tapered shank is indicated.
6. External Threads: NPS 1/2, NPS 3/4, or NPS 1, ASME B1.20.1 pipe threads.
7. Internal Threads: 1/2, 3/4, and 1 inch, with ASME B1.1 screw threads.
8. Bore: Diameter required to match thermometer bulb or stem.
9. Insertion Length: Length required to match thermometer bulb or stem.
10. Lagging Extension: Include on thermowells for insulated piping and tubing.
11. Bushings: For converting size of thermowell's internal screw thread to size of thermometer connection.

B. Heat-Transfer Medium: Mixture of graphite and glycerin.

2.3 DIAL-TYPE PRESSURE GAGES

A. Direct-Mounted, Metal-Case, Dial-Type Pressure Gages:

1. Standard: ASME B40.100
2. Case: Liquid-filled Sealed type(s); cast aluminum or drawn steel; 4-1/2-inch nominal diameter.
3. Pressure-Element Assembly: Bourdon tube unless otherwise indicated.
4. Pressure Connection: Brass, with NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe threads and bottom-outlet type unless back-outlet type is indicated.
5. Movement: Mechanical, with link to pressure element and connection to pointer.
6. Dial: Nonreflective aluminum with permanently etched scale markings graduated in psi.
7. Pointer: Dark-colored metal.
8. Window: Glass.
9. Ring: Metal.
10. Accuracy: Grade A, plus or minus 1 percent of middle half of scale range.

2.4 GAGE ATTACHMENTS

- A. Snubbers: ASME B40.100, brass; with NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe threads and piston-type surge-dampening device. Include extension for use on insulated piping.
- B. Valves: Brass or stainless-steel needle, with NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe threads.

2.5 TEST PLUGS

- A. Description: Test-station fitting made for insertion in piping tee fitting.

- B. Body: Brass or stainless steel with core inserts and gasketed and threaded cap. Include extended stem on units to be installed in insulated piping.
- C. Thread Size: NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe thread.
- D. Minimum Pressure and Temperature Rating: 500 psig at 200 deg F.
- E. Core Inserts: Chlorosulfonated polyethylene synthetic and EPDM self-sealing rubber.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install thermowells with socket extending to center of pipe and in vertical position in piping tees.
- B. Install thermowells of sizes required to match thermometer connectors. Include bushings if required to match sizes.
- C. Install thermowells with extension on insulated piping.
- D. Fill thermowells with heat-transfer medium.
- E. Install direct-mounted thermometers in thermowells and adjust vertical and tilted positions.
- F. Install direct-mounted pressure gages in piping tees with pressure gage located on pipe at the most readable position.
- G. Install valve and snubber in piping for each pressure gage for fluids (except steam).
- H. Install test plugs in piping tees.
- I. Install flow indicators in piping systems in accessible positions for easy viewing.
- J. Assemble and install connections, tubing, and accessories between flow-measuring elements and flowmeters according to manufacturer's written instructions.
- K. Install permanent indicators on walls or brackets in accessible and readable positions.
- L. Install connection fittings in accessible locations for attachment to portable indicators.
- M. Install thermometers in the following locations:
 - 1. Inlet and outlet of each water heater.
 - 2. Each side of mixing valves.
- N. Install pressure gages in the following locations:
 - 1. Building water service entrance into building.
 - 2. Suction and discharge of each domestic water pump.
 - 3. Each side of back flow preventer.

3.2 CONNECTIONS

- A. Install meters and gages adjacent to machines and equipment to allow space for service and maintenance of meters, gages, machines, and equipment.

3.3 ADJUSTING

- A. After installation, calibrate meters according to manufacturer's written instructions.
- B. Adjust faces of meters and gages to proper angle for best visibility.

3.4 THERMOMETER SCHEDULE

- A. Thermometers at inlet and outlet of each domestic water heater shall be the following:
 - 1. Metal-case, liquid-in-glass, 9 inch long with a range of 30 to 240 deg. F, 2 degree scale division and an accuracy of plus or minus 1 percent of range.
- B. Thermometer stems shall be of length to match thermowell insertion length.

3.5 PRESSURE-GAGE SCHEDULE

- A. Pressure gages shall be the following:
 - 1. Cast aluminum, 4½inch diameter glass window, with a range of two times operating pressure and an accuracy of plus or minus 1 percent of middle half of scale.

3.6 PRESSURE-GAGE SCALE-RANGE SCHEDULE

- A. Scale Range for Water Service Piping: 0 to 100 psi.
- B. Scale Range for Domestic Water Piping: 0 to 100 psi.

END OF SECTION 220519

SECTION 220523.12 - BALL VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Bronze ball valves.
2. Steel ball valves

1.3 DEFINITIONS

- A. CWP: Cold working pressure.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of valve.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads.
3. Set ball valves open to minimize exposure of functional surfaces.

- B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR VALVES

- A. Source Limitations for Valves: Obtain each type of valve from single source from single manufacturer.
- B. ASME Compliance:
 1. ASME B1.20.1 for threads for threaded-end valves.
 2. ASME B31.9 for building services piping valves.

- C. Bronze valves shall be made with dezincification-resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc are not permitted.
- D. Refer to Plumbing Valve Schedule articles for applications of valves.
- E. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- F. Valve Sizes: Same as upstream piping unless otherwise indicated.
- G. Valve Actuator Types:
 - 1. Handlever.
- H. Valves in Insulated Piping:
 - 1. Include 2-inch stem extensions.
 - 2. Extended operating handle of nonthermal-conductive material, and protective sleeves that allow operation of valves without breaking the vapor seals or disturbing insulation.
 - 3. Memory stops that are fully adjustable after insulation is applied.
- I. Valve Bypass and Drain Connections: MSS SP-45.

2.2 BRONZE BALL VALVES

- A. Bronze Ball Valves, Two-Piece with Full Port and Stainless-Steel Trim:
 - 1. Description:
 - a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig.
 - c. CWP Rating: 600 psig.
 - d. Body Design: Two piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE.
 - h. Stem: Stainless steel.
 - i. Ball: Stainless steel, vented.
 - j. Port: Full.

2.3 STEEL BALL VALVES

- A. Steel Ball Valves with Full Port, Class 150:
 - 1. Description:
 - a. Standard: MSS SP-72.
 - b. CWP Rating: 285 psig.
 - c. Body Design: Split body.
 - d. Body Material: Carbon steel, ASTM A 216, Type WCB.
 - e. Ends: Flanged or threaded.
 - f. Seats: PTFE.

- g. Stem: Stainless steel.
- h. Ball: Stainless steel, vented.
- i. Port: Full.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Do not attempt to repair defective valves; replace with new valves.

3.2 VALVE INSTALLATION

- A. Install valves with unions at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Locate valves for easy access and provide separate support where necessary.
- C. Install valves in horizontal piping with stem at or above center of pipe.
- D. Install valves in position to allow full stem movement.
- E. Install valve tags. Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.

3.3 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valves with specified SWP classes or CWP ratings are unavailable, the same types of valves with higher SWP classes or CWP ratings may be substituted.
- B. For Copper Tubing, NPS 2 and Smaller: Threaded ends except where solder-joint valve-end option is indicated in valve schedules below:

3.4 DOMESTIC HOT- AND COLD-WATER VALVE SCHEDULE

- A. Pipe NPS 2 and Smaller:
 - 1. Bronze Valves: May be provided with solder-joint ends instead of threaded ends.
 - 2. Bronze ball valves, two-piece with full port and stainless-steel trim.
- B. Pipe NPS 2-1/2 and Larger:

1. Steel and Iron Valves, NPS 2-1/2 to NPS 4: May be provided with threaded ends instead of flanged ends.
2. Steel ball valves, Class 150 with full port.

END OF SECTION 220523

SECTION 220523.14 - CHECK VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Bronze swing check valves.
 - 2. Iron swing check valves with closure control.

1.3 DEFINITIONS

- A. CWP: Cold working pressure.
- B. EPDM: Ethylene propylene copolymer rubber.
- C. NBR: Acrylonitrile-butadiene, Buna-N, or nitrile rubber.
- D. SWP: Steam working pressure.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of valve.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, grooves, and weld ends.
 - 3. Block check valves in either closed or open position.
- B. Use the following precautions during storage:
 - 1. Maintain valve end protection.
 - 2. Store valves indoors and maintain at higher than ambient dew point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.
- C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR VALVES

- A. Source Limitations for Valves: Obtain each type of valve from single source from single manufacturer.
- B. ASME Compliance:
 - 1. ASME B1.20.1 for threads for threaded-end valves.
 - 2. ASME B16.1 for flanges on iron valves.
 - 3. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
 - 4. ASME B16.18 for solder joint.
 - 5. ASME B31.9 for building services piping valves.
- C. AWWA Compliance: Comply with AWWA C606 for grooved-end connections.
- D. Bronze valves shall be made with dezincification-resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc are not permitted.
- E. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- F. Valve Sizes: Same as upstream piping unless otherwise indicated.
- G. Valve Bypass and Drain Connections: MSS SP-45.

2.2 BRONZE SWING CHECK VALVES

- A. Bronze Swing Check Valves with Nonmetallic Disc, Class 125:
 - 1. Description:
 - a. Standard: MSS SP-80, Type 4.
 - b. CWP Rating: 200 psig.
 - c. Body Design: Horizontal flow.
 - d. Body Material: ASTM B 62, bronze.
 - e. Ends: Threaded or soldered. See valve schedule articles.
 - f. Disc: PTFE.

2.3 IRON SWING CHECK VALVES WITH CLOSURE CONTROL

- A. Iron Swing Check Valves with Lever- and Spring-Closure Control, Class 125:
 - 1. Description:
 - a. Standard: MSS SP-71, Type I.
 - b. NPS 2-1/2 to NPS 12, CWP Rating: 200 psig.
 - c. Body Design: Clear or full waterway.
 - d. Body Material: ASTM A 126, gray iron with bolted bonnet.
 - e. Ends: Flanged.
 - f. Trim: Bronze.

- g. Gasket: Asbestos free.
- h. Closure Control: Factory-installed, exterior lever and spring.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

3.2 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Locate valves for easy access and provide separate support where necessary.
- C. Install valves in horizontal piping with stem at or above center of pipe.
- D. Install valves in position to allow full stem movement.
- E. Install check valves for proper direction of flow and as follows:
 - 1. Swing Check Valves: In horizontal position with hinge pin level.
- F. Install valve tags. Comply with requirements for valve tags and schedules in Section 220553 "Identification for Plumbing Piping and Equipment."

3.3 ADJUSTING

- A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.

3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valves with specified SWP classes or CWP ratings are unavailable, the same types of valves with higher SWP classes or CWP ratings may be substituted.
- B. Select valves, except wafer types, with the following end connections:

1. For Copper Tubing, NPS 2 and Smaller: Threaded ends except where solder-joint valve-end option is indicated in valve schedules.
2. For Steel Piping, NPS 2-1/2 to NPS 6: Flanged ends.

3.5 DOMESTIC HOT- AND COLD-WATER VALVE SCHEDULE

A. Pipe NPS 2 and Smaller:

1. Bronze Valves: May be provided with solder-joint ends instead of threaded ends.
2. Bronze Swing Check Valves with Nonmetallic Disc, Class 125.

B. Pipe NPS 2-1/2 and Larger:

1. NPS 2-1/2 to NPS 12: Iron swing check valves with lever and spring-closure control, Class 125.

END OF SECTION 230523

SECTION 220529 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Metal pipe hangers and supports.
 - 2. Trapeze pipe hangers.
 - 3. Thermal-hanger shield inserts.
 - 4. Equipment supports.

1.3 DEFINITIONS

- A. MSS: Manufacturers Standardization Society of The Valve and Fittings Industry Inc.

1.4 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Design trapeze pipe hangers and equipment supports, including comprehensive engineering analysis by a qualified professional engineer, using performance requirements and design criteria indicated.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Signed and sealed by a qualified professional engineer. Show fabrication and installation details and include calculations for the following; include Product Data for components:
 - 1. Trapeze pipe hangers.
 - 2. Equipment supports.
- C. Delegated-Design Submittal: For trapeze hangers indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
 - 1. Detail fabrication and assembly of trapeze hangers.
 - 2. Design Calculations: Calculate requirements for designing trapeze hangers.

1.6 INFORMATIONAL SUBMITTALS

- A. Welding certificates.

1.7 QUALITY ASSURANCE

- A. Structural Steel Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- B. Pipe Welding Qualifications: Qualify procedures and operators according to ASME Boiler and Pressure Vessel Code.

PART 2 - PRODUCTS

2.1 METAL PIPE HANGERS AND SUPPORTS

- A. Carbon-Steel Pipe Hangers and Supports:
 - 1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
 - 2. Galvanized Metallic Coatings: Pregalvanized or hot dipped.
 - 3. Nonmetallic Coatings: Plastic coating, jacket, or liner.
 - 4. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
 - 5. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.

2.2 TRAPEZE PIPE HANGERS

- A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural carbon-steel shapes with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U-bolts.

2.3 THERMAL-HANGER SHIELD INSERTS

- A. Insulation-Insert Material for Hot Piping: Water-repellent treated, ASTM C 533, Type I calcium silicate or ASTM C 552, Type II cellular glass.
- B. Insulation-Insert Material for Cold Piping: Water-repellent treated, ASTM C 533, Type I calcium silicate or ASTM C 552, Type II cellular glass with vapor barrier.
- C. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.
- D. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.
- E. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

2.4 EQUIPMENT SUPPORTS

- A. Description: Welded, shop- or field-fabricated equipment support made from structural carbon-steel shapes.

2.5 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, carbon-steel plates, shapes, and bars; black and galvanized.

- B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.
 - 1. Properties: Nonstaining, noncorrosive, and nongaseous.
 - 2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 HANGER AND SUPPORT INSTALLATION

- A. Metal Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from the building structure.
- B. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.
 - 1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified for individual pipe hangers.
 - 2. Field fabricate from ASTM A 36/A 36M, carbon-steel shapes selected for loads being supported. Weld steel according to AWS D1.1/D1.1M.
- C. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.
- D. Fastener System Installation:
 - 1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches thick in concrete after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual.
 - 2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.
- E. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.
- F. Equipment Support Installation: Fabricate from welded-structural-steel shapes.
- G. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- H. Install lateral bracing with pipe hangers and supports to prevent swaying.
- I. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.

- J. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- K. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.
- L. Insulated Piping:
 - 1. Attach clamps and spacers to piping.
 - a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
 - b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
 - c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.
 - 2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.
 - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
 - 3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.
 - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
 - 4. Shield Dimensions for Pipe: Not less than the following:
 - a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
 - b. NPS 4: 12 inches long and 0.06 inch thick.
 - c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
 - 5. Thermal-Hanger Shields: Install with insulation same thickness as piping ins.

3.2 EQUIPMENT SUPPORTS

- A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.
- B. Grouting: Place grout under supports for equipment and make bearing surface smooth.
- C. Provide lateral bracing, to prevent swaying, for equipment supports.

3.3 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.

- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.4 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.5 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - 1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

3.6 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.
- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use carbon-steel pipe hangers and supports and metal trapeze pipe hangers and attachments for general service applications.
- F. Use padded hangers for piping that is subject to scratching.
- G. Use thermal-hanger shield inserts for insulated piping and tubing.

- H. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.
 2. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes NPS 3/4 to NPS 36, requiring clamp flexibility and up to 4 inches of insulation.
 3. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes NPS 1/2 to NPS 24 if little or no insulation is required.
 4. Pipe Hangers (MSS Type 5): For suspension of pipes NPS 1/2 to NPS 4, to allow off-center closure for hanger installation before pipe erection.
 5. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated, stationary pipes NPS 3/4 to NPS 8.
 6. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
 7. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
 8. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
 9. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 8.
 10. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 3.
 11. U-Bolts (MSS Type 24): For support of heavy pipes NPS 1/2 to NPS 30.
 12. Pipe Saddle Supports (MSS Type 36): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
- I. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.
 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 if longer ends are required for riser clamps.
- J. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
 3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
 4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
 5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.
- K. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.

2. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joint construction, to attach to top flange of structural shape.
 3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
 4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
 5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
 6. C-Clamps (MSS Type 23): For structural shapes.
 7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
 8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
 9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-beams for heavy loads.
 10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
 11. Malleable-Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
 12. Welded-Steel Brackets: For support of pipes from below or for suspending from above by using clip and rod. Use one of the following for indicated loads:
 - a. Light (MSS Type 31): 750 lb.
 - b. Medium (MSS Type 32): 1500 lb.
 - c. Heavy (MSS Type 33): 3000 lb.
 13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
 14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
 15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.
- L. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
 3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- M. Comply with MSS SP-69 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.
- N. Use powder-actuated fasteners or mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 230529

SECTION 220553 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Equipment labels.
- 2. Pipe labels.
- 3. Valve tags.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.
- C. Valve numbering scheme.
- D. Valve Schedules: For each piping system to include in maintenance manuals.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

- A. Plastic Labels for Equipment:

- 1. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/16 inch thick, and having predrilled holes for attachment hardware.
- 2. Letter Color: Comply with ASME A13.1.
- 3. Background Color: Comply with ASME A13.1.
- 4. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
- 5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
- 6. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-quarters the size of principal lettering.
- 7. Fasteners: Stainless-steel rivets or self-tapping screws.
- 8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

- B. Labels shall include equipment number, area(s) served (use actual room numbers used at the facility-not architectural room numbers), Final Acceptance date, extended warranty period, temperature setting, and capacity. The following are examples of labelling to be used:

Water Heaters: GWH01 (Mechanical Room)
 S.C.: 11/16/2005
 Capacity: 500 gallon
 Temperature Setting: 140 deg. F

Pumps: HWRP01 (HW Rec. Pump - Buildings 100 & 200)
 S.C.: 11/16/2005
 Capacity: 20 gpm @ 15 ft head.

Access Doors: Domestic Water Isolation Valves
 Restroom 102

- C. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch bond paper. Tabulate equipment identification number, and identify Drawing numbers where equipment is indicated (plans, details, and schedules) and the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

2.2 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction.
- B. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings; also include pipe size and an arrow indicating flow direction.
1. Flow-Direction Arrows: Integral with piping-system service lettering to accommodate both directions or as separate unit on each pipe label to indicate flow direction.
 2. Lettering Size: Size letters according to ASME A13.1 for piping.
 3. Colors: Comply with ASME A13.1, unless otherwise indicated.

2.3 VALVE TAGS

- A. Valve Tags: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.
1. Tag Material: Brass, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
 2. Fasteners: Brass wire-link chain, beaded chain or S-hook.
- B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or

space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.

1. Valve-tag schedule shall be permanently affixed to wall inside Boiler Room 43. Schedule shall be laminated designating valve location and rooms served.
2. Valve-tag schedule shall be included in operation and maintenance data.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

3.2 GENERAL INSTALLATION REQUIREMENTS

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.

3.3 EQUIPMENT LABEL INSTALLATION

- A. Install or permanently fasten labels on each major item of mechanical equipment.
- B. Locate equipment labels where accessible and visible.

3.4 PIPE LABEL INSTALLATION

- A. Domestic Water Piping Color Coding: Paint and color-code all piping not concealed in walls. Piping shall be color coded as follows with flow arrows and labels located at 10 foot intervals, at all turns and at each floor or wall partition:

Domestic Cold Piping: Dark Blue

Domestic Hot Piping: Dark Red

- B. Natural Gas Piping Color Coding: Paint and color-code all gas piping. Piping shall be color coded as follows and labeled "GAS" in black letters with labels located at beginning and all ends and at intervals not exceeding 5ft, at all turns and at each floor or wall partition. The label shall also include the service pressure:

Natural Gas Piping: Yellow

- C. Provide ceiling valve marker for valves located above lay-in ceilings. Above ceiling valve markers shall be 1/2 inch diameter self-adhesive color-coded circle. Color code as noted above. Attach valve marker to adjacent ceiling grid.

- D. Pipe Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
1. Near each valve and control device.
 2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
 3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.
 4. At access doors, manholes, and similar access points that permit view of concealed piping.
 5. Near major equipment items and other points of origination and termination.
 6. Spaced at maximum intervals of 50 feet along each run. Reduce intervals to 25 feet in areas of congested piping and equipment.
 7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.
- E. Directional Flow Arrows: Arrows shall be used to indicate direction of flow in pipes, including pipes where flow is allowed in both directions.
- F. Pipe Label Color Schedule:
1. Domestic Water Piping
 - a. Background: Comply with ASME A13.1.
 - b. Letter Colors: Comply with ASME A13.1.
 2. Sanitary Waste and Storm Drainage Piping:
 - a. Background Color: Comply with ASME A13.1.
 - b. Letter Color: Comply with ASME A13.1.

3.5 PIPE PAINTING

- A. Paint and color-code all exposed piping located in mechanical rooms. Piping shall be color coded as follows with flow arrows and labels located at 10 foot intervals, at all turns and at each floor or wall partition:
1. Gas Lines: Yellow.

3.6 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems, except check valves, valves within factory-fabricated equipment units, shutoff valves, faucets, convenience and lawn-watering hose connections, and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.
- B. Contractor to furnish valve schedule mounted behind glass in a frame located in main mechanical room.
- C. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following subparagraphs:

1. Valve-Tag Size and Shape:
 - a. Cold Water: 1-1/2 inches, round.
 - b. Hot Water: 1-1/2 inches, round.
 - c. Gas: 1-1/2 inches, round.
2. Valve-Tag Colors:
 - a. Cold Water: Comply with ASME A13.1.
 - b. Hot Water: Comply with ASME A13.1.
 - c. Flammable Fluids: Black letters on a safety-yellow background.
3. Letter Colors:
 - a. Cold Water: Comply with ASME A13.1.
 - b. Hot Water: Comply with ASME A13.1.
 - c. Gas: Comply with ASME A13.1.

END OF SECTION 220553

SECTION 220719 - PLUMBING PIPING INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes insulating the following plumbing piping services:
 - 1. Domestic cold-water piping.
 - 2. Domestic hot-water piping.
 - 3. Domestic recirculating hot-water piping.
 - 4. Supplies and drains for handicap-accessible lavatories and sinks.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory- and field-applied, if any).

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Material Test Reports: From a qualified testing agency acceptable to authorities having jurisdiction indicating, interpreting, and certifying test results for compliance of insulation materials, sealers, attachments, cements, and jackets, with requirements indicated. Include dates of tests and test methods employed.
- C. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84 by a testing agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.
 - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
- C. Comply with the following applicable standards and other requirements specified for miscellaneous components:

1. Supply and Drain Protective Shielding Guards: ICC A117.1.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.7 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

1.8 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.
- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

PART 2 - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule," "Outdoor, Aboveground Piping Insulation Schedule," and "Outdoor, Underground Piping Insulation Schedule" articles for where insulating materials shall be applied.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.
- D. Mineral-Fiber, Preformed Pipe Insulation:
 1. Type I, 850 Deg F Materials: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 547, Type I, Grade A, with factory-applied ASJ. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

2.2 INSULATING CEMENTS

- A. Mineral-Fiber Insulating Cement: Comply with ASTM C 195.
- B. Mineral-Fiber, Hydraulic-Setting Insulating and Finishing Cement: Comply with ASTM C 449.

2.3 ADHESIVES

- A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated, unless otherwise indicated.
- B. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.
- C. ASJ Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.

2.4 MASTICS

- A. Materials shall be compatible with insulation materials, jackets, and substrates; comply with MIL-PRF-19565C, Type II.
- B. Vapor-Barrier Mastic: Water based; suitable for indoor use on below-ambient services.
 - 1. Water-Vapor Permeance: ASTM E 96/E 96M, Procedure B, 0.013 perm at 43-mil dry film thickness.
 - 2. Service Temperature Range: Minus 20 to plus 180 deg F.
 - 3. Solids Content: ASTM D 1644, 58 percent by volume and 70 percent by weight.
 - 4. Color: White.
- C. Breather Mastic: Water based; suitable for indoor and outdoor use on above-ambient services.
 - 1. Water-Vapor Permeance: ASTM F 1249, 1.8 perms at 0.0625-inch dry film thickness.
 - 2. Service Temperature Range: Minus 20 to plus 180 deg F.
 - 3. Solids Content: 60 percent by volume and 66 percent by weight.
 - 4. Color: White.

2.5 LAGGING ADHESIVES

- A. Description: Comply with MIL-A-3316C, Class I, Grade A, and shall be compatible with insulation materials, jackets, and substrates.
 - 1. For indoor applications, use lagging adhesives that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 2. Fire-resistant, water-based lagging adhesive and coating for use indoors to adhere fire-resistant lagging cloths over pipe insulation.
 - 3. Service Temperature Range: 0 to plus 180 deg F.
 - 4. Color: White.

2.6 SEALANTS

- A. ASJ Flashing Sealants:
 - 1. Materials shall be compatible with insulation materials, jackets, and substrates.
 - 2. Fire- and water-resistant, flexible, elastomeric sealant.
 - 3. Service Temperature Range: Minus 40 to plus 250 deg F.
 - 4. Color: White.

2.7 FACTORY-APPLIED JACKETS

- A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:
 - 1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C 1136, Type I.

2.8 FIELD-APPLIED CLOTHS

- A. Woven Glass-Fiber Fabric: Comply with MIL-C-20079H, Type I, plain weave, and presized a minimum of 8 oz./sq. yd..

2.9 FIELD-APPLIED JACKETS

- A. Field-applied jackets shall comply with ASTM C 921, Type I, unless otherwise indicated.
- B. Metal Jacket:
 - 1. Aluminum Jacket: Comply with ASTM B 209, Alloy 3003, 3005, 3105, or 5005, Temper H-14. Prime metal jacket with paint grip finish.
 - a. Sheet and roll stock ready for shop or field sizing.
 - b. Finish and thickness are indicated in field-applied jacket schedules.
 - c. Moisture Barrier for Indoor Applications: 1-mil-thick, heat-bonded polyethylene and kraft paper.
 - d. Factory-Fabricated Fitting Covers:
 - 1) Same material, finish, and thickness as jacket.
 - 2) Preformed 2-piece or gore, 45- and 90-degree, short- and long-radius elbows.
 - 3) Tee covers.
 - 4) Flange and union covers.
 - 5) End caps.
 - 6) Beveled collars.
 - 7) Valve covers.
 - 8) Field fabricate fitting covers only if factory-fabricated fitting covers are not available.

2.10 TAPES

- A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C 1136.
 - 1. Width: 3 inches.
 - 2. Thickness: 11.5 mils.
 - 3. Adhesion: 90 ounces force/inch in width.
 - 4. Elongation: 2 percent.
 - 5. Tensile Strength: 40 lbf/inch in width.
 - 6. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.

2.11 SECUREMENTS

A. Bands:

1. Aluminum: ASTM B 209, Alloy 3003, 3005, 3105, or 5005; Temper H-14, 0.020 inch thick, 1/2 inch wide with wing seal or closed seal.

B. Staples: Outward-clinching insulation staples, nominal 3/4-inch-wide, stainless steel or Monel.

C. Wire: 0.080-inch nickel-copper alloy.

2.12 PROTECTIVE SHIELDING GUARDS

A. Protective Shielding Pipe Covers:

1. Description: Manufactured plastic wraps for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with Americans with Disabilities Act (ADA) requirements.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.

1. Verify that systems to be insulated have been tested and are free of defects.
2. Verify that surfaces to be insulated are clean and dry.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

B. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless-steel surfaces, use demineralized water.

3.3 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping including fittings, valves, and specialties.

B. Install insulation materials, forms, vapor barriers or retarders, jackets, and thicknesses required for each item of pipe system as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.

- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- G. Keep insulation materials dry during application and finishing.
- H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- I. Install insulation with least number of joints practical.
- J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 - 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
 - 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.
- K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- L. Install insulation with factory-applied jackets as follows:
 - 1. Draw jacket tight and smooth.
 - 2. Cover circumferential joints with 3-inch-wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
 - 3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 4 inches o.c.
 - a. For below-ambient services, apply vapor-barrier mastic over staples.
 - 4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
 - 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.
- M. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.
- N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

- O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.
- P. For above-ambient services, do not install insulation to the following:
 - 1. Vibration-control devices.
 - 2. Testing agency labels and stamps.
 - 3. Nameplates and data plates.
 - 4. Cleanouts.

3.4 PENETRATIONS

- A. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
 - 4. Seal jacket to wall flashing with flashing sealant.
- B. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- C. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.
 - 1. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping and fire-resistive joint sealers.
- D. Insulation Installation at Floor Penetrations:
 - 1. Pipe: Install insulation continuously through floor penetrations.
 - 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Section 078413 "Penetration Firestopping."

3.5 GENERAL PIPE INSULATION INSTALLATION

- A. Requirements in this article generally apply to all insulation materials except where more specific requirements are specified in various pipe insulation material installation articles.
- B. Insulation Installation on Fittings, Valves, Strainers, Flanges, and Unions:
 - 1. Install insulation over fittings, valves, strainers, flanges, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
 - 2. Insulate pipe elbows using preformed fitting insulation or mitered fittings made from same material and density as adjacent pipe insulation. Each piece shall be butted tightly

against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.

3. Insulate tee fittings with preformed fitting insulation or sectional pipe insulation of same material and thickness as used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
 4. Insulate valves using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
 5. Insulate strainers using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
 6. Insulate flanges and unions using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker.
 7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
 8. For services not specified to receive a field-applied jacket, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing using PVC tape.
 9. Label the outside insulation jacket of each union with the word "union." Match size and color of pipe labels.
- C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.
- D. Install removable insulation covers at locations indicated. Installation shall conform to the following:
1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as adjoining pipe insulation.
 2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union long at least two times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless-steel or aluminum bands. Select band material compatible with insulation and jacket.
 3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.

4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless-steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
5. Finish exposed surfaces with a metal jacket.

3.6 INSTALLATION OF MINERAL-FIBER INSULATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of preformed pipe insulation to pipe with wire or bands and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with factory-applied jackets on above-ambient surfaces, secure laps with outward clinched staples at 6 inches o.c.
4. For insulation with factory-applied jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

C. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
4. Install insulation to flanges as specified for flange insulation application.

3.7 FIELD-APPLIED JACKET INSTALLATION

A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.

1. Draw jacket smooth and tight to surface with 2-inch overlap at seams and joints.
2. Embed glass cloth between two 0.062-inch-thick coats of lagging adhesive.
3. Completely encapsulate insulation with coating, leaving no exposed insulation.

B. Where metal jackets are indicated, install with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof

sealant recommended by insulation manufacturer. Secure jacket with stainless-steel bands 12 inches o.c. and at end joints.

3.8 FINISHES

- A. Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified in Section 220553 "Identification for Plumbing Piping and Equipment."
 - 1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.
 - a. Finish Coat Material: Interior, flat, latex-emulsion size.

3.9 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Tests and Inspections:
 - 1. Inspect pipe, fittings, strainers, and valves, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to three locations of straight pipe, three locations of threaded fittings, three locations of welded fittings, two locations of threaded strainers, two locations of welded strainers, three locations of threaded valves, and three locations of flanged valves for each pipe service defined in the "Piping Insulation Schedule, General" Article.
- C. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.10 PIPING INSULATION SCHEDULE, GENERAL

- A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.
- B. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:
 - 1. Drainage piping located in crawl spaces.
 - 2. Underground piping.
 - 3. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

3.11 INDOOR PIPING INSULATION SCHEDULE

- A. Domestic Cold and Hot Water:
 - 1. Insulation shall be the following:
 - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
- B. Domestic Recirculated Hot Water:

1. Insulation shall be the following:
 - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1-1/2 inches thick.
 - C. Exposed Sanitary Drains, Domestic Water, Domestic Hot Water, and Stops for Plumbing Fixtures for People with Disabilities:
 1. All Pipe Sizes: Insulation shall be the following:
 - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
 - D. Floor Drains, Traps, and Sanitary Drain Piping within 10 Feet of Drain Receiving Condensate and Equipment Drain Water below 60 Deg F:
 1. All Pipe Sizes: Insulation shall be the following:
 - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
- 3.12 INDOOR, FIELD-APPLIED JACKET SCHEDULE
- A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.
 - B. Piping, exposed insulated lines within 8 ft. above floor in occupied spaces:
 1. Painted Aluminum, Smooth: 0.024 inch thick, Color-Coded by System.
 - C. Piping, exposed in equipment rooms:
 1. Painted field applied cloth woven glass fiber fabric, Color-Coded by System.

END OF SECTION 220719

SECTION 221116 - DOMESTIC WATER PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Copper tube and fittings.
 - 2. Piping joining materials.
 - 3. Transition fittings.
- B. This Division is applicable to domestic cold and hot water piping within building to a point 5 feet outside the building.

1.3 ACTION SUBMITTALS

- A. Product Data: For transition fittings and dielectric fittings.

1.4 INFORMATIONAL SUBMITTALS

- A. System purging and disinfecting activities report.
- B. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

- A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.
- B. Potable-water piping and components shall comply with NSF 14 and NSF 61 Annex G.
- C. Comply with NSF Standard 372 for low lead.

2.2 COPPER TUBE AND FITTINGS

- A. Hard Copper Tube: ASTM B 88, Type L water tube, drawn temper.
- B. Soft Copper Tube: ASTM B 88, Type K water tube, annealed temper.
- C. Wrought-Copper, Solder-Joint Fittings: ASME B16.22, wrought-copper pressure fittings.

D. Copper Unions:

1. MSS SP-123.
2. Cast-copper-alloy, hexagonal-stock body.
3. Ball-and-socket, metal-to-metal seating surfaces.
4. Solder-joint or threaded ends.

2.3 PIPING JOINING MATERIALS

A. Solder Filler Metals: ASTM B 32, lead-free alloys.

B. Flux: ASTM B 813, water flushable.

2.4 TRANSITION FITTINGS

A. General Requirements:

1. Same size as pipes to be joined.
2. Pressure rating at least equal to pipes to be joined.
3. End connections compatible with pipes to be joined.

B. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.

C. Plastic-to-Metal Transition Fittings:

1. Description:
 - a. CPVC or PVC one-piece fitting with manufacturer's Schedule 80 equivalent dimensions.
 - b. One end with threaded brass insert and one solvent-cement-socket end.

D. Plastic-to-Metal Transition Unions:

1. Description:
 - a. CPVC or PVC four-part union.
 - b. Solvent-cement-joint plastic end.
 - c. Rubber O-ring.
 - d. Union nut.

PART 3 - EXECUTION

3.1 EARTHWORK

A. Comply with requirements in Section 312000 "Earth Moving" for excavating, trenching, and backfilling.

3.2 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of domestic water piping. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.
- B. Install copper tubing under building slab according to CDA's "Copper Tube Handbook."
- C. Install underground copper tube in PE encasement according to ASTM A 674 or AWWA C105/A21.5. Do not locate joints below slab of building.
- D. Install shutoff valve, hose-end drain valve, pressure gage, and test tee with valve inside the building at domestic water-service entrance. Comply with requirements for pressure gages in Section 220519 "Meters and Gages for Plumbing Piping."
- E. Install shutoff valve immediately upstream of each dielectric fitting.
- F. Install domestic water piping level without pitch and plumb.
- G. Rough-in domestic water piping for water-meter installation according to utility company's requirements.
- H. Install piping concealed from view and protected from physical contact by building occupants unless otherwise indicated and except in equipment rooms and service areas.
- I. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- J. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal, and coordinate with other services occupying that space.
- K. Install piping to permit valve servicing.
- L. Install nipples, unions, special fittings, and valves with pressure ratings the same as or higher than the system pressure rating used in applications below unless otherwise indicated.
- M. Install piping free of sags and bends.
- N. Install fittings for changes in direction and branch connections.
- O. Install unions in copper tubing at final connection to each piece of equipment, machine, and specialty.
- P. Install pressure gages on suction and discharge piping for each plumbing pump. Comply with requirements for pressure gages in Section 220519 "Meters and Gages for Plumbing Piping."
- Q. Install thermostats in hot-water circulation piping. Comply with requirements for thermostats in Section 221123 "Domestic Water Pumps."

- R. Install thermometers on outlet piping from each water heater. Comply with requirements for thermometers in Section 220519 "Meters and Gages for Plumbing Piping."
- S. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- T. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- U. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

3.3 JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
- C. Soldered Joints for Copper Tubing: Apply ASTM B 813, water-flushable flux to end of tube. Join copper tube and fittings according to ASTM B 828 or CDA's "Copper Tube Handbook."
- D. Joints for Dissimilar-Material Piping: Make joints using adapters compatible with materials of both piping systems.

3.4 TRANSITION FITTING INSTALLATION

- A. Install transition couplings at joints of dissimilar piping.
- B. Transition Fittings in Underground Domestic Water Piping:
 - 1. Fittings for NPS 1-1/2 and Smaller: Fitting-type coupling.
 - 2. Fittings for NPS 2 and Larger: Sleeve-type coupling.
- C. Transition Fittings in Aboveground Domestic Water Piping NPS 2 and Smaller: Plastic-to-metal transition fittings or unions.

3.5 HANGER AND SUPPORT INSTALLATION

- A. Comply with requirements for pipe hanger, support products, and installation in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
 - 1. Vertical Piping: MSS Type 8 or 42, clamps.
 - 2. Individual, Straight, Horizontal Piping Runs:
 - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
- B. Support vertical piping and tubing at base and at each floor.
- C. Rod diameter may be reduced one size for double-rod hangers, to a minimum of 3/8 inch.

- D. Install hangers for copper tubing with the following maximum horizontal spacing and minimum rod diameters:
 - 1. NPS 3/4 and Smaller: 60 inches with 3/8-inch rod.
 - 2. NPS 1 and NPS 1-1/4: 72 inches with 3/8-inch rod.
 - 3. NPS 1-1/2 and NPS 2: 96 inches with 3/8-inch rod.
 - 4. NPS 2-1/2: 108 inches with 1/2-inch rod.
 - 5. NPS 3 to NPS 5: 10 feet with 1/2-inch rod.
- E. Install supports for vertical copper tubing every 10 feet.
- F. Support piping and tubing not listed in this article according to MSS SP-58 and manufacturer's written instructions.

3.6 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. When installing piping adjacent to equipment and machines, allow space for service and maintenance.
- C. Connect domestic water piping to exterior water-service piping. Use transition fitting to join dissimilar piping materials.
- D. Connect domestic water piping to water-service piping with shutoff valve; extend and connect to the following:
 - 1. Water Heaters: Cold-water inlet and hot-water outlet piping in sizes indicated, but not smaller than sizes of water heater connections.
 - 2. Plumbing Fixtures: Cold- and hot-water-supply piping in sizes indicated, but not smaller than that required by plumbing code.
 - 3. Equipment: Cold- and hot-water-supply piping as indicated, but not smaller than equipment connections. Provide shutoff valve and union for each connection. Use flanges instead of unions for NPS 2-1/2 and larger.

3.7 IDENTIFICATION

- A. Identify system components. Comply with requirements for identification materials and installation in Section 220553 "Identification for Plumbing Piping and Equipment."

3.8 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
 - 1. Piping Inspections:
 - a. Do not enclose, cover, or put piping into operation until it has been inspected and approved by authorities having jurisdiction.
 - b. During installation, notify authorities having jurisdiction at least one day before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction:

- 1) Roughing-in Inspection: Arrange for inspection of piping before concealing or closing in after roughing in and before setting fixtures.
 - 2) Final Inspection: Arrange for authorities having jurisdiction to observe tests specified in "Piping Tests" Subparagraph below and to ensure compliance with requirements.
- c. Reinspection: If authorities having jurisdiction find that piping will not pass tests or inspections, make required corrections and arrange for reinspection.
 - d. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
2. Piping Tests:
- a. Fill domestic water piping. Check components to determine that they are not air bound and that piping is full of water.
 - b. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit a separate report for each test, complete with diagram of portion of piping tested.
 - c. Leave new, altered, extended, or replaced domestic water piping uncovered and unconcealed until it has been tested and approved. Expose work that was covered or concealed before it was tested.
 - d. Cap and subject piping to static water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials. Isolate test source and allow it to stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired.
 - e. Repair leaks and defects with new materials, and retest piping or portion thereof until satisfactory results are obtained.
 - f. Prepare reports for tests and for corrective action required.

B. Domestic water piping will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

3.9 ADJUSTING

A. Perform the following adjustments before operation:

1. Close drain valves, hydrants, and hose bibbs.
2. Open shutoff valves to fully open position.
3. Open throttling valves to proper setting.
4. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.
 - a. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide hot-water flow in each branch.
 - b. Adjust calibrated balancing valves to flows indicated.
5. Remove plugs used during testing of piping and for temporary sealing of piping during installation.
6. Remove and clean strainer screens. Close drain valves and replace drain plugs.
7. Remove filter cartridges from housings and verify that cartridges are as specified for application where used and are clean and ready for use.

8. Check plumbing specialties and verify proper settings, adjustments, and operation.

3.10 CLEANING

- A. Clean and disinfect potable domestic water piping as follows:
 1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
 2. Use purging and disinfecting procedures prescribed by authorities having jurisdiction; if methods are not prescribed, use procedures described in either AWWA C651 or AWWA C652 or follow procedures described below:
 - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
 - b. Fill and isolate system according to either of the following:
 - 1) Fill system or part thereof with water/chlorine solution with at least 50 ppm of chlorine. Isolate with valves and allow to stand for 24 hours.
 - 2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for three hours.
 - c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
 - d. Repeat procedures if biological examination shows contamination.
 - e. Submit water samples in sterile bottles to authorities having jurisdiction.
- B. Prepare and submit reports of purging and disinfecting activities. Include copies of water-sample approvals from authorities having jurisdiction.
- C. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.

3.11 PIPING SCHEDULE

- A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
- B. Under-building-slab, domestic water, building-service piping shall be the following:
 1. Soft copper tube, ASTM B 88, Type K; no joints.
- C. Aboveground domestic water piping shall be any of the following:
 1. Hard copper tube, ASTM B 88, Type L; wrought-copper, solder-joint fittings; and soldered joints.

3.12 VALVE SCHEDULE

- A. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:
 1. Shutoff Duty: Use ball valves for piping NPS 2 and smaller. Use butterfly or ball valves with flanged ends for piping NPS 2-1/2 and larger.

2. Throttling Duty: Use ball or globe valves for piping NPS 2 and smaller. Use butterfly or ball valves with flanged ends for piping NPS 2-1/2 and larger.
3. Hot-Water Circulation Piping, Balancing Duty: Calibrated balancing valves.
4. Drain Duty: Hose-end drain valves.

B. Use check valves to maintain correct direction of domestic water flow to and from equipment.

END OF SECTION 221116

SECTION 221119 - DOMESTIC WATER PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Vacuum breakers.
2. Backflow preventers.
3. Balancing valves.
4. Temperature-actuated, water mixing valves.
5. Drain valves.
6. Outlet boxes.
7. Hose bibbs.
8. Roof hydrants.
9. Water-hammer arresters.

- B. Related Requirements:

1. Section 220519 "Meters and Gages for Plumbing Piping" for thermometers, pressure gages, and flow meters in domestic water piping.
2. Section 221116 "Domestic Water Piping" for water meters.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For domestic water piping specialties.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For domestic water piping specialties to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR PIPING SPECIALTIES

- A. Potable-water piping and components shall comply with NSF 61 Annex G.

2.2 PERFORMANCE REQUIREMENTS

- A. Minimum Working Pressure for Domestic Water Piping Specialties: 125 psig unless otherwise indicated.

2.3 VACUUM BREAKERS

- A. Hose-Connection Vacuum Breakers:

1. Standard: ASSE 1011.
2. Body: Bronze, nonremovable, with manual drain.
3. Outlet Connection: Garden-hose threaded complying with ASME B1.20.7.
4. Finish: Chrome or nickel plated.

2.4 BALANCING VALVES

- A. Copper-Alloy Calibrated Balancing Valves:

1. Type: Ball valve with two readout ports and memory-setting indicator.
2. Body: bronze.
3. Size: Same as connected piping, but not larger than NPS 2.
4. Accessories: Meter hoses, fittings, valves, differential pressure meter, and carrying case.

2.5 TEMPERATURE-ACTUATED, WATER MIXING VALVES

- A. Individual-Fixture, Water Tempering Valves, MX1:

1. Standard: ASSE 1016, thermostatically controlled, water tempering valve.
2. Pressure Rating: 125 psig minimum unless otherwise indicated.
3. Body: Bronze body with corrosion-resistant interior components.
4. Temperature Control: Adjustable.
5. Inlets and Outlet: Threaded.
6. Finish: Rough or chrome-plated bronze.
7. Tempered-Water Setting: 110 deg F.
8. Tempered-Water Design Flow Rate: 1.5 gpm.

2.6 DRAIN VALVES

- A. Ball-Valve-Type, Hose-End Drain Valves:

1. Standard: MSS SP-110 for standard-port, two-piece ball valves.
2. Pressure Rating: 400-psig minimum CWP.
3. Size: NPS 3/4.
4. Body: Copper alloy.
5. Ball: Chrome-plated brass.
6. Seats and Seals: Replaceable.
7. Handle: Vinyl-covered steel.
8. Inlet: Threaded or solder joint.
9. Outlet: Threaded, short nipple with garden-hose thread complying with ASME B1.20.7 and cap with brass chain.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install balancing valves in locations where they can easily be adjusted.
- B. Install temperature-actuated, water mixing valves with check stops or shutoff valves on inlets and with shutoff valve on outlet.
- C. Install Y-pattern strainers where indicated on plans and risers.

3.2 CONNECTIONS

- A. Comply with requirements for ground equipment in Section 260526 "Grounding and Bonding for Electrical Systems."
- B. Fire-retardant-treated-wood blocking is specified in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for electrical connections.

3.3 LABELING AND IDENTIFYING

- A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:
 - 1. Primary, thermostatic, water mixing valves.
 - 2. Calibrated balancing valves.
- B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
 - 1. Test each double-check, backflow-prevention assembly according to authorities having jurisdiction and the device's reference standard.
- B. Domestic water piping specialties will be considered defective if they do not pass tests and inspections.
- C. Prepare test and inspection reports.

3.5 ADJUSTING

- A. Set field-adjustable flow set points of balancing valves.
- B. Set field-adjustable temperature set points of temperature-actuated, water mixing valves.

END OF SECTION 221119

SECTION 221124 - FACILITY NATURAL-GAS PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Pipes, tubes, and fittings.
2. Piping specialties.
3. Piping and tubing joining materials.
4. Valves.
5. Pressure regulators.

1.2 DEFINITIONS

- A. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct shafts, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspace, and tunnels.
- B. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.
- C. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. Examples include rooftop locations.

1.3 PERFORMANCE REQUIREMENTS

A. Minimum Operating-Pressure Ratings:

1. Piping and Valves: 100 psig minimum unless otherwise indicated.
2. Service Regulators: 65 psig minimum unless otherwise indicated.
3. Minimum Operating Pressure of Service Meter: 5 psig.

- B. Natural-Gas System Pressures within Buildings: Two pressure ranges. Primary pressure is more than 0.5 psig but not more than 2 psig, and is reduced to secondary pressure of 0.5 psig or less.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of the following:

1. Piping specialties.
2. Valves. Include pressure rating, capacity, settings, and electrical connection data of selected models.
3. Pressure regulators. Indicate pressure ratings and capacities.
4. Dielectric fittings.

- B. Delegated-Design Submittal: For natural-gas piping and equipment indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1. Detail fabrication and assembly of seismic restraints.
2. Design Calculations: Calculate requirements for selecting seismic restraints.

1.5 INFORMATIONAL SUBMITTALS

- A. Site Survey: Plans, drawn to scale, on which natural-gas piping is shown and coordinated with other services and utilities.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For motorized gas valves pressure and regulators to include in emergency, operation, and maintenance manuals.

1.7 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Handling Flammable Liquids: Remove and dispose of liquids from existing natural-gas piping according to requirements of authorities having jurisdiction.
- B. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.
- C. Store and handle pipes and tubes having factory-applied protective coatings to avoid damaging coating, and protect from direct sunlight.
- D. Protect stored PE pipes and valves from direct sunlight.

1.9 PROJECT CONDITIONS

- A. Perform site survey, research public utility records, and verify existing utility locations. Contact utility-locating service for area where Project is located.
- B. Interruption of Existing Natural-Gas Service: Do not interrupt natural-gas service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide purging and startup of natural-gas supply according to requirements indicated:
 - 1. Notify Owner no fewer than two days in advance of proposed interruption of natural-gas service.
 - 2. Do not proceed with interruption of natural-gas service without Owner's written permission.

1.10 COORDINATION

- A. Coordinate sizes and locations of concrete bases with actual equipment provided.

PART 2 - PRODUCTS

2.1 PIPES, TUBES, AND FITTINGS

- A. Steel Pipe: ASTM A 53/A 53M, black steel, Schedule 40, Type E or S, Grade B.
 - 1. Malleable-Iron Threaded Fittings: ASME B16.3, Class 150, standard pattern.
 - 2. Wrought-Steel Welding Fittings: ASTM A 234/A 234M for butt welding and socket welding.
 - 3. Unions: ASME B16.39, Class 150, malleable iron with brass-to-iron seat, ground joint, and threaded ends.
 - 4. Forged-Steel Flanges and Flanged Fittings: ASME B16.5, minimum Class 150, including bolts, nuts, and gaskets of the following material group, end connections, and facings:
 - a. Material Group: 1.1.
 - b. End Connections: Threaded or butt welding to match pipe.
 - c. Lapped Face: Not permitted underground.
 - d. Gasket Materials: ASME B16.20, metallic, flat, asbestos free, aluminum o-rings, and spiral-wound metal gaskets.
 - e. Bolts and Nuts: ASME B18.2.1, carbon steel aboveground and stainless steel underground.
- B. Drawn-Temper Copper Tube: Comply with ASTM B 88, Type L.
 - 1. Copper Fittings: ASME B16.22, wrought copper, and streamlined pattern.
 - 2. Bronze Flanges and Flanged Fittings: ASME B16.24, Class 150.
 - a. Gasket Material: ASME B16.20, metallic, flat, asbestos free, aluminum o-rings, and spiral-wound metal gaskets.
 - b. Bolts and Nuts: ASME B18.2.1, carbon steel or stainless steel.
- C. Annealed-Temper Copper Tube: Comply with ASTM B 88, Type L.
 - 1. Copper Fittings: ASME B16.22, wrought copper, and streamlined pattern.

2.2 PIPING SPECIALTIES

- A. Appliance Flexible Connectors:
 - 1. Indoor, Fixed-Appliance Flexible Connectors: Comply with ANSI Z21.24.
 - 2. Indoor, Movable-Appliance Flexible Connectors: Comply with ANSI Z21.69.
 - 3. Corrugated stainless-steel tubing with polymer coating.
 - 4. Operating-Pressure Rating: 0.5 psig.
 - 5. End Fittings: Zinc-coated steel.
 - 6. Threaded Ends: Comply with ASME B1.20.1.
 - 7. Maximum Length: 72 inches
- B. Quick-Disconnect Devices: Comply with ANSI Z21.41.
 - 1. Copper-alloy convenience outlet and matching plug connector.
 - 2. Nitrile seals.
 - 3. Hand operated with automatic shutoff when disconnected.
 - 4. For indoor or outdoor applications.
 - 5. Adjustable, retractable restraining cable.

C. Y-Pattern Strainers:

1. Body: ASTM A 126, Class B, cast iron with bolted cover and bottom drain connection.
2. End Connections: Threaded ends for NPS 2 and smaller; flanged ends for NPS 2-1/2 and larger.
3. Strainer Screen: 40 mesh startup strainer, and perforated stainless-steel basket with 50 percent free area.
4. CWP Rating: 125 psig.

2.3 JOINING MATERIALS

- A. Joint Compound and Tape: Suitable for natural gas.
- B. Welding Filler Metals: Comply with AWS D10.12/D10.12M for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.
- C. Brazing Filler Metals: Alloy with melting point greater than 1000 deg F complying with AWS A5.8/A5.8M. Brazing alloys containing more than 0.05 percent phosphorus are prohibited.

2.4 MANUAL GAS SHUTOFF VALVES

- A. General Requirements for Metallic Valves, NPS 2 and Smaller: Comply with ASME B16.33.
1. CWP Rating: 125 psig.
 2. Threaded Ends: Comply with ASME B1.20.1.
 3. Dryseal Threads on Flare Ends: Comply with ASME B1.20.3.
 4. Tamperproof Feature: Locking feature for valves indicated in "Underground Manual Gas Shutoff Valve Schedule" and "Aboveground Manual Gas Shutoff Valve Schedule" Articles.
 5. Listing: Listed and labeled by an NRTL acceptable to authorities having jurisdiction for valves 1 inch and smaller.
 6. Service Mark: Valves 1-1/4 inches to NPS 2 shall have initials "WOG" permanently marked on valve body.
- B. Two-Piece, Full-Port, Bronze Ball Valves with Bronze Trim: MSS SP-110.
1. Body: Bronze, complying with ASTM B 584.
 2. Ball: Chrome-plated bronze.
 3. Stem: Bronze; blowout proof.
 4. Seats: Reinforced TFE; blowout proof.
 5. Packing: Threaded-body packnut design with adjustable-stem packing.
 6. Ends: Threaded, flared, or socket as indicated in "Underground Manual Gas Shutoff Valve Schedule" and "Aboveground Manual Gas Shutoff Valve Schedule" Articles.
 7. CWP Rating: 600 psig.
 8. Listing: Valves NPS 1 and smaller shall be listed and labeled by an NRTL acceptable to authorities having jurisdiction.
 9. Service: Suitable for natural-gas service with "WOG" indicated on valve body.
- C. Bronze Plug Valves: MSS SP-78.
1. Body: Bronze, complying with ASTM B 584.

2. Plug: Bronze.
3. Ends: Threaded, socket, or flanged as indicated in "Underground Manual Gas Shutoff Valve Schedule" and "Aboveground Manual Gas Shutoff Valve Schedule" Articles.
4. Operator: Square head or lug type with tamperproof feature where indicated.
5. Pressure Class: 125 psig.
6. Listing: Valves NPS 1 and smaller shall be listed and labeled by an NRTL acceptable to authorities having jurisdiction.
7. Service: Suitable for natural-gas service with "WOG" indicated on valve body.

2.5 MOTORIZED GAS VALVES

A. Electrically Operated Valves: Comply with UL 429.

1. Pilot operated.
2. Body: Brass or aluminum.
3. Seats and Disc: Nitrile rubber.
4. Springs and Valve Trim: Stainless steel.
5. 120-V ac, 60 Hz, Class B, continuous-duty molded coil, and replaceable.
6. NEMA ICS 6, Type 4, coil enclosure.
7. Normally closed.
8. Visual position indicator.

B. Control Station (Emergency Stop).

1. Flush mounted or surface mounted as construction allows.
2. Power to valves shut off to close in 0.1 seconds or less.
3. Keyed reset.

2.6 PRESSURE REGULATORS

A. General Requirements:

1. Single stage and suitable for natural gas.
2. Steel jacket and corrosion-resistant components.
3. Elevation compensator.
4. End Connections: Threaded for regulators NPS 2 and smaller; flanged for regulators NPS 2-1/2 and larger.

B. Service Pressure Regulators: Comply with ANSI Z21.80.

1. Body and Diaphragm Case: Cast iron or die-cast aluminum.
2. Springs: Zinc-plated steel; interchangeable.
3. Diaphragm Plate: Zinc-plated steel.
4. Seat Disc: Nitrile rubber resistant to gas impurities, abrasion, and deformation at the valve port.
5. Orifice: Aluminum; interchangeable.
6. Seal Plug: Ultraviolet-stabilized, mineral-filled nylon.
7. Single-port, self-contained regulator with orifice no larger than required at maximum pressure inlet, and no pressure sensing piping external to the regulator.
8. Pressure regulator shall maintain discharge pressure setting downstream, and not exceed 150 percent of design discharge pressure at shutoff.
9. Atmospheric Vent: Factory- or field-installed, stainless-steel screen in opening if not connected to vent piping.

10. Maximum Inlet Pressure: 100 psig.

C. Line Pressure Regulators: Comply with ANSI Z21.80.

1. Body and Diaphragm Case: Cast iron or die-cast aluminum.
2. Springs: Zinc-plated steel; interchangeable.
3. Diaphragm Plate: Zinc-plated steel.
4. Seat Disc: Nitrile rubber resistant to gas impurities, abrasion, and deformation at the valve port.
5. Orifice: Aluminum; interchangeable.
6. Seal Plug: Ultraviolet-stabilized, mineral-filled nylon.
7. Single-port, self-contained regulator with orifice no larger than required at maximum pressure inlet, and no pressure sensing piping external to the regulator.
8. Pressure regulator shall maintain discharge pressure setting downstream, and not exceed 150 percent of design discharge pressure at shutoff.
9. Atmospheric Vent: Factory- or field-installed, stainless-steel screen in opening if not connected to vent piping.
10. Maximum Inlet Pressure: 2 psig
11. Provide with leak-limiting device.

2.7 DIELECTRIC FITTINGS

A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.

B. Dielectric Unions:

1. Description:
 - a. Standard: ASSE 1079.
 - b. Pressure Rating: 125 psig minimum at 180 deg F.
 - c. End Connections: Solder-joint copper alloy and threaded ferrous.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for natural-gas piping system to verify actual locations of piping connections before equipment installation.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Close equipment shutoff valves before turning off natural gas to premises or piping section.
- B. Inspect natural-gas piping according to NFPA 54 and NC Fuel Gas Code to determine that natural-gas utilization devices are turned off in piping section affected.
- C. Comply with NFPA 54 and NC Fuel Gas Code requirements for prevention of accidental ignition.

3.3 OUTDOOR PIPING INSTALLATION

- A. Comply with NFPA 54 and NC Fuel Gas Code for installation and purging of natural-gas piping.
- B. Install pressure gage downstream from service regulator.

3.4 INDOOR PIPING INSTALLATION

- A. Comply with NFPA 54 and NC Fuel Gas Code for installation and purging of natural-gas piping.
- B. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.
- C. Arrange for pipe spaces, chases, slots, sleeves, and openings in building structure during progress of construction, to allow for mechanical installations.
- D. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- E. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- F. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- G. Locate valves for easy access.
- H. Install piping free of sags and bends.
- I. Install fittings for changes in direction and branch connections.
- J. Verify final equipment locations for roughing-in.
- K. Comply with requirements in Sections specifying gas-fired appliances and equipment for roughing-in requirements.
- L. Drips and Sediment Traps: Install drips at points where condensate may collect, including service-meter outlets. Locate where accessible to permit cleaning and emptying. Do not install where condensate is subject to freezing.
 - 1. Construct drips and sediment traps using tee fitting with bottom outlet plugged or capped. Use nipple a minimum length of 3 pipe diameters, but not less than 3 inches long and same size as connected pipe. Install with space below bottom of drip to remove plug or cap.
- M. Extend relief vent connections for service regulators, line regulators, and overpressure protection devices to outdoors and terminate with weatherproof vent cap.

- N. Conceal pipe installations in walls, pipe spaces, utility spaces, above ceilings, below grade or floors, and in floor channels unless indicated to be exposed to view.
 - O. Concealed Location Installations: Except as specified below, install concealed natural-gas piping and piping installed under the building in containment conduit constructed of steel pipe with welded joints as described in Part 2. Install a vent pipe from containment conduit to outdoors and terminate with weatherproof vent cap.
 - 1. Above Accessible Ceilings: Natural-gas piping, fittings, valves, and regulators may be installed in accessible spaces without containment conduit.
 - 2. In Walls or Partitions: Protect tubing installed inside partitions or hollow walls from physical damage using steel striker barriers at rigid supports.
 - a. Exception: Tubing passing through partitions or walls does not require striker barriers.
 - 3. Prohibited Locations:
 - a. Do not install natural-gas piping in or through circulating air ducts, clothes or trash chutes, chimneys or gas vents (flues), ventilating ducts, or dumbwaiter or elevator shafts.
 - b. Do not install natural-gas piping in solid walls or partitions.
 - P. Use eccentric reducer fittings to make reductions in pipe sizes. Install fittings with level side down.
 - Q. Connect branch piping from top or side of horizontal piping.
 - R. Install unions in pipes NPS 2 and smaller, adjacent to each valve, at final connection to each piece of equipment. Unions are not required at flanged connections.
 - S. Do not use natural-gas piping as grounding electrode.
 - T. Each above-ground portion of the gas piping system shall be electrically continuous and bonded to an effective ground-fault current path.
 - U. Install strainer on inlet of each line-pressure regulator and automatic or electrically operated valve.
 - V. A tee fitting with one opening capped or plugged shall be installed between the MP regulator and its upstream shutoff valve. Such tee fitting shall be positioned to allow connection of a pressure-measuring instrument and to serve as a sediment trap
 - W. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
 - X. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."
- 3.5 VALVE INSTALLATION
- A. Install manual gas shutoff valve for each gas appliance ahead of corrugated stainless-steel tubing, aluminum, or copper connector.

- B. Install regulators and overpressure protection devices with maintenance access space adequate for servicing and testing.
- C. Install motorized gas valves in all classrooms/labs with natural gas. Provide emergency stop pushbuttons at classroom/lab exit.

3.6 PIPING JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- C. Threaded Joints:
 - 1. Thread pipe with tapered pipe threads complying with ASME B1.20.1.
 - 2. Cut threads full and clean using sharp dies.
 - 3. Ream threaded pipe ends to remove burrs and restore full inside diameter of pipe.
 - 4. Apply appropriate tape or thread compound to external pipe threads unless dryseal threading is specified.
 - 5. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
- D. Brazed Joints: Construct joints according to AWS's "Brazing Handbook," "Pipe and Tube" Chapter.

3.7 HANGER AND SUPPORT INSTALLATION

- A. Install seismic restraints on piping. Comply with requirements for seismic-restraint devices specified in the North Carolina Building Code.
- B. Comply with requirements for pipe hangers and supports specified in Section 220529 "Hangers and Supports for HVAC Piping and Equipment."
- C. Install hangers for horizontal steel piping with the following maximum spacing and minimum rod sizes:
 - 1. NPS 1 and Smaller: Maximum span, 96 inches; minimum rod size, 3/8 inch.
 - 2. NPS 1-1/4: Maximum span, 108 inches; minimum rod size, 3/8 inch.
 - 3. NPS 1-1/2 and NPS 2: Maximum span, 108 inches; minimum rod size, 3/8 inch.
 - 4. NPS 2-1/2 to NPS 3-1/2: Maximum span, 10 feet; minimum rod size, 1/2 inch.
 - 5. NPS 4 and Larger: Maximum span, 10 feet; minimum rod size, 5/8 inch.
- D. Install hangers for horizontal drawn-temper copper tubing with the following maximum spacing and minimum rod sizes:
 - 1. NPS 3/8: Maximum span, 48 inches; minimum rod size, 3/8 inch.
 - 2. NPS 1/2 and NPS 5/8: Maximum span, 72 inches; minimum rod size, 3/8 inch.
 - 3. NPS 3/4 and NPS 7/8: Maximum span, 84 inches; minimum rod size, 3/8 inch.
 - 4. NPS 1: Maximum span, 96 inches; minimum rod size, 3/8 inch.

3.8 CONNECTIONS

- A. Connect to utility's gas main according to utility's procedures and requirements.
- B. Install natural-gas piping electrically continuous, and bonded to gas appliance equipment grounding conductor of the circuit powering the appliance according to NFPA 70.
- C. Install piping adjacent to appliances to allow service and maintenance of appliances.
- D. Connect piping to appliances using manual gas shutoff valves and unions. Install valve within 72 inches of each gas-fired appliance and equipment. Install union between valve and appliances or equipment.
- E. Sediment Traps: Install tee fitting with capped nipple in bottom to form drip, as close as practical to inlet of each appliance.

3.9 LABELING AND IDENTIFYING

- A. Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for piping and valve identification.
- B. Install detectable warning tape directly above gas piping, 12 inches below finished grade, except 6 inches below subgrade under pavements and slabs.

3.10 PAINTING

- A. Comply with requirements in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting" for painting interior and exterior natural-gas piping.
- B. Paint exposed, exterior metal piping, valves, service regulators, and piping specialties, except components, with factory-applied paint or protective coating.
 - 1. Alkyd System: MPI EXT 5.1D.
 - a. Prime Coat: Alkyd anticorrosive metal primer.
 - b. Intermediate Coat: Exterior alkyd enamel matching topcoat.
 - c. Topcoat: Exterior alkyd enamel (gloss).
 - d. Color: Gray.
- C. Paint exposed, interior metal piping, valves, and piping specialties, except components, with factory-applied paint or protective coating.
 - 1. Alkyd System: MPI INT 5.1E.
 - a. Prime Coat: Alkyd anticorrosive metal primer.
 - b. Intermediate Coat: Interior alkyd matching topcoat.
 - c. Topcoat: Interior alkyd (gloss).
 - d. Color: Yellow.
- D. Damage and Touchup: Repair marred and damaged factory-applied finishes with materials and by procedures to match original factory finish.

3.11 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Tests and Inspections:
 - 1. Test, inspect, and purge natural gas according to NFPA 54, NC Fuel Gas Code and authorities having jurisdiction.
- C. Natural-gas piping will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports. Copy of the test and inspector report shall be provided to the Engineer of Record and the State Construction Office per Specification Section 014000.

3.12 OUTDOOR PIPING SCHEDULE

- A. Aboveground natural-gas piping shall be the following:
 - 1. Steel pipe with malleable-iron fittings and threaded joints.

3.13 INDOOR PIPING SCHEDULE

- A. Aboveground, branch piping NPS 1 and smaller shall be one of the following:
 - 1. Annealed-temper, copper tube with wrought-copper fittings and brazed joints.
 - 2. Steel pipe with malleable-iron fittings and threaded joints.
- B. Aboveground, distribution piping shall be one of the following:
 - 1. Steel pipe with malleable-iron fittings and threaded joints.
 - 2. Drawn-temper copper tube with wrought-copper fittings and brazed joints.

3.14 ABOVEGROUND MANUAL GAS SHUTOFF VALVE SCHEDULE

- A. Valves for pipe sizes NPS 2 and smaller at service meter shall be the following:
 - 1. Bronze plug valve.
- B. Distribution piping valves for pipe sizes NPS 2 and smaller shall be the following:
 - 1. Two-piece, full-port, bronze ball valves with bronze trim.
- C. Valves in branch piping for single appliance shall be the following:
 - 1. Two-piece, full-port, bronze ball valves with bronze trim.

END OF SECTION 221124

SECTION 221316 - STORM, SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Pipe, tube, and fittings.
 - 2. Specialty pipe fittings.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.3 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Piping materials shall bear label, stamp, or other markings of specified testing agency.
- B. Comply with NSF/ANSI 14, "Plastics Piping Systems Components and Related Materials," for plastic piping components. Include marking with "NSF-dwv" for plastic drain, waste, and vent piping and "NSF-sewer" for plastic sewer piping.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

- A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.2 HUB-AND-SPIGOT, CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings: ASTM A 74, Service class.
- B. Gaskets: ASTM C 564, rubber.

2.3 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings: ASTM A 888 or CISPI 301.

- B. CISPI, Hubless-Piping Couplings:
 - 1. Standards: ASTM C 1277 and CISPI 310.
 - 2. Description: Stainless-steel corrugated shield with stainless-steel bands and tightening devices; and ASTM C 564, rubber sleeve with integral, center pipe stop.

2.4 PVC PIPE AND FITTINGS

- A. Cellular-Core PVC Pipe: ASTM F 891, Schedule 40.
- B. PVC Socket Fittings: ASTM D 2665, made to ASTM D 3311, drain, waste, and vent patterns and to fit Schedule 40 pipe.
- C. Adhesive Primer: ASTM F 656.
- D. Solvent Cement: ASTM D 2564.

2.5 SPECIALTY PIPE FITTINGS

- A. Transition Couplings:
 - 1. General Requirements: Fitting or device for joining piping with small differences in OD's or of different materials. Include end connections same size as and compatible with pipes to be joined.
 - 2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.
 - 3. Unshielded, Nonpressure Transition Couplings:
 - a. Standard: ASTM C 1173.
 - b. Description: Elastomeric, sleeve-type, reducing or transition pattern. Include shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.
 - c. Sleeve Materials:
 - 1) For Cast-Iron Soil Pipes: ASTM C 564, rubber.
 - 2) For Plastic Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
 - 3) For Dissimilar Pipes: ASTM D 5926, PVC or other material compatible with pipe materials being joined.

PART 3 - EXECUTION

3.1 EARTH MOVING

- A. Comply with requirements for excavating, trenching, and backfilling specified in Section 312000 "Earth Moving."

3.2 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements were used to size pipe and calculate friction

loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.

- B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping at indicated slopes.
- F. Install piping free of sags and bends.
- G. Install fittings for changes in direction and branch connections.
- H. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Use long-turn, double Y-branch and 1/8-bend fittings if two fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Use proper size of standard increasers and reducers if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- I. Lay buried building drainage piping beginning at low point of each system. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements. Maintain swab in piping and pull past each joint as completed.
- J. Install soil and waste drainage and vent piping at the following minimum slopes unless otherwise indicated:
 - 1. Building Sanitary Drain: 2 percent downward in direction of flow for piping NPS 3 and smaller; 1 percent downward in direction of flow for piping NPS 4 and larger.
 - 2. Vent Piping: 1 percent down toward vertical fixture vent or toward vent stack.
- K. Install cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."
- L. Install underground PVC piping according to ASTM D 2321.
- M. Plumbing Specialties:
 - 1. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers in sanitary drainage gravity-flow piping. Comply with requirements for cleanouts specified in Section 221319 "Sanitary Waste Piping Specialties."
 - 2. Install drains in sanitary drainage gravity-flow piping. Comply with requirements for drains specified in Section 221319 "Sanitary Waste Piping Specialties."

- N. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
- O. Install sleeves for piping penetrations of walls, ceilings, and floors.
- P. Install sleeve seals for piping penetrations of concrete walls and slabs.
- Q. Install escutcheons for piping penetrations of walls, ceilings, and floors.

3.3 JOINT CONSTRUCTION

- A. Join hub-and-spigot, cast-iron soil piping with gasket joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- B. Join hubless, cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-piping coupling joints.
- C. Plastic, Nonpressure-Piping, Solvent-Cement Joints: Clean and dry joining surfaces. Join pipe and fittings according to the following:
 - 1. Comply with ASTM F 402 for safe-handling practice of cleaners, primers, and solvent cements.
 - 2. PVC Piping: Join according to ASTM D 2855 and ASTM D 2665 Appendixes.

3.4 SPECIALTY PIPE FITTING INSTALLATION

- A. Transition Couplings:
 - 1. Install transition couplings at joints of piping with small differences in OD's.
 - 2. In Drainage Piping: Unshielded and Shielded, nonpressure transition couplings.

3.5 HANGER AND SUPPORT INSTALLATION

- A. Comply with requirements for pipe hanger and support devices and installation specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
 - 1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.
 - 2. Install carbon-steel pipe support clamps for vertical piping in noncorrosive environments.
 - 3. Vertical Piping: MSS Type 8 or Type 42, clamps.
 - 4. Install individual, straight, horizontal piping runs:
 - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
 - 5. Base of Vertical Piping: MSS Type 52, spring hangers.
- B. Support horizontal piping and tubing within 12 inches of each fitting and coupling.
- C. Support vertical piping and tubing at base and at each floor.
- D. Rod diameter may be reduced one size for double-rod hangers, with 3/8-inch minimum rods.
- E. Install hangers for cast-iron soil piping with the following maximum horizontal spacing and minimum rod diameters:
 - 1. NPS 1-1/2 and NPS 2: 60 inches (1500 mm) with 3/8-inch (10-mm) rod.

2. NPS 3 (DN 80): 60 inches (1500 mm) with 1/2-inch (13-mm) rod.
 3. NPS 4: 60 inches (1500 mm) with 5/8-inch (16-mm) rod.
 4. Spacing for 10-foot (3-m) lengths may be increased to 10 feet (3 m). Spacing for fittings is limited to 60 inches (1500 mm).
- F. Install supports for vertical cast-iron soil piping every 15 feet (4.5 m).
- G. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written instructions.

3.6 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect drainage and vent piping to the following:
1. Plumbing Fixtures: Connect drainage piping in sizes indicated, but not smaller than required by plumbing code.
 2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by authorities having jurisdiction.
 3. Plumbing Specialties: Connect drainage and vent piping in sizes indicated, but not smaller than required by plumbing code.
 4. Install test tees (wall cleanouts) in conductors near floor and floor cleanouts with cover flush with floor.
 5. Equipment: Connect drainage piping as indicated. Provide shutoff valve if indicated and union for each connection. Use flanges instead of unions for connections NPS 2-1/2 (DN 65) and larger.
- D. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.
- E. Make connections according to the following unless otherwise indicated:
1. Install unions, in piping NPS 2 (DN 50) and smaller, adjacent to each valve and at final connection to each piece of equipment.
 2. Install flanges, in piping NPS 2-1/2 (DN 65) and larger, adjacent to flanged valves and at final connection to each piece of equipment.

3.7 IDENTIFICATION

- A. Identify exposed sanitary waste and vent piping. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.8 FIELD QUALITY CONTROL

- A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.

1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
 2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
- B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.
- C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- D. Test sanitary drainage and vent piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
 2. Leave uncovered and unconcealed new, altered, extended, or replaced drainage and vent piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
 3. Roughing-in Plumbing Test Procedure: Test drainage and vent piping except outside leaders on completion of roughing-in. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water (30 kPa). From 15 minutes before inspection starts to completion of inspection, water level must not drop. Inspect joints for leaks.
 4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1-inch wg (250 Pa). Use U-tube or manometer inserted in trap of water closet to measure this pressure. Air pressure must remain constant without introducing additional air throughout period of inspection. Inspect plumbing fixture connections for gas and water leaks.
 5. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
 6. Prepare reports for tests and required corrective action.

3.9 CLEANING AND PROTECTION

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- C. Place plugs in ends of uncompleted piping at end of day and when work stops.

3.10 PIPING SCHEDULE

- A. Aboveground, storm, soil and waste piping NPS 4 and smaller shall be any of the following:
 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
 2. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.

- B. Aboveground, vent piping NPS 4 and smaller shall be any of the following:
 - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
 - 2. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
- C. Underground, storm, soil, waste, and vent piping shall be the following:
 - 1. Cellular-core PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 2. Dissimilar Pipe-Material Couplings: Unshielded, nonpressure transition couplings.

END OF SECTION 221316

SECTION 221319 - SANITARY WASTE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cleanouts.
2. Floor drains.
3. Air-admittance valves.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product

1.3 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For drainage piping specialties to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

A. Drainage piping specialties shall bear label, stamp, or other markings of specified testing agency.

PART 2 - PRODUCTS

2.1 CLEANOUTS

A. Exposed Metal Cleanouts:

1. ASME A112.36.2M, Cast-Iron Cleanouts:
2. Standard: ASME A112.36.2M for cast iron for cleanout test tee.
3. Size: Same as connected drainage piping
4. Body Material: Hub-and-spigot, cast-iron soil pipe T-branch as required to match connected piping.
5. Closure: Countersunk or raised-head, cast-iron plug.
6. Closure Plug Size: Same as or not more than one size smaller than cleanout size.

B. Metal Floor Cleanouts:

1. ASME A112.36.2M, Cast-Iron Cleanouts:
2. Standard: ASME A112.36.2M for adjustable housing cast-iron soil pipe with cast-iron ferrule cleanout.
3. Size: Same as connected branch.
4. Body or Ferrule: Cast iron.
5. Clamping Device: Not required.
6. Outlet Connection: Spigot.
7. Closure: Brass plug with straight threads and gasket.
8. Adjustable Housing Material: Cast iron with threads.
9. Frame and Cover Material and Finish: Nickel-bronze, copper alloy.
10. Frame and Cover Shape: Round.
11. Top Loading Classification: Medium Duty.
12. Riser: ASTM A 74, Service class, cast-iron drainage pipe fitting and riser to cleanouts.

C. Cast-Iron Wall Cleanouts:

1. Standard: ASME A112.36.2M. Include wall access.
2. Size: Same as connected drainage piping.
3. Body: Hub-and-spigot, cast-iron soil pipe T-branch as required to match connected piping.
4. Closure: Countersunk or raised-head, brass plug.
5. Closure Plug Size: Same as or not more than one size smaller than cleanout size.
6. Wall Access: Round, flat, chrome-plated brass or stainless-steel cover plate with screw.
7. Wall Access: Round, nickel-bronze, copper-alloy, or stainless-steel wall-installation frame and cover.

2.2 FLOOR DRAINS

- A. Refer to Plumbing Fixture Schedule on design drawings.

2.3 MISCELLANEOUS SANITARY DRAINAGE PIPING SPECIALTIES

A. Air-Gap Fittings:

1. Standard: ASME A112.1.2, for fitting designed to ensure fixed, positive air gap between installed inlet and outlet piping.
2. Body: Bronze or cast iron.
3. Inlet: Opening in top of body.
4. Outlet: Larger than inlet.
5. Size: Same as connected waste piping and with inlet large enough for associated indirect waste piping.

B. Expansion Joints:

1. Standard: ASME A112.21.2M.
2. Body: Cast iron with bronze sleeve, packing, and gland.

3. End Connections: Matching connected piping.
4. Size: Same as connected soil, waste, or vent piping.

C. Floor-Drain, Trap-Seal Primer Fittings:

1. Description: Cast iron, with threaded inlet and threaded or spigot outlet, and trap-seal primer valve connection.
2. Size: Same as floor drain outlet with NPS 1/2 side inlet.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install cleanouts in aboveground piping and building drain piping according to the following, unless otherwise indicated:
1. Size same as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
 2. Locate at each change in direction of piping greater than 45 degrees.
 3. Locate at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
 4. Locate at base of each vertical soil and waste stack.
- B. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.
- C. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.
- D. Install floor drains at low points of surface areas to be drained. Set grates of drains flush with finished floor, unless otherwise indicated.
1. Position floor drains for easy access and maintenance.
 2. Set floor drains below elevation of surrounding finished floor to allow floor drainage. Set with grates depressed according to the following drainage area radii:
 - a. Radius, 30 Inches or Less: Equivalent to 1 percent slope, but not less than 1/4-inch total depression.
 - b. Radius, 30 to 60 Inches: Equivalent to 1 percent slope.
 - c. Radius, 60 Inches or Larger: Equivalent to 1 percent slope, but not greater than 1-inch total depression.
 3. Install floor-drain flashing collar or flange so no leakage occurs between drain and adjoining flooring. Maintain integrity of waterproof membranes where penetrated.
 4. Install individual traps for floor drains connected to sanitary building drain, unless otherwise indicated.
- E. Install air-gap fittings on draining-type backflow preventers and on indirect-waste piping discharge into sanitary drainage system.

- F. Install expansion joints where piping crosses building expansion joints.
- G. Install wood-blocking reinforcement for wall-mounting-type specialties.
- H. Install traps on plumbing specialty drain outlets. Omit traps on indirect wastes unless trap is indicated.
- I. Install floor-drain, trap-seal primer fittings on inlet to floor drains that require trap-seal primer connection.
 - 1. Exception: Fitting may be omitted if trap has trap-seal primer connection.
 - 2. Size: Same as floor drain inlet.

3.2 CONNECTIONS

- A. Comply with requirements in Section 221316 "Sanitary Waste and Vent Piping" for piping installation requirements. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to equipment to allow service and maintenance.

3.3 FIELD QUALITY CONTROL

- A. Perform tests and inspections and prepare test reports.
- B. Tests and Inspections:
 - 1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
 - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

3.4 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319

SECTION 221319.13 - SANITARY DRAINS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Floor drains.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 DRAIN ASSEMBLIES

- A. Sanitary drains shall bear label, stamp, or other markings of specified testing agency.

2.2 FLOOR DRAINS

- A. Refer to Plumbing Fixture Schedule on design drawings for further information.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install floor drains at low points of surface areas to be drained. Set grates of drains flush with finished floor, unless otherwise indicated.
 - 1. Position floor drains for easy access and maintenance.
 - 2. Set floor drains below elevation of surrounding finished floor to allow floor drainage.
 - 3. Install individual traps for floor drains connected to sanitary building drain, unless otherwise indicated.

3.2 CONNECTIONS

- A. Comply with requirements in Section 221316 "Sanitary Waste and Vent Piping" for piping installation requirements. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to equipment to allow service and maintenance.

3.3 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319.13

SECTION 221423 - STORM DRAINAGE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Roof drains.
 - 2. Overflow roof drain

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.3 QUALITY ASSURANCE

- A. Drainage piping specialties shall bear label, stamp, or other markings of specified testing agency.

PART 2 - PRODUCTS

2.1 ROOF DRAINS

- A. Refer to Plumbing Fixture Schedule on design drawings:

2.2 OVERFLOW ROOF DRAINS

- A. Refer to Plumbing Fixture Schedule on design drawings:

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install roof drains at low points of roof areas according to roof membrane manufacturer's written installation instructions.
 - 1. Install flashing collar or flange of roof drain to prevent leakage between drain and adjoining roofing. Maintain integrity of waterproof membranes where penetrated.
 - 2. Install expansion joints, if indicated, in roof drain outlets.
 - 3. Position roof drains for easy access and maintenance.

- B. Install cleanouts in aboveground piping and building drain piping according to the following instructions unless otherwise indicated:
 - 1. Use cleanouts the same size as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
 - 2. Locate cleanouts at each change in direction of piping greater than 45 degrees.
 - 3. Locate cleanouts at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
 - 4. Locate cleanouts at base of each vertical soil and waste stack.
- C. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.
- D. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.
- E. Install wall cleanouts in vertical conductors. Install access door in wall if indicated.
- F. Install sleeve flashing device with each conductor passing through floors with waterproof membrane.

3.2 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221423

SECTION 223400 - FUEL-FIRED, DOMESTIC-WATER HEATERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Commercial, power-vent, gas-fired, storage, domestic-water heaters.
 - 2. Domestic-water heater accessories.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type and size of domestic-water heater indicated. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings:
 - 1. Wiring Diagrams: For power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of commercial, gas-fired, domestic-water heater, from manufacturer.
- B. Domestic-Water Heater Labeling: Certified and labeled by testing agency acceptable to authorities having jurisdiction.
- C. Source quality-control reports.
- D. Field quality-control reports.
- E. Warranty: Sample of special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fuel-fired, domestic-water heaters to include in emergency, operation, and maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. ASME Compliance:

1. Where ASME-code construction is indicated, fabricate and label commercial, domestic-water heater storage tanks to comply with ASME Boiler and Pressure Vessel Code: Section VIII, Division 1.

C. NSF Compliance: Fabricate and label equipment components that will be in contact with potable water to comply with NSF 61 Annex G, "Drinking Water System Components - Health Effects."

1.7 COORDINATION

- A. Coordinate sizes and locations of concrete bases with actual equipment provided.

1.8 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of fuel-fired, domestic-water heaters that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:
 - a. Structural failures including storage tank and supports.
 - b. Faulty operation of controls.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal use.
2. Warranty Periods: From date of Final Acceptance.
 - a. Commercial, Gas-Fired, Storage, Domestic-Water Heaters:
 - 1) Storage Tank: Five years.
 - 2) Controls and Other Components: Two year(s).
 - b. Compression Tanks: Five years.

PART 2 - PRODUCTS

2.1 COMMERCIAL, GAS-FIRED, STORAGE, DOMESTIC-WATER HEATERS

- A. Commercial, Power-Vent, Gas-Fired, Storage, Domestic-Water Heaters:

1. Standard: ANSI Z21.10.3/CSA 4.3.
2. Storage-Tank Construction: ASME-code steel with 150-psig working-pressure rating.
 - a. Tappings: Factory fabricated of materials compatible with tank. Attach tappings to tank before testing.
 - 1) NPS 2 and Smaller: Threaded ends according to ASME B1.20.1.
 - 2) NPS 2-1/2 and Larger: Flanged ends according to ASME B16.5 for steel and stainless-steel flanges and according to ASME B16.24 for copper and copper-alloy flanges.

- b. Interior Finish: Comply with NSF 61 Annex G barrier materials for potable-water tank linings, including extending finish into and through tank fittings and outlets.
 - c. Lining: Glass complying with NSF 61 Annex G barrier materials for potable-water tank linings, including extending lining into and through tank fittings and outlets.
3. Factory-Installed Storage-Tank Appurtenances:
- a. Anode Rod: Replaceable magnesium.
 - b. Dip Tube: Required unless cold-water inlet is near bottom of tank.
 - c. Drain Valve: Corrosion-resistant metal complying with ASSE 1005.
 - d. Insulation: Comply with ASHRAE/IESNA 90.1. Surround entire storage tank except connections and controls.
 - e. Jacket: Steel with enameled finish.
 - f. Burner: For use with power-vent, gas-fired, domestic-water heaters and natural-gas fuel.
 - g. Automatic Ignition: ANSI Z21.20/CSA C22.2 No. 199, electric, automatic, gas-ignition system.
 - h. Temperature Control: Adjustable thermostat.
 - i. Safety Controls: Automatic, high-temperature-limit and low-water cutoff devices or systems.
 - j. Combination Temperature-and-Pressure Relief Valves: ANSI Z21.22/CSA 4.4-M. Include one or more relief valves with total relieving capacity at least as great as heat input, and include pressure setting less than domestic-water heater working-pressure rating. Select one relief valve with sensing element that extends into storage tank.
4. Special Requirements: NSF 5 construction.
5. Power-Vent System: Exhaust fan, interlocked with burner.

2.2 DOMESTIC-WATER HEATER ACCESSORIES

A. Vent Piping:

- 1. Description: PVC, as recommended by water heater manufacturer.
- 2. Termination: Sidewall intake and exhaust. Concentric vents are acceptable.

B. Domestic-Water Compression Tanks:

- 1. Description: Steel, pressure-rated tank constructed with welded joints and factory-installed butyl-rubber diaphragm. Include air precharge to minimum system-operating pressure at tank.
- 2. Construction:
 - a. Tappings: Factory-fabricated steel, welded to tank before testing and labeling. Include ASME B1.20.1 pipe thread.
 - b. Interior Finish: Comply with NSF 61 Annex G barrier materials for potable-water tank linings, including extending finish into and through tank fittings and outlets.
 - c. Air-Charging Valve: Factory installed.
- 3. Capacity and Characteristics:

- a. Working-Pressure Rating: 100 psig.
 - b. Capacity Acceptable: 4 gal. minimum.
 - c. Air Precharge Pressure: 12 psig.
- C. Piping-Type Heat Traps: Field-fabricated piping arrangement according to ASHRAE/IESNA 90.1.
- D. Heat-Trap Fittings: ASHRAE 90.2.
- E. Manifold Kits: Domestic-water heater manufacturer's factory-fabricated inlet and outlet piping for field installation, for multiple domestic-water heater installation. Include ball-, butterfly-, or gate-type shutoff valves to isolate each domestic-water heater and calibrated balancing valves to provide balanced flow through each domestic-water heater.
- F. Comply with requirements for ball- or butterfly-type shutoff valves specified in Section 220523.12 "Ball Valves for Plumbing Piping" and Section 220523.13 "Butterfly Valves for Plumbing Piping."
 - 1. Comply with requirements for balancing valves specified in Section 221119 "Domestic Water Piping Specialties."
- G. Gas Shutoff Valves: ANSI Z21.15/CSA 9.1-M, manually operated. Furnish for installation in piping.
- H. Gas Pressure Regulators: ANSI Z21.18/CSA 6.3, appliance type. Include 2-psig pressure rating as required to match gas supply.
- I. Automatic Gas Valves: ANSI Z21.21/CSA 6.5, appliance, electrically operated, on-off automatic valve.
- J. Combination Temperature-and-Pressure Relief Valves: Include relieving capacity at least as great as heat input, and include pressure setting less than domestic-water heater working-pressure rating. Select relief valves with sensing element that extends into storage tank.
 - 1. Gas-Fired, Domestic-Water Heaters: ANSI Z21.22/CSA 4.4-M.

2.3 SOURCE QUALITY CONTROL

- A. Factory Tests: Test and inspect assembled domestic-water heaters specified to be ASME-code construction, according to ASME Boiler and Pressure Vessel Code.
- B. Hydrostatically test commercial domestic-water heaters to minimum of one and one-half times pressure rating before shipment.
- C. Domestic-water heaters will be considered defective if they do not pass tests and inspections. Comply with requirements in Section 014000 "Quality Requirements" for retesting and reinspecting requirements and Section 017300 "Execution" for requirements for correcting the Work.
- D. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 DOMESTIC-WATER HEATER INSTALLATION

- A. Commercial, Domestic-Water Heater Mounting: Install commercial domestic-water heaters on concrete base. Comply with requirements for concrete base specified in Section 033000 "Cast-in-Place Concrete."
 - 1. Exception: Omit concrete bases for commercial domestic-water heaters if installation on stand, bracket, suspended platform, or directly on floor is indicated.
 - 2. Maintain manufacturer's recommended clearances.
 - 3. Arrange units so controls and devices that require servicing are accessible.
 - 4. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around the full perimeter of concrete base.
 - 5. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete floor.
 - 6. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 7. Install anchor bolts to elevations required for proper attachment to supported equipment.
 - 8. Anchor domestic-water heaters to substrate.
- B. Install domestic-water heaters level and plumb, according to layout drawings, original design, and referenced standards. Maintain manufacturer's recommended clearances. Arrange units so controls and devices needing service are accessible.
 - 1. Install shutoff valves on domestic-water-supply piping to domestic-water heaters and on domestic-hot-water outlet piping. Comply with requirements for shutoff valves specified in Section 220523.12 "Ball Valves for Plumbing Piping" and Section 220523.13 "Butterfly Valves for Plumbing Piping."
- C. Install gas-fired, domestic-water heaters according to NFPA 54.
 - 1. Install gas shutoff valves on gas supply piping to gas-fired, domestic-water heaters without shutoff valves.
 - 2. Install gas pressure regulators on gas supplies to gas-fired, domestic-water heaters without gas pressure regulators if gas pressure regulators are required to reduce gas pressure at burner.
 - 3. Install automatic gas valves on gas supplies to gas-fired, domestic-water heaters if required for operation of safety control.
 - 4. Comply with requirements for gas shutoff valves, gas pressure regulators, and automatic gas valves specified in Section 231123 "Facility Natural-Gas Piping."
- D. Install combination temperature-and-pressure relief valves in top portion of storage tanks. Use relief valves with sensing elements that extend into tanks. Extend commercial-water-heater relief-valve outlet, with drain piping same as domestic-water piping in continuous downward pitch, and discharge by positive air gap onto closest floor drain.
- E. Install water-heater drain piping as indirect waste to spill by positive air gap into open drains or over floor drains. Install hose-end drain valves at low points in water piping for domestic-water heaters that do not have tank drains. Comply with requirements for hose-end drain valves specified in Section 221119 "Domestic Water Piping Specialties."

- F. Install thermometer on outlet piping of domestic-water heaters. Comply with requirements for thermometers specified in Section 220519 "Meters and Gages for Plumbing Piping."
- G. Assemble and install inlet and outlet piping manifold kits for multiple domestic-water heaters. Fabricate, modify, or arrange manifolds for balanced water flow through each domestic-water heater. Include shutoff valve and thermometer in each domestic-water heater inlet and outlet, and throttling valve in each domestic-water heater outlet. Comply with requirements for valves specified in Section 220523.12 "Ball Valves for Plumbing Piping" and Section 220523.13 "Butterfly Valves for Plumbing Piping," and comply with requirements for thermometers specified in Section 220519 "Meters and Gages for Plumbing Piping."
- H. Install piping-type heat traps on inlet and outlet piping of domestic-water heater storage tanks without integral or fitting-type heat traps.
- I. Fill domestic-water heaters with water.
- J. Charge domestic-water compression tanks with air.

3.2 CONNECTIONS

- A. Comply with requirements for domestic-water piping specified in Section 221116 "Domestic Water Piping."
- B. Comply with requirements for gas piping specified in Section 231123 "Facility Natural-Gas Piping."
- C. Drawings indicate general arrangement of piping, fittings, and specialties.
- D. Where installing piping adjacent to fuel-fired, domestic-water heaters, allow space for service and maintenance of water heaters. Arrange piping for easy removal of domestic-water heaters.

3.3 IDENTIFICATION

- A. Identify system components. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
 - 1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
 - 2. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
 - 3. Operational Test: After electrical circuitry has been energized, start units to confirm proper operation.
 - 4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

- B. Domestic-water heaters will be considered defective if they do not pass tests and inspections. Comply with requirements in Section 014000 "Quality Requirements" for retesting and reinspecting requirements and Section 017300 "Execution" for requirements for correcting the Work.
- C. Prepare test and inspection reports.

3.5 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain commercial, gas-fired, storage, domestic-water heaters.

END OF SECTION 223400

SECTION 224213.13 - COMMERCIAL WATER CLOSETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Water closets.
 - 2. Toilet seats.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for water closets.
 - 2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings: Include diagrams for power, signal, and control wiring.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For flushometer valves and electronic sensors to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 FLOOR-MOUNTED, BOTTOM-OUTLET WATER CLOSETS

- A. Refer to Plumbing Fixture Schedule on design drawings.

2.2 TOILET SEATS

- A. Refer to Plumbing Fixture Schedule on design drawings:

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before water-closet installation.
- B. Examine walls and floors for suitable conditions where water closets will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Water-Closet Installation:
 - 1. Install level and plumb according to roughing-in drawings.
 - 2. Install floor-mounted water closets on bowl-to-drain connecting fitting attachments to piping or building substrate.
- B. Install toilet seats on water closets.
- C. Wall Flange and Escutcheon Installation:
 - 1. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations and within cabinets and millwork.
 - 2. Install deep-pattern escutcheons if required to conceal protruding fittings.
 - 3. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."
- D. Joint Sealing:
 - 1. Seal joints between water closets and walls using sanitary-type, one-part, mildew-resistant silicone sealant.
 - 2. Match sealant color to water-closet color.
 - 3. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.3 CONNECTIONS

- A. Connect water closets with water supplies and soil, waste, and vent piping. Use size fittings required to match water closets.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."
- D. Where installing piping adjacent to water closets, allow space for service and maintenance.

3.4 ADJUSTING

- A. Operate and adjust water closets and controls. Replace damaged and malfunctioning water closets, fittings, and controls.

3.5 CLEANING AND PROTECTION

- A. Clean water closets and fittings with manufacturers' recommended cleaning methods and materials.
- B. Install protective covering for installed water closets and fittings.
- C. Do not allow use of water closets for temporary facilities unless approved in writing by Owner.

END OF SECTION 224213.13

SECTION 224213.16 - COMMERCIAL URINALS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Urinals.
 - 2. Flushometer valves.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.3 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For flushometer valves to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 WALL-HUNG URINALS, FLUSHOMETER VALVES

- A. Refer to Plumbing Fixture Schedule on design drawings.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before urinal installation.
- B. Examine walls and floors for suitable conditions where urinals will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Urinal Installation:
 - 1. Install urinals level and plumb according to rough-in drawings.

2. Install wall-hung, back-outlet urinals onto waste fitting seals and attached to supports.
3. Install accessible, wall-mounted urinals at mounting height for the handicapped/elderly, according to ICC A117.1.

B. Support Installation:

1. Install supports, affixed to building substrate, for wall-hung urinals.
2. Use off-floor carriers with waste fitting and seal for back-outlet urinals.
3. Use carriers without waste fitting for urinals with tubular waste piping.
4. Use chair-type carrier supports with rectangular steel uprights for accessible urinals.

C. Flushometer-Valve Installation:

1. Install flushometer-valve water-supply fitting on each supply to each urinal.
2. Attach supply piping to supports or substrate within pipe spaces behind fixtures.

D. Wall Flange and Escutcheon Installation:

1. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations.
2. Install deep-pattern escutcheons if required to conceal protruding fittings.

E. Joint Sealing:

1. Seal joints between urinals and walls and floors using sanitary-type, one-part, mildew-resistant silicone sealant.
2. Match sealant color to urinal color.

3.3 CONNECTIONS

- A. Connect urinals with water supplies and soil, waste, and vent piping. Use size fittings required to match urinals.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."
- D. Where installing piping adjacent to urinals, allow space for service and maintenance.

3.4 ADJUSTING

- A. Operate and adjust urinals and controls. Replace damaged and malfunctioning urinals, fittings, and controls. Adjust water pressure at flushometer valves to produce proper flow.

3.5 CLEANING AND PROTECTION

- A. Clean urinals and fittings with manufacturers' recommended cleaning methods and materials.

- B. Install protective covering for installed urinals and fittings.
- C. Do not allow use of urinals for temporary facilities unless approved in writing by Owner.

END OF SECTION 224213.16

SECTION 224216.16 - COMMERCIAL SINKS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Sinks.
2. Sink faucets.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance data.

PART 2 - PRODUCTS

2.1 SINKS, SINK FAUCETS

- A. Refer to Plumbing Fixture Schedule on design drawings.
- B. NSF Standard: Comply with NSF/ANSI 61, "Drinking Water System Components - Health Effects," for faucet-spout materials that will be in contact with potable water.

2.2 SUPPLY FITTINGS

- A. NSF Standard: Comply with NSF/ANSI 61, "Drinking Water System Components - Health Effects," for supply-fitting materials that will be in contact with potable water.
- B. Standard: ASME A112.18.1/CSA B125.1.
- C. Supply Piping: Chrome-plated brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated brass or stainless-steel wall flange.

- D. Supply Stops: Chrome-plated brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
- E. Operation: Wheel handle.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before sink installation.
- B. Examine walls, floors, and counters for suitable conditions where sinks will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install sinks level and plumb according to roughing-in drawings.
- B. Install supports, affixed to building substrate, for wall-hung sinks.
- C. Install accessible wall-mounted sinks at handicapped/elderly mounting height according to ICC/ANSI A117.1.
- D. Set floor-mounted sinks in leveling bed of cement grout.
- E. Install water-supply piping with stop on each supply to each sink faucet.
 - 1. Exception: Use ball valve if supply stops are not specified with sink. Comply with valve requirements specified in Section 220523 "General-Duty Valves for Plumbing Piping."
 - 2. Install stops in locations where they can be easily reached for operation.
- F. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings.
- G. Seal joints between sinks and counters, floors, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color.
- H. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible sinks. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

3.3 CONNECTIONS

- A. Connect sinks with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ADJUSTING

- A. Operate and adjust sinks and controls. Replace damaged and malfunctioning sinks, fittings, and controls.
- B. Adjust water pressure at faucets to produce proper flow.

3.5 CLEANING AND PROTECTION

- A. After completing installation of sinks, inspect and repair damaged finishes.
- B. Clean sinks, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.
- C. Provide protective covering for installed sinks and fittings.
- D. Do not allow use of sinks for temporary facilities unless approved in writing by Owner.

END OF SECTION 224216.16

SECTION 224216.13 - COMMERCIAL LAVATORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Lavatories.
 - 2. Faucets.
 - 3. Supply fittings.
 - 4. Waste fittings.
 - 5. Supports.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for lavatories.
 - 2. Include rated capacities, operating characteristics, and furnished specialties and accessories.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For lavatories and faucets to include in operation and maintenance manuals.
 - 1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:
 - a. Servicing and adjustments of automatic faucets.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Faucet Washers and O-Rings: Equal to 10 percent of amount of each type and size installed.
 - 2. Faucet Cartridges and O-Rings: Equal to 5 percent of amount of each type and size installed.

PART 2 - PRODUCTS

2.1 LAVATORIES AND FAUCETS

- A. Refer to Plumbing Fixture Schedule on design drawings for further information.

2.2 SUPPLY FITTINGS

- A. NSF Standard: Comply with NSF 372 for supply-fitting materials that will be in contact with potable water.
- B. Standard: ASME A112.18.1/CSA B125.1.
- C. Supply Piping: Chrome-plated-brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated-brass or stainless-steel wall flange.
- D. Supply Stops: Chrome-plated-brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
- E. Operation: Loose key.
- F. Risers:
 - 1. NPS 1/2.
 - 2. ASME A112.18.6, braided- or corrugated-stainless-steel, flexible hose riser.

2.3 WASTE FITTINGS

- A. Standard: ASME A112.18.2/CSA B125.2.
- B. Drain: Grid type with NPS 1-1/4 offset and straight tailpiece.
- C. Trap:
 - 1. Size: NPS 1-1/2 by NPS 1-1/4.
 - 2. Material: Chrome-plated, two-piece, cast-brass trap and swivel elbow with 0.032-inch-thick brass tube to wall; and chrome-plated, brass or steel wall flange.

3. Material: Stainless-steel, two-piece trap and swivel elbow with 0.012-inch-thick stainless-steel tube to wall; and stainless-steel wall flange.

2.4 SUPPORTS

- A. Type II Lavatory Carrier:
 1. Standard: ASME A112.6.1M.
- B. Type III Lavatory Carrier:
 1. Standard: ASME A112.6.1M.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before lavatory installation.
- B. Examine counters and walls for suitable conditions where lavatories will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install lavatories level and plumb according to roughing-in drawings.
- B. Install supports, affixed to building substrate, for wall-mounted lavatories.
- C. Install accessible wall-mounted lavatories at handicapped/elderly mounting height for people with disabilities or the elderly, according to ICC/ANSI A117.1.
- D. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."
- E. Seal joints between lavatories, counters, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."
- F. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible lavatories. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

3.3 CONNECTIONS

- A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ADJUSTING

- A. Operate and adjust lavatories and controls. Replace damaged and malfunctioning lavatories, fittings, and controls.
- B. Adjust water pressure at faucets to produce proper flow.

3.5 CLEANING AND PROTECTION

- A. After completing installation of lavatories, inspect and repair damaged finishes.
- B. Clean lavatories, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.
- C. Provide protective covering for installed lavatories and fittings.
- D. Do not allow use of lavatories for temporary facilities unless approved in writing by Owner.

END OF SECTION 224216.13

SECTION 224223 - COMMERCIAL SHOWERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Individual shower receptors.
2. Shower faucets.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for showers.
2. Include rated capacities, operating characteristics, and furnished specialties and accessories.

1.3 CLOSEOUT SUBMITTALS

A. Maintenance Data: For shower faucets to include in maintenance manuals.

PART 2 - PRODUCTS

2.1 INDIVIDUAL SHOWERS AND SHOWER FAUCETS

A. Individual Showers and Shower Faucets:

1. Refer to Plumbing Fixture Schedule on design drawings.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water-supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before shower installation.
- B. Examine walls and floors for suitable conditions where showers will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Assemble shower components according to manufacturers' written instructions.
- B. Install showers level and plumb according to roughing-in drawings.
- C. Install water-supply piping with stop on each supply to each shower faucet.
 - 1. Exception: Use ball or gate valves if supply stops are not specified with shower. Comply with valve requirements specified in Section 220523.12 "Ball Valves for Plumbing Piping."
 - 2. Install stops in locations where they can be easily reached for operation.
- D. Install shower flow-control fittings with specified maximum flow rates in shower arms.
- E. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheons requirements specified in Section 220518 "Escutcheons for Plumbing Piping."
- F. Seal joints between showers and floors and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.3 CONNECTIONS

- A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with traps and soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ADJUSTING

- A. Operate and adjust showers and controls. Replace damaged and malfunctioning showers, fittings, and controls. Adjust water pressure at faucets to produce proper flow.

3.5 CLEANING AND PROTECTION

- A. After completing installation of showers, inspect and repair damaged finishes. Clean showers, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.
- B. Provide protective covering for installed fixtures and fittings. Do not allow use of showers for temporary facilities unless approved in writing by Owner.

END OF SECTION 224223

SECTION 224716 - PRESSURE WATER COOLERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes pressure water coolers and related components.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of pressure water cooler.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings: Include diagrams for power, signal, and control wiring.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For pressure water coolers to include in maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

PART 2 - PRODUCTS

2.1 PRESSURE WATER COOLERS

- A. Refer to Plumbing Fixture Schedule on design drawings for further information.

2.2 SUPPORTS

- A. Type I Water Cooler Carrier:

1. Standard: ASME A112.6.1M.
- B. Type II Water Cooler Carrier:
 1. Standard: ASME A112.6.1M.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for water-supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before fixture installation.
- B. Examine walls and floors for suitable conditions where fixtures will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install fixtures level and plumb according to roughing-in drawings. For fixtures indicated for children, install at height required by authorities having jurisdiction.
- B. Set freestanding pressure water coolers on floor.
- C. Install off-the-floor carrier supports, affixed to building substrate, for wall-mounted fixtures.
- D. Install mounting frames, affixed to building construction, and attach recessed, pressure water coolers to mounting frames.
- E. Install water-supply piping with shutoff valve on supply to each fixture to be connected to domestic-water distribution piping. Use ball valve. Install valves in locations where they can be easily reached for operation. Valves are specified in Section 220523.12 "Ball Valves for Plumbing Piping."
- F. Install trap and waste piping on drain outlet of each fixture to be connected to sanitary drainage system.
- G. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons where required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."
- H. Seal joints between fixtures and walls using sanitary-type, one-part, mildew-resistant, silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.3 CONNECTIONS

- A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Install ball or gate shutoff valve on water supply to each fixture. Comply with valve requirements specified in Section 220523.12 "Ball Valves for Plumbing Piping."
- D. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ADJUSTING

- A. Adjust fixture flow regulators for proper flow and stream height.
- B. Adjust pressure water-cooler temperature settings.

3.5 CLEANING

- A. After installing fixture, inspect unit. Remove paint splatters and other spots, dirt, and debris. Repair damaged finish to match original finish.
- B. Clean fixtures, on completion of installation, according to manufacturer's written instructions.
- C. Provide protective covering for installed fixtures.
- D. Do not allow use of fixtures for temporary facilities unless approved in writing by Owner.

END OF SECTION 224716

SECTION 230000 – GENERAL MECHANICAL

PART 1 - GENERAL

1.1 SCOPE OF WORK

- A. The work shall include furnishing, installing and testing the equipment and materials specified in other sections of the Mechanical Specifications and shown on the Drawings. It is the intent of these Specifications that the mechanical systems shall be suitable in every way for the intended usage. All material and all work which may be reasonably implied as being incidental to the work of this Division shall be furnished at no extra cost.
- B. Instructions to Bidders, General Conditions of the Contract, Supplementary General Conditions and Project Manual Specifications Sections bound herewith are a component part of Division 23 specifications. Comply with all provisions, details and instructions of these sections in the accomplishment of work covered under Division 23.
- C. Furnish all labor, materials and equipment and incidentals required to make ready for use complete mechanical systems as shown on the Drawings and specified herein.
- D. Where Sub-Contracts are used to perform portions of the work, division of labor between sub trades is the responsibility of the Contractor.
- E. The general scope work includes, but is not limited to, furnishing, coordinating, and installing the following:
 - 1. Heating, air conditioning and ventilation equipment.
 - 2. Ductwork, air distribution.
 - 3. HVAC specialties and equipment.
 - 4. Controls and wiring.
 - 5. Testing and balancing.
- F. Visit all areas of the site, buildings and structures (as applicable) in which work under these sections is to be performed. Inspect carefully the existing conditions prior to bidding. Bid submission is evidence that the Contractor has examined the site and existing conditions, understands conditions under which the work will be performed, and takes full responsibility for complete knowledge of all factors governing the work.
- G. Schedule all service interruptions in existing facilities at the Owner's convenience with 24 hours (minimum) notice. Obtain prior approval for each interruption.
- H. Thoroughly test all mechanical systems at the completion of work and make any minor correction changes or adjustments necessary for all the proper functioning of the system and equipment. All workmanship shall be of the highest quality; substandard work will be rejected.

1.2 SUBMITTALS

- A. Procedures for submittals: Submit under provisions of relevant sections of the General and Supplemental General Conditions and Project Manual Specifications Sections.

- B. Clearly indicate proposed equipment and/or materials substitutions in shop drawings. Summarize all deviations from the specified quality, functionality, appearance or performance of proposed equipment and/or materials in the preface of each submittal. Include documentation to support deviations.
- C. Provide descriptive data on all materials and equipment as required to ascertain compliance with Specifications.
- D. Design layout shown on drawings is based on physical sizes of reputable equipment manufacturers. If equipment other than models indicated is installed, any resulting conflicts with space, maintenance access, clearances or codes are the responsibility of the Contractor to correct at his expense.
- E. Where specific models and manufacturers of materials and equipment are specified, substitutions as allowed by the specifications and State law will be considered. Substitutions must be equivalent in quality, function, suitability and arrangement to specified equipment. Engineer to have final authority as to equivalency of substitutions.
- F. Equipment model numbers noted in these specifications or on the drawings are intended to establish a minimum standard of quality and do not necessarily relate to specific options or arrangement as shown. Provide equipment with all standard features and optional features as stated and arranged as shown on the drawings.

1.3 REGULATORY REQUIREMENTS

- A. Perform Work in accordance with all applicable state and local codes, standards and regulations.
- B. Furnish all materials and labor which is required for compliance with codes, standards and regulations, whether specifically mentioned in these specifications or shown on the drawings.
- C. Obtain required construction permit from the authority having jurisdiction and arrange, at the proper time, for all inspections required by such authority. Pay all permit and inspection costs required.

1.4 COORDINATION OF WORK

- A. Contractor is responsible for coordination of work between trades. Provide fully complete and functional systems.
- B. Compare mechanical drawings and specifications with the drawings and specifications for other trades.
- C. Coordinate mechanical installation with the work of other trades. Report any pertinent discrepancies to the Engineer and obtain written instructions for any necessary revisions. Before starting any construction, make proper provisions to avoid interferences in a manner approved by the Engineer. No extras will be allowed for rework of uncoordinated installations.
- D. Determine exact route and location of each mechanical item prior to fabrication and/or installation. Adjust location of ducts, piping and equipment, etc., to accommodate interferences anticipated and encountered.

- E. Right of Way: General priority for right of way is as follows:
 - 1. Items located per regulatory requirement.
 - 2. Piping with pitch requirement (plumbing drains, etc.).
 - 3. Ductwork.
 - 4. Piping without pitch requirement.
 - 5. Electrical wiring (conduits, etc.).
- F. Arrange all work to permit removal (without damage to other parts) of any equipment requiring periodic replacement.
- G. Provide clearance and easy access to any equipment which requires periodic maintenance. Arrange ducts and equipment to permit ready access and to clear the opening of swinging doors and access panels.

1.5 EQUIPMENT AND MATERIALS (GENERAL)

- A. Provide all new materials unless specifically indicated otherwise.
- B. Manufacturers and models listed in drawings and specifications are used for layout and to convey to bidders the general style, type, character and quality of product desired. Listed examples are used only to denote the quality standard of product desired and are not intended to restrict bidders to a specific brand, make, manufacturer or specific name.
- C. Adjust layout, system connections and coordinate with other trades as required to properly install equivalent products.
- D. Where equivalent products are submitted, include all associated costs related to substitution in bid.
- E. Furnish materials bearing the manufacturer's name and trade name. Provide UL label where a UL standard has been established for the particular material.
- F. Furnish standard products of manufacturers regularly engaged in production of equipment types required for the work. Use the manufacturer's latest approved design.
- G. Use the same manufacturer for equipment and materials of the same general type throughout the work to obtain uniform appearance, operation and maintenance.
- H. Protect equipment and materials from dirt, water, chemical or mechanical injury and theft at all times during construction. Provide covers or shelter as required.
- I. If materials or equipment are damaged at any time prior to final acceptance of the work, repair such damage at no additional cost. If materials or equipment are damaged by water, provide replacement no additional cost.
- J. Follow manufacturer's directions completely in the delivery, storage, protection and installation of all equipment and materials. Notify the Engineer in writing of any conflicts between any requirements of the contract documents and manufacturer's directions. Obtain written instructions before proceeding with the work. The Contractor is responsible for correction of

any work that does not comply with the manufacturer's directions or written instructions from the Engineer at no additional cost.

- K. Repair any damage to factory applied paint finish using touch-up paint furnished by the equipment manufacturer. Repaint entire damaged panel or section no additional cost.

1.6 OPERATION AND MAINTENANCE MANUALS

- A. Refer to individual mechanical sections and Project Manual.

1.7 LOCATIONS AND MEASUREMENTS

- A. Location of mechanical work is shown on the drawings as accurately as possible. Field verify all measurements to insure that the work suits the surrounding structure, trim, finishes and/or construction. Provide adjustment as necessary.
- B. Make minor relocations of work prior to installation as required or as directed by the Engineer at no additional cost.

1.8 SUPERVISION

- A. Contractor to provide an authorized and competent representative to constantly supervise the work from the beginning to completion and final acceptance. Insofar as possible, keep the same foreman and workmen throughout the project duration.
- B. Representatives of Engineer, Owner, and local inspection authorities will make inspections during the progress of the work. Contractor to accommodate such inspections and correct deficiencies noted.

1.9 QUALITY AND WORKMANSHIP

- A. Contractor to employ skilled tradesmen, laborers and supervisors. Final product to present a neat, well finished, and professional installation.
- B. Remove and replace any work considered substandard quality in the judgment of the Engineer.

1.10 CLOSING IN WORK

- A. Do not cover up or enclose work until it has been inspected, tested and approved by authorities having jurisdiction over the work. Uncover any such work for inspection and/or test at no additional cost. Restore the work to its original condition after inspection and/or test at no additional cost.

1.11 CUTTING AND PATCHING

- A. Perform all cutting and patching necessary to install work under this Division.
- B. Perform cutting and patching in professional, workmanlike manner.
- C. Arrange work to minimize cutting and patching.

- D. Do not cut joists, beams, girders, columns or any other structural members without written permission from the Engineer.
- E. Cut opening only large enough to allow easy installation of piping, wiring or ductwork.
- F. Patching material to match material removed.
- G. Restore patched surface to its original appearance at completion of patching.
- H. Where waterproofed surfaces are patched, maintain integrity of waterproofing.
- I. Remove rubble and excess patching materials from the premises.

1.12 INTERPRETATION OF DRAWINGS

- A. Drawings and specifications under this Division are complementary each to the other. Provide any work specified herein and/or indicated on the drawings.
- B. Drawings are diagrammatic and indicate generally the location of fixtures, piping, devices, equipment, etc. Follow drawings as closely as possible, but arrange work to suit the finished surroundings and/or trim.
- C. The words “furnish”, “provide”, and/or “install” as used in these drawings and specifications are interpreted to include all material and labor necessary to complete the particular item, system, equipment, etc.
- D. Any omissions from either the drawings or specifications are unintentional. Contractor is responsible for notifying the Engineer of any pertinent omissions before submitting a bid. Complete and working systems are required, whether every small item of material is shown and specified or not.

1.13 ACCESSIBILITY

- A. Locate all equipment which must be serviced, operated, or maintained in fully accessible positions. Equipment to include, but not be limited to, valves, traps, cleanouts, motors, controllers, and dampers. If required for accessibility, furnish access doors for this purpose. Minor deviations from drawings may be made to allow for better accessibility. Lack of access doors on drawings does not relieve Contractor of responsibility to provide access doors, if needed to properly service equipment.
- B. Coordinate exact locations and size of access panels for each concealed device requiring service.
- C. Access panels: Steel construction with 16 gauge frames and 18 gauge panels, factory primed with rust inhibiting paint, finish paint by Contractor. Provide suitable UL listed doors where installed in rated construction.
- D. Coordinate access panel locations with architectural construction.
- E. Access panels are not required for access to work located above a lift-out “T” bar type ceiling.

1.14 ELECTRICAL WORK IN CONNECTION WITH MECHANICAL CONTRACTS

- A. Comply with Division 26. Any required Division 23 electrical work not specifically specified to be furnished by Division 26 Contractor shall be provided by Division 23 Contractor.
- B. All electrical work performed Division 23 shall comply with Division 26 specification requirements. Install control wiring in conduit.
- C. See Division 26 specifications and electrical connection diagrams for division of labor between Divisions 23 and 26.
- D. Coordinate electrical interface of supplied mechanical equipment with electrical system. Division 26 electrical work for mechanical systems is based on values scheduled on mechanical drawings. Division 23 Contractor is responsible for any costs to modify the contracted electrical work to service equipment with electrical characteristics different than those scheduled.

1.15 ALTERNATE BIDS

- A. Alternate Bids, IF ANY, are described in relevant sections of the General and Supplemental General Conditions and Project Manual Specification Sections.

1.16 PROJECT RECORD DRAWINGS

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions.
- B. As the work progresses, legibly record all field changes on a set of project contract drawings, herein after called the "record drawings."
- C. Record drawings shall accurately show the installed condition of mechanical work.

1.17 PHASING OF THE WORK

- A. Schedule work in accordance with the relevant sections of the General and Supplemental General Conditions and Project Manual Specifications Sections.

1.18 PROJECT CLOSEOUT

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions and Project Manual Specifications Sections.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

END OF SECTION 230000

SECTION 230517 - SLEEVES AND SLEEVE SEALS FOR HVAC PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Sleeves.
 - 2. Sleeve-seal systems.
 - 3. Grout.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Galvanized Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, with plain ends.

2.2 SLEEVE-SEAL SYSTEMS

- A. Description:
 - 1. Seal Elements: EPDM-rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size.
 - 2. Pressure Plates: Stainless steel.
 - 3. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements.

2.3 GROUT

- A. Description: Nonshrink, recommended for interior and exterior sealing openings in nonfire-rated walls or floors.
- B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.

- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
 - 2. Using grout, seal space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 - 3. Seal annular space between sleeve and piping or piping insulation; use sealants appropriate for size, depth, and location of joint.

3.2 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at service piping entries into building.
- B. Select type, size, and number of sealing elements required for piping material and size and for sleeve ID or hole size. Position piping in center of sleeve. Center piping in penetration, assemble sleeve-seal-system components, and install in annular space between piping and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make a watertight seal.

3.3 SLEEVE AND SLEEVE-SEAL SCHEDULE

- A. Use sleeves and sleeve seals for the following piping-penetration applications:
 - 1. Exterior Concrete Walls Above Grade:
 - a. Galvanized steel pipe sleeves.
 - 2. Concrete Slabs-on-Grade:
 - a. Galvanized steel pipe sleeves with sleeve-seal system.
 - 3. Interior Partitions:
 - a. Galvanized steel pipe sleeves.

END OF SECTION 230517

SECTION 230518 - ESCUTCHEONS FOR HVAC PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Escutcheons.
 - 2. Floor plates.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

- A. One-Piece, Cast-Brass Type: With rough-brass finish and setscrew fastener.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with chrome-plated finish and spring-clip fasteners.

2.2 FLOOR PLATES

- A. One-Piece Floor Plates: Cast-iron flange with holes for fasteners.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install floor plates and escutcheons with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
- C. Install floor plates for piping penetrations of equipment-room floors.

3.2 FIELD QUALITY CONTROL

- A. Replace broken and damaged escutcheons and floor plates using new materials.

END OF SECTION 230518

SECTION 230529 - HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Metal pipe hangers and supports.
2. Trapeze pipe hangers.
3. Thermal-hanger shield inserts.
4. Fastener systems.
5. Equipment supports.

1.2 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Hangers and supports for HVAC piping and equipment shall withstand the effects of gravity loads and stresses within limits and under conditions indicated according to ASCE/SEI 7.
1. Design supports for multiple pipes capable of supporting combined weight of supported systems, system contents, and test water.
 2. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.4 QUALITY ASSURANCE

- A. Structural Steel Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

PART 2 - PRODUCTS

2.1 METAL PIPE HANGERS AND SUPPORTS

A. Copper Pipe Hangers:

1. Description: MSS SP-58, Types 1 through 58, copper-coated-steel, factory-fabricated components.
2. Hanger Rods: Continuous-thread rod, nuts, and washer made of copper-coated steel.

2.2 TRAPEZE PIPE HANGERS

- A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural carbon-steel shapes with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U-bolts.

2.3 THERMAL-HANGER SHIELD INSERTS

- A. Insulation-Insert Material for Cold Piping: ASTM C 552, Type II cellular glass with 100-psig or ASTM C 591, Type VI, Grade 1 polyisocyanurate with 125-psig minimum compressive strength and vapor barrier.
- B. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.
- C. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.
- D. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

2.4 FASTENER SYSTEMS

- A. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.
- B. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel anchors, for use in hardened portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

2.5 EQUIPMENT SUPPORTS

- A. Description: Welded, shop- or field-fabricated equipment support made from structural carbon-steel shapes.

2.6 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, carbon-steel plates, shapes, and bars; black and galvanized.
- B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.
 - 1. Properties: Nonstaining, noncorrosive, and nongaseous.
 - 2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 HANGER AND SUPPORT INSTALLATION

- A. Metal Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from the building structure.
- B. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.

1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified for individual pipe hangers.
 2. Field fabricate from ASTM A 36/A 36M, carbon-steel shapes selected for loads being supported. Weld steel according to AWS D1.1/D1.1M.
- C. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.
- D. Fastener System Installation:
1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches thick in concrete after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual.
 2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.
- E. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.
- F. Equipment Support Installation: Fabricate from welded-structural-steel shapes.
- G. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- H. Install lateral bracing with pipe hangers and supports to prevent swaying.
- I. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.
- J. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- K. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.
- L. Insulated Piping:
1. Attach clamps and spacers to piping.
 - a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
 - b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
 - c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.
 2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.

- a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
- 3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.
 - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
- 4. Shield Dimensions for Pipe: Not less than the following:
 - a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
- 5. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

3.2 EQUIPMENT SUPPORTS

- A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.
- B. Grouting: Place grout under supports for equipment and make bearing surface smooth.
- C. Provide lateral bracing, to prevent swaying, for equipment supports.

3.3 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.4 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.5 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - 1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

3.6 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.
- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use carbon-steel pipe hangers and supports and metal trapeze pipe hangers and attachments for general service applications.
- F. Use copper-plated pipe hangers and copper attachments for copper piping and tubing.
- G. Use padded hangers for piping that is subject to scratching.
- H. Use thermal-hanger shield inserts for insulated piping and tubing.
- I. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.
- J. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.
 - 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 if longer ends are required for riser clamps.
- K. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
 - 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.

- L. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
 2. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
 3. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
 4. C-Clamps (MSS Type 23): For structural shapes.
 5. Welded-Steel Brackets: For support of pipes from below, or for suspending from above by using clip and rod. Use one of the following for indicated loads:
 - a. Light (MSS Type 31): 750 lb.
 6. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
 7. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
- M. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
 3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- N. Comply with MSS SP-69 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.

END OF SECTION 230529

SECTION 230548.13 - VIBRATION CONTROLS FOR HVAC

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Elastomeric isolation pads.
 - 2. Elastomeric isolation mounts.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ELASTOMERIC ISOLATION PADS

- A. Elastomeric Isolation Pads:
 - 1. Fabrication: Single or multiple layers of sufficient durometer stiffness for uniform loading over pad area.
 - 2. Size: Factory or field cut to match requirements of supported equipment.
 - 3. Pad Material: Oil and water resistant with elastomeric properties.
 - 4. Surface Pattern: Ribbed pattern.
 - 5. Infused nonwoven cotton or synthetic fibers.
 - 6. Load-bearing metal plates adhered to pads.

2.2 ELASTOMERIC ISOLATION MOUNTS

- A. Elastomeric Mount in a Steel Frame with Upper and Lower Steel Hanger Rods:
 - 1. Frame: Steel, fabricated with a connection for an upper threaded hanger rod and an opening on the underside to allow for a maximum of 30 degrees of angular lower hanger-rod misalignment without binding or reducing isolation efficiency.
 - 2. Dampening Element: Molded, oil-resistant rubber, neoprene, or other elastomeric material with a projecting bushing for the underside opening preventing steel to steel contact.

PART 3 - EXECUTION

3.1 VIBRATION CONTROL DEVICE INSTALLATION

- A. Installation of vibration isolators must not cause any change of position of equipment, piping, or ductwork resulting in stresses or misalignment.

- B. Install Elastomeric Isolation Pads under each air handling unit base mounting rail at spacing recommended by pad manufacturer.
- C. Install elastomeric hangers at suspended units.

END OF SECTION 230548.13

SECTION 230553 - IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Equipment labels.
2. Pipe labels.
3. Duct labels.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

A. Plastic Labels for Equipment:

1. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/16 inch thick, and having predrilled holes for attachment hardware.
2. Letter Color: White.
3. Background Color: Black.
4. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
6. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-quarters the size of principal lettering.
7. Fasteners: Stainless-steel rivets.
8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

B. Label Content: Include equipment's Drawing designation or unique equipment number.

C. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch bond paper. Tabulate equipment identification number, and identify Drawing numbers where equipment is indicated (plans, details, and schedules) and the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

2.2 PIPE LABELS

A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction according to ASME A13.1.

- B. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings; also include pipe size and an arrow indicating flow direction.
 - 1. Flow-Direction Arrows: Integral with piping system service lettering to accommodate both directions or as separate unit on each pipe label to indicate flow direction.
 - 2. Lettering Size: Size letters according to ASME A13.1 for piping.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

3.2 EQUIPMENT LABEL INSTALLATION

- A. All major HVAC equipment, including air handlers, fans and heat pumps shall be properly identified with equipment tag stating equipment ID, ratings and date of installation.
- B. Install or permanently fasten labels on each major item of mechanical equipment.
- C. Locate equipment labels where accessible and visible.

3.3 PIPE LABEL INSTALLATION

- A. Pipe Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
 - 1. Near each valve and control device.
 - 2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
 - 3. Near penetrations and on both sides of through walls, floors, ceilings, and inaccessible enclosures.
 - 4. At access doors, manholes, and similar access points that permit view of concealed piping.
 - 5. Near major equipment items and other points of origination and termination.
 - 6. Spaced at maximum intervals of 50 feet along each run. Reduce intervals to 25 feet in areas of congested piping and equipment.
 - 7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.
- B. Pipe Label Color Schedule:
 - 1. Condensate Drain Piping: White letters on a safety-green background.
 - 2. Refrigerant Piping: White letters on a safety-purple background.

END OF SECTION 230553

SECTION 230593 - TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Balancing Air Systems (New systems, existing air distribution):
 - a. Constant-volume air systems.
 - b. Variable-air-volume systems

1.2 DEFINITIONS

- A. AABC: Associated Air Balance Council.
- B. TAB: Testing, adjusting, and balancing.
- C. TABB: Testing, Adjusting, and Balancing Bureau.
- D. TAB Specialist: An entity engaged to perform TAB Work.

1.3 INFORMATIONAL SUBMITTALS

- A. Certified TAB reports.

1.4 QUALITY ASSURANCE

- A. Certify TAB field data reports and perform the following:
 1. Review field data reports to validate accuracy of data and to prepare certified TAB reports.
 2. Certify that the TAB team complied with the approved TAB plan and the procedures specified and referenced in this Specification.
- B. TAB Report Forms: Use standard TAB contractor's forms approved by Construction Manager.
- C. Instrumentation Type, Quantity, Accuracy, and Calibration: As described in ASHRAE 111, Section 5, "Instrumentation."

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems' designs that may preclude proper TAB of systems and equipment.
- B. Examine systems for installed balancing devices. Verify that locations of these balancing devices are accessible.
- C. Examine the approved submittals for HVAC systems and equipment.
- D. Examine design data including HVAC system descriptions, statements of design assumptions for environmental conditions and systems' output, and statements of philosophies and assumptions about HVAC system and equipment controls.
- E. Examine system and equipment installations and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.
- F. Examine test reports specified in individual system and equipment Sections.
- G. Examine HVAC equipment and filters and verify that bearings are greased, belts are aligned and tight, and equipment with functioning controls is ready for operation.
- H. Examine terminal units and verify that they are accessible and their controls are connected and functioning.
- I. Examine heat-transfer coils for correct piping connections and for clean and straight fins.
- J. Examine operating safety interlocks and controls on HVAC equipment.
- K. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.2 PREPARATION

- A. Prepare a TAB plan that includes strategies and step-by-step procedures.
- B. Complete system-readiness checks and prepare reports. Verify the following:
 - 1. Permanent electrical-power wiring is complete.
 - 2. Automatic temperature-control systems are operational.
 - 3. Equipment and duct access doors are securely closed.
 - 4. Balance, smoke, and fire dampers are open.
 - 5. Ceilings are installed in critical areas where air-pattern adjustments are required and access to balancing devices is provided.

6. Windows and doors can be closed so indicated conditions for system operations can be met.

3.3 GENERAL PROCEDURES FOR TESTING AND BALANCING

- A. Perform testing and balancing procedures on each system according to the procedures contained in AABC's "National Standards for Total System Balance" and in this Section.
- B. Cut insulation, ducts, pipes, and equipment cabinets for installation of test probes to the minimum extent necessary for TAB procedures.
 1. After testing and balancing, patch probe holes in ducts with same material and thickness as used to construct ducts.
 2. Install and join new insulation that matches removed materials. Restore insulation, coverings, vapor barrier, and finish according to Section 230713 "Duct Insulation."
- C. Mark equipment and balancing devices with paint or other suitable, permanent identification material to show final settings.
- D. Take and report testing and balancing measurements in inch-pound (IP) units.

3.4 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

- A. Prepare test reports for both fans and outlets. Obtain manufacturer's outlet factors and recommended testing procedures. Crosscheck the summation of required outlet volumes with required fan volumes.
- B. Prepare schematic diagrams of systems' "as-built" duct layouts.
- C. For variable-air-volume systems, develop a plan to simulate diversity.
- D. Determine the best locations in main and branch ducts for accurate duct-airflow measurements.
- E. Check airflow patterns from the outdoor-air louvers and dampers and the return- and exhaust-air dampers through the supply-fan discharge and mixing dampers.
- F. Locate start-stop and disconnect switches, electrical interlocks, and motor starters.
- G. Verify that motor starters are equipped with properly sized thermal protection.
- H. Check dampers for proper position to achieve desired airflow path.
- I. Check for airflow blockages.
- J. Check condensate drains for proper connections and functioning.
- K. Check for proper sealing of air-handling-unit components.
- L. Verify that air duct system is sealed as specified in Section 233113 "Metal Ducts."

3.5 PROCEDURES FOR CONSTANT-VOLUME AIR SYSTEMS

- A. Adjust fans to deliver total indicated airflows within the maximum allowable fan speed listed by fan manufacturer.
 - 1. Measure total airflow.
 - a. Where sufficient space in ducts is unavailable for Pitot-tube traverse measurements, measure airflow at terminal outlets and inlets and calculate the total airflow.
 - 2. Measure fan static pressures as follows to determine actual static pressure:
 - a. Measure outlet static pressure as far downstream from the fan as practical and upstream from restrictions in ducts such as elbows and transitions.
 - b. Measure static pressure directly at the fan outlet or through the flexible connection.
 - c. Measure inlet static pressure of single-inlet fans in the inlet duct as near the fan as possible, upstream from the flexible connection, and downstream from duct restrictions.
 - d. Measure inlet static pressure of double-inlet fans through the wall of the plenum that houses the fan.
 - 3. Measure static pressure across each component that makes up an air-handling unit.
 - a. Report the cleanliness status of filters and the time static pressures are measured.
 - 4. Measure static pressures entering and leaving other devices under final balanced conditions.
 - 5. Obtain approval from Construction Manager for adjustment of fan speed higher or lower than indicated speed. Comply with requirements in Sections for air-handling units for adjustment of fans, belts, and pulley sizes to achieve indicated air-handling-unit performance.
 - 6. Do not make fan-speed adjustments that result in motor overload. Consult equipment manufacturers about fan-speed safety factors. Modulate dampers and measure fan-motor amperage to ensure that no overload will occur. Measure amperage in full-cooling, full-heating, economizer, and any other operating mode to determine the maximum required brake horsepower.
- B. Adjust volume dampers for main duct, submain ducts, and major branch ducts to indicated airflows within specified tolerances.
 - 1. Measure airflow of submain and branch ducts.
 - a. Where sufficient space in submain and branch ducts is unavailable for Pitot-tube traverse measurements, measure airflow at terminal outlets and inlets and calculate the total airflow for that zone.
 - 2. Measure static pressure at a point downstream from the balancing damper, and adjust volume dampers until the proper static pressure is achieved.
 - 3. Remeasure each submain and branch duct after all have been adjusted. Continue to adjust submain and branch ducts to indicated airflows within specified tolerances.

- C. Measure air outlets and inlets without making adjustments.
 - 1. Measure terminal outlets using a direct-reading hood or outlet manufacturer's written instructions and calculating factors.
- D. Adjust air outlets and inlets for each space to indicated airflows within specified tolerances of indicated values. Make adjustments using branch volume dampers rather than extractors and the dampers at air terminals.
 - 1. Adjust each outlet in same room or space to within specified tolerances of indicated quantities without generating noise levels above the limitations prescribed by the Contract Documents.
 - 2. Adjust patterns of adjustable outlets for proper distribution without drafts.

3.6 PROCEDURES FOR VARIABLE-AIR-VOLUME SYSTEMS

- A. Adjust the variable-air-volume systems as follows:
 - 1. Verify that the system static pressure sensor is located two-thirds of the distance down the duct from the fan discharge.
 - 2. Verify that the system is under static pressure control.
 - 3. Select the terminal unit that is most critical to the supply-fan airflow. Measure inlet static pressure, and adjust system static pressure control set point so the entering static pressure for the critical terminal unit is not less than the sum of the terminal-unit manufacturer's recommended minimum inlet static pressure plus the static pressure needed to overcome terminal-unit discharge system losses.
 - 4. Calibrate and balance each terminal unit for maximum and minimum design airflow as follows:
 - a. Adjust controls so that terminal is calling for maximum airflow. Some controllers require starting with minimum airflow. Verify calibration procedure for specific project.
 - b. Measure airflow and adjust calibration factor as required for design maximum airflow. Record calibration factor.
 - c. When maximum airflow is correct, balance the air outlets downstream from terminal units.
 - d. Adjust controls so that terminal is calling for minimum airflow.
 - e. Measure airflow and adjust calibration factor as required for design minimum airflow. Record calibration factor. If no minimum calibration is available, note any deviation from design airflow.
 - f. When in full cooling or full heating, ensure that there is no mixing of hot-deck and cold-deck airstreams unless so designed.
 - g. On constant volume terminals, in critical areas where room pressure is to be maintained, verify that the airflow remains constant over the full range of full cooling to full heating. Note any deviation from design airflow or room pressure.
 - 5. After terminals have been calibrated and balanced, test and adjust system for total airflow. Adjust fans to deliver total design airflows within the maximum allowable fan speed listed by fan manufacturer.

- a. Set outside-air, return-air, and relief-air dampers for proper position that simulates minimum outdoor-air conditions.
 - b. Set terminals for maximum airflow. If system design includes diversity, adjust terminals for maximum and minimum airflow so that connected total matches fan selection and simulates actual load in the building.
 - c. Where duct conditions allow, measure airflow by Pitot-tube traverse. If necessary, perform multiple Pitot-tube traverses to obtain total airflow.
 - d. Where duct conditions are not suitable for Pitot-tube traverse measurements, a coil traverse may be acceptable.
 - e. If a reliable Pitot-tube traverse or coil traverse is not possible, measure airflow at terminals and calculate the total airflow.
6. Measure fan static pressures as follows:
- a. Measure static pressure directly at the fan outlet or through the flexible connection.
 - b. Measure static pressure directly at the fan inlet or through the flexible connection.
 - c. Measure static pressure across each component that makes up the air-handling system.
 - d. Report any artificial loading of filters at the time static pressures are measured.
7. Set final return and outside airflow to the fan while operating at maximum return airflow and minimum outdoor airflow.
- a. Balance the return-air ducts and inlets the same as described for constant-volume air systems.
 - b. Verify that terminal units are meeting design airflow under system maximum flow.
8. Re-measure the inlet static pressure at the most critical terminal unit and adjust the system static pressure set point to the most energy-efficient set point to maintain the optimum system static pressure. Record set point and give to controls contractor.
9. Verify final system conditions as follows:
- a. Re-measure and confirm that minimum outdoor, return, and relief airflows are within design. Readjust to match design if necessary.
 - b. Re-measure and confirm that total airflow is within design.
 - c. Re-measure final fan operating data, rpms, volts, amps, and static profile.
 - d. Mark final settings.
 - e. Test system in economizer mode. Verify proper operation and adjust if necessary. Measure and record all operating data.
 - f. Verify tracking between supply and return fans.

3.7 PROCEDURES FOR CONDENSING UNITS

- A. Verify proper rotation of fans.
- B. Measure entering- and leaving-air temperatures.
- C. Record compressor data.

3.8 TOLERANCES

- A. Set HVAC system's air flow rates and water flow rates within the following tolerances:
 - 1. Equipment with Fans: Plus or minus 10 percent.
 - 2. Air Outlets and Inlets: Plus or minus 10 percent.

3.9 REPORTING

- A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for systems' balancing devices. Recommend changes and additions to systems' balancing devices to facilitate proper performance measuring and balancing. Recommend changes and additions to HVAC systems and general construction to allow access for performance measuring and balancing devices.

3.10 FINAL REPORT

- A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.
 - 1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing engineer.
 - 2. Include a list of instruments used for procedures, along with proof of calibration.
- B. Final Report Contents: In addition to certified field-report data, include the following:
 - 1. Field test reports prepared by system and equipment installers.
 - 2. Other information relative to equipment performance; do not include Shop Drawings and product data.
- C. General Report Data: In addition to form titles and entries, include the following data:
 - 1. Title page.
 - 2. Project name.
 - 3. Project location.
 - 4. Architect's name and address.
 - 5. Engineer's name and address.
 - 6. Contractor's name and address.
 - 7. Report date.
 - 8. Signature of TAB supervisor who certifies the report.
 - 9. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
 - 10. Summary of contents including the following:
 - a. Indicated versus final performance.
 - b. Notable characteristics of systems.
 - c. Description of system operation sequence if it varies from the Contract Documents.

11. Nomenclature sheets for each item of equipment.
12. Data for terminal units, including manufacturer's name, type, size, and fittings.
13. Notes to explain why certain final data in the body of reports vary from indicated values.
14. Test conditions for fans and pump performance forms including the following:
 - a. Settings for outdoor-, return-, and exhaust-air dampers.
 - b. Conditions of filters.
 - c. Cooling coil, wet- and dry-bulb conditions.
 - d. Fan drive settings including settings and percentage of maximum pitch diameter.
 - e. Other system operating conditions that affect performance.

3.11 ADDITIONAL TESTS

- A. Within 90 days of completing TAB, perform additional TAB to verify that balanced conditions are being maintained throughout and to correct unusual conditions.

END OF SECTION 230593

SECTION 230713 - DUCT INSULATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes insulating the following duct services:
 - 1. Indoor, supply, return, exhaust and outdoor air.
 - 2. Indoor, Concealed, Type I, commercial, kitchen hood exhaust.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (factory-applied).

1.3 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.
 - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.6 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."
- B. Coordinate clearance requirements with duct Installer for duct insulation application. Before preparing ductwork Shop Drawings, establish and maintain clearance requirements for installation of insulation and finishes and for space required for maintenance.

1.7 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

PART 2 - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Duct Insulation Schedule, General," "Indoor Duct and Plenum Insulation Schedule" article for where insulating materials shall be applied.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- D. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Mineral-Fiber Blanket Insulation: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 553, Type II and ASTM C 1290, Type III with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.
- F. Mineral-Fiber Board Insulation: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 612, Type IA or Type IB. For duct and plenum applications, provide insulation with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.
- G. Mineral-Fiber, Pipe and Tank Insulation: Mineral or glass fibers bonded with a thermosetting resin. Semirigid board material with factory-applied FSK jacket complying with ASTM C 1393, Type II or Type IIIA Category 2, or with properties similar to ASTM C 612, Type IB. Nominal density is 2.5 lb/cu. ft. or more. Thermal conductivity (k-value) at 100 deg F is 0.29 Btu x in./h x sq. ft. x deg F or less. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

2.2 FIRE-RATED INSULATION SYSTEMS

- A. Fire-Rated Board: Structural-grade, press-molded, xonolite calcium silicate, fireproofing board suitable for operating temperatures up to 1700 deg F. Comply with ASTM C 656, Type II, Grade 6. Tested and certified to provide a 2-hour fire rating by an NRTL acceptable to authorities having jurisdiction. Board shall provide zero clearance to combustible construction throughout the entire enclosure system.
- B. Fire-Rated Blanket: High-temperature, flexible, blanket insulation with FSK jacket that is tested and certified to provide a 2-hour fire rating by an NRTL acceptable to authorities having jurisdiction. Blanket shall provide zero clearance to combustible construction throughout the entire enclosure system.

2.3 ADHESIVES

- A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.
- B. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

- C. FSK Jacket Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.
- 2.4 MASTICS
- A. Materials shall be compatible with insulation materials, jackets, and substrates; comply with MIL-PRF-19565C, Type II.
 - B. Vapor-Barrier Mastic: Solvent based; suitable for indoor use on below ambient services.
 - 1. Water-Vapor Permeance: ASTM F 1249, 0.05 perm at 35-mil dry film thickness.
 - 2. Service Temperature Range: 0 to 180 deg F.
 - 3. Solids Content: ASTM D 1644, 44 percent by volume and 62 percent by weight.
 - 4. Color: White.
 - C. Vapor-Barrier Mastic: Solvent based; suitable for outdoor use on below ambient services.
 - 1. Water-Vapor Permeance: ASTM F 1249, 0.05 perm at 30-mil dry film thickness.
 - 2. Service Temperature Range: Minus 50 to plus 220 deg F.
 - 3. Solids Content: ASTM D 1644, 33 percent by volume and 46 percent by weight.
 - 4. Color: White.
- 2.5 SEALANTS
- A. FSK Flashing Sealants:
 - 1. Materials shall be compatible with insulation materials, jackets, and substrates.
 - 2. Fire- and water-resistant, flexible, elastomeric sealant.
 - 3. Service Temperature Range: Minus 40 to plus 250 deg F.
 - 4. Color: Aluminum.
- 2.6 FACTORY-APPLIED JACKETS
- A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:
 - 1. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing; complying with ASTM C 1136, Type II.
- 2.7 TAPES
- A. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C 1136.
 - 1. Width: 3 inches.
 - 2. Thickness: 6.5 mils.
 - 3. Adhesion: 90 ounces force/inch in width.
 - 4. Elongation: 2 percent.
 - 5. Tensile Strength: 40 lbf/inch in width.
 - 6. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.
- 2.8 SECUREMENTS
- A. Insulation Pins and Hangers:

1. Capacitor-Discharge-Weld Pins: Copper- or zinc-coated steel pin, fully annealed for capacitor-discharge welding, 0.106-inch- diameter shank, length to suit depth of insulation indicated.
2. Cupped-Head, Capacitor-Discharge-Weld Pins: Copper- or zinc-coated steel pin, fully annealed for capacitor-discharge welding, 0.106-inch- diameter shank, length to suit depth of insulation indicated with integral 1-1/2-inch galvanized carbon-steel washer.
3. Metal, Adhesively Attached, Perforated-Base Insulation Hangers: Baseplate welded to projecting spindle that is capable of holding insulation, of thickness indicated, securely in position indicated when self-locking washer is in place. Comply with the following requirements:
 - a. Baseplate: Perforated, galvanized carbon-steel sheet, 0.030 inch thick by 2 inches square.
 - b. Spindle: Copper- or zinc-coated, low-carbon steel, fully annealed, 0.106-inch-diameter shank, length to suit depth of insulation indicated.
 - c. Adhesive: Recommended by hanger manufacturer. Product with demonstrated capability to bond insulation hanger securely to substrates indicated without damaging insulation, hangers, and substrates.
4. Insulation-Retaining Washers: Self-locking washers formed from 0.016-inch-thick, galvanized-steel sheet, with beveled edge sized as required to hold insulation securely in place but not less than 1-1/2 inches in diameter.
 - a. Protect ends with capped self-locking washers incorporating a spring steel insert to ensure permanent retention of cap in exposed locations.
5. Nonmetal Insulation-Retaining Washers: Self-locking washers formed from 0.016-inch-thick nylon sheet, with beveled edge sized as required to hold insulation securely in place but not less than 1-1/2 inches in diameter.

2.9 CORNER ANGLES

- A. PVC Corner Angles: 30 mils thick, minimum 1 by 1 inch, PVC according to ASTM D 1784, Class 16354-C. White or color-coded to match adjacent surface.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
 1. Verify that systems to be insulated have been tested and are free of defects.
 2. Verify that surfaces to be insulated are clean and dry.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of ducts and fittings.
- B. Install insulation materials, vapor barriers or retarders, jackets, and thicknesses required for each item of duct system as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Keep insulation materials dry during application and finishing.
- G. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- H. Install insulation with least number of joints practical.
- I. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 - 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
- J. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- K. Install insulation with factory-applied jackets as follows:
 - 1. Draw jacket tight and smooth.
 - 2. Cover circumferential joints with 3-inch-wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
 - 3. Overlap jacket longitudinal seams at least 1-1/2 inches. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.
 - a. For below ambient services, apply vapor-barrier mastic over staples.
 - 4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
 - 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to duct flanges and fittings.
- L. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.

- M. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- N. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.

3.4 PENETRATIONS

- A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
 - 4. Seal jacket to roof flashing with flashing sealant.
- B. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
 - 4. Seal jacket to wall flashing with flashing sealant.
- C. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- D. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Terminate insulation at fire damper sleeves for fire-rated wall and partition penetrations. Externally insulate damper sleeves to match adjacent insulation and overlap duct insulation at least 2 inches.
 - 1. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping and fire-resistive joint sealers.
- E. Insulation Installation at Floor Penetrations:
 - 1. Duct: For penetrations through fire-rated assemblies, terminate insulation at fire damper sleeves and externally insulate damper sleeve beyond floor to match adjacent duct insulation. Overlap damper sleeve and duct insulation at least 2 inches.
 - 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Section 078413 "Penetration Firestopping."

3.5 INSTALLATION OF MINERAL-FIBER INSULATION

- A. Blanket Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.
1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 100 percent coverage of duct and plenum surfaces.
 2. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:
 - a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
 - b. On duct sides with dimensions larger than 18 inches, place pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
 - c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
 - d. Do not overcompress insulation during installation.
 - e. Impale insulation over pins and attach speed washers.
 - f. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.
 3. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.
 - a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
 - b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops shall consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.
 4. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. At end joints, secure with steel bands spaced a maximum of 18 inches o.c.
 5. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
 6. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

- B. Board Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.
1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 100 percent coverage of duct and plenum surfaces.
 2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
 3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:
 - a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
 - b. On duct sides with dimensions larger than 18 inches, space pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
 - c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
 - d. Do not overcompress insulation during installation.
 - e. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.
 4. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.
 - a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
 - b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops shall consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.
 5. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Groove and score insulation to fit as closely as possible to outside and inside radius of elbows. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
 6. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

3.6 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

- B. Perform tests and inspections.
 - C. Tests and Inspections:
 - 1. Inspect ductwork, randomly selected by Architect, by removing insulation in layers in reverse order of their installation. Extent of inspection shall be limited to five location(s) for each duct system defined in the "Duct Insulation Schedule, General" Article.
 - D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.
- 3.7 DUCT INSULATION SCHEDULE, GENERAL
- A. Items Not Insulated:
 - 1. Factory-insulated flexible ducts.
 - 2. Factory-insulated plenums and casings.
 - 3. Flexible connectors.
 - 4. Vibration-control devices.
 - 5. Factory-insulated access panels and doors.
- 3.8 INDOOR DUCT AND PLENUM INSULATION SCHEDULE
- A. Concealed, Type I, Commercial, Kitchen Hood Exhaust Duct and Plenum Insulation: Fire-rated blanket or board; thickness as required to achieve 2-hour fire rating. Insulation shall provide zero clearance to combustible construction throughout the entire enclosure system.
 - B. Rectangular, round duct (supply, return, exhaust and outside air) in conditioned space, insulation shall be the following:
 - 1. Mineral-Fiber Blanket: 2 inches thick and 0.75-lb/cu. ft. nominal density.
 - 2. Mineral-Fiber Board: 2 inches thick and 2-lb/cu. ft. nominal density.
 - C. Round duct (supply, return, exhaust and outside air) in attic/unconditioned space, insulation shall be the following:
 - 1. Mineral-Fiber Blanket: 3 inches thick and 0.75-lb/cu. ft. nominal density.
 - 2. Mineral-Fiber Board: 3 inches thick and 2-lb/cu. ft. nominal density.
 - D. Rectangular duct (supply, return, exhaust and outside air) in attic/unconditioned space, insulation shall be the following:
 - 1. Mineral-Fiber Board: 3 inches thick and 2-lb/cu. ft. nominal density.

END OF SECTION 230713

SECTION 230719 - HVAC PIPING INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes insulating the following HVAC piping systems:
 - 1. Condensate drain piping, indoors.
 - 2. Refrigerant suction and hot-gas piping, indoors and outdoors.
- B. Related Sections:
 - 1. Section 230713 "Duct Insulation."

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory and field applied if any).

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84, by a testing and inspecting agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.
 - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
 - 2. Insulation Installed Outdoors: Flame-spread index of 75 or less, and smoke-developed index of 150 or less.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.7 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.
- C. Coordinate installation and testing of heat tracing.

1.8 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.
- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

PART 2 - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule" and "Outdoor, Aboveground Piping Insulation Schedule."
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Flexible Elastomeric Insulation: Closed-cell, sponge- or expanded-rubber materials. Comply with ASTM C 534, Type I for tubular materials.

2.2 ADHESIVES

- A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.
- A. Flexible Elastomeric Adhesive: Comply with MIL-A-24179A, Type II, Class I.

2.3 FIELD-APPLIED JACKETS

- A. Field-applied jackets shall comply with ASTM C 921, Type I, unless otherwise indicated.

- B. PVC Jacket: High-impact-resistant, UV-resistant PVC complying with ASTM D 1784, Class 16354-C; thickness as scheduled; roll stock ready for shop or field cutting and forming. Thickness is indicated in field-applied jacket schedules.
 - 1. Adhesive: As recommended by jacket material manufacturer.
 - 2. Factory-fabricated fitting covers to match jacket if available; otherwise, field fabricate.
 - a. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, unions, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories.

2.4 TAPES

- A. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.
 - 1. Width: 2 inches.
 - 2. Thickness: 6 mils.
 - 3. Adhesion: 64 ounces force/inch in width.
 - 4. Elongation: 500 percent.
 - 5. Tensile Strength: 18 lbf/inch in width.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
 - 1. Verify that systems to be insulated have been tested and are free of defects.
 - 2. Verify that surfaces to be insulated are clean and dry.
 - 3. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping including fittings, valves, and specialties.
- B. Install insulation materials, forms, vapor barriers or retarders, jackets, and thicknesses required for each item of pipe system as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.

- E. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- F. Keep insulation materials dry during application and finishing.
- G. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- H. Install insulation with least number of joints practical.
- I. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 - 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
 - 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.
- J. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- K. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.
- L. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- M. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.
- N. For above-ambient services, do not install insulation to the following:
 - 1. Vibration-control devices.
 - 2. Testing agency labels and stamps.
 - 3. Nameplates and data plates.

3.4 PENETRATIONS

- A. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- B. Insulation Installation at Floor Penetrations:
 - 1. Pipe: Install insulation continuously through floor penetrations.

3.5 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

- A. Seal longitudinal seams and end joints with manufacturers recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
- B. Insulation Installation on Valves and Pipe Specialties:
 - 1. Install preformed valve covers manufactured of same material as pipe insulation when available.
 - 2. When preformed valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
 - 3. Secure insulation to valves and specialties and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.6 FIELD-APPLIED JACKET INSTALLATION

- A. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints; for horizontal applications. Seal with manufacturers recommended adhesive.
 - 1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

3.7 FINISHES

- A. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.

3.8 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
 - 1. Inspect pipe, fittings, and valves, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation.
- D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.9 PIPING INSULATION SCHEDULE, GENERAL

- A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range.

3.10 INDOOR PIPING INSULATION SCHEDULE

- A. Condensate and Equipment Drain Water below 60 Deg F:

1. All Pipe Sizes: Insulation shall be the following:

a. Flexible Elastomeric: 1 inch thick.

B. Refrigerant Suction and Hot-Gas Piping:

1. All Pipe Sizes: Insulation shall be the following:

a. Flexible Elastomeric: 1-1/2 inch thick.

3.11 OUTDOOR, ABOVEGROUND PIPING INSULATION SCHEDULE

A. Refrigerant Suction and Hot-Gas Piping:

1. All Pipe Sizes: Insulation shall be the following:

a. Flexible Elastomeric: 1-1/2 inches thick.

3.12 INDOOR, FIELD-APPLIED JACKET SCHEDULE

A. Piping, Exposed where subject to damage (from floor to 8' above finished floor):

1. PVC, Color-Coded by System: 20 mils thick.

3.13 OUTDOOR, FIELD-APPLIED FINISH SCHEDULE

A. Piping, Exposed:

1. All outdoor exposed piping shall be painted with two coats of insulation manufacturer recommended protective finish. Prior to applying the finish, the insulation shall be wiped clean with denatured alcohol. The finish shall not be tinted. To ensure good adhesion, the temperature shall be above 50 °F during application and drying.

END OF SECTION 230719

SECTION 232300 - REFRIGERANT PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes refrigerant piping used for air-conditioning applications.

1.2 PERFORMANCE REQUIREMENTS

- A. Line Test Pressure for Refrigerant R-410A:

- 1. Suction Lines: 535 psig.
- 2. Hot-Gas and Liquid Lines: 535 psig.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of valve and refrigerant piping specialty indicated. Include pressure drop based on manufacturer's test data.
- B. Shop Drawings: Show layout of refrigerant piping and specialties, including pipe, tube, and fitting sizes, flow capacities, valve arrangements and locations, slopes of horizontal runs, oil traps, double risers, wall and floor penetrations, and equipment connection details. Show interface and spatial relationships between piping and equipment.
 - 1. Refrigerant piping indicated on Drawings is schematic only. Size piping and design actual piping layout, including oil traps, double risers, specialties, and pipe and tube sizes to accommodate, as a minimum, equipment provided, elevation difference between compressor and evaporator, and length of piping to ensure proper operation and compliance with warranties of connected equipment.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control test reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and maintenance data.

1.6 QUALITY ASSURANCE

- A. Comply with ASHRAE 15, "Safety Code for Refrigeration Systems."
- B. Comply with ASME B31.5, "Refrigeration Piping and Heat Transfer Components."

1.7 PRODUCT STORAGE AND HANDLING

- A. Store piping in a clean and protected area with end caps in place to ensure that piping interior and exterior are clean when installed.

PART 2 - PRODUCTS

2.1 COPPER TUBE AND FITTINGS

- A. Provide as recommended by equipment by manufacturer.

2.2 VALVES AND SPECIALTIES

- A. Provide as recommended by equipment by manufacturer.

2.3 REFRIGERANTS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- B. ASHRAE 34, R-410A: Pentafluoroethane/Difluoromethane.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

- A. Provide as recommended by equipment by manufacturer.

3.2 VALVE AND SPECIALTY APPLICATIONS

- A. Provide as recommended by equipment by manufacturer.

3.3 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems; indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on Shop Drawings.
- B. Install refrigerant piping according to ASHRAE 15.
- C. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- F. Install piping adjacent to machines to allow service and maintenance.
- G. Install piping free of sags and bends.
- H. Install fittings for changes in direction and branch connections.

- I. Select system components with pressure rating equal to or greater than system operating pressure.
 - J. Install piping as short and direct as possible, with a minimum number of joints, elbows, and fittings.
 - K. Install refrigerant piping in rigid or flexible conduit in locations where exposed to mechanical injury.
 - L. Slope refrigerant piping as follows:
 - 1. Install horizontal hot-gas discharge piping with a uniform slope downward away from compressor.
 - 2. Install horizontal suction lines with a uniform slope downward to compressor.
 - 3. Install traps and double risers to entrain oil in vertical runs as recommended by equipment manufacturer.
 - 4. Liquid lines may be installed level.
 - M. When brazing or soldering, remove valve stems, seats, and packing, and accessible internal parts of refrigerant specialties. Do not apply heat near expansion-valve bulb.
 - N. Install piping with adequate clearance between pipe and adjacent walls and hangers or between pipes for insulation installation.
 - O. Identify refrigerant piping and valves according to Section 230553 "Identification for HVAC Piping and Equipment."
 - P. Install sleeves for piping penetrations of walls, ceilings, and floors. Install sleeve seals for piping penetrations of concrete walls and slabs.
 - Q. Install escutcheons for piping penetrations of walls, ceilings, and floors.
- 3.4 PIPE JOINT CONSTRUCTION
- A. Soldered Joints: Construct joints according to ASTM B 828 or CDA's "Copper Tube Handbook."
 - B. Brazed Joints: Construct joints according to AWS's "Brazing Handbook," Chapter "Pipe and Tube."
 - 1. Use Type BcuP, copper-phosphorus alloy for joining copper socket fittings with copper pipe. Use Type BAg, cadmium-free silver alloy for joining copper with bronze or steel.
- 3.5 HANGERS AND SUPPORTS
- A. Hanger, support, and anchor products are specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."
 - B. Install the following pipe attachments:
 - 1. Adjustable steel clevis hangers for individual horizontal runs less than 20 feet long.

2. Copper-clad hangers and supports for hangers and supports in direct contact with copper pipe.

3.6 FIELD QUALITY CONTROL

- A. Perform tests and inspections as recommended by equipment manufacturer and prepare test reports.
- B. Tests and Inspections:
 1. Comply with ASME B31.5, Chapter VI.
 2. Test refrigerant piping and specialties. Isolate compressor, condenser, evaporator, and safety devices from test pressure if they are not rated above the test pressure.
 3. Test high- and low-pressure side piping of each system separately at not less than the pressures indicated in Part 1 "Performance Requirements" Article.
 - a. Fill system with nitrogen to the required test pressure.
 - b. Maintain test pressure at the manifold gage throughout duration of test.
 - c. Test joints and fittings with electronic leak detector or by brushing a small amount of soap and glycerin solution over joints.
 - d. Remake leaking joints using new materials, and retest until satisfactory results are achieved.

3.7 SYSTEM CHARGING

- A. Charge system as recommended by equipment manufacturer. Work must be conducted under the supervision of an EPA certified technician.

END OF SECTION 232300

SECTION 233113 - METAL DUCTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Single-wall rectangular ducts and fittings.
2. Single-wall round ducts and fittings.
3. Double-wall round ducts and fittings.
4. Sheet metal materials.
5. Sealant and gaskets.
6. Hangers and supports.

B. Related Sections:

1. Section 230593 "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing requirements for metal ducts.
2. Section 233300 "Air Duct Accessories" for dampers, duct-mounting access doors, turning vanes, and flexible ducts.

1.2 PERFORMANCE REQUIREMENTS

- A. Delegated Duct Design: Duct construction, including sheet metal thicknesses, seam and joint construction, reinforcements, and hangers and supports, shall comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" and performance requirements and design criteria indicated in "Duct Schedule" Article.
- B. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of the following products:
 1. Sealants and gaskets.

1.4 INFORMATIONAL SUBMITTALS

- A. Welding certificates.
- B. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel according to AWS D9.1M/D9.1, "Sheet Metal Welding Code," for duct joint and seam welding.
- B. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and System Start-up."
- C. ASHRAE/IESNA Compliance: Applicable requirements in ASHRAE/IESNA 90.1, Section 6.4.4 - "HVAC System Construction and Insulation."

PART 2 - PRODUCTS

2.1 SINGLE-WALL RECTANGULAR DUCTS AND FITTINGS

- A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" based on indicated static-pressure class unless otherwise indicated.
- B. Transverse Joints: Select joint types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-1, "Rectangular Duct/Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- C. Longitudinal Seams: Select seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Duct/Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- D. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 4, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.2 SINGLE-WALL ROUND DUCTS AND FITTINGS

- A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 3, "Round, Oval, and Flexible Duct," based on indicated static-pressure class unless otherwise indicated.
- B. Transverse Joints: Select joint types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-1, "Round Duct Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

1. Transverse Joints in Ducts Larger Than 60 Inches in Diameter: Flanged.
- C. Longitudinal Seams: Select seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-2, "Round Duct Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- D. Tees and Laterals: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.3 DOUBLE-WALL ROUND DUCTS AND FITTINGS

- A. Outer Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 3, "Round, Oval, and Flexible Duct," based on static-pressure class unless otherwise indicated.
1. Transverse Joints: Select joint types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-1, "Round Duct Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 2. Longitudinal Seams: Select seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-2, "Round Duct Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 3. Tees and Laterals: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- B. Inner Duct: Minimum 0.028-inch solid sheet steel.
- C. Interstitial Insulation: Fibrous-glass liner complying with ASTM C 1071, NFPA 90A, or NFPA 90B; and with NAIMA AH124, "Fibrous Glass Duct Liner Standard."
1. Maximum Thermal Conductivity: 0.27 Btu x in./h x sq. ft. x deg F at 75 deg F mean temperature.
 2. Install spacers that position the inner duct at uniform distance from outer duct without compressing insulation.
 3. Coat insulation with antimicrobial coating.
 4. Cover insulation with polyester film complying with UL 181, Class 1.

2.4 SHEET METAL MATERIALS

- A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.
- B. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M.
 - 1. Galvanized Coating Designation: G90.
 - 2. Finishes for Surfaces Exposed to View: Mill phosphatized "paintgrip".
- C. Carbon-Steel Sheets: Comply with ASTM A 1008/A 1008M, with oiled, matte finish for exposed ducts.
- D. Stainless-Steel Sheets: Comply with ASTM A 480/A 480M, Type 304 or 316, as indicated in the "Duct Schedule" Article; cold rolled, annealed, sheet. Exposed surface finish shall be No. 2B, No. 2D, No. 3, or No. 4 as indicated in the "Duct Schedule" Article.
- E. Reinforcement Shapes and Plates: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
 - 1. Where black- and galvanized-steel shapes and plates are used to reinforce aluminum ducts, isolate the different metals with butyl rubber, neoprene, or EPDM gasket materials.

2.5 SEALANT AND GASKETS

- A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets shall be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested according to UL 723; certified by an NRTL.
- B. Water-Based Joint and Seam Sealant:
 - 1. Application Method: Brush on.
 - 2. Solids Content: Minimum 65 percent.
 - 3. Shore A Hardness: Minimum 20.
 - 4. Water resistant.
 - 5. Mold and mildew resistant.
 - 6. VOC: Maximum 75 g/L (less water).
 - 7. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
 - 8. Service: Indoor or outdoor.
 - 9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.
- C. Solvent-Based Joint and Seam Sealant:
 - 1. Application Method: Brush on.
 - 2. Base: Synthetic rubber resin.
 - 3. Solvent: Toluene and heptane.
 - 4. Solids Content: Minimum 60 percent.

5. Shore A Hardness: Minimum 60.
6. Water resistant.
7. Mold and mildew resistant.
8. For indoor applications, sealant shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
9. VOC: Maximum 395 g/L.
10. Maximum Static-Pressure Class: 10-inch wg, positive or negative.
11. Service: Indoor or outdoor.
12. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.

D. Flanged Joint Sealant: Comply with ASTM C 920.

1. General: Single-component, acid-curing, silicone, elastomeric.
2. Type: S.
3. Grade: NS.
4. Class: 25.
5. Use: O.
6. For indoor applications, sealant shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

E. Flange Gaskets: Butyl rubber, neoprene, or EPDM polymer with polyisobutylene plasticizer.

F. Round Duct Joint O-Ring Seals:

1. Seal shall provide maximum leakage class of 3 cfm/100 sq. ft. at 1-inch wg and shall be rated for 10-inch wg static-pressure class, positive or negative.
2. EPDM O-ring to seal in concave bead in coupling or fitting spigot.
3. Double-lipped, EPDM O-ring seal, mechanically fastened to factory-fabricated couplings and fitting spigots.

2.6 HANGERS AND SUPPORTS

- A. Hanger Rods for Noncorrosive Environments: Cadmium-plated steel rods and nuts.
- B. Hanger Rods for Corrosive Environments: Electrogalvanized, all-thread rods or galvanized rods with threads painted with zinc-chromate primer after installation.
- C. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct."
- D. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A 603.
- E. Steel Cables for Stainless-Steel Ducts: Stainless steel complying with ASTM A 492.
- F. Steel Cable End Connections: Cadmium-plated steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.

- G. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- H. Trapeze and Riser Supports:
 - 1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.
 - 2. Supports for Stainless-Steel Ducts: Stainless-steel shapes and plates.

PART 3 - EXECUTION

3.1 DUCT INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and Coordination Drawings.
- B. Install ducts according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" unless otherwise indicated.
- C. Install round ducts in maximum practical lengths.
- D. Install ducts with fewest possible joints.
- E. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.
- F. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.
- G. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.
- H. Install ducts with a clearance of 1 inch, plus allowance for insulation thickness.
- I. Where ducts pass through non-fire-rated interior partitions and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches.
- J. Protect duct interiors from moisture, construction debris and dust, and other foreign materials. Comply with SMACNA's "IAQ Guidelines for Occupied Buildings Under Construction," Appendix G, "Duct Cleanliness for New Construction Guidelines."

3.2 INSTALLATION OF EXPOSED DUCTWORK

- A. All interior exposed ductwork to be double wall round
- B. Protect ducts exposed in finished spaces from being dented, scratched, or damaged.

- C. Trim duct sealants flush with metal. Create a smooth and uniform exposed bead. Do not use two-part tape sealing system.
- D. Grind welds to provide smooth surface free of burrs, sharp edges, and weld splatter. When welding stainless steel with a No. 3 or 4 finish, grind the welds flush, polish the exposed welds, and treat the welds to remove discoloration caused by welding.
- E. Maintain consistency, symmetry, and uniformity in the arrangement and fabrication of fittings, hangers and supports, duct accessories, and air outlets.
- F. Repair or replace damaged sections and finished work that does not comply with these requirements.

3.3 ADDITIONAL INSTALLATION REQUIREMENTS FOR COMMERCIAL KITCHEN HOOD EXHAUST DUCT

- A. Install commercial kitchen hood exhaust ducts without dips and traps that may hold grease, and sloped a minimum of 2 percent to drain grease back to the hood.
- B. Install fire-rated access panel assemblies at each change in direction and at maximum intervals of 12 feet in horizontal ducts, and at every floor for vertical ducts, or as indicated on Drawings.

3.4 DUCT SEALING

- A. Seal ducts for duct static-pressure, seal classes, and leakage classes specified in "Duct Schedule" Article according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

3.5 HANGER AND SUPPORT INSTALLATION

- A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 5, "Hangers and Supports."
- B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.
 - 1. Where practical, install concrete inserts before placing concrete.
 - 2. Install powder-actuated concrete fasteners after concrete is placed and completely cured.
 - 3. Use powder-actuated concrete fasteners for standard-weight aggregate concretes or for slabs more than 4 inches thick.
 - 4. Do not use powder-actuated concrete fasteners for lightweight-aggregate concretes or for slabs less than 4 inches thick.
- C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct," for maximum hanger spacing; install hangers and supports within 24 inches of each elbow and within 48 inches of each branch intersection.
- D. Hangers Exposed to View: Threaded rod and angle or channel supports.

- E. Support vertical ducts with steel angles or channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor and at a maximum intervals of 16 feet.
- F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.6 CONNECTIONS

- A. Make connections to equipment with flexible connectors complying with Section 233300 "Air Duct Accessories."
- B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for branch, outlet and inlet, and terminal unit connections.

3.7 PAINTING

- A. Paint interior of metal ducts that are visible through registers and grilles and that do not have duct liner. Apply one coat of flat, black, latex paint over a compatible galvanized-steel primer. Paint materials and application requirements are specified in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."

3.8 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Leakage Tests:
 - 1. Comply with SMACNA's "HVAC Air Duct Leakage Test Manual." Submit a test report for each test.
 - 2. Test the following systems:
 - a. Test representative duct sections, selected by Architect from sections installed, totaling no less than 25 percent of total installed duct area for each designated pressure class.
 - 3. Disassemble, reassemble, and seal segments of systems to accommodate leakage testing and for compliance with test requirements.
 - 4. Test for leaks before applying external insulation.
 - 5. Conduct tests at static pressures equal to maximum design pressure of system or section being tested. If static-pressure classes are not indicated, test system at maximum system design pressure. Do not pressurize systems above maximum design operating pressure.
 - 6. Give seven days' advance notice for testing.
- C. Prior to the use or concealment of any portion of a grease duct system, a leakage test shall be performed in the presence of the Engineer or qualified representative from engineering team. Ducts shall be considered to be concealed where installed in shafts or covered by coatings or wraps that prevent the ductwork from being visually inspected on all sides. The contractor shall be responsible to provide the necessary equipment and perform the grease duct leakage test.

1. A light test shall be performed to determine that all welded and brazed joints are liquid tight. A light test shall be performed by passing a lamp having a power rating of not less than 100 watts through the entire section of ductwork to be tested. The lamp shall be open so as to emit light equally in all directions perpendicular to the duct walls. A test shall be performed for the entire duct system, including the hood-to-duct connection. The ductwork shall be permitted to be tested in sections, provided that every joint is tested. For listed factory-built grease ducts, this test shall be limited to duct joints assembled in the field and shall exclude factory welds.

D. Duct System Cleanliness Tests:

1. Visually inspect duct system to ensure that no visible contaminants are present.
2. Test sections of metal duct system, chosen randomly by Owner, for cleanliness according to "Vacuum Test" in NADCA ACR, "Assessment, Cleaning and Restoration of HVAC Systems."
 - a. Acceptable Cleanliness Level: Net weight of debris collected on the filter media shall not exceed 0.75 mg/100 sq. cm.

E. Duct system will be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

3.9 DUCT CLEANING

A. Clean duct system(s) before testing, adjusting, and balancing.

B. Use service openings for entry and inspection.

1. Create new openings and install access panels appropriate for duct static-pressure class if required for cleaning access. Provide insulated panels for insulated or lined duct. Patch insulation and liner as recommended by duct liner manufacturer. Comply with Section 233300 "Air Duct Accessories" for access panels and doors.
2. Disconnect and reconnect flexible ducts as needed for cleaning and inspection.
3. Remove and reinstall ceiling to gain access during the cleaning process.

C. Particulate Collection and Odor Control:

1. When venting vacuuming system inside the building, use HEPA filtration with 99.97 percent collection efficiency for 0.3-micron-size (or larger) particles.
2. When venting vacuuming system to outdoors, use filter to collect debris removed from HVAC system, and locate exhaust downwind and away from air intakes and other points of entry into building.

D. Clean the following components by removing surface contaminants and deposits:

1. Air outlets and inlets (registers, grilles, and diffusers).
2. Supply, return, and exhaust fans including fan housings, plenums (except ceiling supply and return plenums), scrolls, blades or vanes, shafts, baffles, dampers, and drive assemblies.

3. Air-handling unit internal surfaces and components including mixing box, coil section, air wash systems, spray eliminators, condensate drain pans, humidifiers and dehumidifiers, filters and filter sections, and condensate collectors and drains.
4. Coils and related components.
5. Return-air ducts, dampers, actuators, and turning vanes except in ceiling plenums and mechanical equipment rooms.
6. Supply-air ducts, dampers, actuators, and turning vanes.
7. Dedicated exhaust and ventilation components and makeup air systems.

E. Mechanical Cleaning Methodology:

1. Clean metal duct systems using mechanical cleaning methods that extract contaminants from within duct systems and remove contaminants from building.
2. Use vacuum-collection devices that are operated continuously during cleaning. Connect vacuum device to downstream end of duct sections so areas being cleaned are under negative pressure.
3. Use mechanical agitation to dislodge debris adhered to interior duct surfaces without damaging integrity of metal ducts, duct liner, or duct accessories.
4. Clean fibrous-glass duct liner with HEPA vacuuming equipment; do not permit duct liner to get wet. Replace fibrous-glass duct liner that is damaged, deteriorated, or delaminated or that has friable material, mold, or fungus growth.
5. Clean coils and coil drain pans according to NADCA 1992. Keep drain pan operational. Rinse coils with clean water to remove latent residues and cleaning materials; comb and straighten fins.
6. Provide drainage and cleanup for wash-down procedures.
7. Antimicrobial Agents and Coatings: Apply EPA-registered antimicrobial agents if fungus is present. Apply antimicrobial agents according to manufacturer's written instructions after removal of surface deposits and debris.

3.10 START UP

- A. Air Balance: Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.11 DUCT SCHEDULE

- A. Fabricate ducts with galvanized sheet steel except as otherwise indicated.

B. Supply Ducts:

1. Ducts Connected to Roof Top Units:
 - a. Pressure Class: Positive 2-inch wg.
 - b. Minimum SMACNA Seal Class: C.
 - c. SMACNA Leakage Class for Rectangular: 16.
 - d. SMACNA Leakage Class for Round: 8.

C. Return Ducts:

1. Ducts Connected to Roof Top Units:
 - a. Pressure Class: Positive 2-inch wg.
 - b. Minimum SMACNA Seal Class: C.
 - c. SMACNA Leakage Class for Rectangular: 16.
 - d. SMACNA Leakage Class for Round: 8.

D. Exhaust Ducts:

1. Ducts Connected to Fans Exhausting (ASHRAE 62.1, Class 1 and 2) Air:
 - a. Pressure Class: Negative 2-inch wg.
 - b. Minimum SMACNA Seal Class: B if negative pressure, and A if positive pressure.
 - c. SMACNA Leakage Class for Rectangular: 16.
 - d. SMACNA Leakage Class for Round: 8.
2. Ducts Connected to Commercial Kitchen Hoods: Comply with NFPA 96.
 - a. Exposed to View: Type 304, stainless-steel sheet, No. 3 finish.
 - b. Concealed: Type 304, stainless-steel sheet, No. 2D finish or Carbon-steel sheet.
 - c. Welded seams and joints.
 - d. Pressure Class: Positive or negative 3-inch wg.
 - e. Minimum SMACNA Seal Class: Welded seams, joints, and penetrations.
 - f. SMACNA Leakage Class: 3.
3. Ducts Connected to Dishwasher:
 - a. Type 304, stainless-steel sheet.
 - b. Exposed to View: No. 3 finish.
 - c. Concealed: No. 2D finish.
 - d. Welded seams and flanged joints with watertight EPDM gaskets.
 - e. Pressure Class: Positive or negative 2-inch wg.
 - f. Minimum SMACNA Seal Class: Welded seams, joints, and penetrations.
 - g. SMACNA Leakage Class: 3.

E. Intermediate Reinforcement:

1. Galvanized-Steel Ducts: Galvanized steel.
2. Stainless-Steel Ducts:
 - a. Exposed to Airstream: Match duct material.
 - b. Not Exposed to Airstream: Match duct material.

F. Elbow Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."
 - a. Velocity 1000 fpm or Lower:
 - 1) Radius Type RE 1 with minimum 0.5 radius-to-diameter ratio.

- 2) Mitered Type RE 4 without vanes.
- b. Velocity 1000 to 1500 fpm:
 - 1) Radius Type RE 1 with minimum 1.0 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 0.5 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
- c. Velocity 1500 fpm or Higher:
 - 1) Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
2. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."
 - a. Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
 - b. Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
 - c. Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
3. Round Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "Round Duct Elbows."
 - a. Minimum Radius-to-Diameter Ratio and Elbow Segments: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 3-1, "Mitered Elbows." Elbows with less than 90-degree change of direction have proportionately fewer segments.
 - 1) Radius-to Diameter Ratio: 1.5.
 - b. Round Elbows, 12 Inches and Smaller in Diameter: Stamped or pleated.
 - c. Round Elbows, 14 Inches and Larger in Diameter: Standing seam.

G. Branch Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-6, "Branch Connection."
 - a. Rectangular Main to Rectangular Branch: 45-degree entry.
 - b. Rectangular Main to Round Branch: Spin in.

2. Round and Flat Oval: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees." Saddle taps are permitted in existing duct.
 - a. Velocity 1000 fpm or Lower: 90-degree tap.
 - b. Velocity 1000 to 1500 fpm: Conical tap.
 - c. Velocity 1500 fpm or Higher: 45-degree lateral.

END OF SECTION 233113

SECTION 233300 - AIR DUCT ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Manual volume dampers.
2. Fire dampers.
3. Combination fire and smoke dampers.
4. Flange connectors.
5. Turning vanes.
6. Duct-mounted access doors.
7. Flexible connectors.
8. Flexible ducts.
9. Duct accessory hardware.

- B. Related Section Includes:

1. Section 283111 – Digital, Addressable Fire-Alarm System for duct-mounted fire and smoke detectors.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- B. Shop Drawings: For duct accessories. Include plans, elevations, sections, details and attachments to other work.

1. Detail duct accessories fabrication and installation in ducts and other construction. Include dimensions, weights, loads, and required clearances; and method of field assembly into duct systems and other construction. Include the following:
 - a. Fire-damper, combination fire- and smoke-damper including sleeves; and duct-mounted access doors and remote damper operators.
 - b. Manual volume damper installations.
 - c. Control-damper installations.
 - d. Wiring Diagrams: For power, signal, and control wiring.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For air duct accessories to include in operation and maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTION

- A. Comply with NFPA 90A, "Installation of Air Conditioning and Ventilating Systems," and with NFPA 90B, "Installation of Warm Air Heating and Air Conditioning Systems."
- B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

2.2 MATERIALS

- A. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M.
 - 1. Galvanized Coating Designation: G90.
 - 2. Exposed-Surface Finish: Mill phosphatized.
- B. Reinforcement Shapes and Plates: Galvanized-steel reinforcement where installed on galvanized sheet metal ducts; compatible materials for aluminum and stainless-steel ducts.
- C. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches.

2.3 MANUAL VOLUME DAMPERS

- A. Standard, Steel, Manual Volume Dampers:
 - 1. Standard leakage rating, with linkage outside airstream.
 - 2. Suitable for horizontal or vertical applications.
 - 3. Frames:
 - a. Frame: Hat-shaped, 0.094-inch-thick, galvanized sheet steel.
 - b. Mitered and welded corners.
 - c. Flanges for attaching to walls and flangeless frames for installing in ducts.
 - 4. Blades:

- a. Multiple or single blade.
 - b. Parallel- or opposed-blade design.
 - c. Stiffen damper blades for stability.
 - d. Galvanized-steel, 0.064 inch thick.
- 5. Blade Axles: Galvanized steel.
- 6. Bearings:
 - a. Molded synthetic.
 - b. Dampers in ducts with pressure classes of 3-inch wg or less shall have axles full length of damper blades and bearings at both ends of operating shaft.
- 7. Tie Bars and Brackets: Galvanized steel.

2.4 FIRE DAMPERS

- A. Type: Dynamic; rated and labeled according to UL 555 by an NRTL.
- B. Closing rating in ducts up to 4-inch wg static pressure class and minimum 2000-fpm velocity.
- C. Fire Rating: 1-1/2 hours.
- D. Frame: Curtain type with blades outside airstream; fabricated with roll-formed, 0.034-inch-thick galvanized steel; with mitered and interlocking corners.
- E. Mounting Sleeve: Factory- or field-installed, galvanized sheet steel.
 - 1. Minimum Thickness: 0.138 inch thick, as indicated, and of length to suit application.
 - 2. Exception: Omit sleeve where damper-frame width permits direct attachment of perimeter mounting angles on each side of wall or floor; thickness of damper frame must comply with sleeve requirements.
- F. Mounting Orientation: Vertical or horizontal as indicated.
- G. Blades: Roll-formed, interlocking, 0.024-inch-thick, galvanized sheet steel. In place of interlocking blades, use full-length, 0.034-inch-thick, galvanized-steel blade connectors.
- H. Horizontal Dampers: Include blade lock and stainless-steel closure spring.
- I. Heat-Responsive Device: Replaceable, 165 deg F rated, fusible links.

2.5 COMBINATION FIRE AND SMOKE DAMPERS

- A. Type: Dynamic; rated and labeled according to UL 555 and UL 555S by an NRTL.
- B. Closing rating in ducts up to 4-inch wg static pressure class and minimum 2000-fpm velocity.
- C. Fire Rating: 1-1/2 hours.

- D. Frame: Hat-shaped, 0.094-inch-thick, galvanized sheet steel, with welded interlocking, gusseted or mechanically attached corners and mounting flange.
- E. Heat-Responsive Device: Electric resettable device and switch package, factory installed, rated.
- F. Smoke Detector: Integral, factory wired for single-point connection.
- G. Blades: Roll-formed, horizontal, interlocking, 0.063-inch-thick, galvanized sheet steel.
- H. Leakage: Class I.
- I. Rated pressure and velocity to exceed design airflow conditions.
- J. Mounting Sleeve: Factory-installed, 0.05-inch-thick, galvanized sheet steel; length to suit wall or floor application with factory-furnished silicone calking.
- K. Damper Motors: two-position action.
- L. Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements for motors specified in Section 230513 "Common Motor Requirements for HVAC Equipment."
 - 1. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.
 - 2. Controllers, Electrical Devices, and Wiring: Comply with requirements for electrical devices and connections specified in Section 230900 "Instrumentation and Control for HVAC."
 - 3. Permanent-Split-Capacitor or Shaded-Pole Motors: With oil-immersed and sealed gear trains.
 - 4. Spring-Return Motors: Equip with an integral spiral-spring mechanism where indicated. Enclose entire spring mechanism in a removable housing designed for service or adjustments. Size for running torque rating of 150 in. x lbf and breakaway torque rating of 150 in. x lbf.
 - 5. Non-spring-Return Motors: For dampers larger than 25 sq. ft., size motor for running torque rating of 150 in. x lbf and breakaway torque rating of 300 in. x lbf.
 - 6. Electrical Connection: 115 V, single phase, 60 Hz.
- M. Accessories:
 - 1. Auxiliary switches for signaling or position indication.
 - 2. Test and reset switches, damper mounted.

2.6 FLANGE CONNECTORS

- A. Description: Add-on or roll-formed, factory-fabricated, slide-on transverse flange connectors, gaskets, and components.
- B. Material: Galvanized steel.
- C. Gage and Shape: Match connecting ductwork.

2.7 TURNING VANES

- A. Manufactured Turning Vanes for Metal Ducts: Curved blades of galvanized sheet steel; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.
- B. General Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figures 4-3, "Vanes and Vane Runners," and 4-4, "Vane Support in Elbows."
- C. Vane Construction: Single wall.

2.8 DUCT-MOUNTED ACCESS DOORS

- A. Duct-Mounted Access Doors: Fabricate access panels according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figures 7-2, "Duct Access Doors and Panels," and 7-3, "Access Doors - Round Duct."
 - 1. Door:
 - a. Double wall, rectangular.
 - b. Galvanized sheet metal with insulation fill and thickness as indicated for duct pressure class.
 - c. Vision panel.
 - d. Hinges and Latches: 1-by-1-inch butt or piano hinge and cam latches.
 - e. Fabricate doors airtight and suitable for duct pressure class.
 - 2. Frame: Galvanized sheet steel, with bend-over tabs and foam gaskets.
 - 3. Number of Hinges and Locks:
 - a. Access Doors Less Than 12 Inches Square: No hinges and two sash locks.
 - b. Access Doors up to 18 Inches Square: Continuous and two sash locks.
 - c. Access Doors up to 24 by 48 Inches: Continuous and two compression latches.

2.9 FLEXIBLE CONNECTORS

- A. Materials: Flame-retardant or noncombustible fabrics.
- B. Coatings and Adhesives: Comply with UL 181, Class 1.
- C. Metal-Edged Connectors: Factory fabricated with a fabric strip 3-1/2 inches wide attached to two strips of 2-3/4-inch-wide, 0.028-inch-thick, galvanized sheet steel or 0.032-inch-thick aluminum sheets. Provide metal compatible with connected ducts.
- D. Indoor System, Flexible Connector Fabric: Glass fabric double coated with neoprene.
 - 1. Minimum Weight: 26 oz./sq. yd..
 - 2. Tensile Strength: 480 lbf/inch in the warp and 360 lbf/inch in the filling.
 - 3. Service Temperature: Minus 40 to plus 200 deg F.
- E. Insulated, Flexible Duct: UL 181, Class 1, multiple layers of aluminum laminate supported by helically wound, spring-steel wire; fibrous-glass insulation; aluminized vapor-barrier film.

1. Pressure Rating: 10-inch wg positive and 1.0-inch wg negative.
2. Maximum Air Velocity: 4000 fpm.
3. Temperature Range: Minus 20 to plus 210 deg F.

F. Flexible Duct Connectors:

1. Clamps: Nylon strap in sizes 3 through 18 inches, to suit duct size.
2. Non-Clamp Connectors: Liquid adhesive plus tape.

2.10 DUCT ACCESSORY HARDWARE

- A. Instrument Test Holes: Cast iron or cast aluminum to suit duct material, including screw cap and gasket. Size to allow insertion of pitot tube and other testing instruments and of length to suit duct-insulation thickness.
- B. Adhesives: High strength, quick setting, neoprene based, waterproof, and resistant to gasoline and grease.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install duct accessories according to applicable details in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts and in NAIMA AH116, "Fibrous Glass Duct Construction Standards," for fibrous-glass ducts.
- B. Install duct accessories of materials suited to duct materials; use galvanized-steel accessories in galvanized-steel and fibrous-glass ducts, stainless-steel accessories in stainless-steel ducts, and aluminum accessories in aluminum ducts.
- C. Install volume dampers at points on supply, return, and exhaust systems where branches extend from larger ducts.
 1. Install steel volume dampers in steel ducts.
- D. Set dampers to fully open position before testing, adjusting, and balancing.
- E. Install test holes at fan inlets and outlets and elsewhere as indicated.
- F. Install fire and combination fire smoke dampers according to UL listing.
- G. Install duct access doors on sides of ducts to allow for inspecting, adjusting, and maintaining accessories and equipment at the following locations:
 1. At outdoor-air intakes.
 2. At outdoor-air intakes and mixed-air plenums.
 3. Downstream from manual volume dampers.
 4. Adjacent to and close enough to fire or smoke dampers, to reset or reinstall fusible links. Access doors for access to fire or smoke dampers having fusible links shall be pressure

- relief access doors and shall be outward operation for access doors installed upstream from dampers and inward operation for access doors installed downstream from dampers.
5. Elsewhere as indicated.

H. Install access doors with swing against duct static pressure.

I. Access Door Sizes:

1. One-Hand or Inspection Access: 8 by 5 inches.
2. Two-Hand Access: 12 by 6 inches.
3. Head and Hand Access: 18 by 10 inches.
4. Head and Shoulders Access: 21 by 14 inches.
5. Body Access: 25 by 14 inches.
6. Body plus Ladder Access: 25 by 17 inches.

J. Label access doors according to Section 230553 "Identification for HVAC Piping and Equipment" to indicate the purpose of access door.

K. Install flexible connectors to connect ducts to equipment.

L. For fans developing static pressures of 5-inch wg and more, cover flexible connectors with loaded vinyl sheet held in place with metal straps.

M. Connect terminal units to supply ducts directly or with maximum 12-inch lengths of flexible duct. Do not use flexible ducts to change directions.

N. Connect diffusers to ducts with maximum 60-inch lengths of flexible duct clamped or strapped in place. Connect flexible ducts to metal ducts with liquid adhesive plus tape and draw bands.

O. Install duct test holes where required for testing and balancing purposes.

3.2 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Operate dampers to verify full range of movement.
2. Inspect locations of access doors and verify that purpose of access door can be performed.
3. Operate fire, smoke, and combination fire and smoke dampers to verify full range of movement and verify that proper heat-response device is installed.
4. Inspect turning vanes for proper and secure installation.

END OF SECTION 233300

SECTION 233423 - HVAC POWER VENTILATORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Centrifugal roof ventilators.
2. Ceiling-mounted ventilators.
3. In-line centrifugal fans.

1.2 PERFORMANCE REQUIREMENTS

- A. Project Altitude: Base fan-performance ratings on sea level.
- B. Operating Limits: Classify according to AMCA 99.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include rated capacities, operating characteristics, and furnished specialties and accessories. Also include the following:
 1. Certified fan performance curves with system operating conditions indicated.
 2. Certified fan sound-power ratings.
 3. Motor ratings and electrical characteristics, plus motor and electrical accessories.
 4. Material thickness and finishes, including color charts.
 5. Dampers, including housings, linkages, and operators.
 6. Fan speed controllers.
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
 1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 2. Wiring Diagrams: For power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For power ventilators to include in emergency, operation, and maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. AMCA Compliance: Fans shall have AMCA-Certified performance ratings and shall bear the AMCA-Certified Ratings Seal.
- C. UL Standards: Power ventilators shall comply with UL 705. Power ventilators for use for restaurant kitchen exhaust shall also comply with UL 762.

PART 2 - PRODUCTS

2.1 CENTRIFUGAL ROOF VENTILATORS

- A. Refer to schedule on drawings for performance, physical characteristics and accessories.

2.2 CEILING-MOUNTED VENTILATORS

- A. Refer to schedule on drawings for performance, physical characteristics and accessories.

2.3 IN-LINE CENTRIFUGAL FANS

- A. Refer to schedule on drawings for performance, physical characteristics and accessories.

2.4 SOURCE QUALITY CONTROL

- A. Certify sound-power level ratings according to AMCA 301, "Methods for Calculating Fan Sound Ratings from Laboratory Test Data." Factory test fans according to AMCA 300, "Reverberant Room Method for Sound Testing of Fans." Label fans with the AMCA-Certified Ratings Seal.
- B. Certify fan performance ratings, including flow rate, pressure, power, air density, speed of rotation, and efficiency by factory tests according to AMCA 210, "Laboratory Methods of Testing Fans for Aerodynamic Performance Rating." Label fans with the AMCA-Certified Ratings Seal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install power ventilators level and plumb.
- B. Ceiling Units: Suspend units from structure; use steel wire or metal straps.

- C. Support suspended units from structure using threaded steel rods and elastomeric hangers.
- D. Install units with clearances for service and maintenance.
- E. Label units according to requirements specified in Section 230553 "Identification for HVAC Piping and Equipment."

3.2 CONNECTIONS

- A. Drawings indicate general arrangement of ducts and duct accessories. Make final duct connections with flexible connectors. Flexible connectors are specified in Section 233300 "Air Duct Accessories."
- B. Install ducts adjacent to power ventilators to allow service and maintenance.
- C. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."
- D. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

3.3 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Verify that shipping, blocking, and bracing are removed.
 - 2. Verify that unit is secure on mountings and supporting devices and that connections to ducts and electrical components are complete. Verify that proper thermal-overload protection is installed in motors, starters, and disconnect switches.
 - 3. Verify that cleaning and adjusting are complete.
 - 4. Disconnect fan drive from motor, verify proper motor rotation direction, and verify fan wheel free rotation and smooth bearing operation. Reconnect fan drive system.
 - 5. Adjust damper linkages for proper damper operation.
 - 6. Verify lubrication for bearings and other moving parts.
 - 7. Verify that manual and automatic volume control and fire and smoke dampers in connected ductwork systems are in fully open position.
 - 8. Disable automatic temperature-control operators, energize motor and adjust fan to indicated rpm, and measure and record motor voltage and amperage.
 - 9. Shut unit down and reconnect automatic temperature-control operators.
 - 10. Remove and replace malfunctioning units and retest as specified above.
- B. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- C. Prepare test and inspection reports.

3.4 ADJUSTING

- A. Adjust damper linkages for proper damper operation.

- B. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing procedures.
- C. Lubricate bearings.

END OF SECTION 233423

SECTION 233713 - DIFFUSERS, REGISTERS, AND GRILLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Rectangular and square ceiling diffusers.
2. Fixed face registers and grilles.

B. Related Sections:

1. Section 233300 "Air Duct Accessories" for volume-control dampers not integral to diffusers, registers, and grilles.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product indicated, include the following:

1. Data Sheet: Indicate materials of construction, finish, and mounting details; and performance data including throw and drop, static-pressure drop, and noise ratings.
2. Diffuser, Register, and Grille Schedule: Indicate drawing designation, room location, quantity, model number, size, and accessories furnished.

1.4 INFORMATIONAL SUBMITTALS

- A. Source quality-control reports.

PART 2 - PRODUCTS

2.1 DIFFUSERS, REGISTERS, AND GRILLES

- A. Refer to schedule on drawings for performance, physical characteristics and accessories.

2.2 SOURCE QUALITY CONTROL

- A. Verification of Performance: Rate diffusers, registers, and grilles according to ASHRAE 70, "Method of Testing for Rating the Performance of Air Outlets and Inlets."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas where diffusers, registers, and grilles are to be installed for compliance with requirements for installation tolerances and other conditions affecting performance of equipment.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install diffusers, registers, and grilles level and plumb.
- B. Ceiling-Mounted Outlets and Inlets: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements for air volume, noise criteria, airflow pattern, throw, and pressure drop. Make final locations where indicated, as much as practical. For units installed in lay-in ceiling panels, locate units in the center of panel. Where architectural features or other items conflict with installation, notify Architect for a determination of final location.
- C. Install diffusers, registers, and grilles with airtight connections to ducts and to allow service and maintenance of dampers.

3.3 ADJUSTING

- A. After installation, adjust diffusers, registers, and grilles to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 233713

SECTION 237416.11 - PACKAGED ROOFTOP AIR-CONDITIONING UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes packaged, small-capacity, rooftop air-conditioning units (RTUs).

1.3 DEFINITIONS

- A. RTU: Rooftop unit. As used in this Section, this abbreviation means packaged, small-capacity, rooftop air-conditioning units. This abbreviation is used regardless of whether the unit is mounted on the roof or on a concrete base on ground.

1.4 ACTION SUBMITTALS

- A. Product Data: For each RTU.
 - 1. Include manufacturer's technical data.
 - 2. Include rated capacities, dimensions, required clearances, characteristics, and furnished specialties and accessories.
- B. Shop Drawings:
 - 1. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 2. Include diagrams for power, signal, and control wiring.
- C. Delegated-Design Submittal: For RTU supports indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
 - 1. Include design calculations for selecting vibration isolators and for designing vibration isolation bases.
 - 2. Detail mounting, securing, and flashing of roof curb to roof structure. Indicate coordinating requirements with roof membrane system.
 - 3. Wind-Restraint Details: Detail fabrication and attachment of wind restraints and snubbers. Show anchorage details and indicate quantity, diameter, and depth of penetration of anchors.

1.5 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

- B. Sample Warranty: For special warranty.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For RTUs to include in emergency, operation, and maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Filters: One set(s) of filters for each unit.

1.8 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of RTUs that fail in materials or workmanship within specified warranty period.

1. Warranty Period for Compressors: Manufacturer's standard, but not less than five years from date of Substantial Completion.
2. Warranty Period for Solid-State Ignition Modules: Manufacturer's standard, but not less than three years from date of Substantial Completion.
3. Warranty Period for Control Boards: Manufacturer's standard, but not less than three years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 DESCRIPTION

- A. AHRI Compliance:

1. Comply with AHRI 340/360 for testing and rating energy efficiencies for RTUs.
2. Comply with AHRI 270 for testing and rating sound performance for RTUs.

- B. AMCA Compliance:

1. Comply with AMCA 11 and bear the AMCA-Certified Ratings Seal for air and sound performance according to AMCA 211 and AMCA 311.
2. Damper leakage tested according to AMCA 500-D.
3. Operating Limits: Classify according to AMCA 99.

- C. ASHRAE Compliance:

1. Comply with ASHRAE 15 for refrigeration system safety.
2. Comply with ASHRAE 33 for methods of testing cooling and heating coils.
3. Comply with applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."

- D. ASHRAE/IES Compliance: Comply with applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."
- E. NFPA Compliance: Comply with NFPA 90A or NFPA 90B.
- F. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design mounting and restraints for RTUs, including comprehensive engineering analysis.
 - 1. Design RTU supports to comply with wind performance requirements.

2.3 CAPACITIES AND CHARACTERISTICS

- A. Refer to schedule on design drawings.

2.4 MOTORS

- A. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.

2.5 ADAPTOR ROOF CURBS

- A. Curbs shall be vibration isolation type custom made from 12 gauge or heavier as required galvanized steel with welded one-piece construction and insulated with 1-1/2" thick rigid insulation. Curb height shall be minimum of 14" high above the finished roof height. Secure curb to roof structure and unit to curb per manufacturer's recommendations for site's wind zone loading. Curbs shall have structural cross members.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of RTUs.
- B. Examine roughing-in for RTUs to verify actual locations of piping and duct connections before equipment installation.
- C. Examine roofs for suitable conditions where RTUs will be installed.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Roof Curb: Install on roof structure or existing curb, level and secure, according to NRCA's "NRCA Roofing Manual: Membrane Roof Systems." Install RTUs on curbs and coordinate roof

penetrations and flashing with roof construction. Secure RTUs to upper curb rail, and secure curb base to roof framing with anchor bolts.

- B. Install drain pipes from unit drain pans to roof drains. Provide manufactured roof pipe supports for condensate piping. Piping supports shall be designed specifically for support of condensate piping systems. Supports shall be UV resistant and suitable for installation on roofing material. Supports must comply with NCPC 301.10 for wind speeds up to 145 MPH.
 - 1. Drain Piping: Schedule 40 PVC pipe complying with ASTM D 1785, with solvent-welded fittings.
 - 2. Pipe Size: Same size as condensate drain pan connection.

3.3 CONNECTIONS

- A. Comply with duct installation requirements specified in other HVAC Sections. Drawings indicate general arrangement of ducts. The following are specific connection requirements:
 - 1. Install ducts to termination at top of roof curb.
 - 2. Connect supply ducts to RTUs with flexible duct connectors specified in Section 233300 "Air Duct Accessories."
 - 3. Install return-air duct continuously through roof structure.
- B. Where installing piping adjacent to RTUs, allow space for service and maintenance.
- C. Connect electrical wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- D. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."
- E. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.
 - 1. Nameplate shall be laminated acrylic or melamine plastic signs as specified in Section 260553 "Identification for Electrical Systems."
 - 2. Nameplate shall be laminated acrylic or melamine plastic signs as layers of black with engraved white letters at least 1/2 inch high.
 - 3. Locate nameplate where easily visible.

3.4 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- B. RTU will be considered defective if it does not pass tests and inspections.
- C. Prepare test and inspection reports.

3.5 STARTUP SERVICE

- A. Engage a factory-authorized service representative to perform startup service. After startup and performance testing and prior to Substantial Completion, replace existing filters with new filters.

3.6 CLEANING AND ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.
- B. After completing system installation and testing, adjusting, and balancing RTU and air-distribution systems, clean filter housings and install new filters.

3.7 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain RTUs.

END OF SECTION 237416.11

SECTION 238126.18 – SPLIT DUCTLESS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes split-system air-conditioning and heat-pump units consisting of separate evaporator-fan and compressor-condenser components.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include rated capacities, operating characteristics, and furnished specialties and accessories. Include performance data in terms of capacities, outlet velocities, static pressures, sound power characteristics, motor requirements, and electrical characteristics.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.
- B. Warranty: Sample of special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For split-system air-conditioning units to include in emergency, operation, and maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Filters: One set(s) for each air-handling unit provided at Final Completion.

1.7 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. ASHRAE Compliance:

1. Fabricate and label refrigeration system to comply with ASHRAE 15, "Safety Standard for Refrigeration Systems."

1.8 COORDINATION

- A. Coordinate sizes and locations of concrete bases with actual equipment provided.

1.9 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of split-system air-conditioning units that fail in materials or workmanship within specified warranty period.

1. Warranty Period:

- a. For Compressor: Five year(s) from date of Substantial Completion.
- b. For Parts: One year(s) from date of Substantial Completion.
- c. For Labor: One year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 DUCTLESS SPLIT SYSTEM HEAT PUMPS

- A. Refer to schedule on drawings for performance, physical characteristics and accessories.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install unit's level and plumb.
- B. Install evaporator-fan components using manufacturer's standard mounting devices securely fastened to concrete housekeeping pad.
- C. Equipment Mounting:
1. Install compressor-condenser components on concrete housekeeping pads as indicated on plans per manufacturer's recommendations.
- D. Install and connect precharged refrigerant tubing to component's quick-connect fittings. Install tubing to allow access to unit.

3.2 CONNECTIONS

- A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Where piping is installed adjacent to unit, allow space for service and maintenance of unit.

3.3 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- B. Perform tests and inspections.
 - 1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
- C. Tests and Inspections:
 - 1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
 - 2. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
 - 3. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- D. Remove and replace malfunctioning units and retest as specified above.
- E. Prepare test and inspection reports.

3.4 STARTUP SERVICE

- A. Perform startup service.
 - 1. Complete installation and startup checks according to manufacturer's written instructions.

3.5 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain units.

END OF SECTION 238126

SECTION 238239.16 - PROPELLER UNIT HEATERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes propeller unit heaters with electric-resistance heating coils.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include rated capacities, operating characteristics, furnished specialties, and accessories.

1.3 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For propeller unit heaters to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 DESCRIPTION

- A. Assembly including casing, coil, fan, and motor in horizontal discharge configuration with adjustable discharge louvers.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Comply with UL 2021.

2.2 HOUSINGS

- A. Finish: Manufacturer's standard baked enamel applied to factory-assembled and -tested propeller unit heaters before shipping.
- B. Discharge Louver: Adjustable fin diffuser for horizontal units and conical diffuser for vertical units.

2.3 COILS

- A. Electric-Resistance Heating Coil: Nickel-chromium heating wire, free from expansion noise and 60-Hz hum, embedded in magnesium oxide refractory and sealed in steel or corrosion-resistant metallic sheath with fins no closer than 0.16 inch. Element ends shall be enclosed in terminal box. Fin surface temperature shall not exceed 550 deg F at any point during normal operation.

1. Circuit Protection: One-time fuses in terminal box for overcurrent protection and limit controls for high-temperature protection of heaters.
2. Wiring Terminations: Stainless-steel or corrosion-resistant material.

2.4 FAN AND MOTOR

- A. Fan: Propeller type with aluminum wheel directly mounted on motor shaft in the fan venturi.
- B. Motor: Permanently lubricated.

2.5 CONTROLS

- A. Control Devices:
 1. Unit-mounted thermostat.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas to receive propeller unit heaters for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for electrical connections to verify actual locations before unit-heater installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install propeller unit heaters to comply with NFPA 90A.
- B. Install propeller unit heaters level and plumb.
- C. Suspend propeller unit heaters from structure with unit manufacturer wall bracket.

3.3 CONNECTIONS

- A. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."
- B. Connect wiring according to Section 260519 "Building Wire and Cable."

3.4 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:

1. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
2. Operate electric heating elements through each stage to verify proper operation and electrical connections.
3. Test and adjust controls and safety devices. Replace damaged and malfunctioning controls and equipment.

B. Units will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports.

3.5 ADJUSTING

A. Adjust initial temperature set points.

END OF SECTION 238239.16

SECTION 239119 - FIXED LOUVERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes fixed, extruded-aluminum louvers.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. For louvers specified to bear AMCA seal, include printed catalog pages showing specified models with appropriate AMCA Certified Ratings Seals.
- B. Shop Drawings: For louvers and accessories. Include plans, elevations, sections, details, and attachments to other work. Show frame profiles and blade profiles, angles, and spacing.
- C. Samples: For each type of metal finish required.

1.3 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: Based on tests performed according to AMCA 500-L.

PART 2 - PRODUCTS

2.1 FIXED, EXTRUDED-ALUMINUM LOUVERS

- A. Refer to equipment schedule on design drawings.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Locate and place louvers level, plumb, and at indicated alignment with adjacent work.
- B. Use concealed anchorages where possible. Provide brass or lead washers fitted to screws where required to protect metal surfaces and to make a weathertight connection.
- C. Provide perimeter reveals and openings of uniform width for sealants and joint fillers, as indicated.

3.2 ADJUSTING

- A. Restore louvers damaged during installation and construction so no evidence remains of corrective work. If results of restoration are unsuccessful, as determined by Architect, remove damaged units and replace with new units.

END OF SECTION 239119

SECTION 260500 - GENERAL ELECTRICAL

PART 1 - GENERAL

1.1 SCOPE OF WORK

- A. The Instructions to Bidders, General Conditions of the Contract, Supplementary General Conditions and Division 1 bound herewith are a component part of this Division of the specifications and shall apply to this Division with equal force and shall be consulted in detail for instructions pertaining to the work.
- B. Furnish all labor, materials and equipment and incidentals required to make ready for use complete electrical systems as shown on the Drawings and specified herein.
- C. It is the intent of these Specifications that the electrical systems shall be suitable in every way for the service required. All material and all work which may be reasonably implied as being incidental to the work of this Division shall be furnished at no extra cost.
- D. The work shall include, but not be limited to, furnishing, coordinating, and installing the following:
 - 1. Underground electrical service from pad mounted transformer to service equipment.
 - 2. Electrical distribution system for power, lighting, receptacles and miscellaneous power as shown on the contract drawings.
 - 3. Electrical lighting systems as shown on the contract drawings, complete with indicated switching, circuiting, etc.
 - 4. Electrical receptacle systems as shown on the contract drawings.
 - 5. Exit and emergency lighting systems.
 - 6. Power supplies for equipment furnished by others.
 - 7. Fire alarm system.
 - 8. Raceway and outlet systems (including cabling where noted) for telecommunications, data, and other special systems.
 - 9. Grounding.
 - 10. Seismic restraint systems.
 - 11. Other special requirements and/or systems where shown.
- E. Each bidder (or Representative) shall, before preparing a proposal, visit all areas of the existing site. If the work includes demolition, restoration, renovation and/or addition; then existing buildings and structures should be carefully inspected. The submission of the proposal by this Bidder shall be considered evidence that the Bidder (or Representative) has visited the site and noted the locations and conditions under which the work will be performed and that the Bidder takes full responsibility for a complete knowledge of all factors governing the work.
- F. All power interruptions to existing equipment shall be at the Owner's convenience with 24 hours (minimum) notice. Each interruption shall have prior approval.
- G. The work shall include complete testing of all equipment and wiring at the completion of work and making any minor correction changes or adjustments necessary for all the proper

functioning of the system and equipment. All work shall be of the highest quality; substandard work will be rejected.

1.2 SUBMITTALS

- A. Shop drawings shall be submitted for all equipment, apparatus, and other items as required by the Architect/Engineer. Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Submittals are required for all materials shown in the individual specifications sections.
- C. Submittals are required for materials and specific methods used for penetrations of rated assemblies and for seismic restraints.
- D. Transmit each shop drawing submittal with provided Shop Drawing Submittal Cover Form, attached, for each item of equipment/material or each specification section/paragraph.
- E. All shop drawings and submittals shall be submitted at the same time. Partial shop drawing and submittals will be rejected and not processed. Materials, equipment and long lead items that require special handling, if identified and requested by the contractor, will be processed separately.
- F. Proposed equipment and/or materials substitutions shall be clearly indicated in shop drawings. All deviations from the specified quality, functionality, appearance or performance of the proposed equipment and/or materials shall be clearly summarized in the preface of each submittal.
- G. The project shall be bid based on the equipment listed in these specifications and on the drawings. After award of the Electrical Contract the Contractor may wish to substitute equipment other than that specified, subject to approval. The Electrical Contractor shall bear the "burden of proof" for demonstrating substitute equipment equivalency and suitability.
- H. The Electrical Contractor shall be required to replace installed "equivalent" equipment if the operation of this equipment does not meet the full design intent of the specified system.
- I. Physical size of equipment used in the design layout are those of reputable equipment manufacturers. The Contractor is responsible for providing equipment which will fit the space provided. If the Contractor elects to use other manufacturer's equipment, any resulting conflicts with space clearance or codes shall be the responsibility of the Contractor to correct at the Contractor's expense.
- J. The Contractor assumes all responsibility for providing code clearances. Submit a scale drawing of each electrical equipment room showing exact size and location of all proposed electrical equipment with code clearances and working space clearly indicated.

1.3 COORDINATION OF WORK

- A. It is understood and agreed that the Contractor is, by careful examination, satisfied as to the nature and location of the work, the conformation of the ground, the character, quality and

quantity of the materials to be encountered, the general and local conditions and all other matters which can and may affect the work under this contract. The Contractor shall be held responsible for visiting the site and thoroughly familiarizing himself with the existing conditions and also any contractual requirements as may be set forth in the other Divisions of these Specifications. No extras will be considered because of additional work necessitated by obvious job conditions that are not indicated on the drawings.

- B. The Contractor shall compare the electrical drawings and specifications with the drawings and specifications for other trades, and shall report any discrepancies between them to the Architect/Engineer and obtain written instructions for changes necessary in the electrical work. The electrical work shall be installed in cooperation with other trades installing interrelated work. Before installation, the Contractor shall make proper provisions to avoid interferences in a manner approved by the Architect/Engineer. All changes required in the work of the Contractor caused by neglect to do so shall be made at the expense of the Contractor.
- C. Location of electrical raceways, switches, panels, equipment, fixtures, etc., shall be adjusted to accommodate the work to interferences anticipated and encountered. The Contractor shall determine the exact route and location of each electrical raceway prior to make up and assembly.
 - 1. Right of Way: Lines which pitch shall have the right of way over those which do not pitch. For example, steam, condensate and plumbing drains shall normally have right of way. Lines whose elevations cannot be changed shall have the right of way over lines whose elevations can be changed.
 - 2. Offsets and changes in direction of electrical raceways shall be made as required to maintain proper headroom and to clear pitched lines whether or not indicated on the drawings. The Contractor shall furnish and install elbows, pull boxes, etc., as required to affect these offsets, transitions, and changes in directions. Conflicts between electrical raceways, fixtures, etc., and ductwork or piping which cannot be resolved otherwise, will be resolved by the Architect/Engineer.
- D. Installation and Arrangements: The Contractor shall install all electrical work to permit removal (without damage to other parts) of any equipment requiring periodic replacement or maintenance. The Contractor shall arrange electrical raceways and equipment to permit ready access to valves, cocks, traps, starters, motors, control components, etc., and to clear the opening of swinging and overhead doors and of access panels.

1.4 EQUIPMENT AND MATERIALS (GENERAL)

- A. In compliance with North Carolina General Statute 133.3, the Architect/Engineer has, wherever possible, specified the required performance and design characteristics of all materials utilized in this construction. In some cases it is impossible to specify the required performance and design characteristics and when this occurs the Architect/Engineer has specified three or more examples of equal design or equivalent design, establishing an acceptable range for items of equal or equivalent design. Cited examples are used only to denote the quality standard of product desired and do not restrict bidders to a specific brand, make, manufacturer or specific name and are used only to set forth and convey to bidders the general style, type, character and quality of product desired. Equivalent products will be acceptable.
- B. Substitution of materials, items, or equipment of equal or equivalent design shall be submitted to the Architect/Engineer for approval or disapproval. Equal or equivalent shall be interpreted

to mean an item of material or equipment, similar to that named and which is suitable for the same use and capable of performing the same functions as that named, the Architect/Engineer being the judge of equality.

- C. The materials used in all systems shall be new, unused and as hereinafter specified and shall bear the manufacturer's name, trade name and third party testing agency label in every case where a standard has been established for the particular material. Equipment furnished under this specification shall be essentially the standard product of manufacturers regularly engaged in the production of the required type of equipment, and shall be the manufacturer's latest approved design. All materials where not specified shall be of the very best of their respective kinds. Samples of materials or manufacturer's specifications shall be submitted for approval as required by the Architect/Engineer.
- D. Protection: Electrical equipment shall at all times during construction be adequately protected against damage. Equipment shall be tightly covered and protected against dirt, water and chemical or mechanical injury and theft. Electrical equipment shall not be stored out of doors. Electrical equipment shall be stored in dry, permanent shelters. If an apparatus has been damaged, such damage shall be repaired at no additional cost. If any apparatus has been subject to possible injury by water, it shall be replaced at no additional cost to the Owner. At the completion of the work, fixtures, equipment, and materials shall be cleaned and polished thoroughly and turned over to the Owner in a condition satisfactory to the Architect/Engineer. Damage or defects, developing before acceptance of the work shall be made good at the Contractor's expense.
- E. Any damage to factory applied paint finish shall be repaired using touch up paint furnished by the equipment manufacturer. The entire damaged panel or section shall be repainted per the field painting specifications in Division 9, at no additional cost to the Owner.
- F. Where materials such as wiring devices and plates, fire alarm equipment, paging system components, etc. are specified to match existing, provide materials to match existing equipment in finish, color, capacity, ratings, operating characteristics, performance, etc.
- G. Delivery and Storage: Equipment and materials shall be delivered to the site and stored in original containers, suitably sheltered from the elements, but readily accessible for inspection by the Architect/Engineer until installed.
- H. Equipment and materials of the same general type shall be of the same make throughout the work to provide uniform appearance, operation and maintenance.
- I. Manufacturer's directions shall be followed completely in the delivery, storage, protection, and installation of all equipment and materials. The Contractor shall promptly notify the Architect/Engineer, in writing, of any conflicts between any requirements of the Contract Documents and the manufacturer's directions and shall obtain the Architect/Engineer's written instructions before proceeding with the work. Should the Contractor perform any work that does not comply with the manufacturer's direction or such written instructions from the Architect/Engineer, the Contractor shall bear all costs arising in correcting the deficiencies.

1.5 OPERATION AND MAINTENANCE MANUALS

- A. Submit under relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. The Contractor shall provide two compilations of catalog data, bound in suitable loose leaf binders, for each manufactured item of equipment used in the electrical work. These shall be presented to the Architect/Engineer for transmittal to the Owner before the final inspection is made. Data shall include printed installation, operation and maintenance instructions for each item, indexed by product with heavy sheet dividers and tabs. All warranties shall be included with each item. Each manufacturer's name, address and telephone number shall be clearly indicated.
- C. Shop drawings with Architect/Engineer's "as noted" markings are not acceptable for the above. "Approved" shop drawings are acceptable if adequate information is contained therein. Generally, shop drawings alone are not adequate.

1.6 PAINTING

- A. All painting will be performed by the General Contractor for the project, except as noted below and unless specifically indicated otherwise.
- B. The Electrical Contractor shall clean all exposed electrical work for painting. Should the Electrical Contractor delay in installing exposed conduit and outlets until the General Contractor has begun painting, the Electrical Contractor shall be required to paint all exposed electrical work at the Electrical Contractor's own expense. Such painting will be accomplished in accordance with the detailed specifications for the Project.
- C. Conductors exposed in boxes and cabinets shall be protected against painting. Devices, cover plates, trims, etc., for panel boards and cabinets shall not be installed until painting has been completed.
- D. The Electrical Contractor shall be responsible for touch up painting that may be required for electrical material or apparatus furnished with factory applied finish.

1.7 LOCATIONS AND MEASUREMENTS

- A. Outlets and appliances are shown and located on the drawings as accurately as possible. All measurements shall be verified on the project and in all cases the work shall suit the surrounding trim, finishes and/or construction. The locations of outlets for special appliances shall be installed so that when extended, they are flush with the finished wall or ceiling and permit the proper installation of fixtures and/or devices. Heights of all outlets shown on the drawings are approximate only. Slight relocations of outlets, devices and equipment shall be made by the Contractor as required or as directed by the Architect/Engineer at no additional cost to the Owner.

1.8 QUALITY OF WORK

- A. All work shall be executed as required by this specifications and the accompanying drawings and shall be done by skilled mechanics, and shall present a neat, trim, and mechanical appearance when completed. All work shall be performed as required by the progress of the job.

1.9 SUPERVISION

- A. The Contractor shall personally, or through an authorized and competent representative, constantly supervise the work from the beginning to completion and final acceptance. So far as possible, the Contractor shall keep the same foreman and mechanics throughout the project duration.
- B. During the progress of the work it shall be subject to inspection by representatives of the Architect/Engineer, the Owner, and local inspection authorities, at which time the Contractor shall furnish such required information and data on the project as requested.
- C. The Electrical Contractor shall coordinate the electrical work with other Contractors and cooperate in the preparation and maintenance of a master schedule for the completion of the project.

1.10 EXCAVATION, TRENCHING AND BACKFILLING

- A. The Electrical Contractor shall do all excavating, trenching and backfilling in connection with this contract. All such excavation shall be done in a manner as not to endanger or damage existing utility lines and other structures. If damage occurs, the Contractor shall pay for and repair damage to the satisfaction of the Architect/Engineer.
- B. It shall be the responsibility of the Contractor to investigate conditions before excavation and to exercise care during the excavation to avoid any utilities or other objects which may not be shown. Whether or not utilities, etc., are shown on the drawings shall not relieve the Contractor from the responsibility to repair any damage caused by this work. Location of all ditching shall be laid out at grade and shall be approved by the Architect/Engineer before excavating and no work shall be done until such approval has been obtained.
- C. All surplus earth shall be removed by the Contractor from the site and disposed of at the Contractor's expense.
- D. All excavation, trenching and shoring shall be in accordance with rules and regulations set forth in Article XXI, Bulletin 1 "Trenching" as published in a separate bulletin by the North Carolina Department of Labor, Division of Standards and Inspection Construction Bureau.
- E. Backfilling shall be in 6" layers with each layer tamped. No boulders or debris shall be used for backfill material. Where trenching passes through areas designated as streets, driveways, walkways, or parking areas, backfill shall be tamped with power tamps to 95 percent compaction.
- F. Excavation shall be bid unclassified with no extra payment for removal of rock.

1.11 CLOSING IN WORK

- A. Work shall not be covered up or enclosed until it has been inspected, tested and approved by the authorities having jurisdiction over this work. Should any of the work be enclosed or covered up before such inspection and test, the Contractor shall uncover the work at the Contractor's expense; after it has been inspected, tested and approved, the Contractor shall restore the work to its original condition.

1.12 REFERENCE STANDARDS

- A. All electrical equipment, materials, and installation shall be in accordance with the latest edition of the following codes and standards:
 - 1. American Association of Edison Illuminating Companies (AEIC)
 - 2. American National Standards Institute (ANSI)
 - 3. American Society for Testing and Materials (ASTM)
 - 4. Building Officials Code Administrators (BOCA)
 - 5. Institute of Electrical and Electronic Engineers (IEEE)
 - 6. Insulated Cable Engineers Association (ICEA)
 - 7. International Code Council (ICC)
 - 8. International Conference of Building Officials (ICBO)
 - 9. National Electrical Code (NEC) 2020 edition
 - 10. National Electrical Contractor's Association (NECA)
 - 11. National Electrical Installation Standards (NEIS)
 - 12. National Electrical Manufacturer's Association (NEMA)
 - 13. National Electrical Safety Code (NESC)
 - 14. National Fire Protection Association (NFPA)
 - 15. North Carolina Energy Conservation Code, 2012 (NCECC)
 - 16. North Carolina State Building Code (NCSBC)
 - 17. Occupational Safety and Health Act (OSHA)
 - 18. Requirements of the Americans with Disabilities Act (ADA), latest edition.
 - 19. Underwriters Laboratories Inc (U.L.)
 - 20. Southern Building Code Congress International (SBCCI)
 - 21. Toxicity Characteristics Leaching Procedure (TCLP)
- B. All electrical equipment and material shall be listed by an approved third party testing agency approved by the NCBCC and shall bear the appropriate testing agency's listing mark or classification marking. Equipment, materials, etc. utilized not bearing a third party testing agency certification shall be field or factory third party testing agency certified prior to equipment acceptance and use.
- C. Where reference is made to one of the above standards, the revision in effect at the time of the bid opening shall apply.

1.13 ENCLOSURE TYPES

- A. Unless otherwise specified herein or shown on the Drawings, electrical enclosures shall have the following ratings:
 - 1. NEMA 1 for dry, indoor locations.

2. NEMA 3R for outdoor locations, rooms below grade (including basements and buried vaults), "DAMP" and "WET" locations.
3. NEMA 4X for kitchen and locations subject to corrosion when specifically noted.

1.14 CODES, INSPECTION AND FEES

- A. All equipment, materials and installation shall be in accordance with the requirements of the local authority having jurisdiction.
- B. The Electrical Contractor shall obtain all necessary permits and pay all fees required for permits and inspections of electrical work.

1.15 TESTS AND SETTINGS

- A. Test all systems furnished under Division 26, 27 & 28 and repair or replace all defective work. Make all necessary adjustments to the systems and instruct the Owner's personnel in the proper operation of the systems.
- B. Make the following minimum tests and checks prior to energizing electrical equipment:
 1. Mechanical inspection, testing and settings of all circuit breakers, disconnect switches, motor starters, control equipment, etc., for proper operation.
 2. Check all wire and cable terminations. Verify to the Architect/Engineer that connections meet the equipment torque requirements.
 3. Check rotation of motors, obtain permission from other contractors to start motor, and proceed to check for proper rotation. If the motor rotates in the wrong direction, correct it. Take all necessary precautions not to damage any equipment.
 4. Provide all instruments and equipment for the tests specified herein.
- C. All testing shall be scheduled and coordinated by the Contractor. Notify the Owner at least two (2) weeks in advance of conducting tests. The Contractor shall have qualified personnel present during all testing.
- D. All tests shall be completely documented with the time of day, date, temperature, and all other pertinent test information. All required documentation of readings indicated shall be submitted to the Architect/Engineer prior to, and as one of the prerequisites for, final acceptance of the project.
- E. Electrical Distribution System Tests: All current carrying phase conductors and neutrals shall be tested as installed, and before load connections are made, for insulation resistance and accidental grounds. This shall be done with a 500 volt megger. The following procedures shall be as follows:
 1. Minimum readings shall be one million (1,000,000) ohms or more for #6 AWG wire and smaller; 250,000 ohms or more for #4 AWG wire or larger. Measurement to be taken between conductors and between conductor and the grounded metal raceway.
 2. After all fixtures, devices and equipment are installed and all connections completed to each panel, the Contractor shall disconnect the neutral feeder conductor from the neutral bar and take a megger reading between the neutral bar and grounded enclosure. If this reading is less than 250,000 ohms, the Contractor shall disconnect the branch circuit neutral wires from this neutral bar. The Contractor shall then test each one separately to

- the panel until the low reading ones are found. The Contractor shall correct troubles, reconnect and retest until at least 250,000 ohms from the neutral bar to the grounded panel can be achieved with only the neutral feeder disconnected.
3. The Contractor shall send a letter to the Architect/Engineer, and to the North Carolina State Construction Office certifying that the above has been done and tabulating the megger readings for each panel. This shall be done at least four (4) days prior to final inspection.
 4. At inspection, the Contractor shall furnish a megger and show Architect/Engineer's representative that the panels comply with the above requirements. The Contractor shall also furnish a clamp type ammeter and a voltmeter and take current and voltage readings as directed by the representatives.
 5. At inspection, the Contractor shall furnish ladders, required tools, and mechanics to open fixtures, boxes, panels, or any other equipment to enable the Architect/Engineer's representatives to see into any parts of the installation that may be requested.
- F. Electrical Grounding System Tests: Provide documentation showing values of earth ground impedance for the system ground. See Specifications Section 260526 for testing requirements.
- G. For services 1000 amperes and larger, the following circuit breaker tests shall be performed on the service circuit breakers and all distribution circuit breakers by a qualified factory technician at the project site. All readings shall be tabulated and submitted to the Architect for approval.
1. Phase tripping tolerance (within 20% of UL requirements).
 2. Trip time (per phase) in seconds.
 3. Instantaneous trip (amperes) per phase.
 4. Insulation resistance (in megaohms) at 100 volts (phase to phase and line to load).

1.16 SLEEVES AND FORMS FOR OPENINGS

- A. Anchor bolts, sleeves, inserts, supports, etc., that may be required for electrical work shall be furnished, located and installed by the Electrical Contractor. The Electrical Contractor shall give sufficient information (marked and located) to the General Contractor in time for proper placement in the construction schedule. Should the Electrical Contractor delay or fail to provide sufficient information in time, then the Electrical Contractor shall cut and patch construction as necessary and required to install electrical work. Such cutting and patching will be done by the General Contractor but paid for by the Electrical Contractor.
- B. Provide and place all sleeves for conduits penetrating floors, walls, partitions, etc. Locate all necessary slots for electrical work and form before concrete is poured.
- C. Where exact locations are required by equipment for stubbing up and terminating conduit concealed in floor slabs, request shop drawings, equipment location drawings, foundation drawings, and any other data required to locate the concealed conduit before the floor slab is poured.
- D. Where such data is not available in time to avoid delay in scheduled floor slab pours, the Architect/Engineer may elect to allow the installations of such conduits to be exposed. No additional compensation for such change will be allowed and written approval must be obtained from the Architect/Engineer.

- E. Seal all openings, sleeves, penetration, and slots as specified and as shown on the Contract Drawings.

1.17 CUTTING AND PATCHING

- A. For the purposes of the Electrical Contract, “cutting and patching” shall be defined as that work required to introduce new electrical work into existing construction. Work required to install or fit electrical boxes, conduit, enclosures, equipment, etc. into new construction is not “cutting and patching”.
- B. The Electrical Contractor shall perform all cutting and patching necessary to install all equipment as required under his contract and shall re-establish all finishes to their original condition where cutting and patching occur.
- C. All cutting and patching shall be done in a thoroughly workmanlike manner.
- D. Core drill holes in existing concrete floors and walls as required.
- E. Install work at such time as to require the minimum amount of cutting and patching.
- F. Do not cut joists, beams, girders, columns or any other structural members without first obtaining written permission from the Architect/Engineer.
- G. Cut opening only large enough to allow easy installation of the conduit.
- H. Patching is to be of the same kind of material as was removed.
- I. The completed patching work shall restore the surface to its original appearance.
- J. Patching of waterproofed surfaces shall render the area of the patching completely waterproofed.
- K. Remove rubble and excess patching materials from the premises.
- L. Raceways and ducts penetrating rated floor, ceiling or wall assemblies shall be properly sealed in accordance with the corresponding Underwriters Laboratories approved method utilizing approved and listed materials.

1.18 INTERPRETATION OF DRAWINGS

- A. The Electrical drawings and specifications are complementary each to the other and what may be called for by one shall be as binding as if called for by both. The drawings are diagrammatic and indicate generally the location of outlets, devices, equipment, wiring, etc. Drawings shall be followed as closely as possible; however, all work shall suit the finished surroundings and/or trim.
- B. Do not scale electrical drawings. Refer to the architectural drawings for dimensions.

- C. Where the words “furnish and install” or “provide” are used, it is intended that this contractor shall purchase and install completely any and/or all material necessary and required for this particular item, system, equipment, etc.
- D. Where the words “the Contractor” or “this Contractor” appear in either the Electrical Drawings or Division 26 Specifications, it shall mean the Electrical Contractor.
- E. Any omission from either the drawings or these specifications are unintentional, and it shall be the responsibility of this Contractor to call to the attention of the Architect/Engineer any pertinent omissions before submitting a bid. Complete and working systems are required, whether every small item of material is shown and specified or not.
- F. Where no specific material or equipment type is mentioned, a high quality product of a reputable manufacturer may be used provided it conforms to the requirements of these specifications. These materials shall be listed or labeled by a Third Party Testing Agency accredited by the NCBCC to label electrical equipment.
- G. The electrical drawings show the general arrangement of raceways, equipment, fixtures, and appurtenances and shall be followed as closely as actual building construction and the work of other trades will permit. Some adjustment of routings and installation of conduit, cable tray and devices should be expected. The electrical work shall conform to the requirements shown on all of the drawings. General and Structural drawings shall take precedence over Electrical Drawings. Because of small scale of the electrical drawings, it is not possible to indicate offsets, fittings and accessories which may be required. The Contractor shall investigate the structural and finish conditions affecting the work and shall arrange his work accordingly, providing such fittings and accessories as may be required to meet such conditions, without additional cost to the Owner and as directed by the Architect/Engineer.
- H. Each 3 phase circuit shall be run in a separate conduit unless otherwise shown on the Drawings.
- I. Unless otherwise approved by the Architect/Engineer, conduit shown exposed shall be installed exposed; conduit shown concealed shall be installed concealed.
- J. Where circuits are shown as “home runs” all necessary fittings and boxes shall be provided for a complete raceway installation.
- K. Verify with the Architect/Engineer the exact locations and mounting heights of lighting fixtures, switches and receptacles prior to installation.
- L. Any work installed contrary to or without approval by the Architect/Engineer shall be subject to change as directed by the Architect/Engineer, and no extra compensation will be allowed for making these changes.
- M. The locations of equipment, fixtures, outlets, and similar devices shown on the Drawings are approximate only. Exact locations shall be as approved by the Architect/Engineer during construction. Obtain in the field all information relevant to the placing of electrical work and in case of any interference with other work, proceed as directed by the Architect/Engineer and furnish all labor and materials necessary to complete the work in an approved manner.
- N. Surface mounted panel boxes, junction boxes, conduit, etc., shall be supported by spacers to provide a clearance between wall and equipment.

- O. Circuit layouts are not intended to show the number of fittings, or other installation details. Furnish all labor and materials necessary to install and place in satisfactory operation all power, lighting, and other electrical systems shown. Additional circuits shall be installed wherever needed to conform to the specific requirements of equipment.
- P. All connections to the equipment shall be made as required, and in accordance with the approved shop and setting drawings.
- Q. Redesign of electrical work, which is required due to the Contractor's use of an alternate item, arrangement of equipment and/or layout other than specified herein, shall be done by the Contractor at the Contractor's expense. Redesign and detailed plans shall be submitted to the Architect/Engineer for approval. No additional compensation will be provided for changes in the work, either the Electrical Contractor's or others, caused by such redesign.
- R. All floor mounted electrical equipment shall be placed on 4 inch thick concrete housekeeping pads. Edges shall be chamfered.

1.19 SIZE OF EQUIPMENT

- A. Investigate each space in the structure through which equipment must pass to reach its final location. If necessary, the manufacturer shall be required to ship his materials in sections sized to permit passing through such restricted areas in the structure.
- B. The equipment shall be kept upright at all times. When equipment has to be tilted for ease of passage through restricted areas during transportation, the manufacturer shall be required to suitably brace the equipment, to insure that the tilting does not impair the functional integrity of the equipment.

1.20 RECORD DRAWINGS

- A. As the work progresses, legibly record all field changes on one set of project contract drawings, herein after called the "record drawings".
- B. Record drawings shall accurately show the installed condition of the following items:
 - 1. Power distribution one line diagram(s).
 - 2. Panel schedule(s).
 - 3. Lighting fixture schedule(s).
 - 4. Service, feeder, branch circuit conduit and conductor sizes.
 - 5. Lighting fixture, receptacle, and switch outlets, interconnections and homeruns with circuit identification.
 - 6. Underground raceway routing.
 - 7. Plan view, sizes and locations of distribution transformers, and panelboards.
 - 8. Fire alarm system for fire protection monitoring and air handler shutdown.
 - 9. Telecommunications system.

1.21 CORROSION PROTECTION

- A. All equipment, raceways, hardware, etc., furnished under the electrical contract shall be protected from corrosion by factory applied coatings, paint and galvanizing, or shall be fabricated of high quality 300 series stainless steel. All exposed hardware shall be hot dip galvanized. The requirements of preceding section entitled "Delivery and Storage" shall be strictly followed. Touch up any scratched metallic surfaces immediately to prevent corrosion. Apply cold galvanizing compound to all galvanized surfaces damaged during installation, i.e., cutting, etc. Rusted or corroded materials shall be replaced before final acceptance of the work.

1.22 SEISMIC REQUIREMENTS

- A. All equipment furnished under the electrical contract shall be installed in a manner to be fully compliant with the seismic restraint requirements of the North Carolina State Building Code (NCSBC). The Contractor shall provide any and all seismic restraint details and calculations that may be required by the NCSBC and/or the Authority Having Jurisdiction.
- B. Requirements for restraints are detailed in the NCSBC. All tables and references shall conform to building's location. Restraints shall be per Seismic Performance Category stated on Architectural Drawings.
- C. The Contractor shall retain the services of a Professional Engineer registered in the State of North Carolina to design seismic restraint elements required for this project. The Engineer's calculations, bearing his professional seal, shall accompany shop drawings and shall demonstrate Code compliance including certification that the seismic system components comply with the testing requirements of NCSBC Section 1708.5. Calculations and shop drawings shall be submitted for review prior to the purchasing of materials, equipment, systems and assemblies. Internal seismic restraint elements of manufactured equipment shall be certified by a professional engineer retained by the manufacturer. Such certificate applies only to internal elements of the equipment. All equipment anchorage requirements shall be coordinated with the building structure and shall be compatible thereto. All such anchorages shall be subject to the review and approval of the project's structural engineer
- D. The Professional Engineer retained for seismic restraint calculations shall visit the job site upon completion of the seismic restraint installation to comply with the Special Inspections requirement of the Code. This engineer shall provide written verification of compliance of the installation with the approved seismic submittal. This verification shall be submitted as a Special Inspections Report and shall bear the Engineer's professional seal. Job site inspections by other than this engineer are not acceptable.
- E. Review of the seismic design computations and shop drawings by the Architect/Engineer or his agent shall not relieve the Contractor of his responsibility to comply with the seismic or any other requirements of the North Carolina State Building Code.

1.23 GUARANTEE

- A. The Contractor shall guarantee the materials and workmanship covered by these drawings and specifications for a period of one year from the date of acceptance by the Owner. The Contractor shall repair and/or replace any parts of any system that may prove to be defective at

no additional cost to the Owner within the guarantee period. All equipment warranties shall be as specified and included in the Contract Documents.

1.24 PHASING OF THE WORK

- A. The Electrical Contractor shall schedule his work as described in the relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.

1.25 ALTERNATE BIDS

- A. Alternate bid items are described in relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.

PART 2 - PRODUCTS Not Used

PART 3 - EXECUTION Not Used

END OF SECTION 260500

SECTION 260519 – BUILDING WIRE AND CABLE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Building wires and cables rated 600 V and less.
2. Metal-clad cable, Type MC, rated 600 V or less.
3. Lighting Control Cable.
4. Connectors, splices, and terminations rated 600 V and less.

B. References:

1. ANSI/NFPA 70 National Electrical Code.
2. B. NECA Standard of Installation (National Electrical Contractors Association).

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Test and Field quality-control reports. Indicate procedures and values obtained.
- B. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency specified under Regulatory Requirements.

1.4 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing products specified in this Section with minimum three years documented experience.

1.5 PROJECT CONDITIONS

- A. All wire and cable shall be installed in conduit. This includes all power wiring; fire alarm, sound and communications wire and cable (unless noted otherwise); HVAC control cable; etc.
- B. Conductor sizes are based on 75° C. copper.
- C. Wire and cable routing shown on Drawings is approximate unless dimensioned. Route wire and cable as required to meet Project Conditions.
- D. Where wire and cable routing is not shown, and destination only is indicated, determine exact routing and lengths required.

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. Copper Conductors: Comply with NEMA WC 70/ICEA S-95-658.
 - 1. Description: Flexible, insulated and uninsulated, drawn copper current-carrying conductor with an overall insulation layer or jacket, or both, rated 600 V or less.
 - 2. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.
 - 3. RoHS compliant.
 - 4. Conductor and Cable Marking: Comply with wire and cable marking according to UL's "Wire and Cable Marking and Application Guide.
 - 5. ALL ITEMS ABOVE LAY-IN CEILINGS SHALL BE PLENUM RATED.
- B. Conductor Insulation: Comply with NEMA WC 70/ICEA S-95-658 and UL 83 for Type THHN/THWN-2/THW and THW-2.

2.2 METAL CLAD (MC) CABLE

- A. Description: Metal clad (MC) cable with aluminum interlocked armor, copper conductors and an internal green insulated equipment grounding conductor may be used for branch circuits 30 amperes and less. Use cable with individual neutral conductors where specified and/or required. Cable with individual neutral per phase design neutral conductors shall be provided with factory color coded neutral markings or stripes identified for their associated phase conductor (white-black, white-red, white-blue, gray-brown, gray-orange, gray-yellow).
- B. Conductors: Copper. Solid and stranded as specified below. Minimum #12 AWG, maximum #10 AWG.
- C. Insulation/Voltage Rating: 600 volts.
- D. Insulation: Dual-rated THHN/THWN or XHHW.
- E. Conductor Color Coding: Same as Building Wire above.
- E. Interlocked armor color coding: Consistent with Section 260553 requirements for raceways.
- F. MC cable with integral power and low voltage cable for lighting control is permitted.
- G. Connectors shall be zinc plated malleable iron or steel body with locknut, dual cable gripping saddle design with set screw and insulated throat. Pressure cast (pot metal) connectors are not permitted.

2.2 ALUMINUM SERVICE AND FEEDER CONDUCTOR OPTION

The Contractor may provide aluminum conductors for service entrance and large feeders. Such conductors shall result in equal ampacity to the copper service entrance and feeders they replace. The contractor is responsible for obtaining written approval from the Architect/Engineer for all proposed changes prior to installation. Raceways shall be upsized

and quantities increased as required to maintain service entrance and feeder ampacity. Installation shall conform to conductor and connector manufacturer's recommendations including oxide inhibitor use and properly torqued connections. Maintain all NEC required spacing inside cabinets at terminations.

- A. AA-8000 series aluminum conductors may be substituted for copper service entrance and feeder conductors in size #4/0 AWG and larger (i.e.; #2/0 AWG copper replaced with #4/0 AWG aluminum. Copper conductors in size #1/0 and smaller shall remain copper.).
- B. The maximum aluminum conductor size shall be 500 KCMil.
- C. All aluminum conductor terminations shall be made with machine applied compression connectors and individually field verified and certified in writing by the contractor to be installed per the conductor and equipment manufacturer's recommendations. Insulation shall be removed by "penciling" or using a manufacturer-approved insulation removal tool that does not nick the underlying conductor. Do not "ring cut" insulation. Wire brush the conductor and apply conductor manufacturer approved oxide inhibitor prior to terminating, unless the compression connector is prefilled with inhibitor, all as recommended by the manufacturer.

2.2 LIGHTING CONTROL CABLE

Lighting control cable for dimming and occupancy sensor control shall be provided as required. Lighting control cable may be provided integral to MC cable, or discrete, as approved by the lighting controls manufacturer and as required by NEC Article 725. If discrete, cable shall be NEC Type CMP, in raceway from the switch outlet box to the accessible ceiling cavity, then free run to follow the lighting power system raceways to the fixtures controlled, be secured to the structure to the plane of the lighting power raceway system, then supported by the lighting power raceway system using NEC approved cable ties installed on no more than six foot intervals, or less if required by Codes and the AHJ. Lighting control cable shall be plenum rated and be approved by the lighting controls manufacturer. It shall consist of a 2#18 AWG solid, violet and gray insulated conductors minimum with an outer jacket rating of 300V minimum. Cable outer jacket shall not be red. Cable shall be daisy chain connected to lighting fixtures or be taped in junction boxes installed at the same plane of the lighting power raceway system. Do not support cable with ceiling grid supports wires. Do not drape cable over ceilings, lighting fixtures, conduit, ductwork, piping or equipment. Daisy chaining cable at the ceiling level is not permitted.

2.3 CONNECTORS AND SPLICES

- A. Conductors shall be installed continuous from outlet to outlet with no splicing except within outlet or junction boxes, troughs and gutters. Make splices, taps, and terminations to carry full ampacity of conductors with no perceptible temperature rise.
- B. Use mechanical connectors for copper conductor splices and taps, 8 AWG and larger, except main grounding conductors, which shall be terminated with compression lugs. Tape un-insulated conductors and connector with electrical tape to 150 percent of insulation rating of conductor or use third party testing agency-approved insulating covers.

- C. Use insulated spring wire connectors with plastic caps for copper conductors, 10 AWG and smaller, splices and taps in junction boxes, outlet boxes and lighting fixtures, Ideal “Wire-Nut” or “Wing-Nut”, 3M Company “Scotchlock” series or NSI “Easy-Twist”. “Push wire” type connectors are not acceptable.
- D. “Sta-Kon” or other permanent type crimp connectors shall not be used for branch circuit connections.
- E. Joints in stranded conductors shall be spliced by approved mechanical connectors and insulated with vinyl mastic tape and covered with vinyl electrical tape, 3M Scotch Vinyl Mastic Tape 2210 and Scotch Vinyl Electrical Tape Super 88, respectively, or approved equal. Solderless mechanical connectors for splices and taps, provided with U.L approved insulating covers, may be used instead of mechanical connectors plus tape.
- F. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- G. Comply with NFPA 70.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

- A. Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger. Minimum #12 AWG, maximum 500 KCMil.
- B. Insulation/Voltage Rating: 600 volts.
- C. . Color Coding:

	120/240 volts and 208/120 volts
Phase A -	Black
Phase B -	Red
Phase C -	Blue
Neutral -	White
Ground -	Green

3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

- A. Service Entrance: Type THHN/THWN-2, single conductors in raceway.
- B. Feeders: Type THHN/THWN-2, single conductors in raceway.
- C. Exposed Branch Circuits, Including in Crawlspace: Type THHN/THWN-2, single conductors in raceway.
- D. Branch Circuits Concealed in Dry Interior Ceilings, Walls, and Partitions: Type THHN/THWN-2, single conductors in raceway or Metal-clad cable, Type MC.

1. MC cable may be used exposed in electrical equipment rooms where branch circuits originate at panelboards, but cable shall be supported and neatly arranged above panelboards on steel ladder rack, width as required. Cable shall be strapped to ladder rack using approved, UV resistant plastic cable ties. Alternately, MC cable shall be transitioned to building wire and metallic raceway outside of the electrical equipment rooms in a junction box or wiring trough concealed above an accessible ceiling. If this method is utilized to convert MC cable to building wire and metallic raceway, provide screw connection, feed-through, modular type DIN rail terminal blocks for termination and extension of circuit conductors. Terminal blocks shall be rated 30A, 300VAC minimum, and higher as required by circuit ampacity and voltage, quantity as required for phase, neutral and equipment ground conductors. Wirenut and similar terminations are not permitted in splice boxes or panelboard interiors. All splices shall be clearly labeled and neatly trained as judged acceptable by the Engineer.
- E. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN/THWN-2, single conductors in raceway.
- F. Cord Drops and Portable Appliance Connections: Type SO, hard service cord with stainless-steel, wire-mesh, strain relief device at terminations to suit application.

3.3 INSTALLATION OF CONDUCTORS AND CABLES

- A. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.
- B. Complete raceway installation between conductor and cable termination points according to Section 260533 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.
- C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values. Completely and thoroughly swab raceway before installing wire.
- D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips that will not damage cables or raceway.
- E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.
- F. Support cables according to Section 260529 "Hangers and Supports for Electrical Systems."
- G. Use solid conductor for feeders and branch circuits 10 AWG and smaller, and Class B stranded for larger conductors.
- H. Use conductor not smaller than 12 AWG for power and lighting circuits. Use conductor not smaller than 14 AWG for fire alarm and control circuits.
- I. Use 10 AWG conductors for 20 ampere, 120 volt branch circuits longer than 75 feet (23 m) or branch circuit homeruns longer than 50 feet.

- J. Neatly train and lace wiring inside boxes, equipment, and panelboards.
- K. Clean conductor surfaces before installing lugs and connectors.
- L. Identify wire and cable under provisions of Section 260553.
- M. Identify each conductor with its circuit number or other designation indicated on Drawings.
- N. Common neutral multiwire receptacle branch circuits are not permitted. Provide separate, individual neutral conductors for all lighting and receptacle branch circuits.
- O. Do not bundle metal clad cable in a manner that requires the conductors be derated.
- P. MC Cable shall be supported in straight lines using approved supporting means and in compliance with the NEC. Dedicated support wires may be used above finished ceilings and shall be painted red prior to installation. Do not support cable with ceiling grid supports wires. Do not drape cable over ceilings, lighting fixtures, conduit, ductwork, piping or equipment. Do not “daisy-chain” connect lighting fixtures with MC cable.

3.4 CONNECTIONS

- A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.
- B. Wiring at Outlets: Install conductor at each outlet, with at least 12 inches of slack.
- C. Conductors shall be installed continuous from outlet to outlet with no splicing except within outlet or junction boxes, troughs and gutters. Make splices, taps, and terminations to carry full ampacity of conductors with no perceptible temperature rise.
- D. Use mechanical connectors for copper conductor splices and taps, 8 AWG and larger, except main grounding conductors, which shall be terminated with compression lugs. Tape un-insulated conductors and connector with electrical tape to 150 percent of insulation rating of conductor or use third party testing agency-approved insulating covers.
- E. Use insulated spring wire connectors with plastic caps for copper conductors, 10 AWG and smaller, splices and taps in junction boxes, outlet boxes and lighting fixtures, “Push wire” type connectors are not acceptable.
- F. “Sta-Kon” or other permanent type crimp connectors shall not be used for branch circuit connections.
- G. Joints in stranded conductors shall be spliced by approved mechanical connectors and gum rubber tape or friction tape. Solderless mechanical connectors for splices and taps, provided with U.L approved insulating covers, may be used instead of mechanical connectors plus tape.

3.5 IDENTIFICATION

- A. Identify and color-code conductors and cables according to Section 260553 "Identification for Electrical Systems."
- B. Identify each spare conductor at each end with identity number and location of other end of conductor, and identify as spare conductor.

3.6 FIRESTOPPING

- A. Apply firestopping to penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly.

3.7 FIELD QUALITY CONTROL

- A. Perform field inspection and testing under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Inspect wire for physical damage and proper connection.
- C. Measure tightness of bolted connections and compare torque measurements with manufacturer's recommended values.
- D. Verify continuity of each branch circuit conductor
- E. Prior to energizing, feeders, sub-feeders and service conductor cables shall be tested for electrical continuity and short circuits. A copy of these tests shall be sent to the Architect.

END OF SECTION 260519

SECTION 260526 - GROUNDING AND BONDING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes grounding and bonding systems and equipment.

1.2 REFERENCES

- A. IEEE 142 - Recommended Practice for Grounding of Industrial and Commercial Power Systems.
- B. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems (International Electrical Testing Association).
- C. NFPA 70 - National Electrical Code.

1.3 GROUNDING SYSTEM DESCRIPTION

- A. The neutral of each secondary electrical distribution system shall be grounded at one point only which shall be at the main disconnecting device. From the main disconnecting device, a copper grounding conductor sized in accordance with the NEC shall be extended to the earth electrode. Main grounding conductors #8 AWG through and including #4 AWG shall be insulated and identified by a green colored insulation. All grounding conductors shall be installed in conduit sized in accordance with the NEC. Conduit carrying a grounding conductor shall also be grounded at the earth electrode.
- B. The earth electrode shall be:
 - 1. The metallic domestic water piping system of the building. Connection of the grounding conductor shall be made by an approved grounding clamp. The point of connection to the water system shall be within 6 inches of the entrance of the pipe inside the building or structure. Where dielectric unions are used in the water piping system, the grounding connection shall be made on the "street side" of the first such union in the system. A bonding jumper the same wire size as the grounding conductor shall be installed across the water piping connection such that the water meter may be removed without interrupting the grounding system continuity. Where no metallic domestic water piping system exists, the earth electrode shall be a ground rod with supplemental ground electrodes as defined below.
 - 2. Ground Rods: Size as specified below driven 11 feet into the earth where shown on the contract drawings or as required. The rods shall be connected to the system ground point as shown on the Drawings by an insulated, green copper jumper in conduit. The connection at the rods shall be brazed or exothermically welded. The points of connection to the earth electrode system shall be visible and accessible upon completion of construction. Sectional rods of the same size and length shall be used in multiple rod installations, if required by soil conditions.

3. The building steel and slab reinforcing steel as shown and as required by the NEC. Connection points shall be as directed by the Architect/Engineer.

1.4 PERFORMANCE REQUIREMENTS

- A. The ground resistance of the earth electrode shall not exceed 5 ohms. The Electrical Contractor shall test the earth electrode using a standard three point ground resistance tester and shall advise the Architect/Engineer of the results of such tests in writing. Where tests show the resistance to ground exceeds 5 ohms, appropriate action shall be taken to reduce the resistance to 5 ohms, or less, by driving additional ground rods or other approved methods. Compliance shall be demonstrated by retesting.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.6 SUBMITTALS FOR CLOSEOUT

- A. Contract Closeout: Procedures for submittals as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Project Record Documents: Record actual locations of components and grounding electrodes.
- C. Certificate of Compliance: Indicate approval of installation by authority having jurisdiction.
- D. Test Reports: Indicates overall resistance to ground and resistance of each electrode.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Comply with UL 467 for grounding and bonding materials and equipment.

2.2 CONDUCTORS

- A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.
- B. Bare Copper Conductors:
 1. Solid Conductors: ASTM B 3.
 2. Stranded Conductors: ASTM B 8.

3. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch (6 mm) in diameter.
4. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
5. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches (41 mm) wide and 1/16 inch (1.6 mm) thick.

2.3 CONNECTORS

- A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.
- B. Bolted Connectors for Conductors and Pipes: Copper or copper alloy.
- C. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.
- D. Bus-Bar Connectors: Mechanical type, cast silicon bronze, solderless exothermic-type wire terminals, and long-barrel, two-bolt connection to ground bus bar.

2.4 GROUNDING ELECTRODES

- A. Ground Rods: Copper-clad steel 3/4 inch by 10 feet.

2.5 GROUND ROD INSPECTION WELLS

- A. Pedestrian Traffic Rated
 1. Well Housing: 9 inch diameter High Density Polyethylene (HDPE), 10" minimum length. Static vertical load rating of 300 PSF minimum. Two knock out mouse holes for conductor entrance. Harger GAW910, nVent Erico T416B or approved equal.
 2. Well cover: HDPE twist lock with locking bolt and the legend "GROUND" embossed on cover.
- B. Vehicle Traffic Rated
 1. Well Housing: 10 inch diameter reinforced concrete, 12" minimum length. Static vertical load rating of 20,000 PSF minimum. Two knock out mouse holes for conductor entrance.
 2. Well cover: Bolt down cast iron with the legend "GROUND" embossed on cover.

2.6 GROUNDING BUSBARS

- A. Electrical Power Grounding Busbars: Third party testing agency listed and labelled. Grounding busbars shall be provided for single point termination of power distribution system grounding and bonding conductors as shown on the Drawings. Grounding busbars shall be tin plated solid copper factory drilled with a NEMA hole size and pattern for termination of two hole lugs, quantity as required with 25% spare, and be of the minimum dimensions shown on the Drawings. Provide with 600V standoff insulators, stainless steel mounting brackets and stainless steel hardware. Provide clear Lexan cover over connections.

- B. Telecommunications Grounding Busbars: Comply with TIA-607-C and BISCII Standards. Grounding busbars shall be provided for single point termination of telecommunications system grounding and bonding conductors as shown on the Drawings. Grounding busbars shall be tin plated solid copper factory drilled with a BISCII hole size and pattern for termination of two hole lugs, quantity as required with 25% spare, and be of the minimum dimensions shown on the Drawings. Provide with 600V standoff insulators, stainless steel mounting brackets and stainless steel hardware. Provide clear Lexan cover over connections.

PART 3 - EXECUTION

3.1 APPLICATIONS

- A. Conductors: Install solid conductor for No. 8 AWG and smaller, and stranded conductors for No. 6 AWG and larger unless otherwise indicated.
- B. Underground Grounding Conductors: Install bare copper conductor, **No. 2/0** AWG minimum.
 - 1. Bury at least 24 inches (600 mm) below grade.
- C. Conductor Terminations and Connections:
 - 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 - 2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
 - 3. Connections to Ground Rods at Test Wells: Bolted connectors.
 - 4. Connections to Structural Steel: Welded connectors.

3.2 GROUNDING AT THE SERVICE

- A. Equipment grounding conductors and grounding electrode conductors shall be connected to the ground bus. Install a main bonding jumper between the neutral and ground buses.

3.3 EQUIPMENT GROUNDING

- A. Install insulated equipment grounding conductors with all feeders and branch circuits.
- B. Air-Duct Equipment Circuits: Install insulated equipment grounding conductor to duct-mounted electrical devices operating at 120 V and more, including air cleaners, heaters, dampers, humidifiers, and other duct electrical equipment. Bond conductor to each unit and to air duct and connected metallic piping.
- C. Water Heater, Heat-Tracing, and Antifrost Heating Cables: Install a separate insulated equipment grounding conductor to each electric water heater and heat-tracing cable. Bond conductor to heater units, piping, connected equipment, and components.
- D. Poles Supporting Outdoor Lighting Fixtures: Install grounding electrode and a separate insulated equipment grounding conductor in addition to grounding conductor installed with branch-circuit conductors.

- E. Metallic Fences: Comply with requirements of IEEE C2.
 - 1. Grounding Conductor: Bare copper, not less than No. 8 AWG.
 - 2. Gates: Shall be bonded to the grounding conductor with a flexible bonding jumper.
 - 3. Barbed Wire: Strands shall be bonded to the grounding conductor.
- F. Signal and Communication Equipment: In addition to grounding and bonding required by NFPA 70, provide a separate grounding system complying with requirements in TIA/ATIS J-STD-607-A.
 - 1. For telephone, alarm, voice and data, and other communication equipment, provide No. 4 AWG minimum insulated grounding conductor in raceway from grounding electrode system to each service location, terminal cabinet, wiring closet, and central equipment location.
 - 2. Service and Central Equipment Locations and Wiring Closets: Terminate grounding conductor on a 1/4-by-4-by-12-inch (6.3-by-100-by-300-mm) grounding bus.
 - 3. Terminal Cabinets: Terminate grounding conductor on cabinet grounding terminal.

3.4 INSTALLATION

- A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.
- B. All connections to ground conductors shall be accessible for inspection and made with approved solderless connectors, brazed or bolted to the equipment or structure to be grounded. All contact surfaces shall be thoroughly cleaned before connections are made to insure good metal to metal contact.
- C. All equipment housings and/or enclosures, and all non-current carrying metallic parts of electrical equipment, raceway systems, etc., shall be effectively and adequately bonded to ground.
- D. Grounding type insulated bonding bushings and jumpers shall be provided where concentric, eccentric or over-sized knockouts are encountered. The jumpers shall be sized per NEC Table 250-66 for services and transformers, and per Table 250-122 for branch circuits.
- E. All metallic raceways entering or leaving panelboards (branch circuits less than 30 amperes in lighting and appliance branch circuit panelboards excepted), switchboards, transfer switches, enclosed circuit breakers, safety switches, transformers, etc. shall be provided with insulated grounding and bonding bushings and each separate piece of raceway shall be individually bonded to the equipment ground bus or metallic enclosure, as applicable, by means of copper conductor sized in accordance with the National Electrical Code, Tables 250-66 for services and transformers and 250-122 for other circuits.
- F. An equipment ground bus shall be installed in each panelboard for terminating equipment grounding conductors.
- G. All wiring devices equipped with grounding connections shall be permanently and securely connected to the enclosure in which they are mounted with a copper grounding jumper.

- H. The frame of all lighting fixtures shall be securely grounded to the equipment ground system with grounding conductors.
- I. Provide grounding electrode conductor and connect to reinforcing steel in foundation footing where indicated. Bond reinforcing steel together.
- J. Ground Bonding Common with Lightning Protection System: Comply with NFPA 780 and UL 96 when interconnecting with lightning protection system. Bond electrical power system ground directly to lightning protection system grounding conductor at closest point to electrical service grounding electrode. Use bonding conductor sized same as system grounding electrode conductor, and install in conduit.
- K. Ground Rods: Drive rods until tops are 12 inches below finished floor or final grade unless otherwise indicated.
 - 1. Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating if any.
 - 2. Install rod electrodes at locations indicated. Install additional rod electrodes as required to achieve specified resistance to ground.
- L. Test Wells: Install at least one test well for each service unless otherwise indicated. Install at the ground rod electrically closest to service entrance. Set top of test well flush with finished grade or floor.
- M. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.
 - 1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
 - 2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
 - 3. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.
- N. Grounding and Bonding for Piping:
 - 1. Metal Water Service Pipe: Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes; use a bolted clamp connector or bolt a lug-type connector to a pipe flange by using one of the lug bolts of the flange. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
 - 2. Water Meter Piping: Use braided-type bonding jumpers to electrically bypass water meters. Connect to pipe with a bolted connector.
 - 3. Bond each aboveground portion of gas piping system downstream from equipment shutoff valve.

- O. Bonding Interior Metal Ducts: Bond metal air ducts to equipment grounding conductors of associated fans, blowers, electric heaters, and air cleaners. Install jumper to bond across flexible duct connections to achieve continuity.

3.5 LABELING

- A. Comply with requirements in Section 260553 "Identification for Electrical Systems" for instruction signs. The label or its text shall be green.
- B. Install labels at the telecommunications bonding conductor and grounding equalizer.
 - 1. Label Text: "If this connector or cable is loose or if it must be removed for any reason, notify the facility manager."

3.6 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections and prepare test reports:
 - 1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
 - 2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
 - 3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal, and at ground test wells. Make tests at ground rods before any conductors are connected.
- B. Report measured ground resistances that exceed the following values:
 - 1. Power and Lighting Equipment or System with Capacity of 500 kVA and Less: 10 ohms.
 - 2. Power and Lighting Equipment or System with Capacity of 500 to 1000 kVA: 5 ohms.
 - 3. Power and Lighting Equipment or System with Capacity More Than 1000 kVA: 3 ohms.
- C. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

END OF SECTION 260526

SECTION 260529 - HANGERS AND SUPPORTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hangers and supports for electrical equipment and systems.
2. Construction requirements for concrete bases.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Seismic Qualification Certificates: For hangers and supports for electrical equipment and systems, accessories, and components, from manufacturer.
- B. Welding certificates.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design hanger and support system.
- B. Provide materials, sizes, and types of anchors, fasteners and supports to carry the loads of equipment and conduit. Consider weight of wire in conduit when selecting products.
- C. Seismic Performance: Hangers and supports shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.
 1. The term "withstand" means "the supported equipment and systems will remain in place without separation of any parts when subjected to the seismic forces specified."

2.2 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Comply with MFMA-4 factory-fabricated components for field assembly.
 1. Manufacturers:
 - a. Unistrut.

- b. B-line.
 - c. Erico.
 - d. Substitutions: As permitted in relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.
 - 2. Material: Provide material and finishes with adequate corrosion resistance.
 - 3. Channel Width: 1-5/8 inches, or as required to carry load.
 - 4. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
 - 5. Channel Dimensions: Selected for applicable load criteria.
- B. Conduit and Cable Support Devices: Steel hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- C. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for nonarmored electrical conductors or cables in riser conduits. Plugs shall have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body shall be made of malleable iron.
- D. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M steel plates, shapes, and bars; black and galvanized.
- E. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
- 1. Steel Structural Elements: Use beam clamps.
 - 2. Concrete Surfaces: Use self drilling anchors and expansion anchors.
 - 3. Hollow Masonry, Plaster, and Gypsum Board Partitions: Use toggle bolts.
 - 4. Solid Masonry Walls: Use expansion anchors.
 - 5. Sheet Metal: Use sheet metal screws or bolts
 - 6. Wood Elements: Use wood screws..

2.3 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

- A. Description: Welded or bolted structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Comply with NECA 1 and NECA 101 for application of hangers and supports for electrical equipment and systems unless requirements in this Section are stricter.
- B. Comply with requirements for raceways and boxes specified in Section 260533 "Raceways and Boxes for Electrical Systems."

- C. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMTs, IMCs, and RMCs as required by NFPA 70. Minimum rod size shall be 1/4 inch in diameter.
- D. Do not use powder actuated anchors.
- E. Obtain permission from Architect/Engineer before drilling or cutting structural members.
- F. Install surface mounted cabinets and panelboards with minimum of four anchors. In wet and damp locations use steel channel supports to stand cabinets and panelboards one inch (25 mm) off wall.
- G. Conduits installed on the interior of exterior building walls shall be spaced away from the wall surface a minimum of 1/4 inch (65mm) using “clamp-backs” or struts.
- H. Use sheet metal channel to bridge studs above and below cabinets and panelboards recessed in hollow partitions.
- I. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
 - 1. Secure raceways and cables to these supports with two-bolt conduit clamps.

3.2 SUPPORT INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this article.
- B. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.
- C. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements. Do not fasten supports to pipes, ducts, mechanical equipment, and conduit.
- D. Drill holes for expansion anchors in concrete at locations and to depths that avoid the need for reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

- A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.
- B. Field Welding: Comply with AWS D1.1/D1.1M.

3.4 PAINTING

- A. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 260529

SECTION 260533 - RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Metal conduits, tubing, and fittings.
2. Nonmetal conduits, tubing, and fittings.
3. Metal wireways and auxiliary gutters.
4. Boxes, enclosures, and cabinets.
5. Handholes and boxes for exterior underground cabling.

1.2 ACTION SUBMITTALS

- A. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.

1.3 INFORMATIONAL SUBMITTALS

- A. Seismic Qualification Certificates: For enclosures, cabinets, and conduit racks and their mounting provisions, including those for internal components, from manufacturer.
- B. Coordination Drawings: Conduit routing plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of items involved:
1. Structural members in paths of conduit groups with common supports.
 2. General, HVAC, fire protection and plumbing contractor items and architectural features in paths of conduit groups with common supports.

1.4 SUBMITTALS FOR CLOSEOUT

- A. Contract Closeout: Submittals for Project closeout. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Record actual locations and mounting heights of outlet, pull, and junction boxes on project record documents.
- C. Accurately record actual routing of conduits larger than 2 inches.

1.5 REFERENCES

- A. ANSI C80.1 - Rigid Steel Conduit, Zinc Coated.

- B. ANSI C80.3 - Electrical Metallic Tubing, Zinc Coated.
- C. ANSI/NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit and Cable Assemblies.
- D. ANSI/NFPA 70 - National Electrical Code.
- E. NECA "Standard of Installation".
- F. NEMA TC2 - Schedule 40 PVC.
- G. NEMA TC 3 - PVC Fittings for Use with Rigid PVC Conduit and Tubing.

1.6 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.
- B. Provide Products listed and classified by testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle Products to site under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Accept conduit and boxes on site. Inspect for damage.
- C. Protect conduit and boxes from corrosion and entrance of debris by storing above grade. Provide appropriate covering.
- D. Protect PVC conduit from sunlight.

1.8 PROJECT CONDITIONS

- A. Verify that field measurements are as shown on Drawings.
- B. Verify routing and termination locations of conduit prior to rough-in.
- C. Conduit routing is shown on Drawings in approximate locations unless dimensioned. Route as required to complete wiring system.
- D. ALL ITEMS IN CEILING SHALL BE PLENUM RATED.

PART 2 - PRODUCTS

2.1 METAL CONDUITS, TUBING, AND FITTINGS

- A. Listing and Labeling: Metal conduits, tubing, and fittings shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. GRC: Comply with ANSI C80.1 and UL 6.
- C. IMC: Comply with ANSI C80.6 and UL 1242.
- D. PVC-Coated Steel Conduit: PVC-coated rigid steel conduit.
 - 1. Comply with NEMA RN 1.
 - 2. Coating Thickness: 0.040 inch minimum.
- E. EMT: Comply with ANSI C80.3 and UL 797.
- F. FMC: Comply with UL 1; zinc-coated steel.
- G. LFMC: Flexible steel conduit with PVC jacket and complying with UL 360.
- H. Fittings for Metal Conduit: Comply with NEMA FB 1 and UL 514B.
 - 1. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 886 and NFPA 70.
 - 2. Fittings for EMT:
 - a. Material: Steel.
 - b. Type: compression.
 - 3. Expansion Fittings: PVC or steel to match conduit type, complying with UL 651, rated for environmental conditions where installed, and including flexible external bonding jumper.
 - 4. Coating for Fittings for PVC-Coated Conduit: Minimum thickness of 0.040 inch, with overlapping sleeves protecting threaded joints.
- I. Joint Compound for IMC, or GRC: Approved, as defined in NFPA 70, by authorities having jurisdiction for use in conduit assemblies, and compounded for use to lubricate and protect threaded conduit joints from corrosion and to enhance their conductivity.

2.2 NONMETALLIC CONDUITS, TUBING, AND FITTINGS

- A. Listing and Labeling: Nonmetallic conduits, tubing, and fittings shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. RNC: Type EPC-40-PVC or RNC, Type EPC-80-PVC, complying with NEMA TC 2 and UL 651 unless otherwise indicated.

- C. LFNC: Comply with UL 1660.
- D. Fittings for RNC: Comply with NEMA TC 3; match to conduit or tubing type and material.
- E. Fittings for LFNC: Comply with UL 514B.

2.3 METAL WIREWAYS AND AUXILIARY GUTTERS

- A. Description: Sheet metal, complying with UL 870 and NEMA 250, NEMA rating in accordance with environment, unless otherwise indicated, and sized according to NFPA 70.
 - 1. Metal wireways installed outdoors shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Fittings and Accessories: Include covers, couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for complete system.

2.4 BOXES, ENCLOSURES, AND CABINETS

- A. General Requirements for Boxes, Enclosures, and Cabinets: Boxes, enclosures, and cabinets installed in wet locations shall be listed for use in wet locations.
- B. Sheet Metal Outlet and Device Boxes: Galvanized steel. Comply with NEMA OS 1 and UL 514A.
 - 1. Junction, switch, receptacle and outlet boxes for interior use in dry locations shall be zinc coated or cadmium plated sheet steel, 4" square and 2 1/8" deep, unless otherwise indicated on the contract drawings. Smaller and shallower outlet boxes will be permitted only by special permission of the Architect/Engineer where such boxes are necessary due to structural conditions encountered. Where larger junction boxes are required, they shall be fabricated from No. 10, 12, 14 or 16 gauge sheet steel as required by the Underwriters Laboratories, Inc., and galvanized after fabrication.
 - 2. All junction boxes shall have screw fastened covers.
 - 3. Outlet boxes shall be provided with extension plaster rings where required by structural and finish conditions. Box extensions used to accommodate new building finishes shall be of same material as recessed box.
- C. Cast-Metal Outlet and Device Boxes: Comply with NEMA FB 1, ferrous alloy, Type FD, with gasketed cover and threaded hubs.
- D. Nonmetallic Outlet and Device Boxes: Comply with NEMA OS 2 and UL 514C.
- E. Floor Boxes:
 - 1. Shape: Rectangular.
 - 2. Listing and Labeling: Floor boxes shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
 - 3. NEMA OS 1, oversized, reach-in, concealed service, multi-compartment, two and three gang type (duplex receptacles and telecommunications outlets as shown), 3-3/4 inches deep, minimum.

4. Material: Cast metal or non-metallic. Do not use plastic boxes in rated assemblies.
- F. Luminaire Outlet Boxes: Nonadjustable, designed for attachment of luminaire weighing 50 lb. Outlet boxes designed for attachment of luminaires weighing more than 50 lb shall be listed and marked for the maximum allowable weight.
- G. Paddle Fan Outlet Boxes: Nonadjustable, designed for attachment of paddle fan weighing 70 lb.
 1. Listing and labeling: Paddle fan outlet boxes shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- H. Cast-Metal Access, Pull, and Junction Boxes: Comply with NEMA FB 1 and UL 1773, cast aluminum with gasketed cover.
- I. Hinged-Cover Enclosures: Comply with UL 50 and NEMA 250, NEMA Rating appropriate for environment with continuous-hinge cover with flush latch unless otherwise indicated.
 1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.
 2. Nonmetallic Enclosures: Plastic.
 3. Interior Panels: Steel; all sides finished with manufacturer's standard enamel.
- J. Cabinets:
 1. NEMA 250, NEMA Rating appropriate for environment, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
 2. Hinged door in front cover with flush latch and concealed hinge.
 3. Key latch to match panelboards.
 4. Metal barriers to separate wiring of different systems and voltage.
 5. Accessory feet where required for freestanding equipment.
 6. Nonmetallic cabinets shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.5 HANDHOLES AND BOXES FOR EXTERIOR UNDERGROUND WIRING

- A. General Requirements for Handholes and Boxes:
 1. Boxes and handholes for use in underground systems shall be designed and identified as defined in NFPA 70, for intended location and application.
 2. Boxes installed in wet areas shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. Polymer-Concrete Handholes and Boxes with Polymer-Concrete Cover: Molded of sand and aggregate, bound together with polymer resin, and reinforced with steel, fiberglass, or a combination of the two.
 1. Standard: Comply with SCTE 77.
 2. Configuration: Designed for flush burial with [open] [closed] [integral closed] bottom unless otherwise indicated.

3. Cover: Weatherproof, secured by tamper-resistant locking devices and having structural load rating consistent with enclosure and handhole location.
4. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.
5. Cover Legend: Molded lettering, "ELECTRIC."
6. Conduit Entrance Provisions: Conduit-terminating fittings shall mate with entering ducts for secure, fixed installation in enclosure wall.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

A. Outdoors: Apply raceway products as specified below unless otherwise indicated:

1. Exposed Conduit: GRC.
2. Concealed Conduit, Aboveground: GRC, IMC, EMT, RNC, Type EPC-40-PVC].
3. Underground Conduit: RNC, Type EPC-40-PVC or Type EPC-80-PVC.
 - a. More than Five Feet from Foundation Wall: Use nonmetallic conduit.
 - b. Within Five Feet from Foundation Wall: Use rigid steel conduit.
4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
5. Boxes and Enclosures, Aboveground: NEMA 250, Type 3R or Type 4.

B. Indoors: Apply raceway products as specified below unless otherwise indicated.

1. Exposed, Not Subject to Physical Damage: EMT or RNC.
2. Exposed, Not Subject to Severe Physical Damage: EMT.
3. Exposed and Subject to Severe Physical Damage: GRC or IMC. Raceway locations include, but are not limited to, the following:
 - a. Loading dock.
 - b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units.
 - c. Mechanical rooms.
 - d. Gymnasiums.
4. Concealed in Ceilings and Interior Walls and Partitions: EMT (MC Cable with insulated Ground is allowed in concealed locations).
5. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
6. Damp or Wet Locations: GRC or IMC.
7. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 stainless steel in institutional and commercial kitchens and damp or wet locations.

C. Minimum Raceway Size: 1/2-inch trade size.

D. Raceway Fittings: Compatible with raceways and suitable for use and location.

1. Rigid and Intermediate Steel Conduit: Use threaded rigid steel conduit fittings unless otherwise indicated. Comply with NEMA FB 2.10.

2. PVC Externally Coated, Rigid Steel Conduits: Use only fittings listed for use with this type of conduit. Patch and seal all joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Use sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
 3. EMT: Use compression fittings. Comply with NEMA FB 2.10.
 4. Flexible Conduit: Use only fittings listed for use with flexible conduit. Comply with NEMA FB 2.20.
- E. Do not install aluminum conduits, boxes, or fittings in contact with concrete or earth.
- F. Install surface raceways only where indicated on Drawings.
- G. Do not install nonmetallic conduit where ambient temperature exceeds 120 deg F.

3.2 INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except where requirements on Drawings or in this article are stricter. Comply with NECA 102 for aluminum conduits. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.
- B. Verify locations of floor boxes and outlets prior to rough in.
- C. Install in locations as shown on Drawings, and as required for splices, taps, wire pulling, equipment connections and compliance with regulatory requirements.
- D. Set wall mounted boxes at elevations to accommodate mounting heights indicated and specified in section for outlet device. Boxes are shown on Drawings in approximate locations unless dimensioned. Adjust box location up to 10 feet if required to accommodate intended purpose. Install pull boxes and junction boxes above accessible ceilings and in unfinished areas only. Install boxes to preserve fire resistance rating of partitions and other elements, using approved materials and methods. Coordinate mounting heights and locations of outlets mounted above counters, benches, and backsplashes. Use flush mounting outlet box in finished areas. Use Erico Caddy RBS series, Raco 9001 or Cooper B-Line BB8-16 box mounting brackets to support flush mounting outlet boxes between studs.
- E. Outlets, junction, taps, etc., on exposed rigid metal conduit shall be cast metal conduit fittings or cast metal boxes of the type and size appropriate for the location. Sheet steel outlet boxes shall not be permitted on exposed raceway runs except at or near a ceiling for interior construction.
- F. Install pull boxes and junction boxes above accessible ceilings and in unfinished areas only.
- G. Install boxes to preserve fire resistance rating of partitions and other elements, using approved materials and methods. Coordinate mounting heights and locations of outlets mounted above counters, benches, and backsplashes. Use flush mounting outlet box in finished areas. Use stamped steel bridges to fasten flush mounting outlet box between studs.
- H. Circuiting is shown schematically. Exact routing of branch circuits may be varied to suit building construction; however, the combination of circuits within raceways and panelboard connections shall not be changed from those shown on the drawings.

- I. Raceways shall be installed concealed in finished areas. Where construction does not permit concealed raceways and where indicated on the drawings, raceways shall be run exposed. All raceways shall be run parallel to, or at a right angle with the building walls.
- J. Where any run of rigid conduit may change to a run of EMT or vice-versa, each change shall be made in a junction or outlet box with each conduit terminated separately therein. Rigid conduit to EMT (or vice-versa) adapters shall not be permitted.
- K. Arrange conduit to maintain headroom and present neat appearance.
- L. Cut conduit square using saw or pipecutter and de-burr cut ends.
- M. Bring conduit to shoulder of fittings; fasten securely.
- N. Use conduit bodies to make sharp changes in direction, as around beams. Use factory elbows, or hydraulic one-shot bender, to fabricate bends in metal conduit larger than 2 inch size.
- O. Avoid moisture traps; provide junction box with drain fitting at low points in conduit system.
- P. Use suitable caps to protect installed conduit against entrance of dirt and moisture.
- Q. The use of "LB's" shall be limited where possible. Where necessary to use "LB's" sized above 2 inch, mogul units shall be installed.
- R. Keep raceways at least 6 inches (150 mm) away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- S. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for hangers and supports.
- T. Arrange stub-ups so curved portions of bends are not visible above finished slab.
- U. Install no more than the equivalent of three 90-degree bends in any conduit run except for control wiring conduits, for which fewer bends are allowed. Support within 12 inches (300 mm) of changes in direction.
- V. All metallic raceways entering or leaving panelboards (branch circuits less than 30 amperes in lighting and appliance branch circuit panelboards excepted), switchboards, transfer switches, enclosed circuit breakers, safety switches, transformers, etc. shall be provided with insulated grounding and bonding bushings and each separate piece of raceway shall be individually bonded to the equipment ground bus or metallic enclosure, as applicable, by means of copper conductor sized in accordance with the National Electrical Code.
- W. Conceal conduit and EMT within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
- X. Support conduit within 12 inches (300 mm) of enclosures to which attached. Do not support conduit with wire or perforated pipe straps. Remove wire used for temporary supports. Do not attach conduit to ceiling support wires.
- Y. Service entrance raceways run inside building foundation walls shall be buried at least eighteen (18) inches below grade or encased with a minimum of three (3) inches of concrete on all sides.

Concrete encasement shall extend to the service equipment for raceways exposed above grade in crawl spaces. Encased raceways shall be of a type approved by the NEC as “suitable for concrete encasement”.

Z. Raceways Embedded in Slabs:

1. Run conduit larger than 1-inch (27-mm) trade size, parallel or at right angles to main reinforcement. Where at right angles to reinforcement, place conduit close to slab support. Secure raceways to reinforcement at maximum 10-foot (3-m) intervals.
2. Arrange raceways to cross building expansion joints at right angles with expansion fittings.
3. Arrange raceways to keep a minimum of 1 inch of concrete cover in all directions.
4. Do not embed threadless fittings in concrete unless specifically approved by Architect for each specific location.
5. Change to GRC before rising above floor.
6. The placement of conduit in floor slabs shall be thoroughly coordinated with the General Contractor to avoid conflicts with steel reinforcing bars, reductions in net concrete sections and floor penetrations.

AA. EMT couplings and terminations shall be “concrete tight” where buried in masonry or concrete. EMT fittings, where installed in damp locations, shall be of the “raintight” type.

BB. Route conduit through roof openings for piping and ductwork or through suitable roof jack with pitch pocket. Coordinate location with roofing installation specified under Division 7

CC. Stub-ups to Above Recessed Ceilings:

1. Use EMT for raceways.
2. Use a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.

DD. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.

EE. PVC schedule 40 shall not be used exposed or concealed in gypsum walls, but may be used in CMU walls.

FF. Coat field-cut threads on PVC-coated raceway with a corrosion-preventing conductive compound prior to assembly.

GG. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to 1-1/4-inch (35-mm) trade size and insulated throat metal bushings on 1-1/2-inch (41-mm) trade size and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.

HH. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb (90-kg) tensile strength. Leave at least 12 inches (300 mm) of slack at each end of pull wire. Cap underground raceways designated as spare above grade alongside raceways in use.

- II. Install raceway sealing fittings at accessible locations according to NFPA 70 and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces.
- JJ. Install devices to seal raceway interiors at accessible locations. Locate seals so no fittings or boxes are between the seal and the following changes of environments. Seal the interior of all raceways at the following points:
 - 1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
 - 2. Where an underground service raceway enters a building or structure.
 - 3. Where otherwise required by NFPA 70.
- KK. Expansion-Joint Fittings:
 - 1. Install in each run of aboveground RNC that is located where environmental temperature change may exceed 30 deg F (17 deg C) and that has straight-run length that exceeds 25 feet (7.6 m).
 - 2. Install type and quantity of fittings that accommodate temperature change listed for each of the following locations:
 - a. Outdoor Locations Not Exposed to Direct Sunlight: 125 deg F (70 deg C) temperature change.
 - b. Outdoor Locations Exposed to Direct Sunlight: 155 deg F (86 deg C) temperature change.
 - c. Indoor Spaces Connected with Outdoors without Physical Separation: 125 deg F (70 deg C) temperature change.
 - 3. Install fitting(s) that provide expansion and contraction for at least 0.00041 inch per foot of length of straight run per degree F (0.06 mm per meter of length of straight run per degree C) of temperature change for PVC conduits.
 - 4. Install expansion fittings at all locations where conduits cross building or structure expansion joints.
 - 5. Install each expansion-joint fitting with position, mounting, and piston setting selected according to manufacturer's written instructions for conditions at specific location at time of installation. Install conduit supports to allow for expansion movement.
- LL. Flexible Conduit Connections: Comply with NEMA RV 3. Use a maximum of 72 inches (1830 mm) of flexible conduit for equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
 - 1. Use LFMC in damp or wet locations subject to severe physical damage.
 - 2. Use LFMC or LFNC in damp or wet locations not subject to severe physical damage.
- MM. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements.
- NN. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall. Prepare block surfaces to provide a flat surface for a raintight connection between the box and cover plate or the supported equipment and box.

- OO. Horizontally separate boxes mounted on opposite sides of walls so they are not in the same vertical channel.
- PP. Locate boxes so that cover or plate will not span different building finishes.
- QQ. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for the purpose.
- RR. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.
- SS. Set metal floor boxes level and flush with finished floor surface.
- TT. Set nonmetallic floor boxes level. Trim after installation to fit flush with finished floor surface.

3.3 INSTALLATION OF UNDERGROUND CONDUIT

A. Direct-Buried Conduit:

1. Excavate trench bottom to provide firm and uniform support for conduit. Prepare trench bottom as specified in Section 312000 "Earth Moving" for pipe less than 6 inches (150 mm) in nominal diameter.
2. Install backfill as specified in Section 312000 "Earth Moving."
3. After installing conduit, backfill and compact. Start at tie-in point, and work toward end of conduit run, leaving conduit at end of run free to move with expansion and contraction as temperature changes during this process. Firmly hand tamp backfill around conduit to provide maximum supporting strength. After placing controlled backfill to within 12 inches (300 mm) of finished grade, make final conduit connection at end of run and complete backfilling with normal compaction as specified in Section 312000 "Earth Moving."
4. Install manufactured duct elbows for stub-up at poles and equipment and at building entrances through floor unless otherwise indicated. Encase elbows for stub-up ducts throughout length of elbow.
5. Install manufactured rigid steel conduit elbows for stub-ups at poles and equipment and at building entrances through floor.
 - a. Couple steel conduits to ducts with adapters designed for this purpose, and encase coupling with 3 inches (75 mm) of concrete for a minimum of 12 inches (300 mm) on each side of the coupling.
 - b. For stub-ups at equipment mounted on outdoor concrete bases and where conduits penetrate building foundations, extend steel conduit horizontally a minimum of 60 inches (1500 mm) from edge of foundation or equipment base. Install insulated grounding bushings on terminations at equipment.
6. Underground Warning Tape: Comply with requirements in Section 260553 "Identification for Electrical Systems."
7. Encased raceways shall have a minimum cover of eighteen (18) inches, except for raceways containing circuits with voltages above 600 volts, which shall have a minimum cover of thirty (30) inches.

3.4 INSTALLATION OF UNDERGROUND HANDHOLES AND BOXES

- A. Install handholes and boxes level and plumb and with orientation and depth coordinated with connecting conduits to minimize bends and deflections required for proper entrances.
- B. Unless otherwise indicated, support units on a level bed of crushed stone or gravel, graded from 1/2-inch (12.5-mm) sieve to No. 4 (4.75-mm) sieve and compacted to same density as adjacent undisturbed earth.
- C. Elevation: In paved areas, set so cover surface will be flush with finished grade. Set covers of other enclosures 1 inch (25 mm) above finished grade.
- D. Field-cut openings for conduits according to enclosure manufacturer's written instructions. Cut wall of enclosure with a tool designed for material to be cut. Size holes for terminating fittings to be used, and seal around penetrations after fittings are installed.

3.5 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies.

3.6 FIRESTOPPING

- A. Install firestopping at penetrations of fire-rated floor and wall assemblies. Comply with requirements in Section 078413 "Penetration Firestopping."

3.7 PROTECTION

- A. Protect coatings, finishes, and cabinets from damage and deterioration.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

3.8 ADJUSTING

- A. Contract Closeout: Adjust installed work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Adjust floor box flush with finish flooring material.
- C. Adjust flush mounting outlets to make front flush with finished wall material.
- D. Install knockout closures in unused box openings

3.9 CLEANING

- A. Contract Closeout: Clean installed work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Clean interior of boxes to remove dust, debris, and other material.
- C. Clean exposed surfaces and restore finish.

END OF SECTION 260533

SECTION 260553 - ELECTRICAL IDENTIFICATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Nameplates and labels.
- B. Wire and cable markers.
- C. Conduit markers.
- D. Wiring device plates marking.
- E. Underground warning tape.

1.2 REFERENCES

ANSI/NFPA 70 - National Electrical Code.

1.3 SUBMITTALS

- A. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Product Data: Provide catalog data for nameplates, labels, and markers.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by Product testing agency specified under regulatory requirements. Include instructions for storage, handling, protection, examination, preparation and installation of Product.

1.4 REGULATORY REQUIREMENTS

- A. Conform to requirements of ANSI/NFPA 70.
- B. Furnish products listed and classified by testing firm acceptable to authority having jurisdiction as suitable for purpose specified and shown.

PART 2 - PRODUCTS

2.1 NAMEPLATES AND LABELS

- A. Nameplates: Engraved three-layer laminated plastic as follows:

Furnish and install engraved laminated phenolic nameplates for all electrical equipment supplied under this contract for identification of system, equipment controlled or served, phase, voltage, ampacity, etc. Nameplates shall be securely attached to equipment with stainless steel screws, and shall identify by name the equipment controlled, attached, etc. Embossed, self adhesive plastic tape is not acceptable for marking equipment. Nameplate material colors shall be:

- 1. Black surface with white core for all 120/208 volt equipment.

2. Bright red surface with white core for all equipment related to fire alarm system.
3. Green surface with white core for all equipment related to “emergency” systems.
4. Orange surface with white core for all equipment related to telephone systems.
5. Brown surface with white core for all equipment related to data systems.
6. Purple surface with white core for all equipment related to TV systems.

B. Locations:

1. Each electrical distribution and control equipment enclosure (safety switches, panelboards, transformers, etc.)
2. Communication cabinets.
3. Pull and splice boxes.

C. Letter Size: Letters shall be a minimum of 1/2 inch (13 mm) high.

D. See details on the Drawings for additional requirements.

2.2 WIRE MARKERS

A. Description: Split sleeve type wire markers or approved equivalent.

B. Locations: Each conductor at panelboard gutters, pull boxes, outlet and junction boxes, and each load connection.

C. Legend:

1. Power and Lighting Circuits: Branch circuit or feeder number as indicated on drawings.
2. Control Circuits: Control wire number as indicated on schematic and interconnection diagrams on drawings.

2.3 CONDUIT, RACEWAY AND BOX MARKING

Paint visible surfaces of exposed junction and outlet boxes and covers of raceway systems above lay-in and other accessible ceilings. Paint all boxes and covers before installation. Paint exposed conduit and raceways at ten foot minimum intervals with a 6 inch wide band in accordance with the color scheme outlined above. Mark conduits at junction boxes above accessible ceilings with the panelboard and circuit numbers of the circuits contained in the raceway using a permanent black marking pen.

2.4 WIRING DEVICE PLATES MARKING

A. Description:

1. Adhesive backed, laminated plastic receptacle device plate labels identifying the circuit feeding the device. Labels shall be label machine printed, **black lettering on a clear background**, to indicate panel and circuit number and shall be Casio, Brother, T&B or approved equal.

B. Locations: Each receptacle device plate. Apply centered on the upper portion below the receptacle, parallel to the upper surface.

C. Legend: Typed labels to indicate panel and circuit number feeding the device (i.e., RPA-24).

2.5 UNDERGROUND WARNING TAPE

6 inch (150 mm) wide, 4 mils thick, minimum, permanent plastic tape or foil face tape for direct burial, detectable type with suitable continuous warning legend describing buried electrical lines.

PART 3 - EXECUTION

3.1 PREPARATION

Degrease and clean surfaces to receive nameplates and labels.

3.2 APPLICATION

- A. Install nameplate parallel to equipment lines.
- B. Secure nameplate to equipment front using stainless steel machine screws, lockwashers and acorn nuts as shown on the Drawings. Stainless steel screws and nylon locknuts may be used in lieu of lockwashers and acorn nuts if the screw threads are not exposed.
- C. Secure nameplate to inside surface of door on panelboard that is recessed in finished locations.
- D. Install receptacle identification labels at top of each device plate, parallel to upper surface.
- E. Identify conduit using field painting under provisions of Division 9.
- F. All empty conduit runs and conduit with conductors for future use shall be identified for use and shall indicate where they terminate. Identification shall be by tags with string or wire attached to conduit or outlet.
- G. Identify underground conduits using one underground warning tape per trench at 6 - 8 inches below finished grade.
- H. Install adhesive backed labels only when ambient temperature and humidity conditions for adhesive use are within range recommended by manufacturer.

END OF SECTION

SECTION 260580 - EQUIPMENT WIRING SYSTEMS

PART 1 - GENERAL

1.1 SECTION INCLUDES

Electrical supply for, and connections to, equipment specified under other Divisions.

1.2 REFERENCES

- A. NEMA WD 1 - General Purpose Wiring Devices.
- B. NEMA WD 6 - Wiring Device Configurations.
- C. ANSI/NFPA 70 - National Electrical Code.

1.3 SUBMITTALS

- A. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Product Data: Provide wiring device manufacturer's catalog information showing dimensions, configurations, and construction.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by Product testing agency specified under Regulatory Requirements. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of Product.

1.4 REGULATORY REQUIREMENTS

- A. Conform to requirements of ANSI/NFPA 70.
- B. Furnish products listed and classified by testing firm acceptable to authority having jurisdiction as suitable for purpose specified and shown.
- C. Where electrical wiring is required by trades other than covered by Division 26, specifications for that section shall refer to same wiring materials and methods as specified under Division 26.

1.5 COORDINATION

- A. Coordinate work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Obtain and review shop drawings, product data, and manufacturer's instructions for equipment furnished under other sections.

- C. Determine connection locations and requirements.
- D. Sequence rough-in of electrical connections to coordinate with installation schedule for equipment.
- E. Sequence electrical connections to coordinate with start-up schedule for equipment.

PART 2 - PRODUCTS

2.1 CORDS AND CAPS

- A. Attachment Plug Construction: Conform to NEMA WD 1.
- B. Configuration: NEMA WD 6; match receptacle configuration at outlet provided for equipment.
- C. Cord Construction: ANSI/NFPA 70, Type SO multiconductor flexible cord with identified equipment grounding conductor, suitable for use in damp locations.
- D. Size: Suitable for connected load of equipment, length of cord, and rating of branch circuit overcurrent protection.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify conditions under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Verify that equipment is ready for electrical connection, wiring, and energization.

3.2 ELECTRICAL WORK IN CONNECTION WITH OTHER CONTRACTS

- A. The Electrical Contractor shall provide a source of power for mechanical, plumbing, General Contractor-furnished and Owner-furnished equipment shown on the Drawings. Provide pigtails, flexible connections, conductors, raceways, circuit breakers, safety switches, local disconnecting means, receptacles, junction boxes, panelboards and/or wiring troughs as required by conditions and codes and/or as shown on the contract drawings.
- B. The locations of electrical equipment serving equipment of other trades and equipment provided by the Owner may not be shown on the electrical drawings due to the variability of equipment room arrangements and equipment provided. Locations of electrical equipment, panelboards, wiring troughs, local disconnecting means, lighting fixtures, receptacles, fire alarm devices, etc. shall be coordinated with the respective contractors and Owner prior to rough-in. Locate and/or adjust equipment locations shown in consultation with other trades and the Owner to maintain visibility of the equipment from disconnecting means in compliance with codes.

- C. The locations of safety switches and other electrical devices shown on the drawings are approximate only and some adjustment of these devices locations should be anticipated. Coordinate exact locations with the contractor providing the equipment. Coordinate and verify all electrical requirements, final connections, phasing and rotation, overcurrent and overload protective device sizes with the Contractor providing the equipment or the Owner in the case of Owner-furnished equipment. Fuses, variable speed drives, magnetic motor starters, magnetic motor starter overload elements, control devices and sensors and control wiring and raceways for such equipment will be provided and installed by the contractor providing the equipment. See other specifications divisions for further explanation of contractor responsibility. Do not apply power to equipment without the permission of the contractor or other entity providing the equipment.
- D. Heating, Ventilating and Air Conditioning Equipment.
1. The Electrical Contractor shall furnish and install a properly sized fused safety switch, and make power connections to the line side of the switch for each item of equipment. The switch shall be installed adjacent to the associated equipment, unless equipment has built-in disconnects, in which case the Electrical Contractor shall make connections to the line side of the built-in disconnect switch. The Electrical Contractor shall provide connections to the equipment from the load side of the switch. If shown on the Drawings, the Electrical Contractor shall provide circuit breakers in adjacent panelboards to serve local mechanical equipment. Circuit breaker ratings shall be coordinated with the Mechanical Contractor. The Electrical Contractor shall provide connections to the equipment from the load side of the circuit breakers.
 2. HVAC Control Panels, Control Equipment and Computers:
 - a. The Electrical Contractor shall provide and install power wiring to the control panel(s) terminals or to a receptacle, as required. The Electrical Contractor shall provide sufficient electrical circuits from the fire alarm control panel to allow all required mechanical equipment operations during fire mode. See HVAC Specifications for further definition of the required fire alarm/mechanical control system interface and operation sequence.
 - b. HVAC Control and Miscellaneous Power: The Electrical Contractor shall provide branch circuit power sources (designated "HVAC Control Power" 20A circuit breakers in selected branch circuit panelboards) as indicated in the panel schedules on the Drawings. The HVAC Contractor shall extend power from these circuit breakers as required for control power, damper power, and power for unscheduled HVAC equipment. If additional circuits are required, the contractor may use circuit breakers designated as "Spare".
 - c. All relays, actuators, timers, seven-day clocks, alternators, pressure, vacuum, float, flow, pneumatic-electric, and low voltage thermostats, thermals, remote selector switches, remote pushbutton stations, emergency break-glass stations, interlocking, safety switches beyond Electrical Contractor termination point (safety switch or junction box) and other appurtenances associated with equipment in Division 23, shall be furnished, installed and wired under Division 23.
 3. Heat Tape: Electrical Contractor shall provide weatherproof, ground fault interrupting type duplex receptacles for heat tapes. See electrical drawings for locations and confirm exact locations with the HVAC Contractor.

4. Duct Mounted Smoke Detectors: Duct mounted smoke detectors shall be provided and wired by the Electrical Contractor, but installed by the HVAC Contractor. Air handling unit/return air fan shutdown circuits shall be provided and installed by the Electrical Contractor. The Electrical Contractor shall leave sufficient marked conductor tails in a junction box adjacent to each unit for final connection by the HVAC Contractor. Duct mounted smoke detectors are shown on the mechanical floor plans only.
5. Smoke Dampers: Provide 120VAC power for smoke dampers provided by the Mechanical Contractor. Circuits are not shown on the Electrical Drawings. The Electrical Contractor shall extend power circuits to dampers from circuit breakers designated as "HVAC Control Power". Leave sufficient marked conductor tails in a junction box adjacent to each damper for final connection by the HVAC Contractor. Smoke dampers are shown on the mechanical floor plans only. The branch circuit breaker(s) supplying smoke dampers shall be physically protected by a panelboard lock and circuit breaker handle lock and each circuit breaker shall be identified with a 1/4" permanent red dot applied to its handle.
6. Refer to Division 23 for additional detail concerning electrical connections to Division 23 equipment, specifically Paragraph 230527.

E. Plumbing Equipment:

1. The Electrical Contractor shall furnish and install a properly sized fused safety switch, and make final power connections for each item of equipment specified in the Plumbing Contract and as listed below.
2. All equipment less than 120VAC, all relays, actuators, timers, seven-day clocks, alternators, pressure, vacuum, float, flow, pneumatic-electric, and low voltage thermostats, thermals, remote selector switches, remote pushbutton stations, emergency break-glass stations, interlocking, safety switches beyond Electrical Contractor termination point and other appurtenances associated with equipment in Division 22, shall be furnished, installed and wired under Division 22. All wiring required for controls and instrumentation, not indicated on the drawings, shall be furnished and installed by the Plumbing Contractor.
3. Electric and Gas-Fired Water Heaters: The Electrical Contractor shall furnish and install a disconnect switch adjacent to each water heater and make power connections to the line side of the disconnect switch terminals. Wiring from the switch to the water heater will be accomplished by the Electrical Contractor.
4. Hot Water Circulation Pump: The Plumbing Contractor will furnish and install a manual motor starter and Aquastat for circulator pump. The Electrical Contractor shall wire the system complete.
5. Electric Water Coolers: The Electrical Contractor shall provide a grounding type 120 volt ground fault interrupting receptacle for 120 volt power supply at each electric water cooler and shall consult the Plumbing Contractor and determine the exact location and type service required for each type installed before roughing in. All outlets and cords shall be concealed within the cabinet.
6. Refer to Division 22 for additional detail concerning electrical connections to Division 22 equipment, specifically Paragraph 220033.

D. Fire Protection (Sprinkler) System:

1. Fire Pump Controller: The Electrical Contractor shall bring his conductors to a junction box adjacent to the fire pump controller, leaving sufficient marked

conductor tails for extension by the Fire Protection Contractor. The Fire Protection Contractor shall make final connections from the junction box to the equipment.

2. Jockey Pump: The Fire Protection Contractor shall furnish and install a disconnect switch for the jockey pump. The Electrical Contractor shall make connection to the line side of the disconnect switch's terminals. All wiring from the disconnect switch to the starter, to the equipment and all control wiring will be by the Fire Protection Contractor.
3. The Electrical Contractor shall connect fire alarm system conductors to sprinkler flow and tamper switches, provided and installed by the Sprinkler contractor. Connections shall be made under the direct supervision of the Fire Protection Contractor.
4. The Electrical Contractor shall connect fire alarm system conductors to sprinkler fire pump controller supervisory and alarm outputs. Connections shall be made under the direct supervision of the Fire Protection Contractor.

F. Food Service Equipment: The Electrical Contractor shall provide a power source adjacent to equipment provided by the Food Service Equipment Contractor. See Food Service Equipment Electrical Notes on the Drawings for additional detail.

F. General Contractor Provided Equipment: The Electrical Contractor shall provide a power source adjacent to equipment provided by the General Contractor. Coordinate exact locations and requirements with the General Contractor.

1. Door Hold-Open Devices: The Electrical Contractor shall furnish and install electrical connections from the fire alarm system to each door hold-open device, furnished by the General Contractor, at locations as shown and as directed by the General Contractor. Provide connections as required and coordinate exact locations and configurations with the General Contractor and the door hardware vendor. Final connections to the equipment shall be by the Electrical Contractor in cooperation with the General Contractor.
2. Electrically-Operated Doors: The Electrical Contractor shall furnish and install a power supply to each electrically-operated door at locations as shown and as directed by the General Contractor. The Electrical Contractor shall also install and wire door activation switches provided by the General Contractor. Provide connections as required and coordinate exact locations and configurations with the General Contractor and the door hardware vendor. Provide local disconnecting means for each motor. Final connections to the equipment shall be by the Electrical Contractor in cooperation with the General Contractor.
3. Projection Screens: The Electrical Contractor shall furnish and install a junction box and disconnect switch adjacent to each projection screen and make power connections to the screen power terminals. The Electrical Contractor shall also install and wire screen position switches provided by the General Contractor. Provide connections as required and coordinate exact locations and configurations with the General Contractor and the projection screen vendor. Final connections to the equipment shall be by the Electrical Contractor in cooperation with the General Contractor.

G. Owner Provided Equipment:

The Electrical Contractor shall provide a power source adjacent to equipment provided by the Owner. Coordinate exact locations and requirements with the General Contractor. Final connection to the equipment will be provided by the Owner. Provide receptacle configurations as required and coordinate exact locations and configurations with the Owner.

3.3 ELECTRICAL CONNECTIONS

- A. Make electrical connections in accordance with equipment manufacturer's instructions.
- B. Make conduit connections to equipment using flexible conduit. Use liquidtight flexible conduit with watertight connectors in damp or wet locations.
- C. Make wiring connections using wire and cable with insulation suitable for temperatures encountered in heat producing equipment.
- D. Provide receptacle outlet where connection with attachment plug is indicated. Provide cord and cap where field-supplied attachment plug is indicated.
- E. Provide suitable strain-relief clamps and fittings for cord connections at outlet boxes and equipment connection boxes.
- F. Install disconnect switches, controllers, control stations, and control devices as indicated.
- G. Modify equipment control wiring with terminal block jumpers as indicated.
- H. Provide interconnecting conduit and wiring between devices and equipment where indicated.

END OF SECTION 260580

SECTION 262416 – PANELBOARDS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Distribution panelboards.
- B. Lighting and appliance branch circuit panelboards.

1.2 REFERENCES

- A. NECA Standard of Installation (published by the National Electrical Contractors Association).
- B. NEMA AB1 - Molded Case Circuit Breakers.
- C. NEMA ICS 2 - Industrial Control Devices, Controllers and Assemblies.
- D. NEMA KS1 - Enclosed and Miscellaneous Distribution Equipment Switches (600 Volts Maximum).
- E. NEMA PB 1 - Panelboards.
- F. NEMA PB 1.1 - Instructions for Safe Installation, Operation and Maintenance of Panelboards Rated 600 Volts or Less.
- G. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment (published by the International Electrical Testing Association).
- H. NFPA 70 - National Electrical Code.

1.3 SUBMITTALS FOR REVIEW

- A. Submittals: Procedures for submittals. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Product Data: Provide manufacturer's catalog information showing dimensions, ratings, features, colors, and configurations.
- C. Shop Drawings: Indicate outline and support point dimensions, voltage, main bus ampacity, integrated short circuit ampere rating, circuit breaker and fusible switch arrangement and sizes.
- D. Arrange panelboard branch circuit breakers as shown on the Drawings. Agreement of circuit breaker (pole) numbers with the Drawings panel schedules and floor plans is required in order to avoid confusion during construction, redrawing the circuitry for record drawing purposes and accurate documentation of the as-built conditions.

1.4 SUBMITTALS FOR INFORMATION

- A. Submittals: Submittals for information. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Submit manufacturer's installation instructions. Indicate application conditions and limitations of use stipulated by Product testing agency specified under Regulatory Requirements. Include instructions for storage, handling, protection, examination, preparation, and installation of Product.

1.5 SUBMITTALS FOR CLOSEOUT

- A. Contract Closeout: Submittals for project closeout. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Record actual locations of panelboards and record actual circuiting arrangements in project record documents.
- C. Maintenance Data: Include spare parts listing; source and current prices of replacement parts and supplies; and recommended maintenance procedures and intervals.

1.6 QUALIFICATIONS

Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.

1.7 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.
- B. Products: Listed and classified by testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

1.8 MAINTENANCE MATERIALS

- A. Contract Closeout. As required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Furnish two of each panelboard key.

PART 2 - PRODUCTS

2.1 DISTRIBUTION PANELBOARDS

- A. Manufacturers:
 - 1. Eaton.
 - 2. General Electric/ABB.
 - 3. Siemens.
 - 4. Square D Schneider.

5. Substitutions: As permitted in relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Description: NEMA PB 1, circuit breaker type.
- C. Service Conditions:
1. Temperature: 104° F. (40° C.).
 2. Altitude: N/A.
 3. Terminal Rating: 75° C. minimum.
- D. Panelboard Bus: Copper, ratings as indicated. Provide 100% copper ground and neutrals buses in each panelboard. Provide insulated ground bus where scheduled.
- E. Minimum integrated short circuit rating: 10,000 amperes rms symmetrical for 240 volt panelboards, or as indicated.
- F. Circuit Breakers: NEMA AB 1, bolt-on or plug-on (Square D I-Line and similar only) type.
1. Circuit breakers in distribution panelboards shall be fully rated.
 2. Solid-state Trip Molded Case Main Circuit Breakers: Panel mounted, NEMA AB 1, with electronic sensing, timing and tripping circuits for adjustable current settings. Electronic trip units shall be provided with external, permanently-mounted power supplies in the gear where required to program trip units while the breakers are deenergized. Trip units shall be field-programmable with an internal display for programming and display and have:
 - a. Adjustable instantaneous trip.
 - b. Adjustable long time pickup and delay.
 - c. Adjustable short time pickup and delay.
 - d. Ground fault pickup and delay.
 - e. Arc flash reduction mode with external switch and indicator.
 - f. Include shunt trip, undervoltage release, and other accessories where indicated.
 - g. Display line currents and cause of trip.
 3. Molded Case Circuit Breakers: Circuit breakers with integral thermal and instantaneous magnetic trip in each pole.
 4. Circuit Breaker Accessories: Trip units and auxiliary switches as indicated.
- G. Enclosure: NEMA PB 1, Type 1, Type 3R or Type 4X cabinet box as indicated.
- H. Cabinet Front: Flush and Surface cabinet front door-in-door type with concealed trim clamps, concealed hinge, metal directory frame, and flush lock all keyed alike. Finish in manufacturer's standard gray enamel. Distribution panelboards larger than 400 amperes are not required to have door-in-door trims.

2.2 BRANCH CIRCUIT PANELBOARDS

- A. Manufacturers:
1. Eaton.
 2. General Electric/ABB.
 3. Siemens.

4. Square D Schneider.
 5. Substitutions: As permitted in relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Description: NEMA PB1, circuit breaker type, branch circuit panelboard.
- C. Service Conditions:
1. Temperature: 104° F. (40° C.).
 2. Altitude: N/A.
 3. Terminal Rating: 75° C. minimum.
- D. Panelboard Bus: Copper, ratings as indicated. Provide 100% copper ground and neutrals buses in each panelboard.
- E. Minimum Integrated Short Circuit Rating: 10,000 amperes rms symmetrical for 240 volt panelboards, or as indicated.
- F. Circuit Breakers: NEMA AB 1, bolt-on type.
1. Circuit breakers in branch circuit panelboards may be series rated.
 2. Molded Case Circuit Breakers: Thermal magnetic trip circuit breakers, with common trip handle for all poles, listed as Type SWD for lighting circuits and Class A ground fault interrupter circuit breakers where scheduled. Do not use tandem circuit breakers.
- G. Enclosure: NEMA PB 1, Type 1, Type 3R or Type 4X cabinet box as indicated.
- H. Cabinet Box: 6 inches deep, 20 inches wide for 240 volt and less panelboards.
- I. Cabinet Front: Flush and Surface cabinet front door-in-door type with concealed trim clamps, concealed hinge, metal directory frame, and flush lock all keyed alike. Finish in manufacturer's standard gray enamel.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install panelboards in accordance with NEMA PB 1.1 and the NECA "Standard of Installation."
- B. Install panelboards plumb. Install recessed panelboards flush with wall finishes.
- C. Panelboards shall be installed in a manner to be fully compliant with the seismic restraint requirements of the North Carolina State Building Code. Provide mounting devices and hardware, bracing, fittings, etc. as required for seismic restraint.
- D. Height: 6 feet to top of panelboard. Install panelboards taller than 6 feet with bottom no more than 4 inches above floor.
- E. Provide filler plates for unused spaces in panelboards.

- F. Provide typed circuit directory for each branch circuit panelboard. Final typed panelboard directories installed in the panelboard door pocket shall include final actual room names and numbers in addition to the general description shown on the panel schedules on the drawings. Revise directory to reflect circuiting changes required to balance phase loads.
- G. Provide engraved plastic nameplates under the provisions of Section 260553.
- H. Provide spare conduits out of each recessed panelboard to an accessible location above ceiling and below floor. Minimum spare conduits: 5 empty 1 inch. Identify each as SPARE.
- I. Ground and bond panelboard enclosure according to Section 260526.

3.2 FIELD QUALITY CONTROL

- A. Quality Control: Field inspection, testing and adjusting shall be as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Inspect and test in accordance with NETA ATS, except Section 4, or provide for qualified technicians to perform testing according to the manufacturer's recommendations.

3.3 ADJUSTING

- A. Contract Closeout: Adjust installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Cleaning: Vacuum dirt and debris from panelboard tubs; do not use compressed air to assist in cleaning.
- C. Measure steady state load currents at each panelboard feeder; rearrange circuits in the panelboard to balance the phase loads to within 20 percent of each other. Maintain proper phasing for multi-wire branch circuits.

END OF SECTION 262416

SECTION 262421 - UTILITY SERVICE ENTRANCE

PART 1 - GENERAL

1.1 SECTION INCLUDES

Coordination with the serving electrical utility company.

1.2 REFERENCES

- A. NECA Standard of Installation (National Electrical Contractors Association).
- B. NFPA 70 - National Electrical Code.

1.3 SYSTEM DESCRIPTION

System Characteristics: 208/120 volts, three phase, four-wire, 60 Hertz.

1.4 SUBMITTALS FOR REVIEW

Not used.

1.5 SUBMITTALS FOR INFORMATION

Not used.

1.6 QUALITY ASSURANCE

- A. Utility Company: Duke Energy, Wilmington, NC.
- B. Perform Work in accordance with Utility Company requirements.

1.7 REGULATORY REQUIREMENTS

Conform to requirements of NFPA 70.

1.8 PRE-INSTALLATION MEETING

Convene one week prior to commencing work of this section. Review service entrance requirements and details with Utility Company representative. Notify the Architect/Engineer at least seven days prior to the scheduled meeting. Provide written meeting minutes to the Architect/Engineer.

PART 2 - PRODUCTS

Provide transformer pad and accessories as required by Duke Energy "THREE-PHASE PAD-MOUNTED TRANSFORMER CONCRETE FOUNDATION SPECIFICATIONS - JANUARY 2019", at

https://www.duke-energy.com/_/media/pdfs/partner-with-us/padtransformerconcretefoundspecs.pdf.

Install as directed by Duke Energy.

PART 3 - EXECUTION

3.1 PREPARATION

Coordinate with Utility Company and assist the Owner in obtaining permanent electric service to the Project. Utility Company fees will be paid by the Owner.

3.2 INSTALLATION

Install transformer pad, service conductors and raceways and metering equipment as required by Utility Company.

END OF SECTION 262421

SECTION 262726 - WIRING DEVICES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Wall switches.
- B. Wall box dimmers.
- C. Receptacles.
- D. Wall plates.

1.2 DESCRIPTION

Provide wiring devices in types, characteristics, grades, colors and electrical ratings for applications indicated which are third party testing agency listed and which comply with NEMA WD 1 and other applicable third party testing agency, NEMA and DSCC (Fed Spec) standards. All devices shall be produced by the same manufacturer.

1.3 REFERENCES

- A. NECA - Standard of Installation.
- B. NEMA WD 1 - General Requirements for Wiring Devices.
- C. NEMA WD 6 - Wiring Device - Dimensional Requirements.
- D. NFPA 70 - National Electrical Code.
- E. Underwriters Laboratories (UL) 498.
- F. DSCC (Fed Spec) W-C-596G

1.4 SUBMITTALS FOR REVIEW

- A. Submittals: Procedures for submittals. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Product Data: Provide manufacturer's catalog information showing dimensions, colors, and configurations.

1.5 SUBMITTALS FOR INFORMATION

- A. Submittals: Submittals for information. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.

- B. Submit manufacturer's installation instructions.

1.6 QUALIFICATIONS

Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.

1.7 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.
- B. Provide Products listed and classified by testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

PART 2 - PRODUCTS

2.1 WALL SWITCHES

- A. Manufacturers:
 - 1. Hubbell Model 1221/2/3/4 Series.
 - 2. Leviton 1221/2/3/4.
 - 3. Pass and Seymour PS20AC1/2/3/4.
 - 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Description: NEMA WD 1, third party testing agency listed, DSCC, heavy-duty, AC only, general-use, grounding type, back and side wired, single pole, three-way and four-way as indicated, snap switch with hex-head equipment grounding screw. Switches shall have a steel, nickel plated bridge with integral ground, one piece rivetless copper alloy spring contact arm and terminal plate and large silver cadmium oxide contacts. All switches shall have quiet operating mechanisms without the use of mercury switches. All switches shall be approved by a third party agency, approved for the voltage and current indicated.
- C. Body and Handle: Gray plastic with toggle handle.
- D. Indicator Light: Neon lighted handle type switch; red color handle. Voltage per system rating.
- E. Locator Light: Neon lighted handle type switch; green color handle. Voltage per system rating.
- F. Ratings:
 - 1. Voltage: 120-277 volts AC.
 - 2. Current: 20 amperes.

2.2 WALL BOX LED 0-10V DIMMERS

- A. Manufacturers:
 - 1. Lutron DVSTV and DDTV.

2. Sensor Switch.
 3. Wattstopper.
 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Description: NEMA WD 1, third party testing agency, DSCC Type I semiconductor dimmer for LED drivers. Provide line voltage or 0-10V to match lighting fixtures specified.
- C. Body and Handle: Gray plastic with preset slider.
- D. Ratings:
1. Voltage: 120-277 volts AC.
 2. Current: 8A minimum. Provide with 16A power pack for loads greater than 8A.
- E. Voltage: 120 volts.
- F. Power Rating: Match load shown on drawings.

2.3 RECEPTACLES

- A. Manufacturers:
1. Hubbell Model HBL 5362.
 2. Leviton 5362.
 3. Pass and Seymour 5362A.
 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Description: NEMA WD 1, third party testing agency, DSCC, heavy-duty, 20 amperes, 120 volt, general use, duplex, straight blade, grounding type receptacle arranged for back and side wiring, with separate single or double grounding terminals. Receptacles shall have a full wrap around brass bridge with integral ground and standup double wipe contacts. Self grounding or automatic type grounding receptacles are not acceptable in lieu of receptacles with separate grounding screw lugs and a direct, green insulated conductor connection to the equipment grounding system.
- C. Device Face and Body: Gray nylon or reinforced thermoplastic.
- D. Configuration: NEMA WD 6, type as specified and indicated.
- E. Convenience Receptacle: Type 5-20R.

2.4 USB RECEPTACLES

- A. Manufacturers:
1. Hubbell Model USB20AC5.
 2. Leviton T5833.
 3. Pass and Seymour TR20USBAC6.
 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.

- B. Description: NEMA WD 1, third party testing agency, DSCC, heavy-duty, 20 amperes, 120 volt, general use, duplex, straight blade, grounding type receptacle with Type A and C, 5A, 5V USB charging ports, arranged for back and side wiring, with separate single or double grounding terminals. Receptacles shall have a full wrap around brass bridge with integral ground and standup double wipe contacts. Self grounding or automatic type grounding receptacles are not acceptable in lieu of receptacles with separate grounding screw lugs and a direct, green insulated conductor connection to the equipment grounding system.
- C. Device Face and Body: Gray nylon or reinforced thermoplastic. Provide red devices and plates where noted.
- D. Configuration: NEMA WD 6, type as specified and indicated.
- E. Convenience Receptacle: Type 5-20R.

2.5 GROUND FAULT CIRCUIT INTERRUPTERS (GFI)

- A. Manufacturers:
 - 1. Hubbell Model GFRWRST20.
 - 2. Leviton GFWT2.
 - 3. Pass and Seymour 2097TRWR.
 - 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Description: NEMA WD 1, third party testing agency, DSCC, heavy-duty, 20 ampere, 120 volt, general use, duplex, straight blade, grounding type receptacle arranged for back and side wiring, with separate single or double grounding terminals. Receptacles shall have a full wrap around brass bridge with integral ground and standup double wipe contacts. Self grounding or automatic type grounding receptacles are not acceptable in lieu of receptacles with separate grounding screw lugs and a direct, green insulated conductor connection to the equipment grounding system.
- C. Device Face and Body: Gray nylon or reinforced thermoplastic.
- D. Configuration: NEMA WD 6, type as specified and indicated.
- E. Convenience Receptacle: Type 5-20R.

2.6 WALL PLATES

- A. Manufacturers:
 - 1. Hubbell.
 - 2. Leviton.
 - 3. Pass and Seymour.
 - 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.

- B. Decorative Cover Plate: Single and combination, of types, sizes and with ganging and cutouts as indicated. Provide plates which mate and match with wiring devices to which attached. Material shall be smooth, 0.04" thick, type 302 Stainless Steel as manufactured by the device vendor.
- C. Weatherproof Cover Plate: Exterior mounted receptacles, and those noted to be weatherproof, shall be provided with weatherproof PVC transparent cover plates, standard size, and shall be single or ganged as indicated on the contract drawings. Weatherproof plates shall be "approved" third party listed as "raintight while in use".

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Ensure that outlet boxes are installed at proper height.
- B. Ensure that wall openings are neatly cut and will be completely covered by wall plates.
- C. Verify that branch circuit wiring installation is completed, tested, and ready for connection to wiring devices.

3.2 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean debris from outlet boxes.

3.3 INSTALLATION

- A. Install in accordance with NECA "Standard of Installation".
- B. Install devices vertically, plumb and level.
- C. Install switches with OFF position down.
- D. Install receptacles with grounding pole on top. Install horizontally oriented receptacles with the grounding pole on the left.
- E. Receptacles installed over counters, backsplashes, etc., shall be mounted horizontally.
- F. Install line voltage wall dimmers to achieve full rating specified and indicated after derating for ganging as instructed by manufacturer.
- G. Do not share neutral conductor on load side of line voltage dimmers.
- H. Connect wiring device grounding terminal to branch circuit equipment grounding conductor.

- I. Install decorative plates on switch, receptacle, and blank outlets in finished areas. Schedule installation of finish plates after the surface upon which they are installed has received final finish.
- J. Connect switches by wrapping conductor around screw terminal.
- K. Connect receptacles by utilizing back wiring provisions only. Do not use side wire terminals.
- L. Install galvanized steel plates on outlet boxes and junction boxes in unfinished areas, above accessible ceilings, and on surface mounted outlets. Use cast box covers and plates on cast boxes.
- M. Install protective rings on active flush cover service fittings.
- N. Provide adhesive backed, laminated plastic receptacle device plate labels identifying the circuit feeding the device. Labels shall be label machine printed to indicate panel and circuit number and shall be Casio, Brother, T&B or approved equal. See Section 260553 for additional requirements

3.4 INTERFACE WITH OTHER PRODUCTS

- A. Coordinate locations of outlet boxes provided under Section 260534 to obtain mounting heights specified and indicated on drawings.
- B. All wiring devices shall be installed at heights as required by the ADA
- C. Install wall switch 48 inches above finished floor, measured to top of device plate.
- D. Install convenience receptacle 18 inches above finished floor, measured to bottom of device plate, unless noted otherwise on the Drawings.
- E. Install convenience receptacle horizontally 6 inches above backsplash of counter, unless noted otherwise on the Drawings.
- F. Install dimmer 48 inches (1.2 m) above finished floor, measured to top of device of plate.
- G. Install telecommunications jack 18 inches (450 mm) above finished floor, measured to bottom of device plate, unless noted otherwise on the Drawings.
- H. Install telephone jack for side-reach wall telephone to position top of telephone at 54 inches (1.4 m) above finished floor, unless noted otherwise on the Drawings.
- I. Install telephone jack for forward-reach wall telephone to position top of telephone at 48 (1.2 m) above finished floor, unless noted otherwise on the Drawings.

3.5 FIELD QUALITY CONTROL

- A. Quality Control. As required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.

- B. Inspect each wiring device for defects.
- C. Operate each wall switch with circuit energized and verify proper operation.
- D. Verify that each receptacle device is energized.
- E. Test each receptacle device for correct polarity and for ground continuity.
- F. Test each GFCI receptacle device for correct operation.

3.6 ADJUSTING

- A. Contract Closeout: Adjust installed work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Adjust devices and wall plates to be flush and level.

3.7 CLEANING

- A. Contract Closeout: Clean installed work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Clean exposed surfaces to remove splatters and restore finish.

END OF SECTION 262726

SECTION 262727 - OCCUPANCY SENSORS

PART 1 - GENERAL

1.1 SECTION INCLUDES

Wall box and ceiling type occupancy sensors and accessories.

1.2 REFERENCES

- A. NECA - Standard of Installation.
- B. NEMA WD 1 - General Requirements for Wiring Devices.
- C. NEMA WD 6 - Wiring Device -- Dimensional Requirements.
- D. NFPA 70 - National Electrical Code.

1.3 SUBMITTALS FOR REVIEW

- A. Submittals: Procedures for submittals. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Product Data: Provide manufacturer's catalog information showing dimensions, colors, ratings and configurations.

1.4 SUBMITTALS FOR INFORMATION

- A. Submittals: Submittals for information. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Submit manufacturer's installation instructions.

1.5 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.

1.6 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.
- B. Provide Products listed and classified by testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

PART 2 - PRODUCTS

2.1 GENERAL

- A. The Occupancy Sensor system shall sense the presence of human activity within the spaces indicated and fully control the “On” / “Off” function of the lighting loads automatically. Sensors shall turn “On” the load upon entrance into the room and shall not initiate “On” outside of entrance.
- B. Acceptable technology is Passive Infrared (PIR), Ultrasonic and Microphonic. Dual Technology is required utilizing PIR and one of the other technologies.
- C. Sensors shall automatically adjust time delays and sensitivity based on the activity level in the space.
- D. All line voltage devices shall be UL Listed under Energy Management Equipment, or Industrial Control Equipment. UL Listing under Appliance Control shall not be accepted.
- E. Product shall be manufactured in the USA and be warranted for 5 years.

2.2 WALL BOX LINE VOLTAGE SENSORS FOR SMALL AREAS

- A. Description: Line voltage, single gang, wall mounted occupancy sensor switch with one override or two (as shown) switch(es). Switch shall recess into single gang switch box and fit a standard GFI receptacle plate opening. Switches shall be compatible with standard three and four-way toggle switches. All switches shall be approved by a third party agency, approved for the voltage and current indicated. Provide hard lens switches in storage rooms and other location subject to abuse.
- B. Manufacturers
 - 1. Hubbell.
 - 2. Sensor Switch.
 - 3. Wattstopper.
 - 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- C. Body and Handle: Match device colors specified in Section 262726.
- D. Ratings:
 - Voltage: 120-277 volts AC.
 - Minimum Load Rating: 800 watts at 120 VAC, 1200 watts at 277 VAC. Sensors shall be compatible with all load types, including electronic and compact fluorescent ballasts, incandescent or fluorescent and require no minimum load

2.3 WALL BOX LOW VOLTAGE SENSOR/DIMMER SWITCHES FOR SMALL AREAS

- A. Description: Low voltage, single gang, wall mounted occupancy sensor switch 0-10v dimmer with one override or two (as shown) switch(es). Switch shall recess into single gang switch box and fit a standard GFI receptacle plate opening. Switches shall be compatible with standard three and four-way toggle switches. All switches shall be approved by a third party agency, approved for the voltage and current indicated. Provide hard lens switches in storage rooms and other location subject to abuse.
- B. Manufacturers
 - 1. Lutron.
 - 2. Sensor Switch.
 - 3. Wattstopper.
 - 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- C. Body and Handle: Match device colors specified in Section 262726.

2.4 CEILING MOUNTED LOW VOLTAGE SENSORS FOR LARGE AREAS

- A. Sensor Switches: Low voltage, recess ceiling mounted occupancy sensor switch. The device shall operate in conjunction with a line voltage power pack to control the connected lighting loads. Sensors shall operate on a class 2, three-conductor system. Multiple sensors shall be connectable to a single power pack. Sensor shall recess into a two gang outlet box. All devices shall be approved by a third party agency, approved for the voltage and current indicated.

Manufacturers:

- 1. Hubbell.
 - 2. Sensor Switch.
 - 3. Wattstopper.
 - 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Control units/Power packs: Devices shall be rated 20A at 120-277 volts and shall be compatible with all load types. They shall have the capacity to power additional remote heads or additional relays. Control relays may be paralleled to accommodate extra load or more than three heads or additional relays. Additional relay shall be used where there is more than one circuit being controlled or where there is a need to control multiple voltages.

Manufacturers:

- 1. Lutron.
 - 2. Sensor Switch.
 - 3. Wattstopper.
 - 4. Substitutions: Refer to provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.

- C. Sensor Body: White plastic, or match device colors specified in Section 262726.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Ensure that outlet boxes are installed at proper height.
- B. Ensure that wall openings are neatly cut and will be completely covered by wall plates.
- C. Verify that branch circuit wiring installation is completed, tested, and ready for connection to wiring devices.

3.2 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean debris from outlet boxes.

3.3 INSTALLATION

- A. Install in accordance with NECA "Standard of Installation."
- B. Install in locations in accordance with manufacturers recommendation.
- C. Install devices vertically, plumb and level.
- D. Connect wiring device grounding terminal to branch circuit equipment grounding conductor.

3.4 INTERFACE WITH OTHER PRODUCTS

- A. Coordinate locations of outlet boxes provided under Section 260534 to obtain mounting heights specified and indicated on drawings.
- B. All wiring devices shall be installed at heights as required by the A.D.A.
- C. Install wall switch 48 inches (1.2 m) above finished floor, measured to bottom of outlet box.

3.5 FIELD QUALITY CONTROL

- A. Quality Control. As required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Inspect each wiring device for defects.
- C. Operate each system with circuit energized and verify proper operation.

3.6 ADJUSTING

- A. Contract Closeout: Adjust installed work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Adjust devices and wall plates to be flush and level.

3.7 CLEANING

- A. Contract Closeout: Clean installed work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Clean exposed surfaces to remove splatters and restore finish.

END OF SECTION 262727

SECTION 262816 - ENCLOSED SWITCHES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Fusible switches.
- B. Nonfusible switches.

1.2 REFERENCES

- A. NECA - Standard of Installation (published by the National Electrical Contractors Association).
- B. NEMA FU1 - Low Voltage Cartridge Fuses.
- C. NEMA KS1 - Enclosed and Miscellaneous Distribution Equipment Switches (600 Volts Maximum).
- D. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems (published by the International Electrical Testing Association).
- E. NFPA 70 - National Electrical Code.

1.4 SUBMITTALS FOR REVIEW

- A. Submittals: Procedures for submittals. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Product Data: Provide switch ratings and enclosure dimensions.

1.5 SUBMITTALS FOR CLOSEOUT

- A. Contract Closeout: Submittals for project closeout. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Record actual locations of enclosed switches in project record documents.

1.6 QUALIFICATIONS

Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.

1.7 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.

- B. Products: Listed and classified by testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Eaton.
- B. General Electric/ABB.
- C. Siemens.
- D. Square D Schneider.
- E. Substitutions: As permitted in relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.

2.2 RATINGS

- A. Service Conditions:
 - 1. Temperature: 104°F. (40°C.).
 - 2. Altitude: N/A.
 - 3. Terminal Rating: 75°C. minimum.
- B. Minimum Integrated Short Circuit Rating: 10,000 amperes rms symmetrical, or as indicated.

2.3 FUSIBLE SWITCH ASSEMBLIES

- A. Description: NEMA KS 1, heavy duty type with externally operable handle interlocked (defeatable) to prevent opening front cover with switch in ON position, enclosed load interrupter knife switch. Mechanisms shall be non-teasible, positive, quick make-quick break type. Handle lockable in ON or OFF position. Switches shall have handles whose positions are easily recognizable in the ON or OFF position.
- B. Fuse clips: Designed to accommodate NEMA FU1, Class R fuses.
- C. Provide accessories required by their installation. Provide auxiliary switch contacts as required by other systems. Coordinate with other Divisions as required.

2.4 NONFUSIBLE SWITCH ASSEMBLIES

- A. Description: NEMA KS 1, heavy duty type with externally operable handle interlocked (defeatable) to prevent opening front cover with switch in ON position, enclosed load interrupter knife switch. Mechanisms shall be non-teasible, positive, quick make-quick break type. Handle lockable in ON or OFF position. Switches shall have handles whose positions are easily recognizable in the ON or OFF position.
- B. Provide accessories required by their installation. Provide auxiliary switch contacts as required by other systems. Coordinate with other Divisions as required.

2.5 ACCESSORIES

- A. Provide neutral assemblies and equipment grounding kits as required.
- B. Provide fuses as required by equipment or as specified.

2.6 ENCLOSURES

- A. Fabrication: NEMA KS 1.
 - 1. Interior Dry Locations: Type 1.
 - 2. Kitchen: Type 4X.
 - 3. Exterior Locations: Type 3R or 4X as indicated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install in accordance with NECA "Standard of Installation".
- B. Switches shall be installed in a manner to be fully compliant with the seismic restraint requirements of the North Carolina State Building Code. Provide mounting devices and hardware, bracing, fittings, etc. as required for seismic restraint. See Section 260500, Paragraph 1.23 for additional requirements.
- C. Install fuses in fusible disconnect switches serving Division 26 equipment.
- D. Apply adhesive tag on inside door of each fused switch indicating NEMA fuse class and size installed.

3.2 FIELD QUALITY CONTROL

- A. Quality Control: Field inspection, testing and adjusting as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Inspect and test in accordance with NETA ATS, except Section 4, or provide for qualified technicians to perform testing according to the manufacturer's recommendations.

END OF SECTION 262816

SECTION 262817 - ENCLOSED CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 REFERENCES

- A. NECA (National Electrical Contractors Association) "Standard of Installation".
- B. NEMA AB 1 - Molded Case Circuit Breakers
- C. NFPA 70 - National Electrical Code.

1.2 SUBMITTALS

- A. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Product Data: Provide catalog sheets showing ratings, trip units, time current curves, dimensions, and enclosure details.
- C. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by Product testing agency specified under Regulatory Requirements. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of Product.

1.3 QUALITY ASSURANCE

- A. Perform Work in accordance with NECA Standard of Installation.
- B. Maintain one copy of each document on site.

1.4 QUALIFICATIONS

Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.

1.5 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.

1.6 Furnish products listed and classified by testing firm acceptable to authority having jurisdiction as suitable for purpose specified and indicated.

1.7 EXTRA MATERIALS

- A. Furnish under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.

- B. Provide three of each size and type current limiter.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Eaton.
- B. General Electric/ABB.
- C. Siemens.
- D. Square D Schneider.
- E. Substitutions: As permitted in relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.

2.2 MOLDED CASE CIRCUIT BREAKER

- A. Circuit Breaker: NEMA AB 1, bolt-on type thermal magnetic trip circuit breakers, with common trip handle for all poles, listed as Type SWD for lighting circuits, Type HACR for air conditioning equipment circuits, Class A ground fault interrupter circuit breakers where scheduled.
- B. Service Conditions:
 - 1. Temperature: 104° F. (40° C.).
 - 2. Altitude: N/A.
 - 3. Terminal Rating: 75° C. minimum.
- C. Minimum Integrated Short Circuit Rating: 30,000 amperes rms symmetrical, or as indicated.

2.3 PRODUCT OPTIONS AND FEATURES (as specified and as applicable)

- A. Provide accessories as scheduled, to NEMA AB 1.
- B. Shunt Trip Device: 120 volts AC.
- C. Undervoltage Trip Device: 120 volts AC.
- D. Auxiliary Switch: 120 volts AC.
- E. Alarm Switch: 120 volts AC.
- F. Electrical Operator: 120 volts AC.
- G. Handle Lock: Include provisions for padlocking.
- H. Provide mechanical trip device.
- I. Provide insulated grounding lug in each enclosure.

2.4 ENCLOSURE

- A. Enclosure: NEMA AB 1, Type 1 and 3R, 4X or as indicated.
- B. Fabricate enclosure from steel.
- C. Finish using manufacturer's standard enamel finish, gray color.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install enclosed circuit breakers where indicated, in accordance with manufacturer's instructions.
- B. Install enclosed circuit breakers plumb. Provide supports in accordance with Section 260529.
- C. Equipment shall be installed in a manner to be fully compliant with the seismic restraint requirements of the North Carolina State Building Code. Provide mounting devices and hardware, bracing, fittings, etc. as required for seismic restraint.
- D. Height: 5 feet AFF to operating handle.
- E. Provide engraved plastic nameplates under the provisions of Section 260553.

3.2 FIELD QUALITY CONTROL

- A. Field inspection and testing shall be performed under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Inspect and test each circuit breaker to NEMA AB 1.
- C. Inspect each circuit breaker visually.
- D. Perform several mechanical ON-OFF operations on each circuit breaker.
- E. Verify circuit continuity on each pole in closed position.
- F. Determine that circuit breaker will trip on overcurrent condition, with tripping time to NEMA AB 1 requirements.
- G. Include description of testing and results in test report.

3.3 ADJUSTING

- A. Adjust work under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Prior to final settings, adjust circuit breaker trip and time delay settings to minimum values that do not cause false tripping.

END OF SECTION 262817

SECTION 264313 - SURGE PROTECTIVE DEVICES FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS

PART 1 - GENERAL

1.1 SUMMARY

Section includes integral equipment and field installed surge protective devices (SPD) for low-voltage (120VAC to 480VAC) power distribution and control equipment.

1.2 DEFINITIONS

- A. ATS: Acceptance Testing Specifications.
- B. SVR: Suppressed voltage rating.
- C. SPD: Surge Protective Device.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated. Include rated capacities, operating weights, electrical characteristics, furnished specialties, and accessories.
- B. Qualification Data: For qualified testing agency.
- C. Product Certificates: For SPD, from manufacturer.
- D. Field quality-control reports.
- E. Operation and Maintenance Data: For SPD to include in operation and maintenance manuals.
- F. Warranties: Sample of actual warranty.

1.5 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Member company of NETA or an NRTL.
 - 1. Testing Agency's Field Supervisor: Currently certified by NETA to supervise on-site testing.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a testing agency, and marked for intended location and application.
- C. Comply with IEEE C62.41.2 and test devices according to IEEE C62.45.
- D. Comply with NEMA LS 1.
- E. Comply with UL 1283 and UL 1449, latest edition.

- F. Comply with NFPA 70 Article 285, 2017 edition.

1.6 PROJECT CONDITIONS

- A. Service Conditions: SPDs shall be rated for continuous operation under the following conditions unless otherwise indicated:
 - 1. Maximum Continuous Operating Voltage: Not less than 115 percent of nominal system operating voltage.
 - 2. Operating Temperature: 30 to 120 deg F.
 - 3. Humidity: 0 to 85 percent, noncondensing.
 - 4. Altitude: Less than 20,000 feet above sea level.

1.7 COORDINATION

Coordinate location of SPDs to allow adequate clearances for maintenance with shortest possible lead length.

1.8 WARRANTY

- A. Manufacturer's standard form in which manufacturer agrees to repair or replace components of surge suppressors that fail in materials or workmanship within specified warranty period.
- B. Warranty: Full replacement warranty for a period of Twenty (20) years from date of Substantial Completion. Owner pays shipping cost to return unit to the manufacturer, Manufacturer returns a replacement unit shipping prepaid. Contractor shall register unit with manufacturer for the Owner.

PART 2 - PRODUCTS

2.1 SERVICE ENTRANCE SPDs

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Basis of Design: Eaton SPD Series.
 - 2. General Electric/ABB.
 - 3. Siemens.
 - 4. Square D.
- B. Surge Protection Devices:
 - 1. Comply with UL 1449, 4th Edition.
 - 2. Thermally protected MOVs.
 - 3. Modular design, allowing Owner replacement of modules.
 - 4. Integral circuit breaker disconnect.
 - 5. LED indicator lights for power and protection status of each phase and neutral.
 - 6. Audible alarm, with silencing switch, to indicate when protection has failed.
 - 7. Form-C contacts rated 0.4A at 150VAC minimum, one normally open and one normally closed, for remote monitoring of protection status. Contacts shall reverse on failure of any surge diversion module or on opening of any current-limiting device. Coordinate with building power monitoring and control system.

- 8. Six-digit transient event counter with reset button and nonvolatile memory to totalize transient surges.
- C. Peak Single-Impulse Surge Current Rating: 320 kA per phase/160 kA per mode.
- D. Short circuit current rating: 200 kA.

2.2 ENCLOSURES

- A. Exterior Enclosures: NEMA 250 Type 4, powder coated.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install SPD at service entrance on load side, with ground lead bonded to service entrance ground.
- B. Install SPD with conductors or buses between suppressor and points of attachment as short and straight as possible. Do not exceed manufacturer's recommended lead length. Do not bond neutral and ground.
- C. SPD circuit breaker and feeder conductors shall be as recommended by the device manufacturer, or #8 AWG copper, whichever is greater.
- D. Coordinate SPD circuit breaker rating with actual SPD provided.

3.2 FIELD QUALITY CONTROL

- A. Inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
- B. Tests and Inspections:
 - 1. Perform each visual and mechanical inspection and electrical test stated in NETA ATS, "Surge Arresters, Low-Voltage Surge Protection Devices" Section. Certify compliance with test parameters.
 - 2. After installing SPDs, but before electrical circuitry has been energized, test for compliance with requirements.
 - 3. Complete startup checks according to manufacturer's written instructions.
- C. SPD will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

3.3 STARTUP SERVICE

- A. Do not energize or connect electrical equipment to their sources until SPDs are installed and connected.

- B. Do not perform insulation resistance tests of the distribution wiring equipment with the SDP installed. Disconnect before conducting insulation resistance tests, and reconnect immediately after the testing is over.

END OF SECTION 264315

SECTION 265100 - INTERIOR LUMINAIRES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Interior luminaires and accessories.
- B. Drivers.
- C. Lamps and LED Light Engines/Sources.
- D. Luminaire accessories.

1.2 REFERENCES

- A. NEMA WD 6 - Wiring Devices-Dimensional Requirements.
- B. NFPA 70 - National Electrical Code.
- C. NFPA 101 - Life Safety Code.

1.3 SUBMITTALS FOR REVIEW

- A. Submittals: Procedures for submittals. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Shop Drawings: Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
- C. Product Data: Provide dimensions, ratings, and performance data.

1.4 SUBMITTALS FOR INFORMATION

- A. Submittals: Submittals for information. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Submit manufacturer's installation instructions. Indicate application conditions and limitations of use stipulated by Product testing agency specified under Regulatory Requirements. Include instructions for storage, handling, protection, examination, preparation, and installation of Product.

1.5 SUBMITTALS FOR CLOSEOUT

- A. Contract Closeout: Submittals for project closeout. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Submit manufacturer's operation and maintenance instructions for each product.

1.6 QUALIFICATIONS

Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.

1.7 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.
- B. Conform to requirements of NFPA 101.
- C. Products: Listed and classified by testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated.

1.8 EXTRA PRODUCTS

Not used.

PART 2 - PRODUCTS

2.1 LUMINAIRES

- A. Furnish Products as scheduled. Refer to relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections for substitutions and product options.
- B. All lighting fixtures shall be approved by third party testing agencies and NFPA and shall bear their label.
- C. All fixtures shall be listed on one or more of the following websites: LED Lighting Facts website (www.lightingfacts.com), Energy Star website (www.energystar.gov), or the Design Light Consortium website www.designlights.org.
- D. All fixtures shall have a stock, or standard finish unless otherwise specified. Fixtures subject to corrosive or damp environments shall have corrosion resistant hardware and finishes.
- E. All fixtures shall be installed complete with lamps or LED sources as specified.
- F. Lighting fixture types shall be furnished as required by the Lighting Fixture Schedule as indicated on the drawings. Catalog numbers are provided as a guide to the design and quality of fixture desired. Equivalent designs and equal quality fixtures of other manufacturers listed will be acceptable upon approval of the Architect/Engineer. The Contractor shall verify from the contract drawings the type ceilings or walls the fixture is to be used with and shall provide compatible mounting attachments and trim. Provide all accessories or additional materials required to maintain the ceiling fire rating as required by regulatory authorities.
- G. Fixtures shall be warrantied for a minimum of five (5) years.

2.2 LED SOURCES

The Wilmington Food Bank
Wilmington, NC

INTERIOR LUMINAIRES

265100 - 2

LED sources shall be high intensity white, single color or as noted. Provide white LEDs in the color temperature(s) specified. The color temperature in all lamps of the same type shall be consistent and remain so over the life of the lamp. Color consistency between lamps shall conform to ANSI NEMA ANSLG standard C78.377-2008. The contractor shall replace lamps/fixtures exhibiting inconsistent lamp color. Minimum lumen maintenance shall be 70% of rated initial lumen output at 50,000 hours of operation. Measurement of lumen maintenance shall be in accordance with IES LM-80-08. The lamp and/or luminaire manufacturer shall provide a minimum of five year warranty from the date of Final Acceptance against premature failure, discoloration and defects. The color or color temperature of replacement LED lamps shall match those of the same lamp types that remain in operation. The minimum color rendering index of white LEDs shall be 80. Electrical and photometric performance of LED assemblies and luminaires shall conform to IES LM 79-08.

2.3 LED DRIVERS

LED Drivers: Provide high frequency electronic type with secondary voltages matching those required by the led source they operate. Drivers shall operate within a 0°F – 140°F ambient temperature range and shall comply with FCC Class A Standards for EMI. Minimum driver specifications:

1. Power factor $\geq 90\%$.
2. Efficiency $\geq 90\%$.
3. Current crest factor – 1.5 minimum.
4. Total harmonic distortion $< 20\%$.
5. Rated life – 50,000 hours.
6. For indoor and building mounted fixtures, provide minimum 2-kv surge suppression integral with the driver (5-kv preferred if available).
7. For outdoor fixtures, provide minimum 10.0-kv surge suppression integral with the driver.

Manufacturers shall have been manufacturing LED drivers for at least ten years with a documentable low failure rate. The contractor shall provide a written warranty against defects in material and workmanship, including replacement for five years from the date of final acceptance.

2.4 LENSES

Lenses shall be clear virgin acrylic material with uniform 3/16" square based female cone prisms aligned 45° to the length and width of the lens panel. Minimum prism depth shall be 0.080" with a nominal panel thickness of 0.156" and a minimum overall panel thickness of 0.150" to 0.160" inches.

2.5 CONTROLS

A. Time Switch: Astronomic, two channel, electronic type with 48 hour capacitor or battery reserve, digital display, 30 ampere output contact rating, two, single pole output contacts, voltage compatible with load served, NEMA-1 enclosure.

B. Photocell: Weatherproof, enclosed, single pole, 1800 VA, 120VAC, twist lock plug-in type with base.

PART 3 - EXECUTION

3.1 INSTALLATION

The Wilmington Food Bank
Wilmington, NC

INTERIOR LUMINAIRE

265100 - 3

- A. Install suspended luminaires using pendants supported from swivel hangers. Provide pendant length required to suspend luminaire at indicated height.
- B. Lighting equipment shall be installed in a manner to be fully compliant with the seismic restraint requirements of the North Carolina State Building Code. Provide mounting devices and hardware, bracing, fittings, etc. as required for seismic restraint. See Specifications Section 260500, Paragraph 1.23 for additional requirements.
- C. Where a recessed or downlight fixture replaces a section or part of an acoustical ceiling tile, or a section or part of a suspended gypsum board ceiling, the fixture shall be supported at two (2) diagonal corners to the steel frame of the building. Supports shall be provided with the same type of wire as used to support the lay-in ceiling track or GWB ceiling system. Attach one end of the wire to one corner of the fixture and the other end to the building's structural system. The lay-in or flange fixture shall then be screwed to the main runners of the lay-in ceiling track or GWB ceiling system at all four (4) corners using sheet metal screws (parabolic type fixtures shall be attached to the ceiling grid with approved clips). The Electrical Contractor shall be responsible for coordination work with the ceiling contractor; however, the ceiling contractor will provide framed openings for reception of lighting fixtures. All recessed fixtures shall be furnished with all necessary mounting accessories.
- D. Locate recessed ceiling luminaires as indicated on reflected ceiling plan.
- E. Install surface mounted luminaires and exit signs plumb and adjust to align with building lines and with each other. Secure to prevent movement.
- F. Exposed Grid Ceilings: Support surface mounted luminaires on grid ceiling directly from building structure. Provide auxiliary members spanning ceiling grid members to support surface mounted luminaires. Fasten surface mounted luminaires to ceiling grid members using bolts or screws.
- G. Install recessed luminaires to permit removal from below.
- H. Install recessed luminaires using accessories and firestopping materials to meet regulatory requirements for fire rating.
- I. Install wall mounted luminaires, emergency lighting units and exit signs at height as indicated on Drawings.
- J. Install accessories furnished with each luminaire.
- K. Connect luminaires, emergency lighting units and exit signs to branch circuit outlets provided under Section 260534 using flexible conduit.
- L. Make wiring connections to branch circuit using building wire with insulation suitable for temperature conditions within luminaire.
- M. Bond products and metal accessories to branch circuit equipment grounding conductor.

- N. Install/provide specified lamps/LEDs in each emergency lighting unit, exit sign, and luminaire.

3.2 FIELD QUALITY CONTROL

- A. Quality Assurance: Field inspection, testing and adjusting shall be as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Operate each luminaire after installation and connection. Inspect for proper connection and operation.

3.3 ADJUSTING

- A. Contract Closeout: Adjust installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Aim and adjust luminaires as directed.

3.4 CLEANING

- A. Contract Closeout: Clean installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Clean electrical parts to remove conductive and deleterious materials.
- C. Remove dirt and debris from enclosures.
- D. Clean photometric control surfaces as recommended by manufacturer.
- E. Clean finishes and touch up damage.

3.5 DEMONSTRATION AND INSTRUCTIONS

- A. Contract Closeout: Demonstrate installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Demonstrate luminaire operation for minimum of two hours.

3.6 PROTECTION OF FINISHED WORK

- A. Contract Closeout: Protect installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Relamp luminaires that have failed lamps at Substantial Completion. Replace LED modules in which more than 5% of the LEDs have failed lamps at Final Acceptance of the Work.

END OF SECTION 265100

SECTION 265200 - EMERGENCY AND EXIT LIGHTING

PART 1 - GENERAL

1.1 SUMMARY

Section includes emergency exit lighting and emergency egress lighting units, LED emergency drivers and lighting inverters.

1.2 STANDARDS

- A. UL 924
- B. NFPA 101 - Life Safety Code.
- C. NFPA 70 - National Electrical Code.
- D. North Carolina State Building Code including Energy Code Volume X.
- E. NEMA - Standards

1.3 SUBMITTALS FOR REVIEW

- A. Submittals: Procedures for submittals. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Shop Drawings: Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
- C. Product Data: Provide dimensions, ratings, and performance data.

1.4 SUBMITTALS FOR INFORMATION

- A. Submittals: Submittals for information. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Submit manufacturer's installation instructions. Indicate application conditions and limitations of use stipulated by Product testing agency specified under Regulatory Requirements. Include instructions for storage, handling, protection, examination, preparation, and installation of Product.

1.5 SUBMITTALS FOR CLOSEOUT

- A. Contract Closeout: Submittals for project closeout. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Submit manufacturer's operation and maintenance instructions for each product.

1.6 QUALIFICATIONS

Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years documented experience.

1.7 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.
- B. Conform to requirements of NFPA 101.
- C. Products: Listed and classified by testing firm acceptable to the authority having jurisdiction as suitable for the purpose specified and indicated. Products shall also meet or exceed the standards listed in Part 2.

PART 2 - PRODUCTS

2.1 GENERAL

- A. All lighting fixtures shall be listed as emergency lighting equipment and approved by third party testing agencies and NFPA and shall bear their label.
- B. All fixtures shall have a stock, or standard finish unless otherwise specified.
- C. All fixtures shall be completely self-contained, provided with maintenance free battery, automatic charger and other features. They shall be installed complete with lamps, batteries, etc. which shall be new and unused at time of final inspection of the project for acceptance.
- D. Lighting fixture types shall be furnished as required by the Lighting Fixture Schedule on the contract drawings and as herein specified. Catalog numbers are provided as a guide to the design and quality of fixture desired. Equivalent designs and equal quality fixtures of other manufacturers listed will be acceptable upon approval of the Architect/Engineer.
The Contractor shall verify from the contract drawings the type of ceilings or walls the fixture is to be used with and shall provide compatible mounting attachments and trim. Provide all accessories or additional materials required to maintain the ceiling fire rating as required by regulatory authorities.
- E. Emergency lighting fixtures shall be as shown on the lighting fixture schedule on the contract drawings, and as herein specified.
- F. Warranty: The entire unit shall be warranted for three years. The battery must have a additional two more years pro-rated warranty. Warranty shall date from the date of final project acceptance and be included in the contract document.

2.2 EMERGENCY LIGHTING (EGRESS) UNITS

- A. Product Description: Self-contained LED emergency lighting unit automatically activated when the line voltage drops below 80%.

- B. Battery: Ten year normal life expectancy, 6 or 12 volt, sealed, maintenance-free, lead calcium type, with 1.5 hour minimum capacity at full load. Battery shall be a high temperature type with an operating range of 0° C. to 60° C., contain a resealable pressure vent and sintered positive and negative terminals. A low voltage disconnect switch shall be included if a lead battery is used, to disconnect the battery from the load and prevent damage from a deep discharge during an extended power outage.
- C. Battery Charger: Automatic, solid state, full wave rectification, surge protected, current-limiting, dual-rate type, with filtered output of sufficient capacity to recharge discharged battery to full charge within twelve hours. Provide fused output circuit, low voltage battery disconnect, brownout and short circuit protection. Thermal protection shall sense circuitry temperature and adjust charge current to prevent overheating and charger failure. Thermal compensation shall adjust charger output to provide optimum charge voltage relative to ambient temperature. Regulated charge voltage shall maintain constant charge voltage over a wide range of line voltages. AC lockout circuit shall allow battery connection before AC power is applied and prevent battery damage due to deep discharge.
- D. Lamps: LED. Heads shall rotate for aiming. Maximum LED failure rate shall be 25% within a seven (7) year period; otherwise, if exceeded, manufacturer shall replace the complete unit at no charge to the Owner.
- E. Mounting: Surface wall or recessed ceiling as indicated by the drawings.
- F. Housing: White polycarbonate, with steel backbox/housing or steel with white finish. Wall mount unit with hinged faceplate and adjustable mounting hardware. Ceiling mount unit with T bar hangar kit.
- G. Self-Diagnostics: Electronics shall automatically, or manually upon demand, conduct self test on battery condition (including actual discharge), charger, lamps and internal wiring integrity per NEC and NFPA at prescribed intervals. A pilot light shall indicate the unit is connect to AC power. Provide test switch and visual indicator(s) of unit operational condition including charger status, ready and service code. Test switch shall simulate operation of the unit upon loss of AC power by energizing lamps from the battery, and also exercise the transfer relay.
- H. Electrical Connection: Conduit connection.
- I. Input Voltage: Dual voltage input (120/277 volts).

2.3 LED EMERGENCY DRIVER

- A. Product Description: Manufacturer-installed UL924 LED emergency battery power supply suitable for installation in LED luminaire wireway. When normal AC power fails, the unit shall immediately drive the LED load at a reduced light output for a minimum of 90 minutes. When AC power is present, the emergency LED driver shall operate in various charging modes to ensure the sealed, maintenance-free, high-temperature nickel-cadmium batteries are fully recharged within 24 hours after a full discharge and remain fully charged until the next loss of AC power.

- B. Battery: Seven to ten year normal life expectancy, 9.6 volt, sealed, maintenance-free, nickel-cadmium type, with 1.5 hour minimum capacity at 10 watts output. Battery shall be a high temperature type with an operating range of 32° F. to 122° F.
- C. Provide with self-diagnostics module with status indicator light and test switch. Self-diagnostics shall automatically, or manually upon demand, conduct self test on battery condition (including actual discharge), charger, LEDs and internal wiring integrity per NEC and NFPA at prescribed intervals. Status light shall indicate operational condition including charger status, ready and service code. Test switch shall simulate operation of the unit upon loss of AC power by energizing lamps from the battery.
- D. Input Voltage: Dual voltage input (120/277 volts).

2.4 EXIT LIGHTING UNITS

- A. Product Description: Self-contained exit lighting unit automatically activated when the line voltage drops below 80%.
- B. Battery: Ten year normal life expectancy, 6 or 12 volt, sealed, maintenance-free, lead calcium type, with 1.5 hour minimum capacity. Battery shall be a high temperature type with an operating range of 0° C. to 60° C. and contain a resealable pressure vent and sintered positive and negative terminals. A low voltage disconnect switch shall be included if lead battery is used, to disconnect the battery from the load and prevent damage from a deep discharge during an extended power outage.
- C. Battery Charger: Automatic, solid state, surge protected, full wave rectification, current-limiting, dual-rate type, with filtered output of sufficient capacity to recharge discharged battery to full charge within twelve hours. Provide fused output circuit, low voltage battery disconnect, brownout and short circuit protection. Thermal protection shall sense circuitry temperature and adjust charge current to prevent overheating and charger failure. Thermal compensation shall adjust charger output to provide optimum charge voltage relative to ambient temperature. Regulated charge voltage shall maintain constant charge voltage over a wide range of line voltages. AC lockout circuit shall allow battery connection before AC power is applied and prevent battery damage due to deep discharge.
- D. Lamps: LED, discrete or diffuse. Maximum failure rate shall be 25% within a seven year period, otherwise, if exceeded the manufacturer shall replace the entire unit at no cost to the Owner.
- E. Face:
 - 1. Standard Unit: Single or dual face as indicated or required. Translucent plastic face with red letters on white background.
 - 2. Architectural/Edge Lit Unit: Clear transparent plastic panel with red letters on clear or mirrored background.
- F. Directional Arrows: As indicated or universal type for field adjustment.
- G. Mounting: Universal, surface wall, back or end mount, or ceiling, top or pendant mount.

- H. Housing: White polycarbonate for standard unit, metallic enclosure with clear plexiglass signage panel for architectural/edge lit unit.
- I. Self-Diagnostics: Electronics shall automatically, or manually upon demand, conduct self test on battery condition (including actual discharge), charger, lamps and internal wiring integrity per NEC and NFPA at prescribed intervals. Provide test switch and visual indicator(s) of unit operational condition including charger status, ready and service code. Test switch shall simulate operation of the unit upon loss of AC power by energizing lamps from the battery. This simulation shall also exercise the transfer relay.
- J. Electrical Connection: Conduit connection.
- K. Input Voltage: Dual voltage input (120/277 volts).

2.5 LIGHTING INVERTERS

- A. Lighting inverters shall be provided for fixtures where noted on the Drawings. Devices shall be capable of powering incandescent and fluorescent lighting fixture loads at full output for a minimum of 90 minutes. Minimum system output shall be as specified on the Drawings. Inverters shall be capable of operating at 100% of stated load without derating. Units shall be universal 120/277 volts input/output, field selectable.
- B. The devices shall be UL 924 listed for field installation at locations indicated. Units shall utilize a solid state pulse width modulated inverter to provide a sine wave output with a minimum voltage regulation of $\pm 2\%$ and be synchronized to the utility. Input voltage distortion shall not exceed 5% THD. Output voltage distortion shall be no greater than 3% THD. Load power factor capability shall be 0.7 leading to 0.7 lagging. Overload capability shall be 150% for one minute. Units shall be fully automatic with temperature compensating variable rate battery charger with AC lockout, low voltage battery disconnect, DC overload, short circuit and brownout protection. The system shall utilize sealed lead calcium batteries with a 10 year design life. Provide with output circuit breaker(s), momentary test switch and LED AC on indicator light. Provide external output enclosed circuit breaker(s) if breaker(s) is (are) not provided integral to the inverter housing. Housing shall be heavy duty steel with a baked-on powder paint finish. Unit shall be designed for surface wall mounting.
- C. Devices shall be warranted for a minimum of three (3) years by the manufacturer.
- D. Devices shall be Chloride CH2 series, Controlled Power Company Model ELC series, Dual-Lite DLS series or approved equal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install suspended exit signs using pendants supported from swivel hangers. Provide pendant length required to suspend sign at indicated height.
- B. Install surface-mounted emergency lighting units and exit signs plumb and adjust to align with building lines and with each other. Secure to prevent movement.

- C. Install wall-mounted emergency lighting units and exit signs at height as indicated.
- D. Install accessories furnished with each emergency lighting unit and exit sign.
- E. Emergency and exit lighting fixtures shall be installed in a manner to be fully compliant with the seismic restraint requirements of the North Carolina State Building Code. Provide mounting devices and hardware, bracing, fittings, etc. as required for seismic restraint.
- F. Connect emergency lighting units and exit signs to branch circuit outlets provided under this Division as indicated.
- G. Exposed Grid Ceilings: Support surface mounted luminaires on grid ceiling directly from building structure. Provide auxiliary members spanning ceiling grid members to support surface mounted luminaires. Fasten surface mounted luminaires to ceiling grid members using bolts or screws.
- H. Make wiring connections to branch circuit using building wire with insulation suitable for temperature conditions within unit.
- I. Install specified lamps in each emergency lighting unit.
- J. Ground and bond emergency lighting units and exit signs under the provisions of Section 260526.
- K. Locate exit and emergency lighting fixtures as indicated on reflected ceiling plan.
- L. Install recessed luminaires to permit removal from below.
- M. Install recessed luminaires using accessories and firestopping materials to meet regulatory requirements for fire rating.
- N. Install screws to secure recessed grid-supported luminaires in place.
- O. Install accessories furnished with each luminaire.
- P. Paint a 3/8" diameter red dot on each emergency lighting fixture to provide ready identification of emergency fixtures. Exact location shall be coordinated with the Architect/Engineer.

3.2 FIELD QUALITY CONTROL

- A. Quality Assurance: Field inspection, testing and adjusting shall be as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Operate each luminaire after installation and connection. Inspect for proper connection and operation.

3.3 ADJUSTING

- A. Contract Closeout: Adjust installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Aim and adjust emergency lighting fixture heads to illuminate paths of egress.

3.4 CLEANING

- A. Contract Closeout: Clean installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Clean electrical parts to remove conductive and deleterious materials.
- C. Remove dirt and debris from enclosures.
- D. Clean photometric control surfaces as recommended by manufacturer.
- E. Clean finishes and touch up damage.

3.5 DEMONSTRATION AND INSTRUCTIONS

- A. Contract Closeout: Demonstrate installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.

The Contractor shall perform a test on each unit after it is permanently installed and charged for a minimum of 24 hours. Battery shall be tested for 90 minutes, in accordance with NEC 700. The battery test shall be done 10 days prior to final inspection by the State Construction Office. Any unit which fails the test must be repaired or replaced, and tested again. A copy of the test report shall be presented at final inspection and included in the Owner's Operation and Maintenance Manual. Include starting voltage, ending voltage, and percent voltage drop in the test report. The Architect/Engineer will provide the testing form for contractor use.

3.6 PROTECTION OF FINISHED WORK

- A. Contract Closeout: Protect installed work as required under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Relamp emergency lighting units and exit signs that have failed lamps at Substantial Completion. Replace exit signs in which more than 5% of the LEDs have failed lamps at Substantial Completion.

END OF SECTION 265200

SECTION 270500 - DATA AND VOICE COMMUNICATIONS

PART 1 GENERAL

1.01 SUMMARY

Section includes termination devices, racks, and premises wiring for telephone and data communication circuits by certified manufacturers and contract installers with certification and testing of all equipment and cabling.

1.02 REFERENCES

TIA/EIA 568 (Telecommunications Industries Association/Electronic Industries Association) - Commercial Building Telecommunication Wiring Standard.

TIA/EIA 569 (Telecommunications Industries Association/Electronic Industries Association) - Commercial Building Standard for Telecommunications Pathways and Spaces.

TIA/EIA 606A Administrative Standard (Labeling).

TIA/EIA 607 - Commercial Building Grounding/Bonding Requirements.

NETA ATS (International Electrical Testing Association) - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems.

NFPA 70 - National Electrical Code.

UL 969 - Standard for Marking and Labeling Systems.

ISO/IEC 11801 - Information Technology, Generic cabling for customer premises.

BISCI - Building Industries Consulting Services International.

BISCI TDMM - Telecommunications Distribution Methods Manual.

BISCI CO-OSP - Customer Outside Plant Design Manual

1.03 SYSTEM DESCRIPTION

- A. Provide, ready for operation, a complete and operational communication network system that is a manufacturer certified Category 6 system. The system shall include, but not be limited to, cabling (copper and fiber optic), cable protectors, patch panels, racks, faceplates, connectors, hardware, accessories, connections, grounding, and all other material, labor and operations required for a complete system in this building.
- B. Cabling shall be installed in conduit as shown on the Drawings. Cable support structure shall be as specified hereinafter.

- C. The horizontal wiring shall consist of the wiring from the MDF/IDF cabinets to the information services outlet. (The horizontal wiring includes the wiring termination components in the MDF/IDF cabinets, the horizontal wiring itself, and the termination components at the outlet).
- D. Backbone cabling shall consist of fiber (optical fiber cabling) and copper cables to connect data and voice services as required and/or as shown on the Drawings.
- E. The system shall provide for current and future voice and data requirements by a planned end-to-end manufacturers system, while recognizing the need for future bandwidth and fault tolerance. The proposed system shall utilize a network of fiber optic and unshielded twisted pair (UTP), riser, tie and station cables. Fiber cables shall terminate on Fiber Distribution Centers and/or modular patch panels as required and/or as shown on the Drawings. Cables and terminations shall be identified at all locations and cables shall terminate in an alphanumeric sequence at all termination locations. The complete system shall be fully standards compliant with guaranteed A Channel performance. All UTP end-to-end Channel Configurations as defined by TIA/EIA 568C-1,2,3 shall be provided by a single manufacturer.

1.04 SUBMITTALS

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Certifications: Copies of Cable Installation Technician Certifications shall be submitted with the equipment shop drawings.
- C. Product Data: Submit catalog data for each termination device, cable, rack, etc.
- D. Test Reports: Indicate procedures and results for specified field testing and inspection.
- E. Test Cables on receipt at Project site:
 - 1. Test optical fiber cable to determine the continuity of the strand end to end. Use optical loss test set.
 - 2. Test optical fiber cable while on reels. Use an optical time domain reflectometer to verify the cable length and locate cable defects, splices, and connector, including the loss value of each. Retain test data and include the record in maintenance data.
 - 3. Test each pair of UTP cable for open and short circuits.

1.05 CLOSEOUT SUBMITTALS

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Project Record Documents: Record actual locations and sizes of pathways and outlets.
- C. Provide a certificate of completion of the installation with verifications that each copper cable pair has been tested to Category 6 standards.

- D. Provide a certificate of completion of the installation with verifications that each fiber optic cable has been tested to industry standards.
- E. Provide a Certified Installation Warranty Certificate.
- F. Provide Test results for each cable and outlet.
- G. Provide marked up Drawings showing additions, deletions, and modifications also identifying cable routs.
- H. Provide electronic copies of marked up final Drawings.
- I. Provide wall mounted copies of the final system Drawings in each telecommunications room.

1.06 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing products specified in this section with minimum five years documented experience.
- B. Installer: Company specializing in installing products specified in this section with minimum five years documented experience on projects utilizing infrastructure work similar to that required for this project, and with service facilities within 100 miles of project.
 - 1. The Installer shall be an experienced firm regularly engaged in the layout and the installation of cabling infrastructure systems. Documentation shall be provided to show that the Contractor has successfully completed projects of similar size and scope within the previous twelve months.
 - 2. The Telecommunication Project Manager shall:
 - a. be certified as BICSI RCDD
 - b. be experienced in this type of project and provide technical support.
 - c. attend monthly progress meetings and additional meetings as scheduled or required.
 - d. be a permanent employee. Use of a temporary employee or sub-contracted employee is not permitted.
 - 3. Contractor and authorized sub-contractors shall use manufacturer certified technicians for all cable terminations, use of temporary or un-certified technicians is not permitted.
- C. Testing Agency: Company member of International Electrical Testing Association and specializing in testing products specified in this section with minimum three years documented experience.

1.07 PRE-INSTALLATION MEETING

Convene minimum two weeks prior to commencing Work of this section.

PART 2 PRODUCTS

2.01 ACCEPTABLE MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, the manufacturers offering products that may be incorporated into the Work are limited to the following
1. Siemons
 2. CommScope
 3. Panduit
 4. Leviton
 5. Hitachi Cable America Inc. (Basis of design for cable)

2.02 COMMUNICATIONS BACKBONE CABLES

A. UTP Cable

1. Description: 100-ohm, 25-pair UTP, covered with a thermoplastic jacket
 - a. Comply with TIA/EIA-568-C.1 for performance specifications.
 - b. Comply with TIA/EIA-568-C.2, Category 3.
 - c. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444 and NFPA 70 for the following types:
 - i. Communications, Riser Rated: Type CMR, complying with UL 1666.

B. UTP Cable Hardware

1. General Requirements for Cable Connecting Hardware: Comply with TIA/EIA-568-C.2, IDC type, with modules designed for punch-down caps or tools. Cables shall be terminated with connecting hardware of same category or higher.
2. Connecting Blocks: 110-style IDC for Category 6. Provide blocks for the number of cables terminated on the block, plus 25 percent spare. Integral with connector bodies, including plugs and jacks where indicated.
3. Patch Panel: Modular panels housing multiple-numbered jack units with IDC-type connectors at each jack for permanent termination of pair groups of installed cables.
 - a. Number of Jacks per Field: One for each four-pair UTP cable, plus spares and blank positions adequate to suit specified expansion criteria.
4. Jacks and Jack Assemblies: Modular, color-coded, eight-position modular receptacle units with integral IDC-type terminals.
5. Patch Cords: Factory-made, 4-pair cables in 48-inch (1200-mm) lengths; terminated with 8-position modular plug at each end.
 - a. Patch cords shall have bend-relief-compliant boots and color-coded icons to ensure Category 6 performance. Patch cords shall have latch guards to protect against snagging.

C. OPTICAL FIBER CABLE

1. Description: Multi mode, 6 -fiber, OM3, nonconductive, tight buffer, optical fiber cable.
 - a. Comply with ICEA S-83-596 for mechanical properties.
 - b. Comply with TIA/EIA-568-C.3 for performance specifications.
 - c. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:
 - i. General Purpose, Nonconductive: Type OFN or OFNG
 - ii. Plenum Rated, Nonconductive: Type OFNP, complying with NFPA 262.
 - iii. Riser Rated, Nonconductive: Type OFNR complying with UL 1666.
 - d. Maximum Attenuation: 0.4 dB/km at 1310 nm; 0.4 dB/km at 1383 nm; 0.3 dB/km at 1550 nm.
2. Jacket:
 - a. Jacket Color: OM3 - Aqua
 - b. Cable cordage jacket, fiber, unit, and group color shall be according to TIA/EIA-598-C.
 - c. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

D. OPTICAL FIBER CABLE HARDWARE

1. Cross-Connects and Patch Panels: Modular panels housing multiple-numbered, duplex cable connectors.
 - a. Number of Connectors per Field: One for each fiber of cable or cables assigned to field, plus spares and blank positions adequate to suit specified expansion criteria.
2. Patch Cords: Factory-made, dual-fiber cables in 36-inch lengths. Provide quantities required for patch panels installed plus 25% spare.
3. Cable Connecting Hardware:
 - a. Comply with Optical Fiber Connector Intermateability Standards (FOCIS) specifications of TIA/EIA-604-2, TIA/EIA-604-3-A, and TIA/EIA-604-12. Comply with TIA/EIA-568-C.3.
 - b. Quick-connect, simplex and duplex, Type LC connectors. Insertion loss not more than 0.75 dB.

2.03 COMMUNICATIONS HORIZONTAL CABLES

A. UTP Cable

1. Description: 100-ohm, 4-pair UTP, covered with a blue thermoplastic jacket and white thermoplastic jacket for voice.
 - a. Comply with TIA/EIA-568-C.1 for performance specifications.
 - b. Comply with TIA/EIA-568-C.2, Category 6.
 - c. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444 and NFPA 70 for the following types:

- i. Communications, General Purpose Rated: Type CM or CMG.

B. UTP Cable Hardware

1. General Requirements for Cable Connecting Hardware: Comply with TIA/EIA-568-C.2, IDC type, with modules designed for punch-down caps or tools. Cables shall be terminated with connecting hardware of same category or higher.
2. Connecting Blocks: 110-style IDC for Category 6. Provide blocks for the number of cables terminated on the block, plus 25 percent spare. Integral with connector bodies, including plugs and jacks where indicated.
3. Patch Panel: Modular panels housing multiple-numbered jack units with IDC-type connectors at each jack for permanent termination of pair groups of installed cables.
 - a. Number of Jacks per Field: One for each four-pair UTP cable, plus spares and blank positions adequate to suit specified expansion criteria.
4. Jacks and Jack Assemblies: Modular, color-coded, eight-position modular receptacle units with integral IDC-type terminals.
5. Patch Cords: Factory-made, 4-pair cables in 48-inch (1200-mm) lengths; terminated with 8-position modular plug at each end.
 - a. Patch cords shall have bend-relief-compliant boots and color-coded icons to ensure Category 6 performance. Patch cords shall have latch guards to protect against snagging.

2.04 BUILDING ENTRANCE PROTECTORS

Provide building entrance protectors which shall be 66 IN termination and 66 OUT termination configured as standard 489ACA1-100 fully loaded with 4c1s protector 5-pin protector modules. Provide rack mounted protectors where indicated or where required.

2.05 COMMUNICATIONS FACEPLATES AND CONNECTORS

- A. Jacks: 100-ohm, balanced, twisted-pair connector; four-pair, eight-position modular. Comply with TIA/EIA-568-C.1.
- B. Workstation Outlets:
 1. Two-port-connector assemblies mounted in single faceplate.
 2. Four-port-connector assemblies mounted in multigang faceplate.
 3. See drawings for other outlet quantities for number of ports. Mount assemblies in multigang faceplate.
 4. Metal Faceplate: Stainless steel, complying with requirements in Section "Wiring Devices."
 5. Flush mounting snap-in jacks.
 6. Provide blanks for unused portions of faceplates.
 7. Legend: Machine printed, in the field, using adhesive-tape label.

2.06 RACKS, PATCH PANELS AND IDF CABINETS.

- A Racks: Racks shall be two post rack with 44 rack mount spaces of 19" width and an overall interior depth of 28"; black paint with matte (satin) finish. For singular or multiple rack configurations, provide tops, rear doors, and one set of side panels for a singular viewing

aspect of each configuration. Secure to floor and wall and cable tray (if utilized) with manufacturers recommended hardware and accessories providing a stable rack, racks shall be connected to the electrical ground system in compliance with TIA/EIA 607. Horizontal and vertical cable management panels shall be provided installed above and below each data patch panel to provide neat and orderly routing of patch cables. Cable management panels shall be sized to accommodate the maximum number of patch cables for the patch panels.

- B Station cable terminations shall be accomplished using patch panels with 66 style IDC connectors. Patch panels will not exceed 2 RU (3.5") in height.
- C Telephone backbone and station cables shall be terminated on 66 style terminal blocks. The number of blocks will be determined by installed cables plus 20% capacity. Mount blocks on the telephone backboard in accordance with BICSI TDMM specification for telephone backboards.
- D Fiber Optic cables shall be terminated in rack mount enclosures in each wiring closet. Enclosures shall be sized based on installed cable count plus 10% spare capacity.
- E Each rack shall have (2) 120V twist-lock NEMA L5-30 outlets installed on a rear post (one above the other) of the data rack approximately 42 inches above the finished floor or on wall adjacent to rack.
- F Each rack shall have (2) dedicated 110V 20A circuits installed on a rear post of the data rack. These two circuits shall be installed in a quad-type manner and mounted approximately 42 inches above the finished floor.
- G Each rack shall have (2) horizontal Power Distribution Units.
- H Patch Panels: TIA/EIA 568C Category 6 compliant rack-mounted assembly or terminals and accessory patch cords, with adequate capacity for all active and 25% spare circuits. Provide Category 6 green patch cords for all patch panel jacks, evenly divided between 3, 5 and 7 foot cords, plus 15% spare of each length. Provide Category 6 green patch cord for all telecommunications outlets throughout the facility, evenly divided into 7 and 10 foot cords, plus 15% spare of each length. All supplied from one manufacturer. Provide 1 foot patch cables for WAP's. Provide ten (10) 20 foot patch cables for labs 710 and 614. Data cables shall terminate on manufacturer's specified end-to-end Cat 6 solution.
- I Communication Cable Management and Ladder Rack
 - 1. Horizontal Cable managers shall be provided for routing of cable between termination points and active components. Provide cable managers for each patch panel and/or fiber enclosure in a rack plus one spare. Provide cable managers for each patch panel and/or fiber enclosure in a rack plus one spare. Example, if an TR rack has three switches it would receive 4 wire managers. The passive rack has three patch panels and one fiber enclosure. It would receive 5 wire managers. All patch panels shall be located at top of rack followed by management, switch, management, switch, switch, management, switch, switch management and UPS.
 - 2. Vertical Cable managers shall be provided for routing of cable between termination points and active components. Provide 12" wide vertical cable managers of appropriate

- height. Provide one manager for exterior of each rack and one in between racks if more than one rack is installed.
3. A system of overhead ladder racks shall be installed in each TR to support and distribute all cabling from where it enters the room to its appropriate termination location. Racks shall be 12" wide min. with 9" spacing between support rungs.
 4. Overhead ladder racks shall be installed below finished ceiling, mounted at 7' - 4" and attached to the equipment racks and walls. They shall be supported at least every 6". One cable runway support bracket shall be mounted on top of each equipment rack. Ladder rack shall be bolted to the top of each cable runway support bracket to allow attachment to the equipment rack.
 5. Vertical ladder racks shall be installed to tie into any wireways and conduits that enter the TR above 9' AFF. All vertical ladder racks shall be connected to the horizontal ladder rack system.
- J Station cable terminations shall be accomplished using patch panels with 66 style IDC connectors. Patch panels will not exceed 2 RU (3.5") in height.
- K Telephone backbone and station cables shall be terminated on 66 style terminal blocks. The number of blocks will be determined by installed cables plus 20% capacity. Mount blocks in IDF rack.
- L Fiber Optic cables shall be terminated in MDF and IDF rack.
- M Provide receptacle in IDF rack.

PART 3 EXECUTION

3.01 INSTALLATION

- A. The project manager and crew shall be consistent through out the project. The project manager shall be present when any work is being performed. The project manager shall contact the Owner designated contact at the beginning and end of each day that work is to be performed.
- B. Cable shall be installed and terminated per manufacturer's specifications.
- C. Notify the Owner when ready for Owner-furnished equipment to be installed.
- D. Install wire and cable in accordance with TIA/EIA 568C.1,2,3 and TIA/EIA 569A.
- E. All penetrations through walls and floors shall be sleeved. All sleeves shall have permanently attached bushings. Sleeves shall be sized to accept 50% growth. All sleeves shall be fire-stopped using UL7 approved methods and shall maintain assembly fire ratings. All sleeves between floors shall be supported with a conduit riser clamp installed per the manufacturer direction and shall be installed tight to the ceiling with enough sleeve to attach the bushing and rise up three inches above the floor on the opposite end.

- F. All cable shall be installed in a complete, neat and orderly fashion. Install cable with sufficient bending radius as not to kink, shear or damage binders. Bend radius shall meet manufacturers specifications for horizontal cable, fiber-optic cable, inter- and intra- building cable and copper inter- and intra- building cable. Cables shall be groomed, such that cables to be terminated on the left side of the patch panels are routed down the left side of the rack, and cables to be terminated on the right side of the patch panels are to be routed down the right side of the rack.
- G. Terminate all data and telephone cables at outlet devices. Terminate data cables on specified rack designated by the manufacturer's end-to-end solution equipment. Terminate telephone cables on specified rack using manufacturer's end-to-end solution for Cat 6.
- H. Install pullwire in each empty telephone or data conduit.
- I. A minimum of three feet of slack should be left in an appropriate tidy fashion in the IDF Cabinet.
- J. All cables shall be installed according to TIA/EIA 568C-1,2,3 /569A standards. Care shall be taken during the installation to prevent nicks, abrasions, burning and scuffing of the cable. Cables found to be damaged will be replaced at the contractor's expense regardless of whether the cable passes Cat 6 Level III testing standards.

3.02 GROUNDING AND BONDING

- A. Ground and bond pathways, cable shields, racks and equipment under the provisions of Section 260526 and TIA/EIA - 607 - Commercial Building Grounding/Bonding Requirements.
- B. Grounding conductors shall be installed neatly, with as few bends as possible, and routed such as to minimize the length of the conductor runs.
- C. The grounding conductors may be wall mounted or fastened to ladder racks with plastic cable ties. While they may be routed adjacent to telecommunications cables, they should not be attached to them in any way.
- D. An acceptable bond between the grounding conductor and painted metal surfaces is required. In these cases, a small area of the paint should be removed by blade or wire brush prior to the attachment of the ground lug. In TRs, this typically applies to the surface of metal wire ways and to the surface of equipment racks.
- E. Definitions
 - 1. Bonding conductor (BC) for telecommunications. This conductor links the telecommunications grounding system to the main electrical power grounding system for the building. It originates in the TR.
 - 2. Telecommunications main grounding bus bar (TMGB). This bar is located in the TR and serves as the hub for the telecommunications grounding system in the entire building. Bond the TMGB to the BC, TBB, and local building steel.
 - 3. Telecommunications bonding backbone (TBB). This conductor links the TGB in each TC back to the TMGB.

F. Required Grounding Configuration

1. TGB. One telecommunications grounding busbar shall be installed onto the plywood on the wall of each TC. It shall be installed at 24" AFF. The bar shall be electrically insulated from its mounting bracket.
 2. TBB. One insulated, stranded, #6 copper wire shall be installed from the TGB in the TC to the TMGB in the TR. This conductor shall be routed inside the riser conduit system along side the telecommunications riser cables. It shall be fastened to the TGB.
3. Equipment racks. A #6 grounding conductor shall be installed between one equipment rack and the TGB using the appropriate grounding lug. The remaining equipment racks shall be connected together in series to the first rack to provide a continuous connection to all racks..
4. Ladder racks. A #6 grounding conductor shall be installed between one section of overhead ladder rack to the TGB or to one of the equipment racks.
5. Pathway components. A #6 grounding conductor shall be installed from each distinct wireway or conduit (over 1" in diameter) which exits the TR and houses either horizontal or riser cabling back to the TGB, ladder rack, or equipment rack. As needed, these components may be connected in series to provide a continuous connection to all components. Grounding lugs shall be used to connect the conductor to wireways. Grounding bushings should be installed on conduit ends to connect these conduits to the conductor.

3.03 LABELING

- A. Manufacturers Identification: Each major component of equipment shall have the manufacturers name, address, model number, and rating on a plate securely affixed in a conspicuous place. NEMA code ratings, UL label, or other data which is die-stamped into the surface of the equipment shall be stamped in a location easily visible.
- B. Custom Panel Identification and Nomenclature: Switches, connectors, jacks, receptacles, outlets, cables and cable terminations shall be logically and permanently marked in a manner approved by the Owner. Custom panel nomenclature shall be engraved, etched, or screened. Marking for these items are purposely detailed in the drawings to ensure consistency and clarity. Verify any changes in working type size, and/or placement with the owner prior to marking. Mount on the custom rack panels as described above a designation of each source machine, which correlates to the system architecture. Submit a sample layout for Architect approval.
- C. Terminal Blocks and Rack Mounted Equipment Identification: All terminal blocks, rack mounted equipment, and active slots of card frame systems shall be clearly and logically labeled in a manner acceptable to the Owner as to their function, circuit, or system as appropriate. Labeling on manufactured equipment shall be engraved plastic laminate with white lettering on black background or dark background. Handwritten identification is not permitted. The contractor may substitute metallized polyester permanent identification labels with black printing on silver, white, or another light color background for the phenolic labels above.

- D. Cable Identification: All cable terminations shall be clearly and permanently labeled with appropriate cable number. Labeling of termination system shall be provided on white labels with black typed lettering. Handwritten labels shall not be permitted. Provide a sample of labeling material and example of the numbering scheme planned for use at the facility with project submittals. The contractor will endeavor to utilize the environmental room number the facility administrators plan to use for new construction projects. If environmental room numbers are not available, the contractor will utilize the most recent set of architectural floor plan room numbers for the cable numbers. Once the contractor has utilized a set of room numbers, those numbers and floor plans showing those numbers must be used for all documentation purposes from that point forward for the project unless changes are approved in writing by the Owners Agent.
- E. The intent of this labeling scheme is to assist in troubleshooting cable problems. Therefore the cables are labeled in a manner that will direct the technician to the opposite end of the cable to allow for testing and troubleshooting.
- F. All fiber backbone cables will be labeled with a unique identifier at each end and at junction / pull boxes. Fiber backbone cables shall be labeled 12" from each end of the cable with a destination tag that identifies each cable's remote destination and the unique identifier.

Example: A fiber strand from Room 503 to the MDF 500D would be labeled:

In MDF 500D: = ARoom 503-O1≡

In Room 503: = ARoom 500D-O1≡

Example: A fiber cable from Room 617A would be labeled:

In MDF 500D: ARoom 617A-O4≡

In Room 617A: ARoom 500D-O4≡

- G. All telecommunication outlet (TO) cables shall be labeled within 12" of each end of the cable using the above described identifier. TO numbers in each room are determined by numerical sequence starting from the main doorway of each room and continuing in a clockwise manner around the room. Each faceplate containing data ports shall be labeled starting in the upper left hand corner of each 1 gang section and assigned in a left to right and top to bottom direction.
- H. Switch: Ports shall be labeled using the Room ID- Port ID of the TO serviced by the patch panel port. Telecommunication Outlets (TO) that are serviced by a patch panel will be labeled using IDF ID - Patch Panel ID - Port ID. Example: Patch panel AA≡, Port 26 in Room 500D servicing Port #2 in Room 500 = 500D-A-26
- I. All test report documentation will contain a complete circuit identification based on the applicable labeling scheme.

3.04 TESTING

- A. A Certified Cat 6 cable tester, Level III, shall perform the certification test on all Cat 6 cables and adhere to TIA/EIA-568C.
- B. All test equipment shall be consistent throughout the installation. All test equipment shall be available for inspection by the Owner at any time. A valid and current calibration certificate

traceable to the National Institute of Standards and Technology for any test equipment to be used shall be provided to the Owner.

- C. Upon substantial completion of the data network, test every data port for the functional requirements as listed in previously. Document, on a contractor generated form, the compliance of every port. The testing individual will initialize the results of each location. Submit a electronic copy of the reports detailing the results of initial adjustments and verification tests including all relevant drawings, charts, and photographs.
- D. Copper Cable Tests: Test and document results for each four (4) pair UTP data cable for the following conditions. (These tests are minimum requirements for Cat 3 Cable). A wire map test of the cable may be used to demonstrate conformance of the cable to the following parameters where applicable.
 - a. Proper polarity
 - b. No reversals
 - c. No transpositions
 - d. Continuity
 - e. No shorts
 - f. No AC voltage
 - g. No DC voltage
 - h. No opens
 - i. Proper numbering at each termination

All Cat 6 UTP cable testing shall be in accordance with proposed TIA/EIA TSB-67 Transmission Performance Specification test parameters for the permanent link. Testing shall be performed using Level IIe test equipment and shall meet or exceed the following performance parameters:

- a. Length of cable $\leq$ 90 meters/300 feet
- b. Attenuation @ 100Mhz $\leq$ 24dB
- c. Pair-to-Pair Near-end Crosstalk (P-P NEXT) $\geq$ 30dB
- d. Power Sum Near-End Crosstalk (PS NEXT) $\geq$ 27dB
- e. Far-End Crosstalk (ELFEXT) $\geq$ 19dB
- f. Power Sum Far-End Crosstalk $\geq$ 16dB
- g. Return Loss $\geq$ 10.1 dB
- h. Calculated ACR $\geq$ 6dB
- i. Calculated PS ACR $\geq$ 3dB

E. Fiber Testing

- 1. Factory Testing: All fiber optic cable shall be factory tested on a reel basis with performance data for each cable supplied to the contractor and to the owner. Tests shall be conducted utilizing an OTDR (Optical Time Domain Reflectometer) at 850nm and 1300 nm with the attenuation in dB/km recorded for each fiber.
- 2. Post Rough-In Test: Upon completion of the installation of all fiber optic cable and prior to termination, each fiber optic strand shall be tested for light continuity to insure no damage occurred during installation. (The contractor may wish to perform a light continuity test on each fiber optic strand of the cable upon receipt of reel from manufacturer to insure no damage occurred during shipping.

3. Termination Testing: After completion of the installation provide the following tests. An Optical Test Set consisting of an Optical Source (transmitter) and Optical Meter (receiver) shall be used to determine end-to-end attenuation and fiber length. This testing shall be in Accordance with EIA/TIA-526-14 Method B: Optical Power Loss Measurement of Installed Multi-mode Fiber Optic Plant. Each fiber shall be measured in one direction at both 850 and 1300 wavelengths. Record each measurement and provide copies to the Owner. Use of an OTDR for this measurement is acceptable provided the Contractor utilize the appropriate launch and receive jumper cables in front of and behind the cable being tested.
- F. Test parameters shall be verifiable by independent parties. Provide electronic copies of tests for every cable as part of the Verification Test Report.
- G. The Contractor is responsible for bringing any copper or fiber that fails to meet the standards into compliance at the Contractors expense.
- H. Two printed copies of the computer generated reports of the test results (in 8.5" by 11" hard cover binders) are required plus two compact disc copies.

3.05 FIELD QUALITY CONTROL

- A. Field inspection and testing shall be performed under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Inspect, test and certify all cabling and equipment and terminations as specified and in accordance with TIA/EIA 568 C.

3.06 WARRANTY

The Contractor shall provide the following minimum warranty:

- A. All materials and equipment shall be new and warranted free of faulty workmanship and damage.
- B. The warranty shall include all parts, labor (including travel), expenses and equipment necessary to perform replacement and/or repairs.
- C. The total system (parts and labor) shall be warranted free of defects for a period of one (1) year from date of final acceptance.
- D. Replacement of defective materials and repair of faulty workmanship shall take place within 48 hours of notification by Owner and shall be guaranteed at no cost to the Owner during the warranty period.
- E. The minimum warranty provisions specified above shall not diminish the terms of individual equipment manufacturers warranties.

END OF SECTION

SECTION 270510 - TELECOMMUNICATIONS PATHWAYS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Pathways, Equipment and terminal backboards.

1.2 REFERENCES

NFPA 70 - National Electrical Code.

1.3 SYSTEM DESCRIPTION

Individual and combination telecommunications/data outlets shall be installed where shown on the contract drawings. Raceways shall be installed as straight as possible and shall contain not more than the equivalent of three quarter bends.

1.4 PROJECT RECORD DOCUMENTS

- A. Submit under provisions of the General and Supplemental General Conditions and Division 1 Specifications Sections.
- B. Record actual locations and sizes of pathways and outlets.

1.5 QUALITY ASSURANCE

- A. Perform Work in accordance with the Owner's requirements.

1.6 REGULATORY REQUIREMENTS

- A. Conform to requirements of NFPA 70.
- B. Furnish Products listed and classified by testing firm acceptable to authority having jurisdiction as suitable for purpose specified and indicated.

PART 2 - PRODUCTS

2.1 TELECOM TERMINATION BACKBOARDS

- A. Material: Grade A/C Fire retardant treated plywood.
- B. Size: 4 x 8 feet (1.2 x 2.4 m), 3/4 inch (19 mm) thick.

2.2 TELECOMMUNICATIONS OUTLETS

Outlets shall consist of standard, square cornered boxes 4-11/16" wide by 4-11/16" high by 2-1/8" deep, minimum, flush mounted at the height indicated on the contract drawings.

2.3 TELECOM WIRE AND CABLE

Provide all telephone and data cabling in accordance with Section 270500.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Finish paint termination backboards with durable white enamel under the provisions of Division 9 prior to installation of equipment.
- B. Support raceways and backboards under the provisions of Section 260529.
- C. The maximum bends between pull points shall be 180 degrees.
- D. The maximum distance between pull boxes shall be 100 feet.
- E. Install termination backboards plumb, and attach securely to building wall at each corner.
- F. Install #14 gauge steel or approved, 200 lb. nylon cord pull wire in each empty conduit run.

END OF SECTION 270510