PROJECT MANUAL

NEW HANOVER COUNTY BOARD OF ELECTIONS

Wilmington, North Carolina

PERMIT SET
APRIL 3, 2023

101 N. Third Street, Suite 500
Wilmington, North Carolina 28401
Phone: 910.790.9901
Fax: 910.790.3111

LS3P Commission No. 7702-190810

© 2023 LS3P

This page intentionally left blank.

PROJECT MANUAL

FOR

NEW HANOVER COUNTY BOARD OF ELECTIONS

WILMINGTON, NORTH CAROLINA

April 3, 2023

ARCHITECT

LS3P ASSOCIATES LTD. (LS3P)
101 North Third Street, Suite 500
Wilmington, North Carolina 28401
(Phone) 910.790.9901 (Fax) 910.790.3111
Principal in Charge: Laura L. Miller, AIA
lauramiller@ls3p.com

NOTICE: This project manual, an unpublished instrument of service of the authors, is for use on this Project only and is prepared for use in conjunction with the authors' interpretations, observations, decisions and administration as described in Contract Documents, without which desired results cannot be assured. Use in part or in whole for other purposes without the authors' expressed written consent may violate Act 17, United States Code, Paragraph 301, 1991.

This page intentionally left blank.

CONSULTANT LIST

FOR

NEW HANOVER COUNTY

BOARD OF ELECTIONS

STRUCTURAL

Ardurra Group North Carolina

3809 Peachtree Ave., Suite 102

Wilmington, NC 28403

Contact: Mark Weiss, PE

Phone: 910.937-2929

E-Mail: mark.weiss@ardurra.com

FIRE PROTECTION/PLUMBING/ MECHANICAL

Newcomb & Boyd

5425 Page Road, Suite 215

Durham, North Carolina 27703

Contact: Paul Kitchens, PE

Phone: 919.783.8965

E-Mail: pkitchens@newcomb-boyd.com

ELECTRICAL/FIRE ALARM

Newcomb & Boyd

5425 Page Road, Suite 215

Durham, North Carolina 27703

Contact: David Chandler, PE

Phone: 919.783.8990

E-Mail: dchandler@newcomb-boyd.com

In cooperation with:

LS3P

101 N. Third Street, Suite 500

Wilmington, North Carolina 28401

TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

011000 - Summary
012500 - Substitution Procedures
012510 - Request for Substitution
012600 - Contract Modification Procedures
012610 - Change Proposal
012900 - Payment Procedures
013100 - Project Management and Coordination
013200 - Construction Progress Documentation
013300 - Submittal Procedures
013310 - Digital Data Letter of Agreement
014000 - Quality Requirements
014200 - References
014339 - Mockups
015000 - Temporary Facilities and Controls
015100 - Project Site Sign
016000 - Product Requirements
017300 - Execution
017419 - Construction Waste Management and Disposal
017700 - Closeout Procedures
017823 - Operation and Maintenance Data
017839 - Project Record Documents
017900 - Demonstration and Training

DIVISION 02 – EXISTING CONDITIONS

024119 – Selective Demolition

DIVISION 03 - CONCRETE

033000 - Cast-In-Place Concrete

DIVISION 04 - MASONRY

042613 - Masonry Veneer

DIVISION 05 - METALS

052100 - Structural Steel Framing
053100 - Steel Decking
054000 - Cold-Formed Metal Framing
055000 - Metal Fabrications
055213 – Pipe and Tube Railings

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES

061053 - Miscellaneous Rough Carpentry
061600 - Sheathing
064023 - Interior Architectural Woodwork
064116 - Plastic-Laminate-Clad Architectural Cabinets
066400 - Solid Polymer Fabrications

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

072100 - Thermal Insulation

072419 - Water-Drainage Exterior Insulation and Finish System (EIFS)
072726 - Fluid-Applied Membrane Air Barriers
074616 - Aluminum Siding
075323 - Ethylene-Propylene-Diene-Monomer (EPDM) Roofing
076200 - Sheet Metal Flashing and Trim
077100 - Roof Specialties
077200 – Roof Accessories
079200 - Joint Sealants
079219 - Acoustical Joint Sealants

DIVISION 08 - OPENINGS

081113 - Hollow Metal Doors and Frames
081216 - Aluminum Frames
081416 - Flush Wood Doors
083323 – Overhead Coiling Doors
084113 - Aluminum-Framed Entrances and Storefronts
087100 - Door Hardware
087113 – Automatic Door Operators
088000 - Glazing
088700 - Glazing Surface Films
089200 – Louvered Equipment Enclosures

DIVISION 09 - FINISHES

092216 - Non-Structural Metal Framing
092900 - Gypsum Board
093013 - Ceramic Tiling
095113 - Acoustical Panel Ceilings
095426 - Suspended Wood Ceilings
096513 - Resilient Base and Accessories
096519 - Resilient Tile Flooring
096520 - Resilient Plank Flooring
096536 - Static-Control Resilient Flooring
096813 - Tile Carpeting
099113 - Exterior Painting
099123 - Interior Painting

DIVISION 10 - SPECIALTIES

101419 - Dimensional Letter Signage
101423.16 - Room-Identification Panel Signage
102800 - Toilet Accessories
104413 - Fire Protection Cabinets
104416 - Fire Extinguishers
107326 - Metal Canopies

DIVISION 12 - FURNISHINGS

122413 - Roller Window Shades
123623.13 - Plastic-Laminate-Clad Countertops
123661.19 - Quartz Agglomerate Countertops

DIVISION 21 - FIRE SUPPRESSION

210517 - Sleeves and Sleeve Seals for Fire-Suppression Piping
210523 - General-Duty Valves for Water-Based Fire-Suppression Piping
210529 - Hangers and Supports for Fire-Suppression Piping and Equipment

210548 - Vibration and Seismic Controls for Fire-Suppression Piping and Equipment
211119 - Fire-Department Connections
211313 - Wet-Pipe Sprinkler Systems

DIVISION 22 - PLUMBING

220513 - Common Motor Requirements for Plumbing Equipment
220516 - Expansion Fittings and Loops for Plumbing Piping
220517 - Sleeves and Sleeve Seals for Plumbing Piping
220518 - Escutcheons for Plumbing Piping
220519 - Meters and Gauges for Plumbing Piping
220523.12 - Ball Valves for Plumbing Piping
220523.14 - Check Valves for Plumbing Piping
220523.15 - Gate Valves for Plumbing Piping
220529 - Hangers and Supports for Plumbing Piping and Equipment
220548.13 - Vibration Controls for Plumbing Piping and Equipment
220553 - Identification for Plumbing Piping and Equipment
220719 - Plumbing Piping Insulation
221116 - Domestic Water Piping
221119 - Domestic Water Piping Specialties
221123.21 - Inline, Domestic-Water Pumps
221316 - Sanitary Waste and Vent Piping
221319 - Sanitary Waste Piping Specialties
221319.13 - Sanitary Drains
221414 - Storm Drainage Piping
221423 - Storm Drainage Piping Specialties
223300 - Electric, Domestic-Water Heaters
224213.13 - Commercial Water Closets
224216.13 - Commercial Lavatories
224216.16 - Commercial Sinks
224713 - Drinking Fountains

DIVISION 23 - HEATING VENTILATING AND AIR CONDITIONING

230513 - Common Motor Requirements for HVAC Equipment
230517 - Sleeves and Sleeve Seals for HVAC Piping
230518 - Escutcheons for HVAC Piping
230529 - Hangers and Supports for HVAC Piping and Equipment
230553 - Identification for HVAC Piping and Equipment
230593 - Testing, Adjusting, and Balancing for HVAC
230713 - Duct Insulation
230719 - HVAC Piping Insulation
230923 - Direct Digital Control (DDC) System for HVAC
230923.17 - Level Instruments
230923.23 - Pressure Instruments
230923.27 - Temperature Instruments
232300 - Refrigerant Piping
233113 - Metal Ducts
233300 - Air Duct Accessories
233346 - Flexible Ducts
233416 - Centrifugal HVAC Fans
233600 - Air Terminal Units
233723 – HVAC Gravity Ventilators
237416.13 - Packaged, Large-Capacity, Rooftop Air-Conditioning Units
238126 - Split-System Air-Conditioners
238239.13 - Cabinet Unit Heaters

238239.16 – Propeller Unit Heaters

DIVISION 26 - ELECTRICAL

260010 - Supplemental Requirements for Electrical
260519 - Low-Voltage Electrical Power Conductors and Cables
260526 - Grounding and Bonding for Electrical Systems
260529 - Hangers and Supports for Electrical Systems
260533 - Raceway and Boxes for Electrical Systems
260544 - Sleeves and Sleeve Seals for Electrical Raceways and Cabling
260548 - Vibration and Seismic Controls for Electrical Systems
260553 - Identification for Electrical Systems
260573.13 - Short-Circuit Studies
260573.16 - Coordination Studies
260573.19 - Arc-Flash Hazard Analysis
260923 - Lighting Control Devices
262416 - Panelboards
262726.11 - General-Use Switches, Dimmer Switches, and Fan-Speed Controller Switches
262726.33 - Industrial-Grade Duplex Straight-Blade Receptacles
262726.37 - Receptacles with Arc-Fault and Ground-Fault Protective Devices
262813 - Fuses
262816 - Enclosed Switches and Circuit Breakers
264113 - Lightning Protection for Structures
265119 - LED Interior Lighting
266710 - Surge Protective Devices

DIVISION 27 - COMMUNICATIONS

270526 - Grounding and Bonding for Communications Systems
270528 - Pathways for Communications Systems
270536 - Cable Trays for Communications Systems
270543 - Underground Pathways and Structures for Communication Systems
270544 - Sleeves and Sleeve Seals for Communications Pathways and Cabling
270553 - Identification for Communications Systems
270800 - Testing of Communications Cabling
271100 - Communications Equipment Room Fittings
271116 - Communications Racks, Frames, and Enclosures
271313 - Communications Copper Backbone Cabling
271323 - Communications Optical Fiber Backbone Cabling
271513 - Communications Copper Horizontal Cabling

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY

284621.11 - Addressable Fire-Alarm Systems

DIVISION 31 - EARTHWORK

313116 - Termite Control

END OF TABLE OF CONTENTS

SECTION 011000 - SUMMARY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Project information.
2. Work covered by Contract Documents.
3. Work under Owner's separate contracts.
4. Owner-furnished products.
5. Contractor's use of site and premises.
6. Coordination with occupants.
7. Work restrictions.
8. Specification and Drawing conventions.

B. Related Requirements:

1. Section 015000 "Temporary Facilities and Controls" for limitations and procedures governing temporary use of Owner's facilities.
2. Section 017300 "Execution" for coordination of Owner-installed products.

1.2 PROJECT INFORMATION

A. Project Identification: New Hanover County Board of Elections.

1. Project Location: Government Center Drive, Wilmington, North Carolina 28403.

B. Owner: Cape Fear FD Stonewater, 1051 Military Cutoff Road, Suite 200, Wilmington, North Carolina 28405.

1. Owner's Representative: Mike Brown.

C. Architect: LS3P, 101 N. Third Street, Suite 500, Wilmington, North Carolina 28401; Phone: 910.790.9901.

1. Architect's Representative: Laura Miller, AIA.

D. Architect's Consultants: Architect has retained the following design professionals, who have prepared designated portions of the Contract Documents:

1. Structural: Ardurra, Mark Weiss.
2. Fire Protection, Plumbing and Mechanical: Newcomb & Boyd, Paul Kitchens.
3. Electrical: Newcomb & Boyd, David Chandler.

E. Owner Consultants: Owner has retained the following design professionals who have prepared designated portions of the Contract Documents:

1. Civil: SEPI Engineering, Mark Arcuri.
2. Landscape: Mihaly Land Design, Josh Mihaly.

F. Construction Manager: Thomas Construction Group.

1. Construction Manager Representative: Jason Lovelace
2. Construction Manager for this Project is Project's constructor. The terms "Construction Manager" and "Contractor" are synonymous.

G. Web-Based Project Software: Project software will be used for purposes of managing communication and documents during the construction stage.

1. See Section 013100 "Project Management and Coordination." for requirements for using web-based Project software.

1.3 WORK COVERED BY CONTRACT DOCUMENTS

A. The Work of Project is defined by the Contract Documents and includes, but is not limited to, the following:

1. New construction for a one-story 7,280 sq ft steel structure office building containing offices, open workstations, and a voting space. The exterior of the building will be comprised of EIFS, aluminum siding, CMU veneer, and storefront glass system. Project scope includes fire protection, plumbing, mechanical, electrical, and other Work indicated in the Contract Documents.

B. Type of Contract:

1. Project will be constructed under a single prime contract.

1.4 WORK UNDER OWNER'S SEPARATE CONTRACTS

A. Work with Separate Contractors: Cooperate fully with Owner's separate contractors, so work on those contracts may be carried out smoothly, without interfering with or delaying Work under this Contract or other contracts. Coordinate the Work of this Contract with work performed under Owner's separate contracts.

B. Concurrent Work: Owner will award separate contract(s) for the following construction operations at Project site. Those operations will be conducted simultaneously with Work under this Contract.

1. Building logo.
2. Television.
3. Commissioning - scope to be determined by Owner.

1.5 OWNER-FURNISHED PRODUCTS

A. Owner-Furnished/Owner-Installed (OFOI) Products:

1. Residential appliances.

B. Owner-Furnished/Contractor-Installed (OFCI) Products:

1. Toilet seat cover dispensers.
2. Toilet tissue dispensers.
3. Paper towel dispensers.
4. Soap dispensers.

1.6 CONTRACTOR'S USE OF SITE AND PREMISES

A. Restricted Use of Site: Contractor shall have limited use of Project site for construction operations as indicated on Drawings by the Contract limits and as indicated by requirements of this Section.

B. Limits on Use of Site: Limit use of Project site to areas within the Contract limits indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.

1. Driveways, Walkways and Entrances: Keep driveways and entrances serving premises clear and available to Owner and New Hanover County, New Hanover County employees and visitors, and emergency vehicles at all times. Do not use these areas for parking or for storage of materials.

    a. Schedule deliveries to minimize use of driveways and entrances by construction operations.
    b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.

1.7 COORDINATION WITH OCCUPANTS

A. Partial Occupancy: New Hanover County will occupy the premises, including, but not limited to, adjacent buildings and parking lots, during entire construction period, with the exception of areas under construction. Cooperate with New Hanover County during construction operations to minimize conflicts and facilitate the County’s usage. Perform the Work so as not to interfere with Owner's operations. Maintain existing exits unless otherwise indicated.

1. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.
2. Provide not less than 72 hours' notice to Owner and New Hanover County of activities that will affect the County’s operations.

1.8 WORK RESTRICTIONS

A. Comply with restrictions on construction operations.

1. Comply with limitations on use of public streets, work on public streets, rights of way, and other requirements of authorities having jurisdiction.

B. On-Site Work Hours: Limit work to between 7:00 a.m. to 7:00 p.m., Monday through Friday, unless otherwise indicated. Work hours may be modified to meet Project requirements if approved by Owner, New Hanover County, and authorities having jurisdiction.

1. Weekend Hours: 7:00 a.m. - 5:00 p.m.
2. Early Morning Hours: Comply with City of Wilmington's noise ordinance.
3. Hours for Utility Shutdowns: 5:00 p.m. - 7:00 a.m. Monday through Friday. Must be coordinated with New Hanover County in advance.

C. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by New Hanover County or others unless permitted under the following conditions and then only after arranging for temporary utility services according to requirements indicated:

1. Notify Owner and New Hanover County not less than two days in advance of proposed utility interruptions.
2. Obtain New Hanover County’s written permission before proceeding with utility interruptions.

D. Noise, Vibration, Dust, and Odors: Coordinate operations that may result in high levels of noise and vibration, dust, odors, or other disruption to New Hanover County occupancy with Owner and New Hanover County.

1. Notify Owner and New Hanover County not less than two days in advance of proposed disruptive operations.
2. Obtain New Hanover County 's written permission before proceeding with disruptive operations.

E. Smoking and Controlled Substance Restrictions: Use of tobacco products , alcoholic beverages, and other controlled substances on Owner's property is not permitted.

F. Employee Conduct: Workers shall conduct themselves in a business-like manner at all times.

1. The following will not be allowed:

a. Loud radios.
b. Guns or weapons.
c. Drugs or alcohol.
d. Harassment of any kind, including catcalls, foul language or other offensive language, gestures or other objectionable behavior.

2. All employees must wear proper attire at all times. Shirts and shoes are required. T-shirts are acceptable provided they contain no objectionable graphics or text.

1.9 SPECIFICATION AND DRAWING CONVENTIONS

A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:

1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
2. Specification requirements are to be performed by Contractor unless specifically stated otherwise.

B. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.

C. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:

1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 011000

SECTION 012500 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for substitutions.

1.2 DEFINITIONS

A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents.

1. Substitutions for Cause: Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product, regulatory changes, or unavailability of required warranty terms.
2. Substitutions for Convenience: Changes proposed by Contractor or Owner that are not required to meet other Project requirements but may offer advantage to Contractor or Owner.

1.3 ACTION SUBMITTALS

A. Substitution Requests: Submit documentation identifying product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.

1. Substitution Request Form: Use form provided in Project Manual.
2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:

a. Statement indicating why specified product or fabrication or installation method cannot be provided, if applicable.
b. Coordination of information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors that will be necessary to accommodate proposed substitution.
c. Detailed comparison of significant qualities of proposed substitutions with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes, such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
e. Samples, where applicable or requested.
f. Certificates and qualification data, where applicable or requested.
g. List of similar installations for completed projects, with project names and addresses as well as names and addresses of architects and owners.
h. Material test reports from a qualified testing agency, indicating and interpreting test results for compliance with requirements indicated.
i. Research reports evidencing compliance with building code in effect for Project.
j. Detailed comparison of Contractor's construction schedule using proposed substitutions with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
k. Cost information, including a proposal of change, if any, in the Contract Sum.

l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents, except as indicated in substitution request, is compatible with related materials and is appropriate for applications indicated.
m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.

3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within seven days of receipt of a request for substitution. Architect will notify Contractor through Construction Manager of acceptance or rejection of proposed substitution within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.

a. Forms of Acceptance:

1) During Bid Phase: Addenda.
2) During Construction: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.

b. Use product specified if Architect does not issue a decision on use of a proposed substitution within time allocated.

1.4 QUALITY ASSURANCE

A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.

1.5 PROCEDURES

A. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

1.6 SUBSTITUTIONS

A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals.

1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:

a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
b. Substitution request is fully documented and properly submitted.
c. Requested substitution will not adversely affect Contractor's construction schedule.
d. Requested substitution has received necessary approvals of authorities having jurisdiction.
e. Requested substitution is compatible with other portions of the Work.
f. Requested substitution has been coordinated with other portions of the Work.
g. Requested substitution provides specified warranty.
h. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

B. Substitutions for Convenience: Not allowed.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012500

This page intentionally left blank.

REQUEST FOR SUBSTITUTION

Project:	New Hanover Co. Board of Election	Project No.:	7702-190810
To:	LS3P	Specification Section #:	
	Wilmington, NC	Contractor:	
Attn.:	Laura Miller	Requested by:	
Phone:	910-790-9901	Phone:	
Fax:	910-790-3301	Fax:	
Email:	lauramiller@ls3p.com	Email:	

Reason for not providing specified item:

Savings to Owner for accepting substitution:

Specified Product/Fabrication Method
(List name/description; model no.; manufacturer):

Required Information for ***Specified*** Product:	Attached:
Point by Point Comparative Product Data	☐
Tests	☐
Reports	☐
Fabrication Drawings	☐
Samples (Where Applicable)	☐

Proposed Product/Fabrication Method
(List trade name/description; model no.; manufacturer):

Required Information for ***Proposed*** Product:	Attached:
Point by Point Comparative Product Data	☐ (Required)
Tests	☐
Reports	☐
Fabrication Drawings	☐
Samples (Where Applicable)	☐

List of Related Changes/Modifications:

Differences between proposed substitution
and specified product:

Proposed product/fabrication method
affects other parts of the Work ☐ No ☐ Yes: Explain

REQUEST FOR SUBSTITUTION

Undersigned certifies:

- Proposed substitution has been fully investigated and determined to be equal or superior in all respects to specified product as utilized for this project, except as noted herein.
- Qualifications of manufacturer, installer, and other specified parties meet the specified qualifications.
- Same special warranty will be furnished for proposed substitution as for specified product.
- Same maintenance service and source for replacement parts, as applicable, is available as that specified.
- Proposed substitution does not affect dimensions and functional clearances, except as noted herein.
- Proposed substitution complies with requirements in the Contract Documents and is appropriate for applications indicated.
- Failure of proposed substitution to produce indicated results will not be considered grounds for additional payment or time.

For the Contractor:

Submitted by: _____

Signed: _____

Firm: _____

Telephone: _____

Fax: _____

Email: _____

For the Manufacturer:

Submitted by: _____

Signed: _____

Firm: _____

Telephone: _____

Fax: _____

Email: _____

END OF REQUEST FOR SUBSTITUTION

SECTION 012600 - CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for handling and processing Contract modifications.

1.2 MINOR CHANGES IN THE WORK

A. Architect will issue through Construction Manager supplemental instructions authorizing minor changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, on AIA Document G710.

1.3 PROPOSAL REQUESTS

A. Owner-Initiated Proposal Requests: Construction Manager will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.

1. Work Change Proposal Requests issued by Construction Manager are not instructions either to stop work in progress or to execute the proposed change.
2. Within time specified in Proposal Request or 20 days, when not otherwise specified, after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.

a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.

1) Excavation Related Changes: Contractor shall coordinate with Owner's testing agency to determine in-place quantities of undisturbed material for changes in the Work relating to soil removal, hauling, disposal and/or placement. Loose, truck, or disturbed material measurements are not acceptable. Claims for quantities not verified by the testing agency are subject to rejection by the Owner.

b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
c. Include costs of labor and supervision directly attributable to the change.
d. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
e. Quotation Form: Use form included in Project Manual.

B. Contractor-Initiated Proposals: If latent or changed conditions require modifications to the Contract, Contractor may initiate a claim by submitting a request for a change to Construction Manager.

1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.

a. Excavation Related Changes: Contractor shall coordinate with Owner's testing agency to determine in-place quantities of undisturbed material for changes in the Work relating to soil removal, hauling, disposal and/or placement. Loose, truck, or disturbed material measurements are not acceptable. Claims for quantities not verified by the testing agency are subject to rejection by the Owner.

3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
4. Include costs of labor and supervision directly attributable to the change.
5. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
6. Comply with requirements in Section 012500 "Substitution Procedures" if the proposed change requires substitution of one product or system for product or system specified.
7. Proposal Request Form: Use form included in Project Manual.

1.4 CHANGE ORDER PROCEDURES

A. On Owner's approval of a Work Change Proposal Request, Construction Manager will issue a Change Order for signatures of Owner and Contractor on AIA Document G701.

B. The cost of the Contractors overhead and profit on any change order shall be:

1. For extra Work completed by the Contractor with his own labor, not more than 15 percent shall be added as the allowance for overhead and profit.
2. For extra Work completed by Subcontractors of the Contractor, not more than 10 percent shall be added as the allowance for overhead and profit.
3. For Work deleted which would have been completed by the Contractor, with his own labor, not less than 10 percent shall be credited to the Owner as the allowance for overhead and profit.
4. For Work deleted which would have been completed by Subcontractors of the Contractor, not less than 5 percent shall be credited to the Owner by the Contractor as the allowance for overhead and profit.

C. In order to facilitate checking of quotations for extras or credits, proposals, except those so minor that their propriety can be seen by inspection, shall be accompanied by a complete itemization of costs including labor, materials, and Subcontracts. Labor and materials shall be itemized in the manner prescribed above. Where major cost items are Subcontracts, they shall be itemized also. In no case will a change be approved without such itemization.

1.5 CONSTRUCTION CHANGE DIRECTIVE

A. Construction Change Directive: Construction Manager may issue a Construction Change Directive on AIA Document G714. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.

1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.

B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.

1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

1.6 EXTENSION OF TIME DUE TO WEATHER

A. General: This article establishes conditions and procedures for amending the Contract Time when excess adverse weather conditions have repeatedly caused cancellation of schedule critical activities, resulting in delay to the Project.

B. Definitions:

1. Adverse Weather: Job site environmental conditions in which precipitation, or soil conditions resulting from precipitation, or ambient temperature conditions during working hours preclude carrying out a Scheduled Critical Activity. The following conditions may be considered by the Architect in determining the extent of excess adverse weather conditions, depending upon the nature of the delayed project tasks:

   a. Precipitation greater than 0.1 inch of water equivalent per day.
   b. Days on which the average air temperature does not exceed 40 degrees F.
   c. Other weather conditions deemed hazardous by the Contractor.

2. Scheduled Critical Activity: Project tasks, the delay of which will directly result in a delay in the completion of the project.
3. Excess Adverse Weather: Adverse weather occurring in excess of the normal, cumulative number of calendar days of adverse weather as listed below:

Month	Normal	Month	Normal
January	5	July	8
February	6	August	10
March	6	September	7
April	5	October	5
May	6	November	5
June	8	December	6

C. Claim for Extension of Time Due to Weather:

1. Contractor shall file claim for each month during which adverse weather occurs.

   a. Attach copies of Contractor's Daily Reports for each day of adverse weather, describing fully the weather conditions, schedule activities delayed, and reasons for the delay.
   b. Include photographs where applicable for documenting soil conditions.
   c. Attach copy of NCDC/NOAA Local Climatological Data report for given month, or other published U.S. or state monthly weather data acceptable to Architect.

2. Claim shall be filed for a calendar month by attaching the completed form to the Application for Payment submitted the following month.
3. Architect shall review and approve or take other action upon Contractor's Claim for Extension of Time. Adjustment of Contract Time shall be made by a single Change Order prepared at project closeout.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012600

This page intentionally left blank.

CHANGE PROPOSAL WORKSHEET SUMMARY

Cape Fear FD Stonewater, Owner

New Hanover County Board of Election — Contract Document Date: _____, 20___

LS3P Project No.: 7702-190810 — Bulletin No. ____, Date: _____, 20___

A. NOTICE TO CONTRACTOR

1. Use this form as a cover sheet and summary for costs associated with Construction Change Directives, Requests for Proposal, and Change Orders. Use one form for Contractor, and a form for each subcontractor. Indicate allowable overhead and profit for Contractor, subcontractors, and sub-subcontractors in accordance with the Conditions of the Contract.

B. MATERIALS

1. Direct Cost of Materials $_____
   a) Attach list with quantity, item, unit cost, unit manhours, total manhours, OT manhours, total cost.
2. Overhead and Profit on Item B.1. $_____
   a) Include __% max. for small tools & consumables
3. Sales Tax $_____
4. Shipping and Transportation $_____
5. Materials Subtotal $_____

C. LABOR

1. Direct Cost of Labor: Hours: _____ @ _____ /hr. $_____
   a) Include time sheets if requested.
2. Overhead and Profit on Item C.1. $_____
   a) Show O & P percentage on straight labor cost, not on premium portion.
   b) O & P includes supervisor's time.
3. Payroll Taxes and Insurance @ _____ % $_____
4. Labor Subtotal $_____

D. EQUIPMENT RENTAL

1. Equipment Rental $_____
   a) Include quotes and pick-up/delivery tickets.
2. Overhead and Profit on Item D.1. (__% maximum) $_____
3. Equipment Rental Subtotal $_____

E. SUBCONTRACTORS

1. Subcontractors $_____
   a) Include quotes with material and equipment back up
2. Overhead and Profit on Item E.1. (__% maximum) $_____
3. Subcontractor Subtotal $_____

F. SUBTOTAL OF PROPOSAL $_____

1. Bonds (___% of Subtotal of Proposal) $_____

G. TOTAL OF CHANGE PROPOSAL $_____

CHANGE PROPOSAL WORKSHEET SUMMARY

H. TIME EXTENSION REQUEST:

1. Number of Days: _____ Schedule Activity # Affected: _____
2. Number of Days: _____ Schedule Activity # Affected: _____
3. Number of Days: _____ Schedule Activity # Affected: _____
4. Total Number of Days, this Proposal: _____

I. CONTRACTOR'S SIGNATURE:

1. Contractor: _____
   Company Name
2. Prepared By: _____
   Name
3. Date: _____

J. ATTACHMENTS:

SECTION 012900 - PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements necessary to prepare and process Applications for Payment.

B. Related Requirements:

1. Section 012600 "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.
2. Section 013200 "Construction Progress Documentation" for administrative requirements governing the preparation and submittal of the Contractor's construction schedule.

1.2 DEFINITIONS

A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

1.3 SCHEDULE OF VALUES

A. Coordination: Coordinate preparation of the schedule of values with preparation of Contractor's construction schedule.

1. Coordinate line items in the schedule of values with items required to be indicated as separate activities in Contractor's construction schedule.
2. Submit the schedule of values to Architect through Construction Manager at earliest possible date, but no later than seven days before the date scheduled for submittal of initial Applications for Payment.
3. Subschedules for Separate Elements of Work: Where the Contractor's construction schedule defines separate elements of the Work, provide subschedules showing values coordinated with each element.

B. ""Format and Content: Use Project Manual table of contents as a guide to establish line items for the schedule of values. Provide at least one line item for each Specification Section.

1. Identification: Include the following Project identification on the schedule of values:

   a. Project name and location.
   b. Owner's name.
   c. Name of Architect.
   d. Architect's Project number.
   e. Contractor's name and address.
   f. Date of submittal.

2. Arrange schedule of values consistent with format of AIA Document G703.
3. Arrange the schedule of values in tabular form, with separate columns to indicate the following for each item listed:

   a. Related Specification Section or division.
   b. Description of the Work.
   c. Name of subcontractor.
   d. Name of manufacturer or fabricator.
   e. Name of supplier.

f. Change Orders (numbers) that affect value.
g. Dollar value of the following, as a percentage of the Contract Sum to nearest one-hundredth percent, adjusted to total 100 percent. Round dollar amounts to whole dollars, with total equal to Contract Sum.

1) Labor.
2) Materials.
3) Equipment.

4. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Provide multiple line items for principal subcontract amounts in excess of five percent of the Contract Sum.
5. Provide a separate line item in the schedule of values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.

a. Differentiate between items stored on-site and items stored off-site.

6. Overhead Costs, Proportional Distribution: Include total cost and proportionate share of general overhead and profit for each line item.
7. Temporary Facilities: Show cost of temporary facilities and other major cost items that are not direct cost of actual work-in-place as separate line items.

1.4 APPLICATIONS FOR PAYMENT

A. Each Application for Payment following the initial Application for Payment shall be consistent with previous applications and payments, as certified by Architect and Construction Manager and paid for by Owner.

B. Payment Application Times: The date for each progress payment is indicated in the Owner/Contractor Agreement. The period of construction work covered by each Application for Payment is the period indicated in the Agreement.

1. Submit draft copy of Application for Payment seven days prior to due date for review by Architect.
2. Pay applications not submitted on time will not be paid until the following month.

C. Application for Payment Forms: Use AIA Document G702 and AIA Document G703 as form for Applications for Payment.

D. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Construction Manager will return incomplete applications without action.

1. Entries shall match data on the schedule of values and Contractor's construction schedule. Use updated schedules if revisions were made.
2. Include amounts for work completed following previous Application for Payment, whether or not payment has been received. Include only amounts for work completed at time of Application for Payment.
3. Include amounts of Change Orders and Construction Change Directives issued before last day of construction period covered by application.
4. Indicate separate amounts for work being carried out under Owner-requested project acceleration.

E. Stored Materials: Include in Application for Payment amounts applied for materials or equipment purchased or fabricated and stored, but not yet installed. Differentiate between items stored on-site and items stored off-site.

1. Provide certificate of insurance, evidence of transfer of title to Owner, and consent of surety to payment for stored materials.
2. Provide supporting documentation that verifies amount requested, such as paid invoices. Match amount requested with amounts indicated on documentation; do not include overhead and profit on stored materials.
3. Provide summary documentation for stored materials indicating the following:
    a. Value of materials previously stored and remaining stored as of date of previous Applications for Payment.
    b. Value of previously stored materials put in place after date of previous Application for Payment and on or before date of current Application for Payment.
    c. Value of materials stored since date of previous Application for Payment and remaining stored as of date of current Application for Payment.

F. Transmittal: Submit five signed and notarized original copies of each Application for Payment to Construction Manager by a method ensuring receipt within 24 hours. One copy shall include waivers of lien and similar attachments if required.

1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.

G. Waivers of Mechanic's Lien: With each Application for Payment, submit waivers of mechanic's lien from entities lawfully entitled to file a mechanic's lien arising out of the Contract and related to the Work covered by the payment.

1. Submit partial waivers on each item for amount requested in previous application, after deduction for retainage, on each item.
2. When an application shows completion of an item, submit conditional final or full waivers.
3. Owner reserves the right to designate which entities involved in the Work must submit waivers.
4. Submit final Application for Payment with or preceded by conditional final waivers from every entity involved with performance of the Work covered by the application who is lawfully entitled to a lien.
5. Waiver Forms: Submit executed waivers of lien on forms acceptable to Owner.

H. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:

1. List of subcontractors.
2. Schedule of values.
3. Contractor's construction schedule (preliminary if not final).
4. 'Products list (preliminary if not final).
5. Submittal schedule (preliminary if not final).
6. List of Contractor's staff assignments.
7. List of Contractor's principal consultants.
8. Copies of building permits.
9. Copies of authorizations and licenses from authorities having jurisdiction for performance of the Work.
10. Initial progress report.
11. Report of preconstruction conference.
12. Certificates of insurance and insurance policies.
13. Performance and payment bonds.
14. Data needed to acquire Owner's insurance.

I. Subsequent Application for Payment: After issuing the Initial Application for Payment, administrative actions and submittals that must precede or coincide with submittal of remaining Applications for Payment include the following:

1. Reports and other documents indicated in Section 013200 "Construction Progress Documentation."
2. Closeout Submittal List (preliminary, if not final).

J. Retainage Reduction:

1. Owner shall pay the amount due to the Contractor on account of progress payments as indicated in the Agreement. After completion of a percentage of the Work, as agreed, the Contractor shall submit, for Owner's and Architect's review and approval a written request for retainage reduction. Upon Owner's approval, with written consent of the surety, the Architect may certify remaining partial payments to be paid in full.
2. The Contractor, as a condition precedent to retainage reduction shall submit, for review and approval by the Architect, the required Operation and Maintenance Manuals.

K. Application for Payment at Substantial Completion: After Architect issues the Certificate of Substantial Completion, submit an Application for Payment showing 100 percent completion for portion of the Work claimed as substantially complete.

1. Include documentation supporting claim that the Work is substantially complete and a statement showing an accounting of changes to the Contract Sum.

   a. Complete administrative actions, submittals, and Work preceding this application, as described in Section 017700 "Closeout Procedures."

L. Final Payment Application: After completing Project closeout requirements, submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:

1. Evidence of completion of Project closeout requirements.
2. Certification of completion of final punch list items.
3. Insurance certificates for products and completed operations where required and proof that taxes, fees, and similar obligations were paid.
4. Updated final statement, accounting for final changes to the Contract Sum.
5. AIA Document G706.
6. AIA Document G706A.
7. AIA Document G707.
8. Evidence that claims have been settled.
9. Final meter readings for utilities, a measured record of stored fuel, and similar data as of date of Substantial Completion or when Owner took possession of and assumed responsibility for corresponding elements of the Work.
10. Final liquidated damages settlement statement.
11. Proof that taxes, fees, and similar obligations are paid.
12. Waivers and releases.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012900

SECTION 013100 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative provisions for coordinating construction operations on Project, including, but not limited to, the following:

1. General coordination procedures.
2. Coordination drawings.
3. RFIs.
4. Digital project management procedures.
5. Web-based Project management software package.
6. Project meetings.

1.2 DEFINITIONS

A. BIM: Building Information Modeling.

B. RFI: Request for Information. Request from Owner, Construction Manager, Architect, or Contractor seeking information required by or clarifications of the Contract Documents.

1.3 INFORMATIONAL SUBMITTALS

A. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:

1. Name, address, telephone number, and email address of entity performing subcontract or supplying products.
2. Number and title of related Specification Section(s) covered by subcontract.
3. Drawing number and detail references, as appropriate, covered by subcontract.

B. Key Personnel Names: Prior to starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses, cellular telephone numbers, and e-mail addresses. Provide names, addresses, and telephone numbers of individuals assigned as alternates in the absence of individuals assigned to Project.

1. Post copies of list in Project meeting room, in temporary field office, in web-based Project software directory, and in prominent location in built facility. Keep list current at all times.

1.4 GENERAL COORDINATION PROCEDURES

A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations included in different Sections that depend on each other for proper installation, connection, and operation.

1. Schedule construction operations in sequence required to obtain the best results, where installation of one part of the Work depends on installation of other components, before or after its own installation.
2. Coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair.

3. Make adequate provisions to accommodate items scheduled for later installation.

B. Prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.

1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.

C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:

1. Preparation of Contractor's construction schedule.
2. Preparation of the schedule of values.
3. Installation and removal of temporary facilities and controls.
4. Delivery and processing of submittals.
5. Progress meetings.
6. Preinstallation conferences.
7. Project closeout activities.
8. Startup and adjustment of systems.

1.5 COORDINATION DRAWINGS

A. Coordination Drawings, General: Prepare coordination drawings according to requirements in individual Sections, and additionally where installation is not completely indicated on Shop Drawings, where limited space availability necessitates coordination, or if coordination is required to facilitate integration of products and materials fabricated or installed by more than one entity.

1. Content: Project-specific information, drawn accurately to a scale large enough to indicate and resolve conflicts. Do not base coordination drawings on standard printed data. Include the following information, as applicable:

a. Use applicable Drawings as a basis for preparation of coordination drawings. Prepare sections, elevations, and details as needed to describe relationship of various systems and components.
b. Indicate functional and spatial relationships of components of architectural, structural, civil, mechanical, and electrical systems.
c. Indicate space requirements for routine maintenance and for anticipated replacement of components during the life of the installation.
d. Show location and size of access doors required for access to concealed dampers, valves, and other controls.
e. Indicate required installation sequences.
f. Indicate dimensions shown on Drawings. Specifically note dimensions that appear to be in conflict with submitted equipment and minimum clearance requirements. Provide alternative sketches to Architect indicating proposed resolution of such conflicts. Minor dimension changes and difficult installations will not be considered changes to the Contract.

2. Review: Architect will review coordination drawings to confirm that, in general, the Work is being coordinated, but not for the details of the coordination, which are Contractor's responsibility. If Architect determines that coordination drawings are not being prepared in sufficient scope or detail, or are otherwise deficient, Architect will so inform Contractor, who shall make suitable modifications and resubmit.
3. Coordination Drawing Prints: Prepare coordination drawing prints according to requirements in Section 013300 "Submittal Procedures."

B. Coordination Drawing Organization: Organize coordination drawings as follows:

1. Floor Plans and Reflected Ceiling Plans: Show architectural and structural elements, and mechanical, plumbing, fire-protection, fire-alarm, and electrical Work. Show locations of visible ceiling-mounted devices relative to acoustical ceiling grid. Supplement plan drawings with section drawings where required to adequately represent the Work.
2. Plenum Space: Indicate subframing for support of ceiling, raised access floor, and wall systems, mechanical and electrical equipment, and related Work. Locate components within plenums to accommodate layout of light fixtures and other components indicated on Drawings. Indicate areas of conflict between light fixtures and other components.
3. Mechanical Rooms: Provide coordination drawings for mechanical rooms, showing plans and elevations of mechanical, plumbing, fire-protection, fire-alarm, and electrical equipment.
4. Structural Penetrations: Indicate penetrations and openings required for all disciplines.
5. Slab Edge and Embedded Items: Indicate slab edge locations and sizes and locations of embedded items for metal fabrications, sleeves, anchor bolts, bearing plates, angles, door floor closers, slab depressions for floor finishes, curbs and housekeeping pads, and similar items.
6. Mechanical and Plumbing Work: Show the following:
    a. Sizes and bottom elevations of ductwork, piping, and conduit runs, including insulation, bracing, flanges, and support systems.
    b. Dimensions of major components, such as dampers, valves, diffusers, access doors, cleanouts and electrical distribution equipment.
    c. Fire-rated enclosures around ductwork.
7. Electrical Work: Show the following:
    a. Runs of vertical and horizontal conduit 1-1/4 inches in diameter and larger.
    b. Light fixture, exit light, emergency battery pack, smoke detector, and other fire-alarm locations.
    c. Panel board, switchboard, switchgear, transformer, busway, generator, and motor-control center locations.
    d. Location of pull boxes and junction boxes, dimensioned from column center lines.
8. Fire-Protection System: Show the following:
    a. Locations of standpipes, mains piping, branch lines, pipe drops, and sprinkler heads.

C. Coordination Digital Data Files: Prepare coordination digital data files according to the following requirements:
1. File Preparation Format: Same digital data software program, version, and operating system as original Drawings.
2. File Submittal Format: Submit or post coordination drawing files using format same as file preparation format or PDF format.
3. Architect will furnish Contractor one set of digital data files of Drawings for use in preparing coordination digital data files.
    a. Architect makes no representations as to the accuracy or completeness of digital data files as they relate to Drawings.
    b. Digital Data Software Program: Drawings are available in AutoCAD translated from Revit file.
    c. Contractor shall execute a data licensing agreement in the form of Agreement included in this Project Manual.

1.6 REQUEST FOR INFORMATION (RFI)

A. General: Immediately on discovery of the need for additional information, clarification, or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.
1. Architect will return without response those RFIs submitted to Architect by other entities controlled by Contractor.

2. Coordinate and submit RFIs in a prompt manner to avoid delays in Contractor's work or work of subcontractors.

B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:

1. Project name.
2. Owner name.
3. Name of Architect and Construction Manager.
4. Architect's Project number.
5. Date.
6. Name of Contractor.
7. RFI number, numbered sequentially.
8. RFI subject.
9. Specification Section number and title and related paragraphs, as appropriate.
10. Drawing number and detail references, as appropriate.
11. Field dimensions and conditions, as appropriate.
12. Contractor's suggested resolution. If Contractor's suggested resolution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
13. Contractor's signature.
14. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.

    a. Include dimensions, thicknesses, structural grid references, and details of affected materials, assemblies, and attachments on attached sketches.

C. RFI Forms: Software-generated form via the Project Information Management System.

1. Attachments shall be electronic files in PDF format.

D. Architect's and Construction Manager's Action: Architect and Construction Manager will review each RFI, determine action required, and respond. Allow five days for Architect's response for each RFI. RFIs received by Architect or Construction Manager after 1:00 p.m. will be considered as received the following working day.

1. The following Contractor-generated RFIs will be returned without action:

    a. Requests for approval of submittals.
    b. Requests for approval of substitutions.
    c. Requests for approval of Contractor's means and methods.
    d. Requests for coordination information already indicated in the Contract Documents.
    e. Requests for adjustments in the Contract Time or the Contract Sum.
    f. Requests for interpretation of Architect's actions on submittals.
    g. Incomplete RFIs or inaccurately prepared RFIs.

2. Architect's action may include a request for additional information, in which case Architect's time for response will date from time of receipt by Architect or Construction Manager of additional information.
3. Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Section 012600 "Contract Modification Procedures."

    a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect and Construction Manager in writing within 5 days of receipt of the RFI response.

E. RFI Log: Use software log that is part of web-based Project management software.

F. On receipt of Architect's and Construction Manager's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect and Construction Manager within seven days if Contractor disagrees with response.

1.7 DIGITAL PROJECT MANAGEMENT PROCEDURES

A. Use of Architect's Digital Data Files: Electronic copies of digital data files of the Contract Drawings will be available from Architect for Contractor's use during construction.

1. Digital data files may be used by Contractor in preparing coordination drawings, Shop Drawings, and Project Record Drawings.
2. Architect makes no representations as to the accuracy or completeness of digital data files as they relate to Contract Drawings.
3. Digital Drawing Software Program: Contract Drawings are available in AutoCAD translated from Revit file.
4. The digital data files are available under the following conditions:

a. Contractor shall execute a data licensing agreement in the form of Digital Data Letter of Agreement.
b. Digital data drawings are not to be considered Contract Documents as defined by the General Conditions for the Contract for Construction.
c. The Contract Documents executed or identified in the Owner/Contractor Agreement, shall prevail in case of an inconsistency with subsequent versions made through manipulatable electronic operations involving computers.
d. The Contractor shall not transfer or reuse Instruments of Service in electronic or machine-readable form without the prior written consent of the Architect.

B. Web-Based Project Management Software Package: Use Architect's web-based Project management software package for purposes of hosting and managing Project communication and documentation until Final Completion.

1. Web-based Project management software includes, at a minimum, the following features:

a. Compilation of Project data, including Contractor, subcontractors, Architect, Architect's consultants, Owner, and other entities involved in Project. Include names of individuals and contact information.
b. Access control for each entity for each workflow process, to determine entity's digital rights to create, modify, view, and print documents.
c. Document workflow planning, allowing customization of workflow between project entities.
d. Creation, logging, tracking, and notification for Project communications required in other Specification Sections, including, but not limited to, RFIs, submittals, Minor Changes in the Work, Construction Change Directives, and Change Orders.
e. Track status of each Project communication in real time, and log time and date when responses are provided.
f. Procedures for handling PDFs or similar file formats, allowing markups by each entity. Provide security features to lock markups against changes once submitted.
g. Processing and tracking of payment applications.
h. Processing and tracking of contract modifications.
i. Creating and distributing meeting minutes.
j. Document management for Drawings, Specifications, and coordination drawings, including revision control.
k. Management of construction progress photographs.
l. Mobile device compatibility, including smartphones and tablets.

C. PDF Document Preparation: Where PDFs are required to be submitted to Architect, prepare as follows:

1. Assemble complete submittal package into a single indexed file, incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
2. Name file with submittal number or other unique identifier, including revision identifier.
3. Certifications: Where digitally submitted certificates and certifications are required, provide a digital signature with digital certificate on where indicated.

1.8 PROJECT MEETINGS

A. General: Construction Manager will schedule and conduct meetings and conferences at Project site unless otherwise indicated.

1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times a minimum of 10 days prior to meeting.
2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
3. Minutes: Entity responsible for conducting meeting will record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner, Construction Manager, and Architect, within three days of the meeting.

B. Preconstruction Conference: Architect will schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner, Construction Manager and Architect.

1. Attendees: Authorized representatives of Owner, Construction Manager, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
2. Agenda: Discuss items of significance that could affect progress, including the following:

a. Responsibilities and personnel assignments.
b. Tentative construction schedule.
c. Phasing.
d. Critical work sequencing and long lead items.
e. Designation of key personnel and their duties.
f. Lines of communications.
g. Use of web-based Project software.
h. Procedures for processing field decisions and Change Orders.
i. Procedures for RFIs.
j. Procedures for testing and inspecting.
k. Procedures for processing Applications for Payment.
l. Distribution of the Contract Documents.
m. Submittal procedures.
n. Preparation of Record Documents.
o. Use of the premises.
p. Work restrictions.
q. Working hours.
r. Owner's occupancy requirements.
s. Responsibility for temporary facilities and controls.
t. Procedures for moisture and mold control.
u. Procedures for disruptions and shutdowns.
v. Construction waste management and recycling.
w. Parking availability.
x. Office, work, and storage areas.
y. Equipment deliveries and priorities.
z. First aid.
aa. Security.

bb. Progress cleaning.
cc. Bonds and insurance.

3. Minutes: Entity responsible for conducting meeting will record and distribute meeting minutes.

C. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity when required by other Sections and when required for coordination with other construction.

1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect, Construction Manager of scheduled meeting dates.
2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:

a. Contract Documents.
b. Options.
c. Related RFIs.
d. Related Change Orders.
e. Purchases.
f. Deliveries.
g. Submittals.
h. Review of mockups.
i. Possible conflicts.
j. Compatibility requirements.
k. Time schedules.
l. Weather limitations.
m. Manufacturer's written instructions.
n. Warranty requirements.
o. Compatibility of materials.
p. Acceptability of substrates.
q. Temporary facilities and controls.
r. Space and access limitations.
s. Regulations of authorities having jurisdiction.
t. Testing and inspecting requirements.
u. Installation procedures.
v. Coordination with other work.
w. Required performance results.
x. Protection of adjacent work.
y. Protection of construction and personnel.

3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.
5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.

D. Project Closeout Conference: Construction Manager will schedule and conduct a project closeout conference, at a time convenient to Owner and Architect, but no later than 90 days prior to the scheduled date of Substantial Completion.

1. Conduct the conference to review requirements and responsibilities related to Project closeout.
2. Attendees: Authorized representatives of Owner, Construction Manager, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the meeting. Participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.

3. Agenda: Discuss items of significance that could affect or delay Project closeout, including the following:

    a. Preparation of Record Documents.
    b. Procedures required prior to inspection for Substantial Completion and for final inspection for acceptance.
    c. Procedures for completing and archiving web-based Project software site data files.
    d. Submittal of written warranties.
    e. Requirements for preparing operations and maintenance data.
    f. Requirements for delivery of material samples, attic stock, and spare parts.
    g. Requirements for demonstration and training.
    h. Preparation of Contractor's punch list.
    i. Procedures for processing Applications for Payment at Substantial Completion and for final payment.
    j. Submittal procedures.
    k. Owner's partial occupancy requirements.
    l. Installation of Owner's furniture, fixtures, and equipment.
    m. Responsibility for removing temporary facilities and controls.

4. Minutes: Entity conducting meeting will record and distribute meeting minutes.

E. Progress Meetings: Construction Manager will conduct progress meetings at monthly intervals.

1. Attendees: In addition to representatives of Owner , Construction Manager, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
2. Coordinate dates of meetings with preparation of payment requests.
3. Status Report: Contractor shall provide written report outlining the following:

    a. Work done in last 30 days.
    b. Work scheduled for next 30 days.
    c. RFI status.
    d. Submittal status.
    e. Allowance recap.
    f. Pre-Installation meetings scheduled.
    g. Narrative of progress schedule status.

4. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.

    a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.

        1) Review schedule for next period.

    b. Review present and future needs of each entity present, including the following:

        1) Interface requirements.
        2) Sequence of operations.
        3) Status of submittals.
        4) Deliveries.
        5) Off-site fabrication.
        6) Access.

7) Site use.
8) Temporary facilities and controls.
9) Progress cleaning.
10) Quality and work standards.
11) Status of correction of deficient items.
12) Field observations.
13) Status of RFIs.
14) Status of Proposal Requests.
15) Pending changes.
16) Status of Change Orders.
17) Pending claims and disputes.
18) Documentation of information for payment requests.

5. Minutes: Entity responsible for conducting the meeting will record and distribute the meeting minutes to each party present and to parties requiring information.

a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting, where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

F. Coordination Meetings: Construction Manager will conduct Project coordination meetings at weekly intervals. Project coordination meetings are in addition to specific meetings held for other purposes, such as progress meetings and preinstallation conferences.

1. Attendees: In addition to representatives of Owner , Construction Manager, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meetings shall be familiar with Project and authorized to conclude matters relating to the Work.
2. Agenda: Review and correct or approve minutes of the previous coordination meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.

a. Combined Contractor's Construction Schedule: Review progress since the last coordination meeting. Determine whether each contract is on time, ahead of schedule, or behind schedule, in relation to combined Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
b. Schedule Updating: Revise combined Contractor's construction schedule after each coordination meeting, where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with report of each meeting.
c. Review present and future needs of each contractor present, including the following:

1) Interface requirements.
2) Sequence of operations.
3) Status of submittals.
4) Deliveries.
5) Off-site fabrication.
6) Access.
7) Site use.
8) Temporary facilities and controls.
9) Work hours.
10) Hazards and risks.
11) Progress cleaning.
12) Quality and work standards.
13) Status of RFIs.
14) Proposal Requests.

15) Change Orders.
16) Pending changes.

3. Reporting: Record meeting results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

SECTION 013200 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:

1. Startup construction schedule.
2. Contractor's Construction Schedule.
3. Construction schedule updating reports.
4. Daily construction reports.
5. Site condition reports.
6. Unusual event reports.

1.2 DEFINITIONS

A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction Project. Activities included in a construction schedule consume time and resources.

1. Critical Activity: An activity on the critical path that must start and finish on the planned early start and finish times.
2. Predecessor Activity: An activity that precedes another activity in the network.
3. Successor Activity: An activity that follows another activity in the network.

B. CPM: Critical path method, which is a method of planning and scheduling a construction project where activities are arranged based on activity relationships. Network calculations determine the critical path of Project and when activities can be performed.

C. Critical Path: The longest connected chain of interdependent activities through the network schedule that establishes the minimum overall Project duration and contains no float.

D. Event: The starting or ending point of an activity.

E. Float: The measure of leeway in starting and completing an activity.

1. Float time is not for the exclusive use or benefit of either Owner or Contractor, but is a jointly owned, expiring Project resource available to both parties as needed to meet schedule milestones and Contract completion date.
2. Free float is the amount of time an activity can be delayed without adversely affecting the early start of the successor activity.
3. Total float is the measure of leeway in starting or completing an activity without adversely affecting the planned Project completion date.

F. Resource Loading: The allocation of manpower and equipment necessary for completing an activity as scheduled.

1.3 INFORMATIONAL SUBMITTALS

A. Format for Submittals: Submit required submittals in the following format:

1. Working electronic copy of schedule file.
2. PDF file.

B. Startup construction schedule.

C. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.

1. Submit a working digital copy of schedule, using software indicated, and labeled to comply with requirements for submittals.

D. CPM Reports: Concurrent with CPM schedule, submit each of the following reports. Format for each activity in reports shall contain activity number, activity description, cost and resource loading, original duration, remaining duration, early start date, early finish date, late start date, late finish date, and total float in calendar days.

1. Activity Report: List of activities sorted by activity number and then early start date, or actual start date if known.
2. Logic Report: List of preceding and succeeding activities for each activity, sorted in ascending order by activity number and then by early start date, or actual start date if known.
3. Total Float Report: List of activities sorted in ascending order of total float.

E. Construction Schedule Updating Reports: Submit with Applications for Payment.

F. Daily Construction Reports: Submit at monthly intervals.

G. Site Condition Reports: Submit at time of discovery of differing conditions.

H. Unusual Event Reports: Submit at time of unusual event.

1.4 COORDINATION

A. Coordinate Contractor's Construction Schedule with the schedule of values, list of subcontracts, submittal schedule, progress reports, payment requests, and other required schedules and reports.

1. Secure time commitments for performing critical elements of the Work from entities involved.
2. Coordinate each construction activity in the network with other activities, and schedule them in proper sequence.

1.5 CONTRACTOR'S CONSTRUCTION SCHEDULE

A. Computer Scheduling Software: Prepare schedules using current version of a program that has been developed specifically to manage construction schedules.

B. Time Frame: Extend schedule from date established for the Notice to Proceed to date of Final Completion.

1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.
2. The Contractor shall conduct his operations so the completion date in the Agreement is met.

C. Activities: Treat each floor or separate area as a separate numbered activity for each main element of the Work. Comply with the following:

1. Activity Duration: Define activities so no activity is longer than 20 days, unless specifically allowed by Architect.
2. Temporary Facilities: Indicate start and completion dates for the following as applicable:

a. Securing of approvals and permits required for performance of the Work.
b. Temporary facilities.

c. Construction of mock-ups, prototypes and samples.
d. Owner interfaces and furnishing of items.
e. Interfaces with Separate Contracts.
f. Regulatory agency approvals.
g. Punch list.

3. Procurement Activities: Include procurement process activities for the following long lead-time items and major items, requiring a cycle of more than 60 days, as separate activities in schedule. Procurement cycle activities include, but are not limited to, submittals, approvals, purchasing, fabrication, and delivery.
4. Submittal Review Time: Include review and resubmittal times indicated in Section 013300 "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's Construction Schedule with submittal schedule.
5. Concrete Slabs: Schedule, coordinate, and install concrete slabs in a timely manner to allow concrete to cure sufficiently for moisture-sensitive floor finishes. Failure to do so, resulting in the requirement for moisture mitigation, will be Contractor's responsibility.
6. Startup and Testing Time: Include no fewer than 14 days for startup and testing.
7. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Architect's and Construction Manager's administrative procedures necessary for certification of Substantial Completion.
8. Punch List and Final Completion: Include not more than 30 days for completion of punch list items and Final Completion.

D. Constraints: Include constraints and work restrictions indicated in the Contract Documents and as follows in schedule, and show how the sequence of the Work is affected.

1. Work by Owner: Include a separate activity for each portion of the Work performed by Owner.
2. Work Stages: Indicate important stages of construction for each major portion of the Work, including, but not limited to, the following:

a. Subcontract awards.
b. Submittals.
c. Purchases.
d. Mockups.
e. Fabrication.
f. Sample testing.
g. Deliveries.
h. Installation.
i. Tests and inspections.
j. Adjusting.
k. Curing.
l. Startup and placement into final use and operation.

3. Construction Areas: Identify each major area of construction for each major portion of the Work. Indicate where each construction activity within a major area must be sequenced or integrated with other construction activities to provide for the following:

a. Structural completion.
b. Temporary enclosure and space conditioning.
c. Permanent space enclosure.
d. Completion of mechanical installation.
e. Completion of electrical installation.
f. Substantial Completion.

E. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and Final Completion.

F. Upcoming Work Summary: Prepare summary report indicating activities scheduled to occur or commence prior to submittal of next schedule update. Summarize the following issues:

1. Unresolved issues.
2. Unanswered Requests for Information.
3. Rejected or unreturned submittals.
4. Notations on returned submittals.
5. Pending modifications affecting the Work and the Contract Time.

G. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.

1. Original target dates shall be retained in scheduling software for the duration of the Project.
2. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
3. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
4. As the Work progresses, indicate Final Completion percentage for each activity.

H. Recovery Schedule: When periodic update indicates the Work is 14 or more calendar days behind the current approved schedule, submit a separate recovery schedule indicating means by which Contractor intends to regain compliance with the schedule. Indicate changes to working hours, working days, crew sizes, equipment required to achieve compliance, and date by which recovery will be accomplished.

I. Distribution: Distribute copies of approved schedule to Architect, Construction Manager, Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.

1. Post copies in Project meeting rooms and temporary field offices.
2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

1.6 STARTUP CONSTRUCTION SCHEDULE

A. Bar Chart Schedule: Submit startup, horizontal, Gantt-chart-type construction schedule within seven days of date established for the Notice to Proceed.

B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line. Outline significant construction activities for first 90 days of construction. Include skeleton diagram for the remainder of the Work and a cash requirement prediction based on indicated activities.

1.7 CPM SCHEDULE REQUIREMENTS

A. Prepare network diagrams using AON (activity-on-node) format.

B. CPM Schedule: Prepare Contractor's Construction Schedule using a time-scaled CPM network analysis diagram for the Work.

1. Develop network diagram in sufficient time to submit CPM schedule, so it can be accepted for use no later than 45 days after date established for the Notice to Proceed.

   a. Failure to include any work item required for performance of this Contract shall not excuse Contractor from completing all work within applicable completion dates.

2. Conduct educational workshops to train and inform key Project personnel, including subcontractors' personnel, in proper methods of providing data and using CPM schedule information.
3. Establish procedures for monitoring and updating CPM schedule and for reporting progress. Coordinate procedures with progress meeting and payment request dates.
4. Use "one workday" as the unit of time for individual activities. Indicate nonworking days and holidays incorporated into the schedule to coordinate with the Contract Time.

C. CPM Schedule Preparation: Prepare a list of all activities required to complete the Work. Using the startup network diagram, prepare a skeleton network to identify probable critical paths.

1. Activities: Indicate the estimated time duration, sequence requirements, and relationship of each activity in relation to other activities. Include estimated time frames for the following activities:

   a. Preparation and processing of submittals.
   b. Mobilization and demobilization.
   c. Purchase of materials.
   d. Delivery.
   e. Fabrication.
   f. Utility interruptions.
   g. Installation.
   h. Work by Owner that may affect or be affected by Contractor's activities.
   i. Testing and inspection.
   j. Punch list and Final Completion.

2. Critical Path Activities: Identify critical path activities, including those for interim completion dates. Scheduled start and completion dates shall be consistent with Contract milestone dates.
3. Processing: Process data to produce output data on a computer-drawn, time-scaled network. Revise data, reorganize activity sequences, and reproduce as often as necessary to produce the CPM schedule within the limitations of the Contract Time.
4. Format: Mark the critical path. Locate the critical path near center of network; locate paths with most float near the edges.

   a. Subnetworks on separate sheets are permissible for activities clearly off the critical path.

D. Contract Modifications: For each proposed contract modification and concurrent with its submission, prepare a time-impact analysis using a network fragment to demonstrate the effect of the proposed change on the overall Project schedule.

E. Initial Issue of Schedule: Prepare initial network diagram from a sorted activity list indicating straight "early start-total float." Identify critical activities. Prepare tabulated reports showing the following:

1. Contractor or subcontractor and the Work or activity.
2. Description of activity.
3. Main events of activity.
4. Immediate preceding and succeeding activities.
5. Early and late start dates.
6. Early and late finish dates.
7. Activity duration in workdays.
8. Total float or slack time.
9. Average size of workforce.

F. Schedule Updating: Concurrent with making revisions to schedule, prepare tabulated reports showing the following:

1. Identification of activities that have changed.
2. Changes in early and late start dates.
3. Changes in early and late finish dates.

4. Changes in activity durations in workdays.
5. Changes in the critical path.
6. Changes in total float or slack time.
7. Changes in the Contract Time.

G. Causes for Extensions of Time:

1. The Contract completion date will be adjusted only for causes specified in the Contract. In the event the Contractor requests an extension of the Contract completion date, the Contractor shall furnish justification and supporting evidence as required by this Section and the General Conditions. The Owner will, after receipt of such justification and supporting evidence, make findings of fact and advise the Contractor in writing thereof. If the Owner determines that the Contractor is entitled to an extension of the Contract completion date, the Owner's determination of the time extension owed shall be based upon the approved CPM schedule or update. Actual delays in activities, which do not affect the scheduled Contract completion date, shall not serve as the basis for a change in Contract completion time.
2. The procedure for preparing and presenting delay justification is as follows:

   a. Create a schedule activity (or activities) that represent the scope of the change or delay.
   b. Assign durations and cost/manpower resources to these new activities.
   c. Determine appropriate logic ties for these new activities. Assign predecessors and successors so that these activities can tie into the existing schedule activities.
   d. These impact activities should be loaded into a separate copy of the updated schedule that immediately precedes the impact issue's time frame. For instance, if an impact issue occurs during mid-April, the new activities should be input into the March 31 (status date) update.
   e. Recalculate the Schedule with these impact activities in place.

3. The Impacted Schedule, along with the backup data describing the new schedule activities and logic ties which comprise the impact/delay issues, will be submitted to the Owner for review and approval. If approved, these impact/delay issues will become a permanent part of the Project Schedule. The Contractor shall not unilaterally make changes to the Project Schedule to justify schedule impacts without the approval of the Owner.
4. Activity delays shall not automatically mean that an extension of the Contract Time is warranted or due the Contractor. Only those delays which impact the imposed Contract Completion Date or other CPM and contract milestone dates will be considered for time extensions.
5. Failure of the Contractor to furnish justification and supporting evidence for an extension of time, as detailed in this Section, within thirty (30) calendar days of the changed condition shall constitute a waiver of any claims for time extension associated with the issue.

1.8 REPORTS

A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:

1. List of subcontractors at Project site.
2. List of separate contractors at Project site.
3. Approximate count of personnel at Project site.
4. Equipment at Project site.
5. Material deliveries.
6. High and low temperatures and general weather conditions, including presence of rain or snow.
7. Testing and inspection.
8. Accidents.
9. Meetings and significant decisions.
10. Unusual events.
11. Stoppages, delays, shortages, and losses.
12. Meter readings and similar recordings.
13. Emergency procedures.

14. Orders and requests of authorities having jurisdiction.
15. Change Orders received and implemented.
16. Construction Change Directives received and implemented.
17. Services connected and disconnected.
18. Equipment or system tests and startups.
19. Partial completions and occupancies.
20. Substantial Completions authorized.

B. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

C. Unusual Event Reports: When an event of an unusual and significant nature occurs at Project site, whether or not related directly to the Work, prepare and submit a special report. List chain of events, persons participating, responses by Contractor's personnel, evaluation of results or effects, and similar pertinent information. Advise Owner in advance when these events are known or predictable.

1. Submit unusual event reports directly to Owner within one day(s) of an occurrence. Distribute copies of report to parties affected by the occurrence.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013200

This page intentionally left blank.

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Submittal schedule requirements.
2. Administrative and procedural requirements for submittals.

1.2 DEFINITIONS

A. Action Submittals: Written and graphic information and physical samples that require Architect's and Construction Manager's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."

B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's and Construction Manager's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."

1.3 SUBMITTAL SCHEDULE

A. Submittal Schedule: Submit, as an action submittal, a list of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or revisions to submittals noted by Architect and Construction Manager and additional time for handling and reviewing submittals required by those corrections.

1. Coordinate submittal schedule with list of subcontracts, the schedule of values, and Contractor's construction schedule.
2. Initial Submittal Schedule: Submit concurrently with startup construction schedule. Include submittals required during the first 60 days of construction. List those submittals required to maintain orderly progress of the Work and those required early because of long lead time for manufacture or fabrication.
3. Final Submittal Schedule: Submit concurrently with the first complete submittal of Contractor's construction schedule.

    a. Submit revised submittal schedule as required to reflect changes in current status and timing for submittals.

4. Format: Arrange the following information in a tabular format:

    a. Scheduled date for first submittal.
    b. Specification Section number and title.
    c. Submittal Category: Action; informational.
    d. Name of subcontractor.
    e. Description of the Work covered.
    f. Scheduled date for Architect's and Construction Manager's final release or approval.
    g. Scheduled dates for purchasing.
    h. Scheduled date of fabrication.
    i. Scheduled dates for installation.
    j. Activity or event number.

1.4 SUBMITTAL FORMATS

A. Submittal Information: Include the following information in each submittal:

1. Project name.
2. Date.
3. Name of Architect.
4. Name of Construction Manager.
5. Name of Contractor.
6. Name of firm or entity that prepared submittal.
7. Names of subcontractor, manufacturer, and supplier.
8. Unique submittal number, including revision identifier. Include Specification Section number with sequential alphanumeric identifier and alphanumeric suffix for resubmittals.
9. Category and type of submittal.
10. Submittal purpose and description.
11. Number and title of Specification Section, with paragraph number and generic name for each of multiple items.
12. Drawing number and detail references, as appropriate.
13. Indication of full or partial submittal.
14. Location(s) where product is to be installed, as appropriate.
15. Other necessary identification.
16. Remarks.
17. Signature of transmitter.

B. Options: Identify options requiring selection by Architect.

C. Deviations and Additional Information: On each submittal, clearly indicate deviations from requirements in the Contract Documents, including minor variations and limitations; include relevant additional information and revisions, other than those requested by Architect and Construction Manager on previous submittals. Indicate by highlighting on each submittal or noting on attached separate sheet.

D. Electronic Submittals: Identify and incorporate information in each electronic submittal file as follows:

1. Assemble complete submittal package into a single indexed file incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
2. Name file with submittal number or other unique identifier, including revision identifier.
   a. File name shall be Specification Section number followed by a hyphen and then a sequential number (e.g. 081113 - 01 HM Doors and Frames). Resubmittals shall include a digital suffix after another hyphen (e.g. 081113 - 01 - 01 HM Doors and Frames).
3. Provide means for insertion to permanently record Contractor's review and approval markings and action taken by Architect.
4. Transmittal Form for Electronic Submittals: Use software-generated form from electronic project information management system.
5. Metadata: Include the following information as keywords in the electronic file metadata:
   a. Project name.
   b. Number and title of appropriate Specification Section.
   c. Manufacturer name.
   d. Product name.

E. Submittals Utilizing Web-Based Project Software: Prepare submittals as PDF files or other format indicated by Project management software.

1.5 SUBMITTAL PROCEDURES

A. Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.

1. Web-Based Project Management Software: Prepare submittals in PDF form, and upload to web-based Project management software website. Enter required data in web-based software site to fully identify submittal.

B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.

1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.
4. Coordinate transmittal of submittals for related parts of the Work specified in different Sections, so processing will not be delayed because of need to review submittals concurrently for coordination.

   a. Architect and Construction Manager reserve the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.

C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Construction Manager's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.

1. Critical Review: Allow 15 days for review of each critical submittal.

   a. Identify critical, long lead item submittals and submittals that require expedited (shorter) turn-around times within the submittal schedule.

2. Initial Review: Allow 30 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Construction Manager will advise Contractor when a submittal being processed must be delayed for coordination.
3. Resubmittal Review: Allow 15 days for review of each resubmittal.
4. Concurrent Consultant Review: Where the Contract Documents indicate that submittals may be transmitted simultaneously to Architect and to Architect's consultants, allow 30 days for review of each submittal. Submittal will be returned to Construction Manager, through Architect, before being returned to Contractor.
5. Deferred Review: For non-critical submittals, including products that are not required until later in the Project, the Architect reserves the right to defer review to within 45 days.

D. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.

1. Note date and content of previous submittal.
2. Note date and content of revision in label or title block, and clearly indicate extent of revision.
3. Resubmit submittals until they are marked with approval notation from Architect's and Construction Manager's action stamp.

E. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.

F. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from Architect's and Construction Manager's action stamp.

1.6 SUBMITTAL REQUIREMENTS

A. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.

1. If information must be specially prepared for submittal because standard published data are unsuitable for use, submit as Shop Drawings, not as Product Data.
2. Mark each copy of each submittal to show which products and options are applicable.
3. Include the following information, as applicable:

a. Manufacturer's catalog cuts.
b. Manufacturer's product specifications.
c. Standard color charts.
d. Statement of compliance with specified referenced standards.
e. Testing by recognized testing agency.
f. Application of testing agency labels and seals.
g. Notation of coordination requirements.
h. Availability and delivery time information.

4. For equipment, include the following in addition to the above, as applicable:

a. Wiring diagrams that show factory-installed wiring.
b. Printed performance curves.
c. Operational range diagrams.
d. Clearances required to other construction, if not indicated on accompanying Shop Drawings.

5. Submit Product Data before Shop Drawings, and before or concurrently with Samples.

B. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data unless submittal based on Architect's digital data drawing files is otherwise permitted.

1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:

a. Identification of products.
b. Schedules.
c. Compliance with specified standards.
d. Notation of coordination requirements.
e. Notation of dimensions established by field measurement.
f. Relationship and attachment to adjoining construction clearly indicated.
g. Seal and signature of professional engineer if specified.

2. Paper Sheet Size: Except for templates, patterns, and similar full-size Drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches, but no larger than 30 by 42 inches.

C. Samples: Submit Samples for review of type, color, pattern, and texture for a check of these characteristics with other materials.

1. Transmit Samples that contain multiple, related components, such as accessories together in one submittal package.
2. Identification: Permanently attach label on unexposed side of Samples that includes the following:

a. Project name and submittal number.

b. Generic description of Sample.
c. Product name and name of manufacturer.
d. Sample source.
e. Number and title of applicable Specification Section.
f. Specification paragraph number and generic name of each item.

3. Web-Based Project Management Software: Prepare submittals in PDF form, and upload to web-based Project software website. Enter required data in web-based software site to fully identify submittal.
4. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.

   a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
   b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.

5. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units, showing the full range of colors, textures, and patterns available.

   a. Number of Samples: Submit one full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect, through Construction Manager, will return submittal with options selected.

6. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.

   a. Number of Samples: Submit three sets of Samples.

      1) Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.
      2) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.

D. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:

1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
2. Manufacturer and product name, and model number if applicable.
3. Number and name of room or space.
4. Location within room or space.

E. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.

F. Design Data: Prepare and submit written and graphic information indicating compliance with indicated performance and design criteria in individual Specification Sections. Include list of assumptions and

summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Number each page of submittal.

G. Certificates:

1. Certificates and Certifications Submittals: Submit a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity. Provide a notarized signature where indicated.
2. Installer Certificates: Submit written statements on manufacturer's letterhead, certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead, certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
4. Material Certificates: Submit written statements on manufacturer's letterhead, certifying that material complies with requirements in the Contract Documents.
5. Product Certificates: Submit written statements on manufacturer's letterhead, certifying that product complies with requirements in the Contract Documents.
6. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of AWS B2.1/B2.1M on AWS forms. Include names of firms and personnel certified.

H. Test and Research Reports:

1. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for substrate preparation and primers required.
2. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
3. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
4. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
5. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
6. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:

    a. Name of evaluation organization.
    b. Date of evaluation.
    c. Time period when report is in effect.
    d. Product and manufacturers' names.
    e. Description of product.
    f. Test procedures and results.
    g. Limitations of use.

1.7 DELEGATED-DESIGN SERVICES

A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.

1. If criteria indicated are insufficient to perform services or certification required, submit a written request for additional information to Architect.

B. Delegated-Design Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally signed PDF file paper copies of certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.

1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

1.8 CONTRACTOR'S REVIEW

A. Action Submittals and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect and Construction Manager.

B. Contractor's Approval: Indicate Contractor's approval for each submittal with a uniform approval stamp. Include name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

1. Architect and Construction Manager will not review submittals received from Contractor that do not have Contractor's review and approval.

1.9 ARCHITECT'S AND CONSTRUCTION MANAGER'S REVIEW

A. Action Submittals: Architect and Construction Manager will review each submittal, annotate to indicate corrections or revisions required, and return it. Architect will stamp each submittal with an action stamp and will mark stamp appropriately to indicate action.

1. No Exceptions Taken: The work covered by the submittal may proceed.
2. Note Markings: The work covered by the submittal may proceed provided it complies with both the Architect’s notations and corrections on the submittal and the Contract Documents.
3. Rejected: Do not proceed with the Work covered by the submittal. Prepare a new submittal for a product that complies with the contract document.

B. Informational Submittals: Architect and Construction Manager will review each submittal and will return it, noting "No Action Taken." If it does not comply with requirements, Architect will return it noting "Revise and Resubmit." Architect and Construction Manager will forward each submittal to appropriate party.

C. Partial submittals prepared for a portion of the Work will be reviewed when use of partial submittals has received prior approval from Architect and Construction Manager.

D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review, with notation "Revise and Resubmit."

E. Submittals not required by the Contract Documents may be returned by the Architect without action, with notation "No Action Taken."

F. Architect and Construction Manager will return without review submittals received from sources other than Contractor.

G. Submittals not required by the Contract Documents will be returned by Architect without action.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013300

DIGITAL DATA LETTER OF AGREEMENT

An Agreement Between the Architect and _____ (the "Transferee," either Original or Third Party, as the case may be) for Transfer of Digital Data

Architect: LS3P
101 N. Third Street, Suite 500
Wilmington, North Carolina 28401
Contact: Laura Miller, AIA

Transferee:
Original
3rd Party

Contract No.:
Project No.: 7702-190810 **Project Name**: New Hanover County Board of Election
Location: Wilmington, NC
Date:

The Architect will provide the following Digital Data, dated as of the particular transmission, to the Transferee **for information purposes only:**

Digital Data was prepared using the following:

Software: AutoCAD (.dwg) **Version:**
MicroStation (.dgn)
Revit (.rvt)

Digital Data to be delivered via the following media: Newforma Website posting

Transferee shall pay the Architect a service fee of $_____ and other good and valuable consideration.

TERMS AND CONDITIONS

1. The Architect and its consultants make no representation as to the compatibility of the Digital Data with any hardware or software. The Transferee shall notify the Architect within five (5) business days of any problems associated with accessing and/or using the Digital Data.

2. The Transferee acknowledges and agrees that the Digital Data can be modified unintentionally or otherwise. The Transferee acknowledges and agrees that the Architect and its consultants may remove all indications of ownership from the Digital Data prior to transmission.

3. All Digital Data shall be considered the property of the Architect and/or its consultants and shall not be used for other Projects, for additions to this Project, or for completion of this Project without the prior written permission of the Architect and/or its consultants. Digital Data shall not be re-transmitted by the Original Transferee to a Third Party Transferee without prior execution of an agreement identical to this Agreement between the Architect, the Original Transferee, and the Third Party Transferee. Under no circumstances shall the transmission of the Digital Data be considered a sale of goods or a sale of copyrights.

4. **THE ARCHITECT AND THE ARCHITECT'S CONSULTANTS HEREBY EXPRESSLY DISCLAIM ANY AND ALL WARRANTIES, BOTH EXPRESS AND IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AS WELL AS ANY WARRANTY OF ACCURACY, COMPLETENESS, AND/OR PERMANENCE. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF.** Addenda information and/or revisions made to the most current Digital Data after any date of transmission may not have been incorporated into the transmitted Digital Data. The Architect may update the Digital Data and give notice to authorized parties (or not) as is consistent with the Architect's professional skill and care and the orderly progress of the Work. In the event of a conflict between the Architect's printed instruments of service (whether sealed or not) and the Digital Data, the printed instruments of service shall govern. The Transferee acknowledges and agrees that the duty to determine the existence of any and all conflicts between the Digital Data and any other information upon which the Transferee relies rests solely upon the Transferee. The Digital Data shall not be considered Contract Documents or Construction Documents as defined by any General Conditions of Contract for Construction. The Digital Data is being provided on a strictly "AS IS" basis.

5. The use and/or provision of the Digital Data prepared by the Architect and/or its consultants shall not in any way reduce or obviate the Transferee's duty to check and coordinate dimensions, details, and quantities of materials as required to facilitate construction of the Project. Confirmation of existing conditions is the sole responsibility of the Transferee.

6. The Transferee agrees to the extent permitted by applicable law, to indemnify, hold harmless, release, and defend the Architect and/or its consultants, their officers, shareholders, employees, and sub-consultants from any and all injuries, claims, demands, expenses, suits, liabilities, losses, damages, costs, disputes, other matters in question, third party claims, pass-through claims, subrogated claims, and/or claim expenses related to the Digital Data, including but not limited to, attorneys' fees, expert witness fees, and court costs arising out of or in any way related to or connected with any negligent act and/or omission in the generation, provision, and/or use of the Digital Data by the Transferee and/or any of its subcontractors, suppliers, and/or consultants and waive any and all rights to such claims and causes of action.

7. The Transferee waives damages against the Architect for any and all injuries, claims, losses, expenses, damages, disputes, other matters in question, and/or claim expenses arising out of or relating to this Agreement and/or generation, provision, and/or use of the Digital Data, including, but not limited to, consequential damages and reasonable attorneys' fees and defense costs.

8. The Architect's and/or the Architect's consultants' liability to the Transferee and/or any of its subcontractors, suppliers, and/or consultants for any and all injuries, claims, losses, expenses, damages, disputes, other matters in question, third party claims, pass-through claims, subrogated claims, and/or claim expenses arising out of or relating to this Agreement and/or the Digital Data, including, but not limited to, reasonable attorneys' fees and defense costs, regardless of the nature of the claim or damage, shall not exceed, either individually or in the aggregate, the total amount of $1,000.00. Such causes include, but are not limited to, the Architect's and/or the Architect's consultants' negligence, errors, omissions, strict liability, breach of contract, and/or breach of warranty.

9. Upon information and belief, there are no licensing or copyright fees due to others based on the transmission of the Digital Data, but to the extent that such unknown fees do exist, the Transferee agrees to pay the required fees and hold the Architect and/or its consultants harmless from any associated costs or penalties.

10. Upon execution of this Agreement, the Architect grants to the Transferee a non-exclusive, non-transferable (except as set forth herein) license to use the Digital Data solely and exclusively for informational purposes only, provided that the Transferee substantially performs its obligations, including prompt payment of all sums when due, under this Agreement.

11. Any purchase order number provided by the Transferee is for the Transferee's accounting purposes only. The Transferee acknowledges and agrees that purchase order terms and conditions are null, void, and inapplicable to this Agreement.

12. Payment of the service fee set forth herein is due prior to transmission of the Digital Data.

13. This Agreement constitutes the entire agreement between the parties relative to the Digital Data and shall be governed by the laws of the State of North Carolina.

AUTHORIZED ACCEPTANCE

by Architect:
LS3P

_____
Signature

_____
Print Name and Title

_____
Date

by Original Transferee:
_____

_____
Signature

_____
Print Name and Title

_____
Date

by Third Party Transferee:
_____

_____
Signature

_____
Print Name and Title

_____
Date

This page intentionally left blank.

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for quality assurance and quality control.

B. Testing and inspection services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.

1. Specific quality-assurance and quality-control requirements for individual work results are specified in their respective Specification Sections. Requirements in individual Sections may also cover production of standard products.
2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and quality-control procedures that facilitate compliance with the Contract Document requirements.
3. Requirements for Contractor to provide quality-assurance and quality-control services required by Architect, Owner, Construction Manager, or authorities having jurisdiction are not limited by provisions of this Section.

1.2 DEFINITIONS

A. Experienced: When used with an entity or individual, "experienced," unless otherwise further described, means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

B. Field Quality-Control Tests and Inspections: Tests and inspections that are performed on-site for installation of the Work and for completed Work.

C. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, subcontractor, or sub-subcontractor, to perform a particular construction operation, including installation, erection, application, assembly, and similar operations.

1. Use of trade-specific terminology in referring to a Work result does not require that certain construction activities specified apply exclusively to specific trade(s).

D. Mockups: Physical assemblies of portions of the Work constructed to establish the standard by which the Work will be judged. Mockups are not Samples.

1. Mockups are used for one or more of the following:

a. Verify selections made under Sample submittals.
b. Demonstrate aesthetic effects.
c. Demonstrate the qualities of products and workmanship.
d. Demonstrate successful installation of interfaces between components and systems.
e. Perform preconstruction testing to determine system performance.

2. Product Mockups: Mockups that may include multiple products, materials, or systems specified in a single Section.
3. In-Place Mockups: Mockups constructed on-site in their actual final location as part of permanent construction.

E. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria. Unless otherwise indicated, copies of reports of tests or inspections performed for other than the Project do not meet this definition.

F. Product Tests: Tests and inspections that are performed by a nationally recognized testing laboratory (NRTL) according to 29 CFR 1910.7, by a testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program (NVLAP), or by a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.

G. Source Quality-Control Tests and Inspections: Tests and inspections that are performed at the source (e.g., plant, mill, factory, or shop).

H. Testing Agency: An entity engaged to perform specific tests, inspections, or both. The term "testing laboratory" has the same meaning as the term "testing agency."

I. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work, to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.

J. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work, to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Contractor's quality-control services do not include contract administration activities performed by Architect or Construction Manager.

1.3 DELEGATED DESIGN SERVICES

A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.

1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.

B. Delegated Design Services Statement: Submit a statement signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional, indicating that the products and systems are in compliance with performance and design criteria indicated. Include list of codes, loads, and other factors used in performing these services.

1.4 CONFLICTING REQUIREMENTS

A. Conflicting Standards and Other Requirements: If compliance with two or more standards or requirements is specified and the standards or requirements establish different or conflicting requirements for minimum quantities or quality levels, inform the Architect regarding the conflict and obtain clarification prior to proceeding with the Work. Refer conflicting requirements that are different, but apparently equal, to Architect for clarification before proceeding.

B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified is the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

1.5 INFORMATIONAL SUBMITTALS

A. Contractor's Quality-Control Plan: For quality-assurance and quality-control activities and responsibilities.

B. Qualification Data: For Contractor's quality-control personnel.

C. Contractor's Statement of Responsibility: When required by authorities having jurisdiction, submit copy of written statement of responsibility submitted to authorities having jurisdiction before starting work on the following systems:

1. Seismic-force-resisting system, designated seismic system, or component listed in the Statement of Special Inspections.
2. Primary wind-force-resisting system or a wind-resisting component listed in the Statement of Special Inspections.

D. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.

E. Schedule of Tests and Inspections: Prepare in tabular form and include the following:

1. Specification Section number and title.
2. Entity responsible for performing tests and inspections.
3. Description of test and inspection.
4. Identification of applicable standards.
5. Identification of test and inspection methods.
6. Number of tests and inspections required.
7. Time schedule or time span for tests and inspections.
8. Requirements for obtaining samples.
9. Unique characteristics of each quality-control service.

F. Reports: Prepare and submit certified written reports and documents as specified.

G. Permits, Licenses, and Certificates: For Owner's record, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents established for compliance with standards and regulations bearing on performance of the Work.

1.6 CONTRACTOR'S QUALITY-CONTROL PLAN

A. Quality-Control Plan, General: Submit quality-control plan within 10 days of Notice of Award, and not less than five days prior to preconstruction conference. Submit in format acceptable to Architect. Identify personnel, procedures, controls, instructions, tests, records, and forms to be used to carry out Contractor's quality-assurance and quality-control responsibilities and to coordinate Owner's quality-assurance and quality-control activities. Coordinate with Contractor's Construction Schedule.

B. Quality-Control Personnel Qualifications: Engage qualified personnel trained and experienced in managing and executing quality-assurance and quality-control procedures similar in nature and extent to those required for Project.

1. Project quality-control manager may also serve as Project superintendent.

C. Submittal Procedure: Describe procedures for ensuring compliance with requirements through review and management of submittal process. Indicate qualifications of personnel responsible for submittal review.

D. Testing and Inspection: In quality-control plan, include a comprehensive schedule of Work requiring testing or inspection, including the following:

1. Contractor-performed tests and inspections, including subcontractor-performed tests and inspections. Include required tests and inspections and Contractor-elected tests and inspections. Distinguish source quality-control tests and inspections from field quality-control tests and inspections.
2. Special inspections required by authorities having jurisdiction and indicated on the Statement of Special Inspections.
3. Owner-performed tests and inspections indicated in the Contract Documents.

E. Continuous Inspection of Workmanship: Describe process for continuous inspection during construction to identify and correct deficiencies in workmanship in addition to testing and inspection specified. Indicate types of corrective actions to be required to bring the Work into compliance with standards of workmanship established by Contract requirements and approved mockups.

F. Monitoring and Documentation: Maintain testing and inspection reports, including log of approved and rejected results. Include Work Architect has indicated as nonconforming or defective. Indicate corrective actions taken to bring nonconforming Work into compliance with requirements. Comply with requirements of authorities having jurisdiction.

1.7 REPORTS AND DOCUMENTS

A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:

1. Date of issue.
2. Project title and number.
3. Name, address, telephone number, and email address of testing agency.
4. Dates and locations of samples and tests or inspections.
5. Names of individuals making tests and inspections.
6. Description of the Work and test and inspection method.
7. Identification of product and Specification Section.
8. Complete test or inspection data.
9. Test and inspection results and an interpretation of test results.
10. Record of temperature and weather conditions at time of sample-taking and testing and inspection.
11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
12. Name and signature of laboratory inspector.
13. Recommendations on retesting and reinspecting.

B. Manufacturer's Technical Representative's Field Reports: Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:

1. Name, address, telephone number, and email address of technical representative making report.
2. Statement on condition of substrates and their acceptability for installation of product.
3. Statement that products at Project site comply with requirements.
4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
6. Statement of whether conditions, products, and installation will affect warranty.
7. Other required items indicated in individual Specification Sections.

C. Factory-Authorized Service Representative's Reports: Prepare written information documenting manufacturer's factory-authorized service representative's tests and inspections specified in other Sections. Include the following:

1. Name, address, telephone number, and email address of factory-authorized service representative making report.
2. Statement that equipment complies with requirements.
3. Results of operational and other tests and a statement of whether observed performance complies with requirements.
4. Statement of whether conditions, products, and installation will affect warranty.
5. Other required items indicated in individual Specification Sections.

1.8 QUALITY ASSURANCE

A. Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.

B. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units. As applicable, procure products from manufacturers able to meet qualification requirements, warranty requirements, and technical or factory-authorized service representative requirements.

C. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.

D. Installer Qualifications: A firm or individual experienced in installing, erecting, applying, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.

E. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that is similar in material, design, and extent to those indicated for this Project.

F. Specialists: Certain Specification Sections require that specific construction activities be performed by entities who are recognized experts in those operations. Specialists will satisfy qualification requirements indicated and engage in the activities indicated.

1. Requirements of authorities having jurisdiction supersede requirements for specialists.

G. Testing and Inspecting Agency Qualifications: An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspection indicated, as documented in accordance with ASTM E329, and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.

H. Manufacturer's Technical Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.

I. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect, demonstrate, repair, and perform service on installations of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.

J. Preconstruction Testing: Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following Contractor's responsibilities, including the following:

1. Provide test specimens representative of proposed products and construction.
2. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
3. Provide sizes and configurations of test assemblies, mockups, and laboratory mockups to adequately demonstrate capability of products to comply with performance requirements.
4. Build site-assembled test assemblies and mockups, using installers who will perform same tasks for Project.
5. When testing is complete, remove test specimens and test assemblies, and mockups; do not reuse products on Project.
6. Testing Agency Responsibilities: Submit a certified written report of each test, inspection, and similar quality-assurance service to Architect, through Construction Manager, with copy to Contractor. Interpret tests and inspections, and state in each report whether tested and inspected Work complies with or deviates from the Contract Documents.

K. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:

1. Build mockups in location indicated or, if not indicated, as directed by Architect or Construction Manager.
2. Notify Architect and Construction Manager seven days in advance of dates and times when mockups will be constructed.
3. Employ supervisory personnel who will oversee mockup construction. Employ workers who will be employed to perform same tasks during the construction at Project.
4. Demonstrate the proposed range of aesthetic effects and workmanship.
5. Obtain Architect's and Construction Manager's approval of mockups before starting corresponding Work, fabrication, or construction.

   a. Allow seven days for initial review and each re-review of each mockup.

6. Promptly correct unsatisfactory conditions noted by Architect's preliminary review, to the satisfaction of the Architect, before completion of final mockup.
7. Approval of mockups by the Architect does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
8. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
9. Demolish and remove mockups when directed unless otherwise indicated.

L. Specialty Mockups: See Section 014339 "Mockups" for additional construction requirements for integrated exterior mockups and room mockups.

1.9 QUALITY CONTROL

A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.

1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspection they are engaged to perform.
2. Costs for retesting and reinspecting construction that replaces or is necessitated by Work that failed to comply with the Contract Documents will be charged to Contractor.

B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities, whether specified or not, to verify and document that the Work complies with requirements.

1. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.
2. Engage a qualified testing agency to perform quality-control services.

    a. Contractor will not employ same entity engaged by Owner, unless agreed to in writing by Owner.

3. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspection will be performed.
4. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
5. Testing and inspection requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
6. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.

C. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.

D. Testing Agency Responsibilities: Cooperate with Architect , Construction Manager, and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.

1. Notify Architect, Construction Manager, and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
2. Determine the locations from which test samples will be taken and in which in-situ tests are conducted.
3. Conduct and interpret tests and inspections, and state in each report whether tested and inspected Work complies with or deviates from requirements.
4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
6. Do not perform duties of Contractor.

E. Manufacturer's Field Services: Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Section 013300 "Submittal Procedures."

F. Manufacturer's Technical Services: Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.

G. Contractor's Associated Requirements and Services: Cooperate with agencies and representatives performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:

1. Access to the Work.
2. Incidental labor and facilities necessary to facilitate tests and inspections.

3. Adequate quantities of representative samples of materials that require testing and inspection. Assist agency in obtaining samples.
4. Facilities for storage and field curing of test samples.
5. Delivery of samples to testing agencies.
6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
7. Security and protection for samples and for testing and inspection equipment at Project site.

H. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and quality-control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspection.

1. Schedule times for tests, inspections, obtaining samples, and similar activities.

1.10 SPECIAL TESTS AND INSPECTIONS

A. Special Tests and Inspections: Owner will engage a qualified special inspector to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner, and as follows:

1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures, and reviewing the completeness and adequacy of those procedures to perform the Work.
2. Notifying Architect, Construction Manager, and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
3. Submitting a certified written report of each test, inspection, and similar quality-control service to Architect, through Construction Manager, with copy to Contractor and to authorities having jurisdiction.
4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
5. Interpreting tests and inspections, and stating in each report whether tested and inspected Work complies with or deviates from the Contract Documents.
6. Retesting and reinspecting corrected Work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:

1. Date test or inspection was conducted.
2. Description of the Work tested or inspected.
3. Date test or inspection results were transmitted to Architect.
4. Identification of testing agency or special inspector conducting test or inspection.

B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Architect's and Construction Manager's and authorities' having jurisdiction reference during normal working hours.

1. Submit log at Project closeout as part of Project Record Documents.

3.2 REPAIR AND PROTECTION

A. General: On completion of testing, inspection, sample-taking, and similar services, repair damaged construction and restore substrates and finishes.

1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Section 017300 "Execution."

B. Protect construction exposed by or for quality-control service activities.

C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 014000

This page intentionally left blank.

SECTION 014200 - REFERENCES

PART 1 - GENERAL

1.1 DEFINITIONS

A. General: Basic Contract definitions are included in the Conditions of the Contract.

B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.

C. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "required," and "permitted" have the same meaning as "directed."

D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."

E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.

F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.

G. "Install": Unload, temporarily store, unpack, assemble, erect, place, anchor, apply, work to dimension, finish, cure, protect, clean, and similar operations at Project site.

H. "Provide": Furnish and install, complete and ready for the intended use.

I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

1.2 INDUSTRY STANDARDS

A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.

B. Publication Dates: Comply with standards in effect as of date of the Contract Documents unless otherwise indicated.

1. For standards referenced by applicable building codes, comply with dates of standards as listed in building codes.

C. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.

1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

1.3 ABBREVIATIONS AND ACRONYMS

A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities indicated in Gale's "Encyclopedia of Associations: National Organizations of the U.S." or in Columbia Books' "National Trade & Professional Associations of the United States."

B. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. This information is believed to be accurate as of the date of the Contract Documents.

1. ICC - International Code Council; www.iccsafe.org.
2. ICC-ES - ICC Evaluation Service, LLC; www.icc-es.org.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 014200

SECTION 014339 - MOCKUPS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Integrated exterior mockups.
2. Room mockups.

B. Related Requirements:

1. Section 014000 "Quality Requirements" for quality assurance requirements for aesthetic and workmanship mockups specified in other Sections.

1.2 DEFINITIONS

A. Integrated Exterior Mockups: Mockups of the exterior envelope constructed on-site as freestanding temporary built elements, consisting of multiple products, assemblies, and subassemblies.

B. Room Mockups: Mockups of typical interior spaces complete with wall, floor, and ceiling finishes; doors; windows; millwork; casework; specialties; furnishings and equipment; and lighting as indicated.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Meet with Owner, Construction Manager, Architect, testing and inspecting agency representative, and installers of major systems whose Work is included in integrated exterior and room mockups.
2. Review coordination of equipment and furnishings provided by the Owner for room mockups.
3. Review locations and extent of mockups.
4. Review testing procedures to be performed on mockups.
5. Review and finalize schedule for mockups, and verify availability of materials, personnel, equipment, and facilities needed to complete mockups and maintain schedule for the Work.

1.4 QUALITY ASSURANCE

A. Build mockups to do the following:

1. Verify selections made under Sample submittals.
2. Demonstrate aesthetic effects.
3. Demonstrate the qualities of products and workmanship.
4. Demonstrate acceptable coordination between components and systems.

B. Fabrication: Before fabricating or installing portions of the Work requiring mockups, build mockups for each form of construction and finish required. Use materials and installation methods as required for the Work.

1. Build mockups in location indicated or, if not indicated, as directed by Architect or Construction Manager.
2. Employ supervisory personnel who will oversee mockup construction. Employ workers who will be employed to perform same tasks during the construction at Project.
3. Demonstrate the proposed range of aesthetic effects and workmanship.

4. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
5. Demolish and remove mockups when directed unless otherwise indicated.

C. Notifications:

1. Notify Architect and Construction Manager seven days in advance of the dates and times when mockups will be constructed.
2. Allow seven days for initial review and each re-review of each mockup.

D. Approval: Obtain Architect's and Construction Manager's approval of mockups before starting fabrication or construction of corresponding Work.

1. Unless otherwise indicated, approved mockups establish the standard by which the Work will be judged.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.5 COORDINATION

A. Coordinate schedule for construction of mockups, so construction, testing, and review of mockups do not impact Project schedule.

PART 2 - PRODUCTS

2.1 INTEGRATED EXTERIOR MOCKUPS

A. Construct integrated exterior mockups to demonstrate constructability, coordination of trades, and sequencing of Work; and to ensure materials, components, subassemblies, assemblies, and interfaces integrate into a system complying with indicated performance and aesthetic requirements.

B. Design and construct foundation and superstructure to support free-standing integrated exterior mockups.

C. Build integrated exterior mockups using installers and construction methods that will be used in completed construction.

D. Use specified products that have been approved by the Architect. Coordinate installation of materials and products specified in individual Specification Sections that include Work included in integrated exterior mockups.

E. The Work of integrated exterior mockups includes, but is not limited to, the following:

1. Cold-formed metal framing and sheathing.
2. Air barriers.
3. Thermal insulation.
4. Concrete masonry units.
5. Exterior insulation and finish system (EIFS).
6. Aluminum siding.
7. Through-wall flashing.
8. Flashing and sheet metal trim.
9. Joint sealants.
10. Aluminum-framed entrances and storefront.
11. Glazing.

F. Provide and document modifications to construction details and interfaces between components and systems required to properly sequence the Work, or to pass performance testing requirements. Obtain Architect's approval for modifications.

G. Retain approved mockups constructed in place. Incorporate fully into the Work.

2.2 ROOM MOCKUPS

A. Build room mockups to evaluate constructability, demonstrate the coordination of trades and sequencing of Work, and to demonstrate aesthetic requirements. Include each visible finish, component, and equipment item within room mockups; include operable lighting.

B. Provide room mockups as instructed by Architect.

C. The Work of room mockups includes, but is not limited to, the following:

1. Millwork and casework.
2. Doors and frames.
3. Access doors and frames.
4. Glazing.
5. Metal framing.
6. Gypsum board.
7. Ceramic tiling.
8. Acoustical ceilings.
9. Resilient flooring.
10. Painting.
11. Registers and grilles.
12. Wiring devices.
13. Lighting.

PART 3 - EXECUTION (Not Used)

END OF SECTION 014339

This page intentionally left blank.

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.

1.2 USE CHARGES

A. Sewer Service: Pay sewer-service use charges for sewer usage by all entities for construction operations.

B. Water Service: Pay water-service use charges for water used by all entities for construction operations.

C. Electric Power Service: Pay electric-power-service use charges for electricity used by all entities for construction operations.

1.3 INFORMATIONAL SUBMITTALS

A. Site Utilization Plan: Show temporary facilities, temporary utility lines and connections, staging areas, construction site entrances, vehicle circulation, and parking areas for construction personnel.

B. Project Identification and Temporary Signs: Show fabrication and installation details, including plans, elevations, details, layouts, typestyles, graphic elements, and message content.

C. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.

D. Moisture- and Mold-Protection Plan: Describe procedures and controls for protecting materials and construction from water absorption and damage and mold. Describe delivery, handling, storage, installation, and protection provisions for materials subject to water absorption or water damage.

1. Indicate procedures for discarding water-damaged materials, protocols for mitigating water intrusion into completed Work, and requirements for replacing water-damaged Work.
2. Indicate sequencing of work that requires water, such as sprayed fire-resistive materials, plastering, and terrazzo grinding, and describe plans for dealing with water from these operations. Show procedures for verifying that wet construction has dried sufficiently to permit installation of finish materials.
3. Indicate methods to be used to avoid trapping water in finished work.

E. Dust- and HVAC-Control Plan: Submit coordination drawing and narrative that indicates the dust- and HVAC-control measures proposed for use, proposed locations, and proposed time frame for their operation. Include the following:

1. Locations of dust-control partitions at each phase of work.
2. HVAC system isolation schematic drawing.
3. Location of proposed air-filtration system discharge.
4. Waste-handling procedures.
5. Other dust-control measures.

F. Noise and Vibration Control Plan: Identify construction activities that may impact the occupancy and use of existing spaces within the building or adjacent existing buildings, whether occupied by others, or occupied by the Owner. Include the following:

1. Methods used to meet the goals and requirements of the Owner.
2. Concrete cutting method(s) to be used.
3. Location of construction devices on the site.
4. Show compliance with the use and maintenance of quieted construction devices for the duration of the Project.
5. Indicate activities that may disturb building occupants and that are planned to be performed during non-standard working hours as coordinated with the Owner.

1.4 QUALITY ASSURANCE

A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.

B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

C. Accessible Temporary Egress: Comply with applicable provisions in the United States Access Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

1.5 PROJECT CONDITIONS

A. Temporary Use of Permanent Facilities: Engage Installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Chain-Link Fencing: Minimum 2-inch, 0.148-inch- thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet high with galvanized-steel pipe posts; minimum 2-3/8-inch- OD line posts and 2-7/8-inch- OD corner and pull posts, with 1-5/8-inch- OD top rails.

B. Polyethylene Sheet: Reinforced, fire-resistive sheet, 10-mil minimum thickness, with flame-spread rating of 15 or less in accordance with ASTM E84 and passing NFPA 701 Test Method 2.

C. Dust-Control Adhesive-Surface Walk-Off Mats: Provide mats, minimum 36 by 60 inches.

2.2 TEMPORARY FACILITIES

A. Field Offices: Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.

B. Common-Use Field Office: Of sufficient size to accommodate needs of Owner, Architect, Construction Manager, and construction personnel office activities and to accommodate Project meetings specified in other Division 01 Sections. Keep office clean and orderly. Furnish and equip offices as follows:

1. Furniture required for Project-site documents, including file cabinets, plan tables, plan racks, and bookcases.
2. Conference room of sufficient size to accommodate meetings of 25 individuals. Provide electrical power service and 120-V ac duplex receptacles, with no fewer than one receptacle on each wall. Furnish room with conference table, chairs, and 4-foot- square tack and marker boards.
3. Drinking water and private toilet.

4. Heating and cooling equipment necessary to maintain a uniform indoor temperature of 68 to 72 deg F.
5. Lighting fixtures capable of maintaining average illumination of 20 fc at desk height.

C. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.

1. Store combustible materials apart from building.

2.3 EQUIPMENT

A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

B. HVAC Equipment: Unless Owner authorizes use of permanent HVAC system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.

1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
2. Heating, Cooling, and Dehumidifying Units: Listed and labeled for type of fuel being consumed, by a qualified testing agency acceptable to authorities having jurisdiction, and marked for intended location and application.
3. Permanent HVAC System: If Owner authorizes use of permanent HVAC system for temporary use during construction, provide filter with MERV of 8 at each return-air grille in system and remove at end of construction and clean HVAC system as required in Section 017700 "Closeout Procedures."

PART 3 - EXECUTION

3.1 TEMPORARY FACILITIES, GENERAL

A. Conservation: Coordinate construction and use of temporary facilities with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.

1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. See other Sections for disposition of salvaged materials that are designated as Owner's property.

3.2 INSTALLATION, GENERAL

A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.

1. Locate facilities to limit site disturbance as specified in Section 011000 "Summary."

B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.3 SITE USE PLAN

A. Contractor shall confine operations within the areas indicated and as shown on the site use plan and as permitted by law, ordinances, and permits. Site shall not be unreasonably encumbered with materials, products, or construction equipment.

B. Contractor, in reviewing the use of the site, shall include access to proposed building for construction purposes, parking where possible for employees, temporary facilities including offices, storage, and workshop sheds or portable trailers, utility hookups, staging areas, storage materials and products, and unloading space.

C. Show additional area needed in the Contractor's use of the site beyond that which may be indicated on the Drawings. Where additional fencing is required, such fencing shall be included at no additional cost to the Owner.

3.4 TEMPORARY UTILITY INSTALLATION

A. General: Install temporary service or connect to existing service.

1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.

B. Storm Sewers and Storm Drainage: Provide temporary utilities to remove effluent lawfully.

1. Connect temporary storm sewers to municipal system as directed by authorities having jurisdiction.

C. Water Service: Install water service and distribution piping in sizes and pressures adequate for construction.

D. Sanitary Facilities: Provide temporary toilets, wash facilities, safety shower and eyewash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.

1. Use of Permanent Toilets: Use of Owner's existing or new toilet facilities is not permitted.

E. Temporary Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.

1. Provide temporary dehumidification systems when required to reduce ambient and substrate moisture levels to level required to allow installation or application of finishes and their proper curing or drying.

F. Electric Power Service: Provide electric power service and distribution system of sufficient size, capacity, and power characteristics required for construction operations.

G. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.

1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.

H. Telephone Service: Provide temporary telephone service in common-use facilities for use by all construction personnel.

1. At each telephone, post a list of important telephone numbers.

a. Police and fire departments.
b. Ambulance service.
c. Contractor's home office.
d. Contractor's emergency after-hours telephone number.
e. Architect's office.

f. Construction Manager's home office.
g. Engineers' offices.
h. Owner's office.
i. Principal subcontractors' field and home offices.

I. Electronic Communication Service: Provide secure WiFi wireless connection to internet with provisions for access by Architect and Owner.

3.5 SUPPORT FACILITIES INSTALLATION

A. Comply with the following:

1. Provide construction for temporary field offices, shops, and sheds located within construction area or within 30 feet of building lines that is noncombustible in accordance with ASTM E136. Comply with NFPA 241.
2. Utilize designated area within existing building for temporary field offices.
3. Maintain support facilities until Architect schedules Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.

B. Temporary Use of Planned Permanent Roads and Paved Areas: Locate temporary roads and paved areas in same location as permanent roads and paved areas. Construct and maintain temporary roads and paved areas adequate for construction operations. Extend temporary roads and paved areas, within construction limits indicated, as necessary for construction operations.

1. Coordinate elevations of temporary roads and paved areas with permanent roads and paved areas.
2. Prepare subgrade and install subbase and base for temporary roads and paved areas in accordance with Section 312000 "Earth Moving."
3. Recondition base after temporary use, including removing contaminated material, regrading, proofrolling, compacting, and testing.
4. Delay installation of final course of permanent hot-mix asphalt pavement until immediately before Substantial Completion. Repair hot-mix asphalt base-course pavement before installation of final course in accordance with Section 321216 "Asphalt Paving."

C. Traffic Controls: Comply with requirements of authorities having jurisdiction.

1. Protect existing site improvements to remain, including curbs, pavement, and utilities.
2. Maintain access for fire-fighting equipment and access to fire hydrants.

D. Parking: Use designated areas of Owner's existing parking areas for construction personnel.

E. Storage and Staging: Use designated areas of Project site for storage and staging needs.

F. Dewatering Facilities and Drains: Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water.

1. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties or endanger permanent Work or temporary facilities.
2. Remove snow and ice as required to minimize accumulations.

G. Project Signs: Provide Project sign as indicated on sign sample following this Section. Unauthorized signs are not permitted.

1. Temporary Signs: Provide other signs as indicated and as required to inform public and individuals seeking entrance to Project.

a. Provide temporary, directional signs for construction personnel and visitors.

2. Maintain and touch up signs, so they are legible at all times.

H. Waste Disposal Facilities: Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."

I. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.

1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.

J. Temporary Elevator Use: See Division 14 elevator Section for temporary use of new elevators.

K. Temporary Stairs: Until permanent stairs are available, provide temporary stairs where ladders are not adequate.

L. Temporary Use of Permanent Stairs: Use of new stairs for construction traffic will be permitted, provided stairs are protected and finishes restored to new condition at time of Substantial Completion.

3.6 SECURITY AND PROTECTION FACILITIES INSTALLATION

A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.

1. Where access to adjacent properties is required in order to affect protection of existing facilities, obtain written permission from adjacent property owner to access property for that purpose.

B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.

1. Comply with work restrictions specified in Section 011000 "Summary."

C. Temporary Erosion and Sedimentation Control: Provide measures to prevent soil erosion and discharge of soil-bearing water runoff and airborne dust to undisturbed areas and to adjacent properties and walkways, according to requirements of EPA Construction General Permit or authorities having jurisdiction, whichever is more stringent.

1. Verify that flows of water redirected from construction areas or generated by construction activity do not enter or cross tree- or plant-protection zones.
2. Inspect, repair, and maintain erosion- and sedimentation-control measures during construction until permanent vegetation has been established.
3. Clean, repair, and restore adjoining properties and roads affected by erosion and sedimentation from Project site during the course of Project.
4. Remove erosion and sedimentation controls, and restore and stabilize areas disturbed during removal.

D. Stormwater Control: Comply with requirements of authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.

E. Tree and Plant Protection: Install temporary fencing located as indicated or outside the drip line of trees to protect vegetation from damage from construction operations. Protect tree root systems from damage, flooding, and erosion.

F. Pest Control: Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals, so Project will be free of pests and their residues at Substantial Completion. Perform control operations lawfully, using materials approved by authorities having jurisdiction.

G. Site Enclosure Fence: Before construction operations begin, furnish and install site enclosure fence in a manner that will prevent people from easily entering site except by entrance gates.

1. Extent of Fence: As required to enclose entire Project site or portion determined sufficient to accommodate construction operations.
2. Maintain security by limiting number of keys and restricting distribution to authorized personnel.

H. Security Enclosure and Lockup: Install temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security. Lock entrances at end of each workday.

I. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.

J. Temporary Egress: Provide temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction. Provide signage directing occupants to temporary egress.

K. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.

1. Where heating or cooling is needed and permanent enclosure is incomplete, insulate temporary enclosures.

L. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.

1. Prohibit smoking in construction areas. Comply with additional limits on smoking specified in other Sections.
2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition in accordance with requirements of authorities having jurisdiction.
3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
4. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign, stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

3.7 MOISTURE AND MOLD CONTROL

A. Moisture and Mold Protection: Protect stored materials and installed Work in accordance with Moisture and Mold Protection Plan.

B. Exposed Construction Period: Before installation of weather barriers, when materials are subject to wetting and exposure and to airborne mold spores, protect as follows:

1. Protect porous materials from water damage.
2. Protect stored and installed material from flowing or standing water.
3. Keep porous and organic materials from coming into prolonged contact with concrete.
4. Remove standing water from decks.

5. Keep deck openings covered or dammed.

C. Partially Enclosed Construction Period: After installation of weather barriers but before full enclosure and conditioning of building, when installed materials are still subject to infiltration of moisture and ambient mold spores, protect as follows:

1. Do not load or install drywall or other porous materials or components, or items with high organic content, into partially enclosed building.
2. Keep interior spaces reasonably clean and protected from water damage.
3. Periodically collect and remove waste containing cellulose or other organic matter.
4. Discard or replace water-damaged material.
5. Do not install material that is wet.
6. Discard and replace stored or installed material that begins to grow mold.
7. Perform work in a sequence that allows wet materials adequate time to dry before enclosing the material in gypsum board or other interior finishes.

D. Controlled Construction Period: After completing and sealing of the building enclosure but prior to the full operation of permanent HVAC systems, maintain as follows:

1. Control moisture and humidity inside building by maintaining effective dry-in conditions.
2. Use temporary or permanent HVAC system to control humidity within ranges specified for installed and stored materials.
3. Comply with manufacturer's written instructions for temperature, relative humidity, and exposure to water limits.

   a. Hygroscopic materials that may support mold growth, including wood and gypsum-based products, that become wet during the course of construction and remain wet for 48 hours are considered defective and require replacing.
   b. Measure moisture content of materials that have been exposed to moisture during construction operations or after installation. Record readings beginning at time of exposure and continuing daily for 48 hours. Identify materials containing moisture levels higher than allowed. Report findings in writing to Architect.
   c. Remove and replace materials that cannot be completely restored to their manufactured moisture level within 48 hours.

3.8 OPERATION, TERMINATION, AND REMOVAL

A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.

B. Maintenance: Maintain facilities in good operating condition until removal.

1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.

C. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.

D. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.

2. Remove temporary roads and paved areas not intended for or acceptable for integration into permanent construction. Where area is intended for landscape development, remove soil and aggregate fill that do not comply with requirements for fill or subsoil. Remove materials contaminated with road oil, asphalt and other petrochemical compounds, and other substances that might impair growth of plant materials or lawns. Repair or replace street paving, curbs, and sidewalks at temporary entrances, as required by authorities having jurisdiction.
3. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 017700 "Closeout Procedures."

END OF SECTION 015000

This page intentionally left blank.

NEW HANOVER COUNTY
BOARD OF ELECTIONS

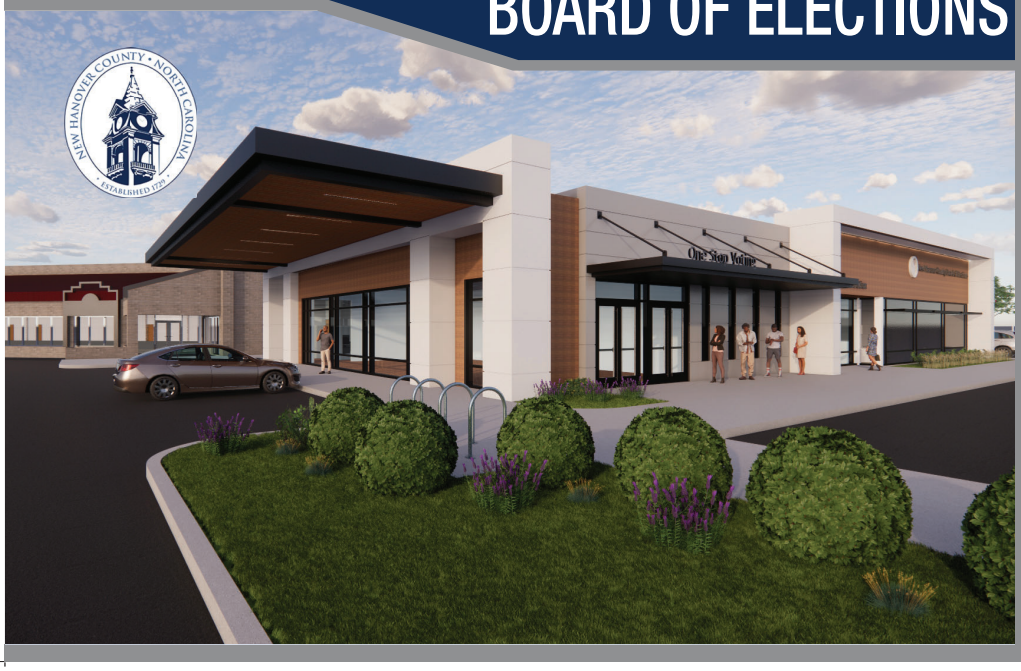

GHKCapeFear DEVELOPMENT

FD | STONEWATER

LS3P

Thomas

Newcomb & Boyd
CONSULTANTS AND ENGINEERS

TranSystems

ARDURRA
ARDURRA GROUP NORTH CAROLINA

This page intentionally left blank.

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.

1.2 DEFINITIONS

A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.

1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
2. New Products: Items that have not previously been incorporated into another project or facility. Salvaged items or items reused from other projects are not considered new products. Items that are manufactured or fabricated to include recycled content materials are considered new products, unless indicated otherwise.
3. Comparable Product: Product by named manufacturer that is demonstrated and approved through the comparable product submittal process described in Part 2 "Comparable Products" Article, to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.

B. Basis-of-Design Product Specification: A specification in which a single manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation. Published attributes and characteristics of basis-of-design product establish salient characteristics of products.

1. Evaluation of Comparable Products: In addition to the basis-of-design product description, product attributes and characteristics may be listed to establish the significant qualities related to type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other special features and requirements for purposes of evaluating comparable products of additional manufacturers named in the specification.

C. Subject to Compliance with Requirements: Where the phrase "Subject to compliance with requirements" introduces a product selection procedure in an individual Specification Section, provide products qualified under the specified product procedure. In the event that a named product or product by a named manufacturer does not meet the other requirements of the specifications, select another named product or product from another named manufacturer that does meet the requirements of the specifications; submit a comparable product request or substitution request, if applicable.

D. Comparable Product Request Submittal: An action submittal requesting consideration of a comparable product, including the following information:

1. Identification of basis-of-design product or fabrication or installation method to be replaced, including Specification Section number and title and Drawing numbers and titles.
2. Data indicating compliance with the requirements specified in Part 2 "Comparable Products" Article.

E. Basis-of-Design Product Specification Submittal: An action submittal complying with requirements in Section 013300 "Submittal Procedures."

F. Substitution: Refer to Section 012500 "Substitution Procedures" for definition and limitations on substitutions.

1.3 QUALITY ASSURANCE

A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.

1. Resolution of Compatibility Disputes between Multiple Contractors:

a. Contractors are responsible for providing products and construction methods compatible with products and construction methods of other contractors.
b. If a dispute arises between the multiple contractors over concurrently selectable but incompatible products, Architect will determine which products shall be used.

B. Identification of Products: Except for required labels and operating data, do not attach or imprint manufacturer or product names or trademarks on exposed surfaces of products or equipment that will be exposed to view in occupied spaces or on the exterior.

1. Labels: Locate required product labels and stamps on a concealed surface, or, where required for observation following installation, on a visually accessible surface that is not conspicuous.
2. Equipment Nameplates: Provide a permanent nameplate on each item of service- or power-operated equipment. Locate on a visually accessible but inconspicuous surface. Include information essential for operation, including the following:

a. Name of product and manufacturer.
b. Model and serial number.
c. Capacity.
d. Speed.
e. Ratings.

3. See individual identification Sections in Divisions 21, 22, 23, and 26 for additional equipment identification requirements.

1.4 COORDINATION

A. Modify or adjust affected work as necessary to integrate work of approved comparable products and approved substitutions.

1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

A. Deliver, store, and handle products, using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.

B. Delivery and Handling:

1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.

3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
4. Inspect products on delivery to determine compliance with the Contract Documents and that products are undamaged and properly protected.

C. Storage:

1. Provide a secure location and enclosure at Project site for storage of materials and equipment.
2. Store products to allow for inspection and measurement of quantity or counting of units.
3. Store materials in a manner that will not endanger Project structure.
4. Store products that are subject to damage by the elements under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation and with adequate protection from wind.
5. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
6. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
7. Protect stored products from damage and liquids from freezing.

1.6 PRODUCT WARRANTIES

A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.

1. Manufacturer's Warranty: Written standard warranty form furnished by individual manufacturer for a particular product and issued in the name of the Owner or endorsed by manufacturer to Owner.
2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner and issued in the name of the Owner or endorsed by manufacturer to Owner.

B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.

1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
2. Specified Form: When specified forms are included in the Project Manual, prepare a written document, using indicated form properly executed.
3. See other Sections for specific content requirements and particular requirements for submitting special warranties.

C. Submittal Time: Comply with requirements in Section 017700 "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.

1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.

2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
3. Owner reserves the right to limit selection to products with warranties meeting requirements of the Contract Documents.
4. Where products are accompanied by the term "as selected," Architect will make selection.
5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
6. Or Equal: For products specified by name and accompanied by the term "or equal," "or approved equal," or "or approved," comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product.
    a. Submit additional documentation required by Architect through Construction Manager in order to establish equivalency of proposed products. Unless otherwise indicated, evaluation of "or equal" product status is by the Architect, whose determination is final.

B. Product Selection Procedures:

1. Sole Product: Where Specifications name a single manufacturer and product, provide the named product that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
    a. Sole product may be indicated by the phrase "Subject to compliance with requirements, provide the following."
2. Sole Manufacturer/Source: Where Specifications name a single manufacturer or source, provide a product by the named manufacturer or source that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
    a. Sole manufacturer/source may be indicated by the phrase "Subject to compliance with requirements, provide products by the following."
3. Limited List of Products: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered unless otherwise indicated.
    a. Limited list of products may be indicated by the phrase "Subject to compliance with requirements, provide one of the following."
4. Non-Limited List of Products: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed or an unnamed product that complies with requirements.
    a. Non-limited list of products is indicated by the phrase "Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to, the following."
    b. Provision of an unnamed product is not considered a substitution, if the product complies with requirements.
5. Limited List of Manufacturers: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered unless otherwise indicated.
    a. Limited list of manufacturers is indicated by the phrase "Subject to compliance with requirements, provide products by one of the following."
6. Non-Limited List of Manufacturers: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed or a product by an unnamed manufacturer that complies with requirements.

a. Non-limited list of manufacturers is indicated by the phrase "Subject to compliance with requirements, available manufacturers whose products may be incorporated in the Work include, but are not limited to, the following."
b. Provision of products of an unnamed manufacturer is not considered a substitution, if the product complies with requirements.

7. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications may additionally indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.

a. For approval of products by unnamed manufacturers, comply with requirements in Section 012500 "Substitution Procedures" for substitutions for convenience.

C. Visual Matching Specification: Where Specifications require the phrase "match Architect's sample," provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.

1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Section 012500 "Substitution Procedures" for proposal of product.

D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or a similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

A. Conditions for Consideration of Comparable Products: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with the following requirements:

1. Evidence that proposed product does not require revisions to the Contract Documents, is consistent with the Contract Documents, will produce the indicated results, and is compatible with other portions of the Work.
2. Detailed comparison of significant qualities of proposed product with those of the named basis-of-design product. Significant product qualities include attributes, such as type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other specific features and requirements.
3. Evidence that proposed product provides specified warranty.
4. List of similar installations for completed projects, with project names and addresses and names and addresses of architects and owners, if requested.
5. Samples, if requested.

B. Architect's Action on Comparable Products Submittal: If necessary, Architect will request additional information or documentation for evaluation, as specified in Section 013300 "Submittal Procedures."

1. Form of Approval of Submittal: As specified in Section 013300 "Submittal Procedures."
2. Use product specified if Architect does not issue a decision on use of a comparable product request within time allocated.

C. Submittal Requirements: Approval by the Architect of Contractor's request for use of comparable product is not intended to satisfy other submittal requirements. Comply with specified submittal requirements.

PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

SECTION 017300 - EXECUTION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes general administrative and procedural requirements governing execution of the Work, including, but not limited to, the following:

1. Construction layout.
2. Field engineering and surveying.
3. Installation of the Work.
4. Coordination of Owner's portion of the Work.
5. Progress cleaning.
6. Starting and adjusting.
7. Protection of installed construction.

1.2 PREINSTALLATION MEETINGS

A. Layout Conference: Conduct conference at Project site.

1. Prior to establishing layout of new perimeter and structural column grid(s), review building location requirements. Review benchmark, control point, and layout and dimension requirements. Inform Architect and Construction Manager of scheduled meeting. Require representatives of each entity directly concerned with Project layout to attend, including the following:

   a. Contractor's superintendent.
   b. Professional surveyor responsible for performing Project surveying and layout.

2. Review meanings and intent of dimensions, notes, terms, graphic symbols, and other layout information indicated on the Drawings.
3. Review requirements for including layouts on Shop Drawings and other submittals.
4. Review areas of potential interference and conflict. Coordinate procedures and resolve potential conflicts before proceeding.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For land surveyor.

B. Certified Surveys: Submit two copies signed by land surveyor.

C. Certificates: Submit certificate signed by land surveyor, certifying that location and elevation of improvements comply with requirements.

D. Landfill Receipts: Submit copy of receipts issued by a landfill facility, licensed to accept hazardous materials, for hazardous waste disposal.

1.4 CLOSEOUT SUBMITTALS

A. Final Property Survey: Submit 10 copies showing the Work performed and record survey data.

1.5 QUALITY ASSURANCE

A. Land Surveyor Qualifications: A professional land surveyor who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing land-surveying services of the kind indicated.

B. Professional Engineer Qualifications: Refer to Section 014000 "Quality Requirements."

C. Manufacturer's Installation Instructions: Obtain and maintain on-site manufacturer's written recommendations and instructions for installation of specified products and equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Comply with requirements specified in other Sections.

B. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.

1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, gas service piping, and water-service piping; underground electrical services; and other utilities.
2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.

B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.

1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
2. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.

C. Written Report: Where a written report listing conditions detrimental to performance of the Work is required by other Sections, include the following:

1. Description of the Work, including Specification Section number and paragraph, and Drawing sheet number and detail, where applicable.
2. List of detrimental conditions, including substrates.

3. List of unacceptable installation tolerances.
4. Recommended corrections.

D. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Existing Utility Information: Furnish information to local utility that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.

B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents, submit a request for information to Architect through Construction Manager in accordance with requirements in Section 013100 "Project Management and Coordination."

3.3 CONSTRUCTION LAYOUT

A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks and existing conditions. If discrepancies are discovered, notify Architect and Construction Manager promptly.

B. Engage a land surveyor experienced in laying out the Work, using the following accepted surveying practices:

1. Establish benchmarks and control points to set lines and levels at each story of construction and elsewhere as needed to locate each element of Project.
2. Establish limits on use of Project site.
3. Establish dimensions within tolerances indicated. Do not scale Drawings to obtain required dimensions.
4. Inform installers of lines and levels to which they must comply.
5. Check the location, level and plumb, of every major element as the Work progresses.
6. Notify Architect and Construction Manager when deviations from required lines and levels exceed allowable tolerances.
7. Close site surveys with an error of closure equal to or less than the standard established by authorities having jurisdiction.

C. Site Improvements: Locate and lay out site improvements, including pavements, grading, fill and topsoil placement, utility slopes, and rim and invert elevations.

D. Building Lines and Levels: Locate and lay out control lines and levels for structures, building foundations, column grids, and floor levels, including those required for mechanical and electrical work. Transfer survey markings and elevations for use with control lines and levels. Level foundations and piers from two or more locations.

E. Record Log: Maintain a log of layout control work. Record deviations from required lines and levels. Include beginning and ending dates and times of surveys, weather conditions, name and duty of each survey party member, and types of instruments and tapes used. Make the log available for reference by Architect and Construction Manager.

3.4 FIELD ENGINEERING

A. Identification: Owner will identify existing benchmarks, control points, and property corners.

B. Reference Points: Locate existing permanent benchmarks, control points, and similar reference points before beginning the Work. Preserve and protect permanent benchmarks and control points during construction operations.

1. Do not change or relocate existing benchmarks or control points without prior written approval of Architect or Construction Manager. Report lost or destroyed permanent benchmarks or control points promptly. Report the need to relocate permanent benchmarks or control points to Architect and Construction Manager before proceeding.
2. Replace lost or destroyed permanent benchmarks and control points promptly. Base replacements on the original survey control points.

C. Benchmarks: Establish and maintain a minimum of two permanent benchmarks on Project site, referenced to data established by survey control points. Comply with authorities having jurisdiction for type and size of benchmark.

1. Record benchmark locations, with horizontal and vertical data, on Project Record Documents.
2. Where the actual location or elevation of layout points cannot be marked, provide temporary reference points sufficient to locate the Work.
3. Remove temporary reference points when no longer needed. Restore marked construction to its original condition.

D. Certified Survey: On completion of foundation walls, major site improvements, and other work requiring field-engineering services, prepare a certified survey showing dimensions, locations, angles, and elevations of construction and sitework.

E. Final Property Survey: Engage a land surveyor to prepare a final property survey showing significant features (real property) for Project. Include on the survey a certification, signed by land surveyor, that principal metes, bounds, lines, and levels of Project are accurately positioned as shown on the survey.

1. Show boundary lines, monuments, streets, site improvements and utilities, existing improvements and significant vegetation, adjoining properties, acreage, grade contours, and the distance and bearing from a site corner to a legal point.
2. Recording: At Substantial Completion, have the final property survey recorded by or with authorities having jurisdiction as the official "property survey."

3.5 INSTALLATION

A. Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.

1. Make vertical work plumb, and make horizontal work level.
2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
3. Conceal pipes, ducts, and wiring in finished areas unless otherwise indicated.
4. Maintain minimum headroom clearance of 96 inches in occupied spaces and 90 inches in unoccupied spaces, unless otherwise indicated on Drawings.

B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.

C. Install products at the time and under conditions that will ensure satisfactory results as judged by Architect. Maintain conditions required for product performance until Substantial Completion.

D. Conduct construction operations, so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy of type expected for Project.

E. Sequence the Work and allow adequate clearances to accommodate movement of construction items on-site and placement in permanent locations.

F. Tools and Equipment: Select tools or equipment that minimize production of excessive noise levels.

G. Templates: Obtain and distribute to the parties involved templates for Work specified to be factory prepared and field installed. Check Shop Drawings of other portions of the Work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.

H. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions with manufacturer.

1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
2. Allow for building movement, including thermal expansion and contraction.
3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

I. Joints: Make joints of uniform width. Where joint locations in exposed Work are not indicated, arrange joints for the best visual effect, as judged by Architect. Fit exposed connections together to form hairline joints.

J. Repair or remove and replace damaged, defective, or nonconforming Work.

1. Comply with Section 017700 "Closeout Procedures" for repairing or removing and replacing defective Work.

3.6 COORDINATION OF OWNER'S PORTION OF THE WORK

A. Site Access: Provide access to Project site for Owner's construction personnel and Owner's separate contractors.

B. Coordination: Coordinate construction and operations of the Work with work performed by Owner's construction personnel and Owner's separate contractors.

1. Construction Schedule: Inform Owner of Contractor's preferred construction schedule for Owner's portion of the Work. Adjust construction schedule based on a mutually agreeable timetable. Notify Owner if changes to schedule are required due to differences in actual construction progress.
2. Preinstallation Conferences: Include Owner's construction personnel and Owner's separate contractors at preinstallation conferences covering portions of the Work that are to receive Owner's work. Attend preinstallation conferences conducted by Owner's construction personnel if portions of the Work depend on Owner's construction.

3.7 PROGRESS CLEANING

A. Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.

1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
   a. Use containers intended for holding waste materials of type to be stored.
4. Coordinate progress cleaning for joint-use areas where Contractor and other contractors are working concurrently.

B. Site: Maintain Project site free of waste materials and debris.

C. Work Areas: Clean areas where Work is in progress to the level of cleanliness necessary for proper execution of the Work.

1. Remove liquid spills promptly.
2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.

D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.

E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.

F. Exposed Surfaces: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.

G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways. Comply with waste disposal requirements in Section 017419 "Construction Waste Management and Disposal."

H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.

I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.

J. Limiting Exposures: Supervise construction operations to ensure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.8 STARTING AND ADJUSTING

A. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.

B. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.

C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

D. Manufacturer's Field Service: Comply with qualification requirements in Section 014000 "Quality Requirements."

3.9 PROTECTION AND REPAIR OF INSTALLED CONSTRUCTION

A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.

B. Repair Work previously completed and subsequently damaged during construction period. Repair to like-new condition.

C. Protection of Existing Items: Provide protection and ensure that existing items to remain undisturbed by construction are maintained in condition that existed at commencement of the Work.

D. Comply with manufacturer's written instructions for temperature and relative humidity.

END OF SECTION 017300

This page intentionally left blank.

SECTION 017419 - CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for the following:

1. Recycling nonhazardous construction waste.
2. Disposing of nonhazardous construction waste.

1.2 DEFINITIONS

A. Construction Waste: Building, structure, and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.

B. Demolition Waste: Building, structure, and site improvement materials resulting from demolition operations.

C. Disposal: Removal of demolition or construction waste and subsequent salvage, sale, recycling, or deposit in landfill, incinerator acceptable to authorities having jurisdiction, or designated spoil areas on Owner’s property.

D. Recycle: Recovery of demolition or construction waste for subsequent processing in preparation for reuse.

1.3 MATERIALS OWNERSHIP

A. Unless otherwise indicated, demolition and construction waste becomes property of Contractor.

1.4 QUALITY ASSURANCE

A. Regulatory Requirements: Comply with transportation and disposal regulations of authorities having jurisdiction.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Contractor is encouraged to recycle as much nonhazardous construction waste as practical, without incurring additional costs to the Owner.

PART 3 - EXECUTION

3.1 WASTE MANAGEMENT AND DISPOSAL

A. General: Provide handling, containers, storage, signage, transportation, and other items as required to implement waste management plan during the entire duration of the Contract.

1. Comply with operation, termination, and removal requirements in Section 015000 "Temporary Facilities and Controls."

B. Training: Train workers, subcontractors, and suppliers on proper waste management procedures, as appropriate for the Work.

1. Review plan procedures and locations established for recycling and disposal.

C. Site Access and Temporary Controls: Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

1. Designate and label specific areas on Project site necessary for separating materials that are to be salvaged and recycled.
2. Comply with Section 015000 "Temporary Facilities and Controls" for controlling dust and dirt, environmental protection, and noise control.

3.2 RECYCLING CONSTRUCTION WASTE, GENERAL

A. General: Recycle paper and beverage containers used by on-site workers.

B. Recycling Incentives: Revenues, savings, rebates, tax credits, and other incentives received for recycling waste materials shall accrue to Contractor.

C. Preparation of Waste: Prepare and maintain recyclable waste materials according to recycling or reuse facility requirements. Maintain materials free of dirt, adhesives, solvents, petroleum contamination, and other substances deleterious to the recycling process.

D. Procedures: Separate recyclable waste from other waste materials, trash, and debris. Separate recyclable waste by type at Project site to the maximum extent practical according to approved construction waste management plan.

1. Provide appropriately marked containers or bins for controlling recyclable waste until removed from Project site. Include list of acceptable and unacceptable materials at each container and bin.

   a. Inspect containers and bins for contamination and remove contaminated materials if found.

2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
3. Stockpile materials away from construction area. Do not store within drip line of remaining trees.
4. Store components off the ground and protect from the weather.
5. Remove recyclable waste from Owner's property and transport to recycling receiver or processor as often as required to prevent overfilling bins.

3.3 DISPOSAL OF WASTE

A. General: Except for items or materials to be salvaged or recycled, remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.

1. Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on-site.
2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.

B. Burning: Do not burn waste materials.

END OF SECTION 017419

SECTION 017700 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for Contract closeout, including, but not limited to, the following:

1. Substantial Completion procedures.
2. Final completion procedures.
3. Warranties.
4. Final cleaning.

1.2 DEFINITIONS

A. List of Incomplete Items: Contractor-prepared list of items to be completed or corrected, prepared for the Architect's use prior to Architect's inspection, to determine if the Work is substantially complete.

1.3 ACTION SUBMITTALS

A. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.

B. Certified List of Incomplete Items: Final submittal at Final Completion.

1.4 CLOSEOUT SUBMITTALS

A. Certificates of Release: From authorities having jurisdiction.

B. Certificate of Insurance: For continuing coverage.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Schedule of Maintenance Material Items: For maintenance material submittal items required by other Sections.

1.6 SUBSTANTIAL COMPLETION PROCEDURES

A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected (Contractor's "punch list"), indicating the value of each item on the list and reasons why the Work is incomplete.

B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.

1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction, permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
2. Submit closeout submittals specified in other Division 01 Sections, including Project Record Documents, operation and maintenance manuals, damage or settlement surveys, property surveys, and similar final record information.

3. Submit closeout submittals specified in individual Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
4. Submit maintenance material submittals specified in individual Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Construction Manager. Label with manufacturer's name and model number.
   a. Schedule of Maintenance Material Items: Prepare and submit schedule of maintenance material submittal items, including name and quantity of each item and name and number of related Specification Section. Obtain Construction Manager's signature for receipt of submittals.
5. Submit testing, adjusting, and balancing records.
6. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.

C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.

1. Advise Owner of pending insurance changeover requirements.
2. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
3. Complete startup and testing of systems and equipment.
4. Perform preventive maintenance on equipment used prior to Substantial Completion.
5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems. Submit demonstration and training video recordings specified in Section 017900 "Demonstration and Training."
6. Advise Owner of changeover in utility services.
7. Participate with Owner in conducting inspection and walkthrough with local emergency responders.
8. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
9. Complete final cleaning requirements.
10. Touch up paint and otherwise repair and restore marred exposed finishes to eliminate visual defects.

D. Inspection: Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Architect and Construction Manager will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.

1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for Final Completion.

1.7 FINAL COMPLETION PROCEDURES

A. Submittals Prior to Final Completion: Before requesting final inspection for determining Final Completion, complete the following:

1. Submit a final Application for Payment in accordance with Section 012900 "Payment Procedures."
2. Certified List of Incomplete Items: Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. Certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.

3. Certificate of Insurance: Submit evidence of final, continuing insurance coverage complying with insurance requirements.

B. Inspection: Submit a written request for final inspection to determine acceptance a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Architect and Construction Manager will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.

1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

1.8 LIST OF INCOMPLETE ITEMS

A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.

1. Organize list of spaces in sequential order, starting with exterior areas first and proceeding from lowest floor to highest floor, listed by room or space number.
2. Organize items applying to each space by major element, including categories for ceilings, individual walls, floors, equipment, and building systems.
3. Include the following information at the top of each page:
   a. Project name.
   b. Date.
   c. Name of Architect and Construction Manager.
   d. Name of Contractor.
   e. Page number.
4. Submit list of incomplete items in the following format:
   a. MS Excel Electronic File: Architect, through Construction Manager, will return annotated file.
   b. Web-Based Project Software Upload: Utilize software feature for creating and updating list of incomplete items (punch list).

1.9 SUBMITTAL OF PROJECT WARRANTIES

A. Time of Submittal: Submit written warranties on request of Architect for designated portions of the Work where warranties are indicated to commence on dates other than date of Substantial Completion, or when delay in submittal of warranties might limit Owner's rights under warranty.

B. Partial Occupancy: Submit properly executed warranties within 15 days of completion of designated portions of the Work that are completed and occupied or used by Owner during construction period by separate agreement with Contractor.

C. Organize warranty documents into an orderly sequence based on the table of contents of Project Manual.

D. Warranty Electronic File: Provide warranties and bonds in PDF format. Assemble complete warranty and bond submittal package into a single electronic PDF file with bookmarks enabling navigation to each item. Provide bookmarked table of contents at beginning of document.

1. Submit on digital media acceptable to Architect.

E. Warranties in Paper Form:

1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.

F. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.

B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.

1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:

a. Clean Project site of rubbish, waste material, litter, and other foreign substances.
b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
c. Rake grounds that are not planted, mulched, or paved to a smooth, even-textured surface.
d. Remove tools, construction equipment, machinery, and surplus material from Project site.
e. Remove snow and ice to provide safe access to building.
f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
g. Remove debris and surface dust from limited-access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
h. Clean flooring, removing debris, dirt, and staining; clean according to manufacturer's recommendations.
i. Vacuum and mop concrete.
j. Vacuum carpet and similar soft surfaces, removing debris and excess nap; clean according to manufacturer's recommendations if visible soil or stains remain.
k. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Polish mirrors and glass, taking care not to scratch surfaces.
l. Remove labels that are not permanent.

m. Wipe surfaces of mechanical and electrical equipment, elevator equipment, and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
n. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
o. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
p. Clean ducts, blowers, and coils that display contamination with particulate matter on inspection.

1) Clean HVAC system in compliance with NADCA ACR. Provide written report on completion of cleaning.

q. Clean luminaires, lamps, globes, and reflectors to function with full efficiency.
r. Clean strainers.
s. Leave Project clean and ready for occupancy.

C. Pest Control: Comply with pest control requirements in Section 015000 "Temporary Facilities and Controls." Prepare written report.

D. Construction Waste Disposal: Comply with waste-disposal requirements in Section 017419 "Construction Waste Management and Disposal."

3.2 REPAIR OF THE WORK

A. Complete repair and restoration operations required by Section 017300 "Execution" before requesting inspection for determination of Substantial Completion.

END OF SECTION 017700

This page intentionally left blank.

SECTION 017823 - OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for preparing operation and maintenance manuals, including the following:

1. Operation and maintenance documentation directory manuals.
2. Emergency manuals.
3. Systems and equipment operation manuals.
4. Systems and equipment maintenance manuals.
5. Product maintenance manuals.

1.2 DEFINITIONS

A. System: An organized collection of parts, equipment, or subsystems united by regular interaction.

B. Subsystem: A portion of a system with characteristics similar to a system.

1.3 CLOSEOUT SUBMITTALS

A. Submit operation and maintenance manuals indicated. Provide content for each manual as specified in individual Specification Sections, and as reviewed and approved at the time of Section submittals. Submit reviewed manual content formatted and organized as required by this Section.

1. Architect will comment on whether content of operation and maintenance submittals is acceptable.
2. Where applicable, clarify and update reviewed manual content to correspond to revisions and field conditions.

B. Format: Submit operation and maintenance manuals in the following format:

1. Submit on digital media acceptable to Architect. Enable reviewer comments on draft submittals.
2. Submit three paper copies of final manual.

C. Initial Manual Submittal: Submit draft copy of each manual at least 30 days before commencing demonstration and training. Architect will comment on whether general scope and content of manual are acceptable.

D. Final Manual Submittal: Submit each manual in final form prior to requesting inspection for Substantial Completion and at least 15 days before commencing demonstration and training. Architect will return copy with comments.

1. Correct or revise each manual to comply with Architect's comments. Submit copies of each corrected manual within 15 days of receipt of Architect's comments and prior to commencing demonstration and training.

E. Comply with Section 017700 "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

1.4 FORMAT OF OPERATION AND MAINTENANCE MANUALS

A. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.

1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
2. File Names and Bookmarks: Bookmark individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.

B. Manuals, Paper Copy: Submit manuals in the form of hard-copy, bound and labeled volumes.

1. Binders: Heavy-duty, three-ring, vinyl-covered, loose-leaf binders, in thickness necessary to accommodate contents, sized to hold 8-1/2-by-11-inch paper; with clear plastic sleeve on spine to hold label describing contents and with pockets inside covers to hold folded oversize sheets.

   a. If two or more binders are necessary to accommodate data of a system, organize data in each binder into groupings by subsystem and related components. Cross-reference other binders if necessary to provide essential information for proper operation or maintenance of equipment or system.
   b. Identify each binder on front and spine, with printed title "OPERATION AND MAINTENANCE MANUAL," Project title or name, and subject matter of contents. Indicate volume number for multiple-volume sets.

2. Dividers: Heavy-paper dividers with plastic-covered tabs for each section of the manual. Mark each tab to indicate contents. Include typed list of products and major components of equipment included in the section on each divider, cross-referenced to Specification Section number and title of Project Manual.
3. Protective Plastic Sleeves: Transparent plastic sleeves designed to enclose diagnostic software storage media for computerized electronic equipment. Enclose title pages and directories in clear plastic sleeves.
4. Supplementary Text: Prepared on 8-1/2-by-11-inch white bond paper.
5. Drawings: Attach reinforced, punched binder tabs on drawings and bind with text.

   a. If oversize drawings are necessary, fold drawings to same size as text pages and use as foldouts.
   b. If drawings are too large to be used as foldouts, fold and place drawings in labeled envelopes and bind envelopes in rear of manual. At appropriate locations in manual, insert typewritten pages indicating drawing titles, descriptions of contents, and drawing locations.

1.5 REQUIREMENTS FOR EMERGENCY, OPERATION, AND MAINTENANCE MANUALS

A. Organization of Manuals: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:

1. Title page.
2. Table of contents.
3. Manual contents.

B. Title Page: Include the following information:

1. Subject matter included in manual.
2. Name and address of Project.

3. Name and address of Owner.
4. Date of submittal.
5. Name and contact information for Contractor.
6. Name and contact information for Construction Manager.
7. Name and contact information for Architect.
8. Names and contact information for major consultants to the Architect that designed the systems contained in the manuals.
9. Cross-reference to related systems in other operation and maintenance manuals.

C. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.

1. If operation or maintenance documentation requires more than one volume to accommodate data, include comprehensive table of contents for all volumes in each volume of the set.

D. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.

E. Identification: In the documentation directory and in each operation and maintenance manual, identify each system, subsystem, and piece of equipment with same designation used in the Contract Documents. If no designation exists, assign a designation according to ASHRAE Guideline 4, "Preparation of Operating and Maintenance Documentation for Building Systems."

1.6 OPERATION AND MAINTENANCE DOCUMENTATION DIRECTORY MANUAL

A. Operation and Maintenance Documentation Directory: Prepare a separate manual that provides an organized reference to emergency, operation, and maintenance manuals. List items and their location to facilitate ready access to desired information. Include the following:

1. List of Systems and Subsystems: List systems alphabetically. Include references to operation and maintenance manuals that contain information about each system.
2. List of Equipment: List equipment for each system, organized alphabetically by system. For pieces of equipment not part of system, list alphabetically in separate list.
3. Tables of Contents: Include a table of contents for each emergency, operation, and maintenance manual.

1.7 EMERGENCY MANUALS

A. Emergency Manual: Assemble a complete set of emergency information indicating procedures for use by emergency personnel and by Owner's operating personnel for types of emergencies indicated.

B. Content: Organize manual into a separate section for each of the following:

1. Type of emergency.
2. Emergency instructions.
3. Emergency procedures.

C. Type of Emergency: Where applicable for each type of emergency indicated below, include instructions and procedures for each system, subsystem, piece of equipment, and component:

1. Fire.
2. Flood.
3. Gas leak.
4. Water leak.
5. Power failure.

6. Water outage.
7. System, subsystem, or equipment failure.
8. Chemical release or spill.

D. Emergency Instructions: Describe and explain warnings, trouble indications, error messages, and similar codes and signals. Include responsibilities of Owner's operating personnel for notification of Installer, supplier, and manufacturer to maintain warranties.

E. Emergency Procedures: Include the following, as applicable:

1. Instructions on stopping.
2. Shutdown instructions for each type of emergency.
3. Operating instructions for conditions outside normal operating limits.
4. Required sequences for electric or electronic systems.
5. Special operating instructions and procedures.

1.8 SYSTEMS AND EQUIPMENT OPERATION MANUALS

A. Systems and Equipment Operation Manual: Assemble a complete set of data indicating operation of each system, subsystem, and piece of equipment not part of a system. Include information required for daily operation and management, operating standards, and routine and special operating procedures.

1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.

B. Content: In addition to requirements in this Section, include operation data required in individual Specification Sections and the following information:

1. System, subsystem, and equipment descriptions. Use designations for systems and equipment indicated on Contract Documents.
2. Performance and design criteria if Contractor has delegated design responsibility.
3. Operating standards.
4. Operating procedures.
5. Operating logs.
6. Wiring diagrams.
7. Control diagrams.
8. Piped system diagrams.
9. Precautions against improper use.
10. License requirements including inspection and renewal dates.

C. Descriptions: Include the following:

1. Product name and model number. Use designations for products indicated on Contract Documents.
2. Manufacturer's name.
3. Equipment identification with serial number of each component.
4. Equipment function.
5. Operating characteristics.
6. Limiting conditions.
7. Performance curves.
8. Engineering data and tests.
9. Complete nomenclature and number of replacement parts.

D. Operating Procedures: Include the following, as applicable:

1. Startup procedures.
2. Equipment or system break-in procedures.
3. Routine and normal operating instructions.
4. Regulation and control procedures.
5. Instructions on stopping.
6. Normal shutdown instructions.
7. Seasonal and weekend operating instructions.
8. Required sequences for electric or electronic systems.
9. Special operating instructions and procedures.

E. Systems and Equipment Controls: Describe the sequence of operation, and diagram controls as installed.

F. Piped Systems: Diagram piping as installed, and identify color coding where required for identification.

1.9 SYSTEMS AND EQUIPMENT MAINTENANCE MANUALS

A. Systems and Equipment Maintenance Manuals: Assemble a complete set of data indicating maintenance of each system, subsystem, and piece of equipment not part of a system. Include manufacturers' maintenance documentation, preventive maintenance procedures and frequency, repair procedures, wiring and systems diagrams, lists of spare parts, and warranty information.

1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.

B. Content: For each system, subsystem, and piece of equipment not part of a system, include source information, manufacturers' maintenance documentation, maintenance procedures, maintenance and service schedules, spare parts list and source information, maintenance service contracts, and warranties and bonds as described below.

C. Source Information: List each system, subsystem, and piece of equipment included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.

D. Manufacturers' Maintenance Documentation: Include the following information for each component part or piece of equipment:

1. Standard maintenance instructions and bulletins; include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.

   a. Prepare supplementary text if manufacturers' standard printed data are not available and where the information is necessary for proper operation and maintenance of equipment or systems.

2. Drawings, diagrams, and instructions required for maintenance, including disassembly and component removal, replacement, and assembly.
3. Identification and nomenclature of parts and components.
4. List of items recommended to be stocked as spare parts.

E. Maintenance Procedures: Include the following information and items that detail essential maintenance procedures:

1. Test and inspection instructions.
2. Troubleshooting guide.
3. Precautions against improper maintenance.
4. Disassembly; component removal, repair, and replacement; and reassembly instructions.
5. Aligning, adjusting, and checking instructions.
6. Demonstration and training video recording, if available.

F. Maintenance and Service Schedules: Include service and lubrication requirements, list of required lubricants for equipment, and separate schedules for preventive and routine maintenance and service with standard time allotment.

1. Scheduled Maintenance and Service: Tabulate actions for daily, weekly, monthly, quarterly, semiannual, and annual frequencies.
2. Maintenance and Service Record: Include manufacturers' forms for recording maintenance.

G. Spare Parts List and Source Information: Include lists of replacement and repair parts, with parts identified and cross-referenced to manufacturers' maintenance documentation and local sources of maintenance materials and related services.

H. Maintenance Service Contracts: Include copies of maintenance agreements with name and telephone number of service agent.

I. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.

1. Include procedures to follow and required notifications for warranty claims.

J. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in record Drawings to ensure correct illustration of completed installation.

1. Do not use original project record documents as part of maintenance manuals.

1.10 PRODUCT MAINTENANCE MANUALS

A. Product Maintenance Manual: Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.

B. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair materials and sources, and warranties and bonds, as described below.

C. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.

D. Product Information: Include the following, as applicable:

1. Product name and model number.
2. Manufacturer's name.
3. Color, pattern, and texture.
4. Material and chemical composition.

5. Reordering information for specially manufactured products.

E. Maintenance Procedures: Include manufacturer's written recommendations and the following:

1. Inspection procedures.
2. Types of cleaning agents to be used and methods of cleaning.
3. List of cleaning agents and methods of cleaning detrimental to product.
4. Schedule for routine cleaning and maintenance.
5. Repair instructions.

F. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.

G. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.

1. Include procedures to follow and required notifications for warranty claims.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017823

This page intentionally left blank.

SECTION 017839 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for Project Record Documents, including the following:

1. Record Drawings.

1.2 CLOSEOUT SUBMITTALS

A. Record Drawings: Submit copies of Record Drawings as follows:

1. Initial Submittal:

a. Submit PDF electronic files of scanned record prints and one set(s) of file prints.
b. Architect will indicate whether general scope of changes, additional information recorded, and quality of drafting are acceptable.

2. Final Submittal:

a. Submit PDF electronic files of scanned Record Prints and one set of file prints.
b. Print each drawing, whether or not changes and additional information were recorded.

3. Engineered Systems: For Manufacturer/Contractor engineered systems, i.e. fire protection systems, light gauge framing systems, panelized systems, etc., Contractor shall submit two sets of security protected record drawings as follows:

a. One in .DWG or acceptable CAD format (write protected).
b. One in .PDF format, with seals and signatures.

1.3 RECORD DRAWINGS

A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised drawings as modifications are issued.

1. Preparation: Mark record prints to show the actual installation, where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.

a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
b. Accurately record information in an acceptable drawing technique.
c. Record data as soon as possible after obtaining it.
d. Record and check the markup before enclosing concealed installations.
e. Cross-reference record prints to corresponding photographic documentation.

2. Content: Types of items requiring marking include, but are not limited to, the following:

a. Dimensional changes to Drawings.
b. Revisions to details shown on Drawings.
c. Depths of foundations.
d. Locations and depths of underground utilities.
e. Revisions to routing of piping and conduits.
f. Revisions to electrical circuitry.

g. Actual equipment locations.
h. Duct size and routing.
i. Locations of concealed internal utilities.
j. Changes made by Change Order or Construction Change Directive.
k. Changes made following Architect's written orders.
l. Details not on the original Contract Drawings.
m. Field records for variable and concealed conditions.
n. Record information on the Work that is shown only schematically.

3. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
4. Mark record prints with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
5. Mark important additional information that was either shown schematically or omitted from original Drawings.
6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.

B. Newly Prepared Record Drawings: Prepare new Drawings instead of preparing record Drawings where Architect determines that neither the original Contract Drawings nor Shop Drawings are suitable to show actual installation.

1. New Drawings may be required when a Change Order is issued as a result of accepting an alternate, substitution, or other modification.
2. Consult Architect for proper scale and scope of detailing and notations required to record the actual physical installation and its relation to other construction. Integrate newly prepared record Drawings into record Drawing sets; comply with procedures for formatting, organizing, copying, binding, and submitting.

C. Format: Identify and date each Record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.

1. Record Prints: Organize record prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
2. Format: Annotated PDF electronic file with comment function enabled.
3. Record Digital Data Files: Organize digital data information into separate electronic files that correspond to each sheet of the Contract Drawings. Name each file with the sheet identification. Include identification in each digital data file.
4. Identification: As follows:

a. Project name.
b. Date.
c. Designation "PROJECT RECORD DRAWINGS."
d. Name of Architect and Construction Manager.
e. Name of Contractor.

1.4 MAINTENANCE OF RECORD DOCUMENTS

A. Maintenance of Record Documents: Store Record Documents in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to Project Record Documents for Architect's and Construction Manager's reference during normal working hours.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017839

This page intentionally left blank.

SECTION 017900 - DEMONSTRATION AND TRAINING

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for instructing Owner's personnel, including the following:

1. Instruction in operation and maintenance of systems, subsystems, and equipment.

1.2 INFORMATIONAL SUBMITTALS

A. Instruction Program: Submit outline of instructional program for demonstration and training, including a list of training modules and a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module.

B. Qualification Data: For facilitator and instructor.

C. Attendance Record: For each training module, submit list of participants and length of instruction time.

D. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.

1.3 QUALITY ASSURANCE

A. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.

B. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Section 014000 "Quality Requirements," experienced in operation and maintenance procedures and training.

1.4 COORDINATION

A. Coordinate instruction schedule with Owner's operations. Adjust schedule as required to minimize disrupting Owner's operations and to ensure availability of Owner's personnel.

B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.

C. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data have been reviewed and approved by Architect.

1.5 INSTRUCTION PROGRAM

A. Program Structure: Develop an instruction program that includes individual training modules for each system and for equipment not part of a system, as required by individual Specification Sections.

B. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following as applicable to the system, equipment, or component:

1. Basis of System Design, Operational Requirements, and Criteria: Include the following:

    a. System, subsystem, and equipment descriptions.
    b. Performance and design criteria if Contractor is delegated design responsibility.
    c. Operating standards.
    d. Regulatory requirements.
    e. Equipment function.
    f. Operating characteristics.
    g. Limiting conditions.
    h. Performance curves.

2. Documentation: Review the following items in detail:

    a. Emergency manuals.
    b. Systems and equipment operation manuals.
    c. Systems and equipment maintenance manuals.
    d. Product maintenance manuals.
    e. Project Record Documents.
    f. Identification systems.
    g. Warranties and bonds.
    h. Maintenance service agreements and similar continuing commitments.

3. Emergencies: Include the following, as applicable:

    a. Instructions on meaning of warnings, trouble indications, and error messages.
    b. Instructions on stopping.
    c. Shutdown instructions for each type of emergency.
    d. Operating instructions for conditions outside of normal operating limits.
    e. Sequences for electric or electronic systems.
    f. Special operating instructions and procedures.

4. Operations: Include the following, as applicable:

    a. Startup procedures.
    b. Equipment or system break-in procedures.
    c. Routine and normal operating instructions.
    d. Regulation and control procedures.
    e. Control sequences.
    f. Safety procedures.
    g. Instructions on stopping.
    h. Normal shutdown instructions.
    i. Operating procedures for emergencies.
    j. Operating procedures for system, subsystem, or equipment failure.
    k. Seasonal and weekend operating instructions.
    l. Required sequences for electric or electronic systems.
    m. Special operating instructions and procedures.

5. Adjustments: Include the following:

    a. Alignments.
    b. Checking adjustments.
    c. Noise and vibration adjustments.
    d. Economy and efficiency adjustments.

6. Troubleshooting: Include the following:

    a. Diagnostic instructions.

b. Test and inspection procedures.

7. Maintenance: Include the following:

a. Inspection procedures.
b. Types of cleaning agents to be used and methods of cleaning.
c. List of cleaning agents and methods of cleaning detrimental to product.
d. Procedures for routine cleaning.
e. Procedures for preventive maintenance.
f. Procedures for routine maintenance.
g. Instruction on use of special tools.

8. Repairs: Include the following:

a. Diagnosis instructions.
b. Repair instructions.
c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
d. Instructions for identifying parts and components.
e. Review of spare parts needed for operation and maintenance.

1.6 PREPARATION

A. Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a training manual organized in coordination with requirements in Section 017823 "Operation and Maintenance Data."

B. Set up instructional equipment at instruction location.

1.7 INSTRUCTION

A. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Owner for number of participants, instruction times, and location.

B. Engage qualified instructors to instruct Owner's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.

1. Owner will furnish Contractor with names of participants.

C. Scheduling: Provide instruction at mutually agreed-on times. For equipment that requires seasonal operation, provide similar instruction at start of each season.

1. Schedule training with Owner, through Construction Manager, with at least seven days' advance notice.

D. Training Location and Reference Material: Conduct training on-site in the completed and fully operational facility using the actual equipment in-place. Conduct training using final operation and maintenance data submittals.

E. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of a demonstration performance-based test.

PART 2 - PRODUCTS

PART 3 - EXECUTION

END OF SECTION 017900

SECTION 024119 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Demolition and removal of selected portions of building or structure.

1.2 DEFINITIONS

A. Remove: Detach items from existing construction and dispose of them off-site unless indicated to be reinstalled.

B. Existing to Remain: Leave existing items that are not to be removed and that are not otherwise indicated to be reinstalled.

C. Dismantle: To remove by disassembling or detaching an item from a surface, using gentle methods and equipment to prevent damage to the item and surfaces; disposing of items unless indicated to be reinstalled.

1.3 MATERIALS OWNERSHIP

A. Unless otherwise indicated, demolition waste becomes property of Contractor.

B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.

1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.4 PREINSTALLATION MEETINGS

A. Predemolition Conference: Conduct conference at Project site.

1. Inspect and discuss condition of construction to be selectively demolished.
2. Review structural load limitations of existing structure.
3. Review and finalize selective demolition schedule and verify availability of materials, demolition personnel, equipment, and facilities needed to make progress and avoid delays.
4. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
5. Review areas where existing construction is to remain and requires protection.

1.5 INFORMATIONAL SUBMITTALS

A. Survey: Submit survey of condition of building.

B. Proposed Protection Measures: Submit report, including Drawings, that indicates the measures proposed for protecting individuals and property, for environmental protection, for dust control and, for noise control. Indicate proposed locations and construction of barriers.

C. Schedule of Selective Demolition Activities: Indicate the following:

1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity. Ensure Owner's on-site operations are uninterrupted.
2. Interruption of utility services. Indicate how long utility services will be interrupted.
3. Coordination for shutoff, capping, and continuation of utility services.
4. Use of elevator and stairs.
5. Coordination of Owner's continuing occupancy of portions of existing building and of Owner's partial occupancy of completed Work.

D. Predemolition Photographs or Video: Show existing conditions of adjoining construction, including finish surfaces, that might be misconstrued as damage caused by demolition operations. Comply with Section 013233 "Photographic Documentation." Submit before Work begins.

E. Warranties: Documentation indicating that existing warranties are still in effect after completion of selective demolition.

1.6 FIELD CONDITIONS

A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.

B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.

1. Before selective demolition, Owner will remove equipment.

C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.

D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.

1. Hazardous materials will be removed by Owner before start of the Work.
2. If suspected hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.

E. Storage or sale of removed items or materials on-site is not permitted.

F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.

1. Maintain fire-protection facilities in service during selective demolition operations.

1.7 WARRANTY

A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so as not to void existing warranties. Notify warrantor before proceeding. Existing warranties include the following:

1. Existing roofing.

B. Notify warrantor on completion of selective demolition and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

1.8 COORDINATION

A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.

B. Standards: Comply with ANSI/ASSP A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify that utilities have been disconnected and capped before starting selective demolition operations.

B. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.

C. Perform a survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective building demolition operations.

1. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.

D. Steel Tendons: Locate tensioned steel tendons and include recommendations for de-tensioning.

E. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video.

1. Before selective demolition or removal of existing building elements that will be reproduced or duplicated in final Work, make permanent record of measurements, materials, and construction details required to make exact reproduction.

3.2 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

A. Existing Services/Systems to Remain: Maintain services/systems indicated to remain and protect them against damage.

B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utility services and mechanical/electrical systems serving areas to be selectively demolished.

1. Owner will arrange to shut off indicated services/systems when requested by Contractor.
2. Arrange to shut off utilities with utility companies.
3. If services/systems are required to be removed, relocated, or abandoned, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of building.
4. Disconnect, demolish, and remove fire-suppression systems, plumbing, and HVAC systems, equipment, and components indicated on Drawings to be removed.

a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.

b. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
c. Equipment to Be Removed: Disconnect and cap services and remove equipment.
d. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
e. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
f. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material and leave in place.

3.3 PROTECTION

A. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.

1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
4. Cover and protect furniture, furnishings, and equipment that have not been removed.
5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls."

B. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.

1. Strengthen or add new supports when required during progress of selective demolition.

C. Remove temporary barricades and protections where hazards no longer exist.

3.4 SELECTIVE DEMOLITION, GENERAL

A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:

1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.
3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
5. Maintain fire watch during and for at least 2 hours after flame-cutting operations.

6. Maintain adequate ventilation when using cutting torches.
7. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
8. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
9. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
10. Dispose of demolished items and materials promptly. Comply with requirements in Section 017419 "Construction Waste Management and Disposal."

B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

C. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.5 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

A. Concrete: Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals using power-driven saw, and then remove concrete between saw cuts.

B. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, and then remove masonry between saw cuts.

C. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.

D. Resilient Floor Coverings: Remove floor coverings and adhesive according to recommendations in RFCI's "Recommended Work Practices for the Removal of Resilient Floor Coverings." Do not use methods requiring solvent-based adhesive strippers.

E. Roofing: Remove no more existing roofing than what can be covered in one day by new roofing and so that building interior remains watertight and weathertight. See Section 075323 "Ethylene-Propylene-Diene-Monomer (EPDM) Roofing" for new roofing requirements.

1. Remove existing roof membrane, flashings, copings, and roof accessories.
2. Remove existing roofing system down to substrate.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

A. Remove demolition waste materials from Project site and recycle or dispose of them according to Section 017419 "Construction Waste Management and Disposal."

1. Do not allow demolished materials to accumulate on-site.
2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
4. Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."

B. Burning: Do not burn demolished materials.

3.7 CLEANING

A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

SECTION 033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finishes.

B. Related Requirements:

1. Section 312000 "Earth Moving" for drainage fill under slabs-on-grade.
2. Section 321313 "Concrete Paving" for concrete pavement and walks.

1.3 DEFINITIONS

A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash, slag cement, other pozzolans, and silica fume; materials subject to compliance with requirements.

B. W/C Ratio: The ratio by weight of water to cementitious materials.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Before submitting design mixtures, review concrete design mixture and examine procedures for ensuring quality of concrete materials. Require representatives of each entity directly concerned with cast-in-place concrete to attend, including the following:

   a. Contractor's superintendent.
   b. Independent testing agency responsible for concrete design mixtures.
   c. Ready-mix concrete manufacturer.
   d. Concrete Subcontractor.
   e. Special concrete finish Subcontractor.

2. Review special inspection and testing and inspecting agency procedures for field quality control, concrete finishes and finishing, cold- and hot-weather concreting procedures, curing procedures, construction contraction and isolation joints, and joint-filler strips, vapor-retarder installation, anchor rod and anchorage device installation tolerances, steel reinforcement installation, methods for achieving specified floor and slab flatness and

levelness, floor and slab flatness and levelness measurement, concrete repair procedures, and concrete protection.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Design Mixtures: For each concrete mixture. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.

1. Indicate amounts of mixing water to be withheld for later addition at Project site.

C. Steel Reinforcement Shop Drawings: Placing Drawings that detail fabrication, bending, and placement. Include bar sizes, lengths, material, grade, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement.

D. Construction Joint Layout: Indicate proposed construction joints required to construct the structure.

1. Location of construction joints is subject to approval of the Architect.

E. Samples: For vapor retarder.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer, manufacturer.

B. Welding certificates.

C. Material Certificates: For each of the following, signed by manufacturers:

1. Cementitious materials.
2. Admixtures.
3. Form materials and form-release agents.
4. Steel reinforcement and accessories.
5. Curing compounds.
6. Floor and slab treatments.
7. Bonding agents.
8. Adhesives.
9. Vapor retarders.
10. Joint-filler strips.
11. Repair materials.

D. Material Test Reports: For the following, from a qualified testing agency:

1. Aggregates: Include service record data indicating absence of deleterious expansion of concrete due to alkali aggregate reactivity.

E. Floor surface flatness and levelness measurements indicating compliance with specified tolerances.

F. Field quality-control reports.

G. Minutes of preinstallation conference.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: A qualified installer who employs on Project personnel qualified as ACI-certified Flatwork Technician and Finisher and a supervisor who is an ACI-certified Concrete Flatwork Technician.

B. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C 94/C 94M requirements for production facilities and equipment.

1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities."

C. Testing Agency Qualifications: An independent agency, acceptable to authorities having jurisdiction, qualified according to ASTM C 1077 and ASTM E 329 for testing indicated.

1. Personnel conducting field tests shall be qualified as ACI Concrete Field Testing Technician, Grade 1, according to ACI CP-1 or an equivalent certification program.
2. Personnel performing laboratory tests shall be ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician, Grade I. Testing agency laboratory supervisor shall be an ACI-certified Concrete Laboratory Testing Technician, Grade II.

D. Welding Qualifications: Qualify procedures and personnel according to AWS D1.4/D 1.4M.

1.8 PRECONSTRUCTION TESTING

A. Preconstruction Testing Service: Engage a qualified testing agency to perform preconstruction testing on concrete mixtures.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Steel Reinforcement: Deliver, store, and handle steel reinforcement to prevent bending and damage.

1.10 FIELD CONDITIONS

A. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.

1. When average high and low temperature is expected to fall below 40 deg F for three successive days, maintain delivered concrete mixture temperature within the temperature range required by ACI 301.
2. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials.
3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.

B. Hot-Weather Placement: Comply with ACI 301 and ACI 305.1, and as follows:

1. Maintain concrete temperature below 90 deg F at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

A. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:

1. ACI 301.
2. ACI 117.

2.2 FORM-FACING MATERIALS

A. Smooth-Formed Finished Concrete: Form-facing panels that provide continuous, true, and smooth concrete surfaces. Furnish in largest practicable sizes to minimize number of joints.

1. Plywood, metal, or other approved panel materials.
2. Exterior-grade plywood panels, suitable for concrete forms, complying with DOC PS 1, and as follows:

   a. High-density overlay, Class 1 or better.
   b. Medium-density overlay, Class 1 or better; mill-release agent treated and edge sealed.
   c. Structural 1, B-B or better; mill oiled and edge sealed.
   d. B-B (Concrete Form), Class 1 or better; mill oiled and edge sealed.

3. Overlaid Finnish birch plywood.

B. Rough-Formed Finished Concrete: Plywood, lumber, metal, or another approved material. Provide lumber dressed on at least two edges and one side for tight fit.

C. Forms for Cylindrical Columns, Pedestals, and Supports: Metal, glass-fiber-reinforced plastic, paper, or fiber tubes that produce surfaces with gradual or abrupt irregularities not exceeding specified formwork surface class. Provide units with sufficient wall thickness to resist plastic concrete loads without detrimental deformation.

D. Void Forms: Biodegradable paper surface, treated for moisture resistance, structurally sufficient to support weight of plastic concrete and other superimposed loads.

E. Chamfer Strips: Wood, metal, PVC, or rubber strips, 3/4 by 3/4 inch, minimum.

F. Rustication Strips: Wood, metal, PVC, or rubber strips, kerfed for ease of form removal.

G. Form-Release Agent: Commercially formulated form-release agent that does not bond with, stain, or adversely affect concrete surfaces and does not impair subsequent treatments of concrete surfaces.

1. Formulate form-release agent with rust inhibitor for steel form-facing materials.

H. Form Ties: Factory-fabricated, removable or snap-off glass-fiber-reinforced plastic or metal form ties designed to resist lateral pressure of fresh concrete on forms and to prevent spalling of concrete on removal.

1. Furnish units that leave no corrodible metal closer than 1 inch to the plane of exposed concrete surface.
2. Furnish ties that, when removed, leave holes no larger than 1 inch in diameter in concrete surface.
3. Furnish ties with integral water-barrier plates to walls indicated to receive dampproofing or waterproofing.

2.3 STEEL REINFORCEMENT

A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed.

B. Plain-Steel Wire: ASTM A 1064/A 1064M, [as drawn] [galvanized].

C. Deformed-Steel Wire: ASTM A 1064/A 1064M.

D. Plain-Steel Welded-Wire Reinforcement: ASTM A 1064/A 1064M, plain, fabricated from as-drawn steel wire into flat sheets.

E. Deformed-Steel Welded-Wire Reinforcement: ASTM A 1064/A 1064M, flat sheet.

2.4 REINFORCEMENT ACCESSORIES

A. Joint Dowel Bars: ASTM A 615/A 615M, Grade 60, plain-steel bars, cut true to length with ends square and free of burrs.

B. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded-wire reinforcement in place. Manufacture bar supports from steel

wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete and as follows:

1. For concrete surfaces exposed to view, where legs of wire bar supports contact forms, use CRSI Class 1 plastic-protected steel wire or CRSI Class 2 stainless-steel bar supports.

2.5 CONCRETE MATERIALS

A. Source Limitations: Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant, obtain aggregate from single source, and obtain admixtures from single source from single manufacturer.

B. Cementitious Materials:

1. Portland Cement: ASTM C 150/C 150M, Type I or Type II.
2. Fly Ash: ASTM C 618, Class F.
3. Slag Cement: ASTM C 989/C 989M, Grade 100 or 120.
4. Silica Fume: ASTM C 1240, amorphous silica.

C. Normal-Weight Aggregates: ASTM C 33/C 33M, Class 1N normal weight coarse aggregate or better, graded. Provide aggregates from a single source with documented service record data of at least 10 years' satisfactory service in similar applications and service conditions using similar aggregates and cementitious materials.

1. Maximum Coarse-Aggregate Size: 3/4 inch nominal.
2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.

D. Lightweight Aggregate: ASTM C 330/C 330M, 3/4-inch nominal maximum aggregate size.

E. Air-Entraining Admixture: ASTM C 260/C 260M.

F. Chemical Admixtures: Certified by manufacturer to be compatible with other admixtures and that do not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.

1. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
2. Retarding Admixture: ASTM C 494/C 494M, Type B.
3. Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type D.
4. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
5. High-Range, Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type G.
6. Plasticizing and Retarding Admixture: ASTM C 1017/C 1017M, Type II.

G. Water: ASTM C 94/C 94M and potable.

2.6 VAPOR RETARDERS

A. Sheet Vapor Retarder: ASTM E 1745, Class A. Include manufacturer's recommended adhesive or pressure-sensitive tape.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Carlisle Coatings & Waterproofing, Inc.; Blackline 400.
b. Fortifiber Building Systems Group; Moistop Ultra 15.
c. Grace Construction Products, W. R. Grace & Co.; Florprufe 120.
d. Insulation Solutions, Inc.; Viper VaporCheck 16.
e. Meadows, W. R., Inc.; Perminator 15 mil.
f. Raven Industries Inc.; Vapor Block 15.
g. Reef Industries, Inc.; Griffolyn 15 mil Green.
h. Stego Industries, LLC; Stego Wrap 15 mil Class A.

B. Granular Fill: Clean mixture of crushed stone or crushed or uncrushed gravel; ASTM D 448, Size 57, with 100 percent passing a 1-1/2-inch sieve and 0 to 5 percent passing a No. 8 sieve.

C. Fine-Graded Granular Material: Clean mixture of crushed stone, crushed gravel, and manufactured or natural sand; ASTM D 448, Size 10, with 100 percent passing a 3/8-inch sieve, 10 to 30 percent passing a No. 100 sieve, and at least 5 percent passing No. 200 sieve; complying with deleterious substance limits of ASTM C 33 for fine aggregates.

2.7 CURING MATERIALS

A. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. when dry.

B. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap-polyethylene sheet.

C. Water: Potable.

A. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B, dissipating.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Anti-Hydro International, Inc.; AH Curing Compound #2 DR WB.
b. BASF Construction Chemicals - Building Systems; Kure 200.
c. ChemMasters; Safe-Cure Clear.
d. Conspec by Dayton Superior; W.B. Resin Cure.
e. Dayton Superior Corporation; Day-Chem Rez Cure (J-11-W).
f. Edoco by Dayton Superior; Res X Cure WB.
g. Euclid Chemical Company (The), an RPM company; Kurez W VOX; TAMMSCURE WB 30C.
h. Kaufman Products, Inc.; Thinfilm 420.
i. Lambert Corporation; AQUA KURE - CLEAR.
j. L&M Construction Chemicals, Inc.; L&M Cure R.
k. Meadows, W. R., Inc.; 1100-CLEAR.
l. Nox-Crete Products Group; Resin Cure E.
m. Right Pointe; Clear Water Resin.
n. SpecChem, LLC; Spec Rez Clear.
o. Symons by Dayton Superior; Resi-Chem Clear.
p. TK Products, Division of Sierra Corporation; TK-2519 DC WB.

A. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B, nondissipating, certified by curing compound manufacturer to not interfere with bonding of floor covering.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Anti-Hydro International, Inc.; AH Clear Cure WB.
b. BASF Construction Chemicals - Building Systems; Kure-N-Seal WB.
c. ChemMasters; Safe-Cure & Seal 20.
d. Conspec by Dayton Superior; Cure and Seal WB.
e. Cresset Chemical Company; Crete-Trete 309-VOC Cure & Seal.
f. Dayton Superior Corporation; Safe Cure and Seal (J-18).
g. Edoco by Dayton Superior; Spartan Cote WB II.
h. Euclid Chemical Company (The), an RPM company; Aqua Cure VOX; Clearseal WB 150.
i. Kaufman Products, Inc.; Cure & Seal 309 Emulsion.
j. Lambert Corporation; Glazecote Sealer-20.
k. L&M Construction Chemicals, Inc.; Dress & Seal WB.
l. Meadows, W. R., Inc.; Vocomp-20.
m. Metalcrete Industries; Metcure.
n. Nox-Crete Products Group; Cure & Seal 150E.
o. Symons by Dayton Superior; Cure & Seal 18 Percent E.
p. TK Products, Division of Sierra Corporation; TK-2519 WB.
q. Vexcon Chemicals, Inc.; Starseal 309.

B. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type 1, Class B, 18 to 25 percent solids, nondissipating, certified by curing compound manufacturer to not interfere with bonding of floor covering.

1. Products: Subject to compliance with requirements, provide one of the following:

a. BASF Construction Chemicals - Building Systems; Kure-N-Seal W.
b. ChemMasters; Safe-Cure Clear.
c. Conspec by Dayton Superior; High Seal.
d. Dayton Superior Corporation; Safe Cure and Seal (J-19).
e. Edoco by Dayton Superior; Spartan Cote WB II 20 Percent.
f. Euclid Chemical Company (The), an RPM company; Diamond Clear VOX; Clearseal WB STD.
g. Kaufman Products, Inc.; SureCure Emulsion.
h. Lambert Corporation; Glazecote Sealer-20.
i. L&M Construction Chemicals, Inc.; Dress & Seal WB.
j. Meadows, W. R., Inc.; Vocomp-20.
k. Metalcrete Industries; Metcure 0800.
l. Nox-Crete Products Group; Cure & Seal 200E.
m. Symons by Dayton Superior; Cure & Seal 18 Percent E.

2.8 Vexcon Chemicals, Inc.; Starseal 0800.RELATED MATERIALS

A. Expansion- and Isolation-Joint-Filler Strips: ASTM D 1751, asphalt-saturated cellulosic fiber or ASTM D 1752, cork or self-expanding cork.

B. Bonding Agent: ASTM C 1059/C 1059M, Type II, nonredispersible, acrylic emulsion or styrene butadiene.

C. Epoxy Bonding Adhesive: ASTM C 881, two-component epoxy resin, capable of humid curing and bonding to damp surfaces, of class suitable for application temperature and of grade to suit requirements, and as follows:

1. Types I and II, nonload bearing, for bonding hardened or freshly mixed concrete to hardened concrete.

D. Reglets: Fabricate reglets of not less than 0.022-inch-thick, galvanized-steel sheet. Temporarily fill or cover face opening of reglet to prevent intrusion of concrete or debris.

E. Dovetail Anchor Slots: Hot-dip galvanized-steel sheet, not less than 0.034 inch thick, with bent tab anchors. Temporarily fill or cover face opening of slots to prevent intrusion of concrete or debris.

2.9 REPAIR MATERIALS

A. Repair Underlayment: Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/8 inch and that can be feathered at edges to match adjacent floor elevations.

1. Cement Binder: ASTM C 150/C 150M, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
2. Primer: Product of underlayment manufacturer recommended for substrate, conditions, and application.
3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch or coarse sand as recommended by underlayment manufacturer.
4. Compressive Strength: Not less than 4,500 psi at 28 days when tested according to ASTM C 109/C 109M.

B. Repair Overlayment: Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/4 inch and that can be filled in over a scarified surface to match adjacent floor elevations.

1. Cement Binder: ASTM C 150/C 150M, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
2. Primer: Product of topping manufacturer recommended for substrate, conditions, and application.
3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch or coarse sand as recommended by topping manufacturer.
4. Compressive Strength: Not less than 6,000 psi at 28 days when tested according to ASTM C 109/C 109M.

2.10 CONCRETE MIXTURES, GENERAL

A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.

1. Use a qualified independent testing agency for preparing and reporting proposed mixture designs based on laboratory trial mixtures.

B. Limit water-soluble, chloride-ion content in hardened concrete to 0.15 percent by weight of cement.

C. Cementitious Materials: Use fly ash, pozzolan, slag cement, and silica fume as needed to reduce the total amount of portland cement, which would otherwise be used, by not less than 40 percent. Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:

1. Fly Ash: 25 percent.
2. Combined Fly Ash and Pozzolan: 25 percent.
3. Slag Cement: 50 percent.
4. Combined Fly Ash or Pozzolan and Slag Cement: 50 percent portland cement minimum, with fly ash or pozzolan not exceeding 25 percent.
5. Silica Fume: 10 percent.
6. Combined Fly Ash, Pozzolans, and Silica Fume: 35 percent with fly ash or pozzolans not exceeding 25 percent and silica fume not exceeding 10 percent.
7. Combined Fly Ash or Pozzolans, Slag Cement, and Silica Fume: 50 percent with fly ash or pozzolans not exceeding 25 percent and silica fume not exceeding 10 percent.

D. Admixtures: Use admixtures according to manufacturer's written instructions.

1. Use water-reducing, high-range water-reducing or plasticizing admixture in concrete, as required, for placement and workability.
2. Use water-reducing and -retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
3. Use water-reducing admixture in pumped concrete, concrete for parking structure slabs, concrete required to be watertight, and concrete with a w/c ratio below 0.50.

2.11 CONCRETE MIXTURES FOR BUILDING ELEMENTS

A. Footings & Foundation Walls: Normal-weight concrete.

1. Minimum Compressive Strength: As indicated at 28 days.
2. Maximum W/C Ratio: 0.45.
3. Slump Limit: 5 inches, plus or minus 1 inch.
4. Air Content: 6 percent, plus or minus 1.5 percent at point of delivery for 3/4-inch nominal maximum aggregate size.

B. Slabs-on-Grade: Normal-weight concrete.

1. Minimum Compressive Strength: As Indicated at 28 days.
2. Maximum W/C Ratio: 0.45.
3. Slump Limit: 5 inches, plus or minus 1 inch.
4. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.

C. Suspended Slabs: Normal-weight concrete.

1. Minimum Compressive Strength: 4000 psi at 28 days.
2. Maximum W/C Ratio: 0.45.
3. Slump Limit: 5 inches or 8 inches for concrete with verified slump of 2 to 4 inches before adding high-range water-reducing admixture or plasticizing admixture, plus or minus 1 inch.
4. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.

D. Suspended Slabs: Lightweight concrete.

1. Minimum Compressive Strength: 4000 psi at 28 days.
2. Calculated Equilibrium Unit Weight: 115 lb/cu. ft., plus or minus 3 lb/cu. ft. as determined by ASTM C 567/C 567M.
3. Slump Limit: 5 inches or 8 inches for concrete with verified slump of 2 to 4 inches before adding high-range water-reducing admixture or plasticizing admixture, plus or minus 1 inch.
4. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.

2.12 FABRICATING REINFORCEMENT

A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.13 CONCRETE MIXING

A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94 and furnish batch ticket information.

1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 FORMWORK INSTALLATION

A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.

B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.

C. Limit concrete surface irregularities, designated by ACI 347 as abrupt or gradual, as follows:

1. Class A, 1/8 inch] for smooth-formed finished surfaces exposed to view.
2. Class C, 1/2 inchfor rough-formed finished surfaces not exposed to view.

D. Construct forms tight enough to prevent loss of concrete mortar.

E. Construct forms for easy removal without hammering or prying against concrete surfaces. Provide crush or wrecking plates where stripping may damage cast-concrete surfaces. Provide top forms for inclined surfaces steeper than 1.5 horizontal to 1 vertical.

1. Install keyways, reglets, recesses, and the like, for easy removal.
2. Do not use rust-stained steel form-facing material.

F. Set edge forms, bulkheads, and intermediate screed strips for slabs to achieve required elevations and slopes in finished concrete surfaces. Provide and secure units to support screed strips; use strike-off templates or compacting-type screeds.

G. Provide temporary openings for cleanouts and inspection ports where interior area of formwork is inaccessible. Close openings with panels tightly fitted to forms and securely braced to prevent loss of concrete mortar. Locate temporary openings in forms at inconspicuous locations.

H. Chamfer exterior corners and edges of permanently exposed concrete.

I. Form openings, chases, offsets, sinkages, keyways, reglets, blocking, screeds, and bulkheads required in the Work. Determine sizes and locations from trades providing such items.

J. Clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, and other debris just before placing concrete.

K. Retighten forms and bracing before placing concrete, as required, to prevent mortar leaks and maintain proper alignment.

L. Coat contact surfaces of forms with form-release agent, according to manufacturer's written instructions, before placing reinforcement.

3.2 EMBEDDED ITEM INSTALLATION

A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.

1. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of AISC 303.
2. Install reglets to receive waterproofing and to receive through-wall flashings in outer face of concrete frame at exterior walls, where flashing is shown at lintels, shelf angles, and other conditions.
3. Install dovetail anchor slots in concrete structures as indicated.

3.3 REMOVING AND REUSING FORMS

A. General: Formwork for sides of beams, walls, columns, and similar parts of the Work that does not support weight of concrete may be removed after cumulatively curing at not less than 50 deg F for 24 hours after placing concrete. Concrete has to be hard enough to not be damaged by form-removal operations, and curing and protection operations need to be maintained.

1. Leave formwork for beam soffits, joists, slabs, and other structural elements that support weight of concrete in place until concrete has achieved at least 70 percent of its 28-day design compressive strength.
2. Remove forms only if shores have been arranged to permit removal of forms without loosening or disturbing shores.

B. Clean and repair surfaces of forms to be reused in the Work. Split, frayed, delaminated, or otherwise damaged form-facing material are not acceptable for exposed surfaces. Apply new form-release agent.

C. When forms are reused, clean surfaces, remove fins and laitance, and tighten to close joints. Align and secure joints to avoid offsets. Do not use patched forms for exposed concrete surfaces unless approved by Architect.

3.4 VAPOR-RETARDER INSTALLATION

A. Sheet Vapor Retarders: Place, protect, and repair sheet vapor retarder according to ASTM E 1643 and manufacturer's written instructions.

1. Lap joints 6 inches and seal with manufacturer's recommended tape.

3.5 STEEL REINFORCEMENT INSTALLATION

A. General: Comply with CRSI's "Manual of Standard Practice" for fabricating, placing, and supporting reinforcement.

1. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.

B. Clean reinforcement of loose rust and mill scale, earth, ice, and other foreign materials that reduce bond to concrete.

C. Accurately position, support, and secure reinforcement against displacement. Locate and support reinforcement with bar supports to maintain minimum concrete cover. Do not tack weld crossing reinforcing bars.

1. Weld reinforcing bars according to AWS D1.4/D 1.4M, where indicated.

D. Set wire ties with ends directed into concrete, not toward exposed concrete surfaces.

E. Install welded-wire reinforcement in longest practicable lengths on bar supports spaced to minimize sagging. Lap edges and ends of adjoining sheets at least one mesh spacing. Offset laps of adjoining sheet widths to prevent continuous laps in either direction. Lace overlaps with wire.

3.6 JOINTS

A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.

B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.

1. Place joints perpendicular to main reinforcement. Continue reinforcement across construction joints unless otherwise indicated. Do not continue reinforcement through sides of strip placements of floors and slabs.
2. Form keyed joints as indicated. Embed keys at least 1-1/2 inches into concrete.
3. Locate joints for beams, slabs, joists, and girders in the middle third of spans. Offset joints in girders a minimum distance of twice the beam width from a beam-girder intersection.
4. Locate horizontal joints in walls and columns at underside of floors, slabs, beams, and girders and at the top of footings or floor slabs.
5. Use a bonding agent at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.

C. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:

1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch-wide joints into concrete when cutting action does not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks.

a. Comply with the Soff-Cut International, Inc.'s instruction for the SOFF-CUT System.

1) Hand-troweled, burnished finish: Install cuts 0 to 2 hours after final finish at each joint location.

2) Broom, burlap finish: Install cuts at each control joint location as soon as concrete will support weight of saw and operator without disturbing final finish.

3) Cut depth not less than 10 percent of slab thickness with a 1-inch minimum.

4) Remove debris in path of cut and under Skid Plate before cutting. Skid Plate must remain flat on surface.

5) Use SOFF-CUT blades and Skid Plates, using a new Skid Plate with each new blade.

6) Install SOFF-CUT joint protector at saw-cut intersection prior to cross-cut.

7) Remove dry powder without disturbing finish.

8) Avoid traffic across saw cut until sufficient strength is gained to protect joint edges.

D. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.

1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface unless otherwise indicated.
2. Terminate full-width joint-filler strips not less than 1/2 inch or more than 1 inch below finished concrete surface where joint sealants, specified in Section 079200 "Joint Sealants," are indicated.
3. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.

3.7 CONCRETE PLACEMENT

A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections are completed.

B. Do not add water to concrete during delivery, at Project site, or during placement unless approved by Architect.

C. Before test sampling and placing concrete, water may be added at Project site, subject to limitations of ACI 301.

1. Do not add water to concrete after adding high-range water-reducing admixtures to mixture.

D. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete is placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.

1. Deposit concrete in horizontal layers of depth not to exceed formwork design pressures and in a manner to avoid inclined construction joints.
2. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.
3. Do not use vibrators to transport concrete inside forms. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least 6 inches into preceding layer. Do not insert vibrators into lower layers of concrete that have begun to lose plasticity. At each insertion, limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.

E. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.

1. Consolidate concrete during placement operations, so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
2. Maintain reinforcement in position on chairs during concrete placement.
3. Screed slab surfaces with a straightedge and strike off to correct elevations.
4. Slope surfaces uniformly to drains where required.

5. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface. Do not further disturb slab surfaces before starting finishing operations.

3.8 FINISHING FORMED SURFACES

A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.

1. Apply to concrete surfaces not exposed to public view.

B. Smooth-Formed Finish: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch tie holes and defects. Remove fins and other projections that exceed specified limits on formed-surface irregularities.

1. Apply to concrete surfaces exposed to public view, to receive a rubbed finish, or to be covered with a coating or covering material applied directly to concrete.

C. Rubbed Finish: Apply the following to smooth-formed-finished as-cast concrete where indicated:

1. Smooth-Rubbed Finish: Not later than one day after form removal, moisten concrete surfaces and rub with carborundum brick or another abrasive until producing a uniform color and texture. Do not apply cement grout other than that created by the rubbing process.
2. Grout-Cleaned Finish: Wet concrete surfaces and apply grout of a consistency of thick paint to coat surfaces and fill small holes. Mix 1 part portland cement to 1-1/2 parts fine sand with a 1:1 mixture of bonding admixture and water. Add white portland cement in amounts determined by trial patches, so color of dry grout matches adjacent surfaces. Scrub grout into voids and remove excess grout. When grout whitens, rub surface with clean burlap and keep surface damp by fog spray for at least 36 hours.
3. Cork-Floated Finish: Wet concrete surfaces and apply a stiff grout. Mix 1 part portland cement and 1 part fine sand with a 1:1 mixture of bonding agent and water. Add white portland cement in amounts determined by trial patches, so color of dry grout matches adjacent surfaces. Compress grout into voids by grinding surface. In a swirling motion, finish surface with a cork float.

D. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.9 FINISHING FLOORS AND SLABS

A. General: Comply with ACI 302.1R recommendations for screeding, restraightening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.

B. Scratch Finish: While still plastic, texture concrete surface that has been screeded and bull-floated or darbied. Use stiff brushes, brooms, or rakes to produce a profile amplitude of 1/4 inch in one direction.

1. Apply scratch finish to surfaces indicated and to receive concrete floor toppings or to receive mortar setting beds for bonded cementitious floor finishes.

C. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power-driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraightening until surface is left with a uniform, smooth, granular texture.

1. Apply float finish to surfaces indicated to receive trowel finish and to be covered with fluid-applied or sheet waterproofing, built-up or membrane roofing, or sand-bed terrazzo.

D. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.

1. Apply a trowel finish to surfaces exposed to view or to be covered with resilient flooring, carpet, ceramic or quarry tile set over a cleavage membrane, paint, or another thin-film-finish coating system
2. Finish surfaces to the following tolerances, according to ASTM E 1155, for a randomly trafficked floor surface:

   a. Specified overall values of flatness, F(F) 35; and of levelness, F(L) 25; with minimum local values of flatness, F(F) 24; and of levelness, F(L) 17; for slabs-on-grade.
   b. Specified overall values of flatness, F(F) 30; and of levelness, F(L) 20; with minimum local values of flatness, F(F) 24; and of levelness, F(L) 15; for suspended slabs.

E. Trowel and Fine-Broom Finish: Apply a first trowel finish to surfaces indicated and where ceramic or quarry tile is to be installed by either thickset or thinset method. While concrete is still plastic, slightly scarify surface with a fine broom.

1. Comply with flatness and levelness tolerances for trowel-finished floor surfaces.

F. Broom Finish: Apply a broom finish to exterior concrete platforms, steps, ramps, and elsewhere as indicated.

1. Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route. Coordinate required final finish with Architect before application.

G. Slip-Resistive Finish: Before final floating, apply slip-resistive finish where indicated and to concrete stair treads, platforms, and ramps. Apply according to manufacturer's written instructions and as follows:

1. Uniformly spread 25 lb/100 sq. ft. of dampened slip-resistive silica aggregate over surface in one or two applications. Tamp aggregate flush with surface, but do not force below surface.
2. After broadcasting and tamping, apply float finish.
3. After curing, lightly work surface with a steel wire brush or an abrasive stone and water to expose slip-resistive aggregate.

3.10 MISCELLANEOUS CONCRETE ITEM INSTALLATION

A. Filling In: Fill in holes and openings left in concrete structures after work of other trades is in place unless otherwise indicated. Mix, place, and cure concrete, as specified, to blend with in-place construction. Provide other miscellaneous concrete filling indicated or required to complete the Work.

B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and by steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.

C. Equipment Bases and Foundations:

1. Coordinate sizes and locations of concrete bases with actual equipment provided.
2. Construct concrete (housekeeping pad) bases as indicated high unless otherwise indicated, and extend base not less than 6 inches in each direction beyond the maximum dimensions of supported equipment unless otherwise indicated or unless required for seismic anchor support.
3. Minimum Compressive Strength: 4000 psi at 28 days.
4. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around the full perimeter of concrete base.
5. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete substrate.
6. Prior to pouring concrete, place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
7. Cast anchor-bolt insert into bases. Install anchor bolts to elevations required for proper attachment to supported equipment.

D. Steel Pan Stairs: Provide concrete fill for steel pan stair treads, landings, and associated items. Cast-in inserts and accessories as shown on Drawings. Screed, tamp, and trowel finish concrete surfaces.

3.11 CONCRETE PROTECTING AND CURING

A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 305.1 for hot-weather protection during curing.

B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.

C. Formed Surfaces: Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces. If forms remain during curing period, moist cure after loosening forms. If removing forms before end of curing period, continue curing for remainder of curing period.

D. Unformed Surfaces: Begin curing immediately after finishing concrete. Cure unformed surfaces, including floors and slabs, concrete floor toppings, and other surfaces.

E. Cure concrete according to ACI 308.1, by one or a combination of the following methods:

1. Moisture Curing: Keep surfaces continuously moist for not less than seven days with the following materials:

   a. Water.
   b. Continuous water-fog spray.
   c. Absorptive cover, water saturated, and kept continuously wet. Cover concrete surfaces and edges with 12-inch lap over adjacent absorptive covers.

2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive. Cure for not less than seven days. Immediately repair any holes or tears during curing period, using cover material and waterproof tape.

   a. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive floor coverings.
   b. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive penetrating liquid floor treatments.
   c. Cure concrete surfaces to receive floor coverings with either a moisture-retaining cover or a curing compound that the manufacturer certifies does not interfere with bonding of floor covering used on Project.

3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.

   a. Removal: After curing period has elapsed, remove curing compound without damaging concrete surfaces by method recommended by curing compound manufacturer unless manufacturer certifies curing compound does not interfere with bonding of floor covering used on Project.

4. Curing and Sealing Compound: Apply uniformly to floors and slabs indicated in a continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.12 JOINT FILLING

A. Prepare, clean, and install joint filler according to manufacturer's written instructions.

1. Defer joint filling until concrete has aged at least one (1) month. Do not fill joints until construction traffic has permanently ceased.

B. Remove dirt, debris, saw cuttings, curing compounds, and sealers from joints; leave contact faces of joints clean and dry.

3.13 CONCRETE SURFACE REPAIRS

A. Defective Concrete: Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.

B. Patching Mortar: Mix dry-pack patching mortar, consisting of 1 part portland cement to 2-1/2 parts fine aggregate passing a No. 16 sieve, using only enough water for handling and placing.

C. Repairing Formed Surfaces: Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.

1. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch in any dimension to solid concrete. Limit cut depth to 3/4 inch. Make edges of cuts perpendicular to concrete surface. Clean, dampen with water, and brush-coat holes and voids with bonding agent. Fill and compact with patching mortar before bonding agent has dried. Fill form-tie voids with patching mortar or cone plugs secured in place with bonding agent.
2. Repair defects on surfaces exposed to view by blending white portland cement and standard portland cement so that, when dry, patching mortar matches surrounding color. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching. Compact mortar in place and strike off slightly higher than surrounding surface.
3. Repair defects on concealed formed surfaces that affect concrete's durability and structural performance as determined by Architect.

D. Repairing Unformed Surfaces: Test unformed surfaces, such as floors and slabs, for finish and verify surface tolerances specified for each surface. Correct low and high areas. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.

1. Repair finished surfaces containing defects. Surface defects include spalls, popouts, honeycombs, rock pockets, crazing and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions.
2. After concrete has cured at least 14 days, correct high areas by grinding.
3. Correct localized low areas during or immediately after completing surface finishing operations by cutting out low areas and replacing with patching mortar. Finish repaired areas to blend into adjacent concrete.
4. Correct other low areas scheduled to receive floor coverings with a repair underlayment. Prepare, mix, and apply repair underlayment and primer according to manufacturer's

written instructions to produce a smooth, uniform, plane, and level surface. Feather edges to match adjacent floor elevations.

5. Correct other low areas scheduled to remain exposed with a repair topping. Cut out low areas to ensure a minimum repair topping depth of 1/4 inch to match adjacent floor elevations. Prepare, mix, and apply repair topping and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.
6. Repair defective areas, except random cracks and single holes 1 inch or less in diameter, by cutting out and replacing with fresh concrete. Remove defective areas with clean, square cuts and expose steel reinforcement with at least a 3/4-inch clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding agent. Mix patching concrete of same materials and mixture as original concrete, except without coarse aggregate. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
7. Repair random cracks and single holes 1 inch or less in diameter with patching mortar. Groove top of cracks and cut out holes to sound concrete and clean off dust, dirt, and loose particles. Dampen cleaned concrete surfaces and apply bonding agent. Place patching mortar before bonding agent has dried. Compact patching mortar and finish to match adjacent concrete. Keep patched area continuously moist for at least 72 hours.

E. Perform structural repairs of concrete, subject to Architect's approval, using epoxy adhesive and patching mortar.

F. Repair materials and installation not specified above may be used, subject to Architect's approval.

3.14 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a special inspector and qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.

B. Testing Agency: Engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.

C. Inspections:

1. Steel reinforcement placement.
2. Steel reinforcement welding.
3. Headed bolts and studs.
4. Verification of use of required design mixture.
5. Concrete placement, including conveying and depositing.
6. Curing procedures and maintenance of curing temperature.
7. Verification of concrete strength before removal of shores and forms from beams and slabs.

D. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172/C 172M shall be performed according to the following requirements:

1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture exceeding 5 cu. yd., but less than 25 cu. yd., plus one set for each additional 50 cu. yd. or fraction thereof.

2. Testing Frequency: Obtain at least one composite sample for each 100 cu. yd. or fraction thereof of each concrete mixture placed each day.

    a. When frequency of testing provides fewer than five compressive-strength tests for each concrete mixture, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.

3. Slump: ASTM C 143; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
4. Air Content: ASTM C 231, pressure method, for normal-weight concrete; ASTM C 173, volumetric method, for structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
5. Concrete Temperature: ASTM C 1064; one test hourly when air temperature is 40 deg F and below or 80 deg F and above, and one test for each composite sample.
6. Unit Weight: ASTM C 567, fresh unit weight of structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
7. Compression Test Specimens: ASTM C 31.

    a. Cast and laboratory cure two sets of two standard cylinder specimens for each composite sample.
    b. Cast and field cure two sets of two standard cylinder specimens for each composite sample.

8. Compressive-Strength Tests: ASTM C 39/C 39M; test one set of two laboratory-cured specimens at 7 days and one set of two specimens at 28 days.

    a. Test one set of two field-cured specimens at 7 days and one set of two specimens at 28 days.
    b. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.

9. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.
10. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi.
11. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
12. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
13. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other

requirements have not been met, as directed by Architect. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Architect.

14. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
15. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

E. Measure floor and slab flatness and levelness according to ASTM E 1155 within 24 hours of finishing.

END OF SECTION 033000

This page intentionally left blank.

SECTION 042613 - MASONRY VENEER

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Brick.
2. Mortar materials.
3. Ties and anchors.
4. Embedded flashing.
5. Accessories.
6. Mortar mixes.

B. Products Installed but not Furnished under This Section:

1. Steel lintels in masonry veneer.
2. Steel shelf angles for supporting masonry veneer.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For the following:

1. Masonry Units: Indicate sizes, profiles, coursing, and locations of special shapes.
2. Fabricated Flashing: Detail corner units, end-dam units, and other special applications.

C. Samples:

1. Clay face brick[, in the form of straps of five or more bricks].
2. Colored mortar.
3. Weep/cavity vents.

1.4 INFORMATIONAL SUBMITTALS

A. Material Certificates: For each type and size of the following:

1. Masonry units.
   a. Include material test reports substantiating compliance with requirements.
   b. For brick, include size-variation data verifying that actual range of sizes falls within specified tolerances.
   c. For exposed brick, include test report for efflorescence in accordance with ASTM C67/C67M.
2. Cementitious materials. Include name of manufacturer, brand name, and type.
3. Mortar admixtures.
4. Preblended, dry mortar mixes. Include description of type and proportions of ingredients.
5. Anchors, ties, and metal accessories.

B. Qualification Statements: For installer.

C. Mix Designs: For each type of mortar. Include description of type and proportions of ingredients.

1. Include test reports for mortar mixes required to comply with property specification. Test in accordance with ASTM C109/C109M for compressive strength, ASTM C1506 for water retention, and ASTM C91/C91M for air content.

D. Cold-Weather and Hot-Weather Procedures: Detailed description of methods, materials, and equipment to be used to comply with requirements.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Engage an experienced installer who specializes in masonry construction and has completed similar projects in material, design, and extent to that indicated for this Project and with a record of successful in-service performance.

1. Submit list including minimum of five similar projects, including Project name, description of project size and scope, and name and contact information for architect, for Installer, superintendent, and crew chiefs. Indicate total years for experience for each.

1.6 MOCKUPS

A. Sample Panels: Build sample panels to verify selections made under Sample submittals and to demonstrate aesthetic effects. Comply with requirements in Section 014000 "Quality Requirements" for mockups.

1. Build sample panels for typical exterior wall in sizes approximately 60 inches long by 48 inches high by full thickness.
2. Build sample panels facing south.
3. Where masonry is to match existing, build panels adjacent and parallel to existing surface.
4. Clean one-half of exposed faces of panels with masonry cleaner indicated.
5. Protect approved sample panels from the elements with weather-resistant membrane.
6. Approval of sample panels is for color, texture, and blending of masonry units; relationship of mortar and sealant colors to masonry unit colors; tooling of joints; aesthetic qualities of workmanship; and other material and construction qualities specifically approved by Architect in writing.

a. Approval of sample panels does not constitute approval of deviations from the Contract Documents contained in sample panels unless such deviations are specifically approved by Architect in writing.

B. Wall Mockups See Section 014339 "Mockups" for construction requirements for integrated exterior mockups.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store masonry units on elevated platforms in a dry location. If units are not stored in an enclosed location, cover tops and sides of stacks with waterproof sheeting, securely tied. If units become wet, do not install until they are dry.

B. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.

C. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.

D. Deliver preblended, dry mortar mix in moisture-resistant containers. Store preblended, dry mortar mix in delivery containers on elevated platforms in a dry location or in covered weatherproof dispensing silos.

E. Store masonry accessories, including metal items, to prevent corrosion and accumulation of dirt and oil.

1.8 FIELD CONDITIONS

A. Protection of Masonry: During construction, cover tops of veneer, projections, and sills with waterproof sheeting at end of each day's work. Cover partially completed masonry when construction is not in progress.

1. Extend cover a minimum of 24 inches down face of veneer, and hold cover securely in place.

B. Stain Prevention: Prevent grout, mortar, and soil from staining the face of masonry. Immediately remove grout, mortar, and soil that come in contact with masonry.

1. Protect base of walls from rain-splashed mud and from mortar splatter by spreading coverings on ground and over wall surface.
2. Protect sills, ledges, and projections from mortar droppings.
3. Protect surfaces of window and door frames, as well as similar products with painted and integral finishes, from mortar droppings.
4. Turn scaffold boards near the wall on edge at the end of each day to prevent rain from splashing mortar and dirt onto completed masonry.

C. Cold-Weather Requirements: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Remove and replace unit masonry damaged by frost or by freezing conditions. Comply with cold-weather construction requirements contained in TMS 602.

1. Cold-Weather Cleaning: Use liquid cleaning methods only when air temperature is 40 deg F and higher and will remain so until masonry has dried, but not less than seven days after completing cleaning.

D. Hot-Weather Requirements: Comply with hot-weather construction requirements contained in TMS 602.

E. Cleaning Masonry Surfaces: Comply with manufacturer's requirements and environmental conditions.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. For exposed masonry units and cementitious mortar components, obtain each color and grade from single source with resources to provide materials of consistent quality in appearance and physical properties.

2.2 UNIT MASONRY, GENERAL

A. Masonry Standard: Comply with TMS 602, except as modified by requirements in the Contract Documents.

B. Defective Units: Referenced masonry unit standards may allow a certain percentage of units to contain chips, cracks, or other defects exceeding limits stated. Do not use units where such defects will be exposed in the completed Work and will be within 20 ft. vertically and horizontally of a walking surface.

2.3 BRICK

A. General: Provide shapes indicated and as follows, with exposed surfaces matching finish and color of exposed faces of adjacent units.

1. For ends of sills and caps and for similar applications that would otherwise expose unfinished brick surfaces, provide units without cores or frogs and with exposed surfaces finished.
2. Provide special shapes for applications where stretcher units cannot accommodate special conditions, including corners, movement joints, bond beams, sashes, and lintels .

B. Clay Face Brick: Facing brick complying with ASTM C216 , Grade MW or SW, Type [**FBS**]

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable product by one of the following:

   a. Statesville Brick Company; Red Royal Special (Basis of Design)
   b. Carolina Ceramics
   c. Taylor Clay
   d. Triangle Brick Co.
   e. Old Carolina Brick Co.

2. Initial Rate of Absorption: Less than 30 g/30 sq. in. per minute when tested in accordance with ASTM C67/C67M.
3. Efflorescence: Provide brick that has been tested in accordance with ASTM C67/C67M and is rated "not effloresced."
4. Size (Actual Dimensions): Match existing. Application: Use where brick is exposed unless otherwise indicated.

   a. Color and Texture: Custom match to existing building. Approval Masonry veneer selection must be received by the Architect and New Hanover County representative.

2.4 MORTAR MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II, except Type III may be used for cold-weather construction. Provide natural color or white cement as required to produce mortar color indicated.

1. Alkali content will not be more than 0.1 percent when tested in accordance with ASTM C114.

B. Hydrated Lime: ASTM C207, Type S.

C. Portland Cement-Lime Mix: Packaged blend of portland cement and hydrated lime containing no other ingredients.

1. Manufacturers: Subject to compliance with requirements, provide one of the following:

   a. Argos USA; Eaglebond Portland Cement Lime.
   b. Holcim U.S.; Cement-Lime.
   c. SPEC MIX, Inc.; Portland Lime & Sand Masonry Mortar.

D. Masonry Cement: Not permitted.

E. Mortar Cement: ASTM C1329/C1329M.

1. Manufacturers: Subject to compliance with requirements, provide one of the following:

   a. Argos USA; Superbond Mortar Cement.
   b. Holcim U.S.; Mortar Cement.
   c. SPEC MIX, Inc.; Mortar Cement and Sand Mortar.

F. Mortar Pigments: Natural and synthetic iron oxides and chromium oxides, compounded for use in mortar mixes and complying with ASTM C979/C979M. Use only pigments with a record of satisfactory performance in masonry mortar.

G. Colored Cement Products: Packaged blend made from portland cement and hydrated lime and mortar pigments, all complying with specified requirements, and containing no other ingredients.

1. Manufacturers: Subject to compliance with requirements, provide one of the following:

a. Argos USA; Eaglebond Mortar Cement.
b. Holcim U.S.; Holcim Mortamix Custom Color Mortar Cement.
c. SPEC MIX, Inc.; Colored Mortar.

2. Formulate blend as required to produce color indicated or, if not indicated, as selected from manufacturer's standard colors.
3. Pigments do not exceed 10 percent of portland cement by weight.
4. Pigments do not exceed 5 percent of mortar cement by weight.

H. Aggregate for Mortar: ASTM C144.

1. For mortar that is exposed to view, use washed aggregate consisting of natural sand or crushed stone.
2. For joints less than 1/4 inch thick, use aggregate graded with 100 percent passing the No. 16 sieve.
3. White-Mortar Aggregates: Natural white sand or crushed white stone.
4. Colored-Mortar Aggregates: Natural sand or crushed stone of color necessary to produce required mortar color.

I. Cold-Weather Admixture: Nonchloride, noncorrosive, accelerating admixture complying with ASTM C494/C494M, Type C, and recommended by manufacturer for use in masonry mortar of composition indicated.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Addiment Incorporated; Mortar Kick
b. BASF Construction Chemicals - Building Systems; Trimix-NCA.
c. Euclid Chemical Company (The); Accelguard 80.
d. GCP Applied Technologies; Morset.
e. Sonneborn, Div. of ChemRex; Trimix-NCA

J. Water: Potable.

2.5 TIES AND ANCHORS

A. General: Ties and anchors shall extend at least 1-1/2 inches into veneer but with at least a 5/8-inch cover on outside face.

B. Materials: Provide ties and anchors specified in this article that are made from materials that comply with the following unless otherwise indicated:

1. Hot-Dip Galvanized, Carbon-Steel Wire: ASTM A82/A82M, with ASTM A153/A153M, Class B-2 coating.
2. Stainless Steel Wire: ASTM A580/A580M, Type 304.
3. Galvanized-Steel Sheet: ASTM A653/A653M, Commercial Steel, G60 zinc coating.
4. Steel Sheet, Galvanized after Fabrication: ASTM A1008/A1008M, Commercial Steel, with ASTM A153/A153M, Class B coating.
5. Stainless Steel Sheet: ASTM A240/A240M or ASTM A666, Type 304.

C. Adjustable Anchors for Connecting to Structural Steel Framing: Provide anchors that allow vertical or horizontal adjustment but resist tension and compression forces perpendicular to plane of wall.

1. Anchor Section for Welding to Steel Frame: Crimped 1/4-inch- diameter, hot-dip galvanized steel wire.
2. Tie Section: Triangular-shaped wire tie made from 0.187-inch- diameter, hot-dip galvanized steel wire.

D. Adjustable Masonry-Veneer Anchors:

1. General: Provide anchors that allow vertical adjustment but resist a 100-lbf load in both tension and compression perpendicular to plane of wall without deforming or developing play in excess of 1/16 inch.
2. Fabricate sheet metal anchor sections and other sheet metal parts from 0.105-inch- thick steel sheet, galvanized after fabrication.
3. Fabricate wire ties from 0.187-inch- diameter, hot-dip galvanized-steel wire unless otherwise indicated.
4. Screw-Attached Masonry Veneer Anchor: Units consisting of a wire tie and a metal anchor section.

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following.

1) Hohmann & Barnard, Inc.
2) Dayton Superior Corporation; Dur-O-Wal Division
3) Heckmann Building Products Inc.
4) Wire-Bond

b. Contractor's Option: Provide one of the following types.

1) Anchor Section: Sheet metal plate, 1-1/4 inches wide by 6 inches long, with screw holes top and bottom and with raised rib-stiffened strap, 5/8 inch wide by 3-5/8 inches long, stamped into center to provide a slot between strap and plate for inserting wire tie. Fabricate sheet metal anchor section from 1.05 inch thick steel sheet, galvanized after fabrication. Provide self-healing strip under each clip. Basis of Design: Hohmann & Barnard, Inc.; Model # X-Seal.
2) Anchor Section: Corrosion-resistant, self-drilling, eye-screw designed to receive wire tie. Eye-screw has spacer that seats directly against framing and is same thickness as sheathing and has gasketed, washer head that covers hole in sheathing. Basis of Design: Heckmann Building Products Inc.; Pos-I-Tie.

2.6 EMBEDDED FLASHING

A. Metal Flashing: Provide metal flashing complying with SMACNA's "Architectural Sheet Metal Manual" and as follows:

1. Stainless Steel: ASTM A240/A240M or ASTM A666, Type 304, 0.016 inch thick.
2. Fabricate continuous flashings in sections 96 inches long minimum, but not exceeding 12 feet. Provide splice plates at joints of formed, smooth metal flashing.
3. Fabricate through-wall flashing with snaplock receiver on exterior face where indicated to receive counterflashing.
4. Fabricate through-wall flashing with drip edge where indicated. Fabricate by extending flashing 1/2 inch out from wall, with outer edge bent down 30 degrees and hemmed.
5. Fabricate metal drip edges from stainless steel. Extend at least 3 inches into wall and 1/2 inch out from wall, with outer edge bent down 30 degrees and hemmed.

B. Flexible Flashing: Use one of the following unless otherwise indicated:

1. Copper-Laminated Flashing: 5-oz./sq. ft. copper sheet bonded between 2 layers of glass-fiber cloth. Use only where flashing is fully concealed in masonry. Subject to compliance with requirements, provide one of the following products:

    a. Advanced Building Products Inc.; Copper Fabric Flashing
    b. AFCO Products Inc.; Copper Fabric
    c. Hohmann & Barnard, Inc.; H & B C-Fab Flashing
    d. Phoenix Building Products; Type FCC-Fabric Covered Copper
    e. Polytite Manufacturing Corp.; Copper Fabric Flashing
    f. Sandell Manufacturing Co., Inc.; Copper Fabric Flashing
    g. York Manufacturing, Inc.; York Copper Fabric Flashing

2. Laminated Stainless Steel Fabric Flashing, Non-Asphaltic: Stainless steel core with polymer fabric laminated to one stainless steel face with non-asphalt adhesive. Provide with manufacturer recommended accessory items for a complete compatible system. Subject to compliance with requirements, provide one of the following:

    a. Hohman and Bernard, Inc.; Mighty-Flash Stainless Steel Fabric Flashing.
    b. York Manufacturing, Inc.; Multi-Flash SS
    c. STS Coatings, Inc.; Gorilla Flash Stainless Fabric
    d. Illinois Products, Inc.; IPCO Stainless Steel Fabric Flashing
    e. TK Products, Inc.; TK TWF

3. Self-Adhering Stainless Steel Flashing: 2 mil., Type 304 stainless steel with butyl rubber adhesive on one face. Use where flashing is fully concealed in masonry. Subject to compliance with requirements, provide one of the following:

    a. Hohman and Bernard, Inc.; Mighty-Flash SA.
    b. York Manufacturing, Inc.; York 304 SS.
    c. Illinois Products, Inc.; IPCO Self-Adhering Stainless Steel Fabric Flashing
    d. Vapro Shield, Inc.; Vapro SS Flashing.

C. Corners and End Dams: Provide prefabricated corners and end dams of same material and thickness as primary material and from the same flashing manufacturer.

D. Application: Unless otherwise indicated, use the following:

1. Where flashing is indicated to receive counterflashing, use metal flashing.
2. Where flashing is indicated to be turned down at or beyond the wall face, use metal flashing.
3. Where flashing is fully concealed, use flexible flashing.

E. Sealants for Sheet Metal Flashings: As specified in Section 076200 "Sheet Metal Flashing and Trim."

1. Elastomeric Sealant: ASTM C920, chemically curing silicone sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and remain watertight.

F. Adhesives, Primers, and Seam Tapes for Flashings: Flashing manufacturer's standard products or products recommended by flashing manufacturer for bonding flashing sheets to each other and to substrates.

G. Termination Bars for Flexible Flashing: Stainless steel sheet 0.019 inch by 1-1/2 inches with a 3/8 inch sealant flange at top.

1. Fasteners: Stainless steel.

2.7 ACCESSORIES

A. Compressible Filler: Premolded filler strips complying with ASTM D1056, Grade 2A1; compressible up to 35 percent; of width and thickness indicated; formulated from neoprene or urethane.

B. Expansion and Control Joint Sealant: Urethane sealant as specified in Section 079200 "Joint Sealants."

C. Weep Vent Products:

1. Cellular Plastic Weep Vent: One-piece, flexible extrusion made from UV-resistant polypropylene copolymer, full height and width of head joint and depth 1/8 inch less than depth of outer wythe, in color selected from manufacturer's standard.

a. Advanced Building Products Inc.; Mortar Maze weep vent.
b. Dayton Superior Corporation, Dur-O-Wal Division; Cell Vents.
c. Heckmann Building Products Inc.; No. 85 Cell Vent.
d. Hohmann & Barnard, Inc.; Quadro-Vent.
e. Wire-Bond; Cell Vent #3601

D. Cavity Drainage Material: Free-draining mesh, made from polymer strands that will not degrade within the wall cavity.

1. Products:

a. Advanced Building Products Inc.; Mortar Break (1 to 1-3/4 inch air space) or Mortar Break II (2-inch airspace).
b. Archovations, Inc.; CavClear Masonry Mat.
c. Dayton Superior Corporation, Dur-O-Wal Division; Polytite MortarStop
d. Heckmann Building Products Inc.; Weep-Thru Mortar Deflector.
e. Hohmann & Barnard, Inc.; Mortar Trap.
f. Mortar Net USA, Ltd.; Mortar Net.
g. Wire-Bond; Cavity Net II.

2. Configuration: Provide one of the following:

a. Strips, full depth of cavity and 10 inches high, with dovetail-shaped notches 7 inches deep that prevent clogging with mortar droppings.
b. Strips, not less than 1-1/2 inches thick and 10 inches high, with dimpled surface designed to catch mortar droppings and prevent weep holes from clogging with mortar.

E. Proprietary Acidic Masonry Cleaner: Manufacturer's standard-strength cleaner designed for removing mortar/grout stains, efflorescence, and other new construction stains from new masonry without discoloring or damaging masonry surfaces. Use product expressly approved for intended use by cleaner manufacturer and manufacturer of masonry units being cleaned.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Diedrich Technologies, Inc.
b. EaCo Chem, Inc.
c. ProSoCo, Inc.

2.8 MORTAR MIXES

A. General: Do not use admixtures, including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures unless otherwise indicated.

1. Do not use calcium chloride in mortar or grout.
2. Use portland cement-lime or mortar cement unless otherwise indicated.

3. Add cold-weather admixture (if used) at same rate for all mortar that will be exposed to view, regardless of weather conditions, to ensure that mortar color is consistent.

B. Preblended, Dry Mortar Mix: Furnish dry mortar ingredients in form of a preblended mix. Measure quantities by weight to ensure accurate proportions, and thoroughly blend ingredients before delivering to Project site.

C. Mortar for Unit Masonry: Comply with ASTM C270, Proportion Specification. Use Type N unless another type is indicated.

1. For masonry below grade or in contact with earth, use Type S.
2. For veneer masonry, use Type N.
3. For exterior, above-grade, load-bearing and nonload-bearing walls and parapet walls; for interior load-bearing walls; for interior nonload-bearing partitions; and for other applications where another type is not indicated, use Type S.

D. Pigmented Mortar: Use colored cement product.

1. Pigments shall not exceed 10 percent of portland cement by weight.
2. Pigments shall not exceed 5 percent of mortar cement by weight.
3. Color: As selected by Architect from manufacturer's full range.
4. Application: Use pigmented mortar for exposed mortar joints.

E. Colored-Aggregate Mortar: Produce required mortar color by using colored aggregates and natural color or white cement as necessary to produce required mortar color.

1. Color: As selected by Architect from manufacturer's full range to match existing.
2. Application: Use colored-aggregate mortar for exposed mortar joints.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

1. For the record, prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Leave openings for equipment to be installed before completing masonry. After installing equipment, complete masonry to match the construction immediately adjacent to opening.

B. Use full-size units without cutting if possible. If cutting is required to provide a continuous pattern or to fit adjoining construction, cut units with motor-driven saws; provide clean, sharp, unchipped edges. Allow units to dry before laying unless wetting of units is specified. Install cut units with cut surfaces and, where possible, cut edges concealed.

C. Select and arrange units for exposed unit masonry to produce a uniform blend of colors and textures. Mix units from several pallets or cubes as they are placed.

D. Matching Existing Masonry: Match coursing, bonding, color, and texture of existing masonry.

E. Wetting of Brick: Wet brick before laying if initial rate of absorption exceeds 30 g/30 sq. in. per minute when tested in accordance with ASTM C67/C67M. Allow units to absorb water so they are damp but not wet at time of laying.

3.3 TOLERANCES

A. Dimensions and Locations of Elements:

1. For dimensions in cross section or elevation, do not vary by more than plus 1/2 inch or minus 1/4 inch.
2. For location of elements in plan, do not vary from that indicated by more than plus or minus 1/2 inch.
3. For location of elements in elevation, do not vary from that indicated by more than plus or minus 1/4 inch in a story height or 1/2 inch total.

B. Lines and Levels:

1. For bed joints and top surfaces of bearing walls, do not vary from level by more than 1/4 inch in 10 ft., or 1/2-inch maximum.
2. For conspicuous horizontal lines, such as lintels, sills, parapets, and reveals, do not vary from level by more than 1/8 inch in 10 ft., 1/4 inch in 20 ft., or 1/2-inch maximum.
3. For vertical lines and surfaces, do not vary from plumb by more than 1/4 inch in 10 ft., 3/8 inch in 20 ft., or 1/2-inch maximum.
4. For conspicuous vertical lines, such as external corners, door jambs, reveals, and expansion and control joints, do not vary from plumb by more than 1/8 inch in 10 ft., 1/4 inch in 20 ft., or 1/2-inch maximum.
5. For lines and surfaces, do not vary from straight by more than 1/4 inch in 10 ft., 3/8 inch in 20 ft., or 1/2-inch maximum.
6. For vertical alignment of exposed head joints, do not vary from plumb by more than 1/4 inch in 10 ft., or 1/2-inch maximum.

C. Joints:

1. For bed joints, do not vary from thickness indicated by more than plus or minus 1/8 inch, with a maximum thickness limited to 1/2 inch.
2. For exposed bed joints, do not vary from bed-joint thickness of adjacent courses by more than 1/8 inch.
3. For head and collar joints, do not vary from thickness indicated by more than plus 3/8 inch or minus 1/4 inch.
4. For exposed head joints, do not vary from thickness indicated by more than plus or minus 1/8 inch. Do not vary from adjacent bed-joint and head-joint thicknesses by more than 1/8 inch.
5. For exposed bed joints and head joints of stacked bond, do not vary from a straight line by more than 1/16 inch from one masonry unit to the next.

3.4 LAYING MASONRY WALLS

A. Lay out walls in advance for accurate spacing of surface bond patterns with uniform joint thicknesses and for accurate location of openings, movement-type joints, returns, and offsets. Avoid using less-than-half-size units, particularly at corners, jambs, and, where possible, at other locations.

B. Bond Pattern for Exposed Masonry: Unless otherwise indicated, lay exposed masonry in running bond pattern; do not use units with less-than-nominal 4-inch horizontal face dimensions at corners or jambs.

C. Stopping and Resuming Work: Stop work by stepping back units in each course from those in course below; do not tooth. When resuming work, clean masonry surfaces that are to receive mortar, remove loose masonry units and mortar, and wet brickif required before laying fresh masonry.

D. Built-in Work: As construction progresses, build in items specified in this and other Sections. Fill in solidly with masonry around built-in items.

E. Fill space between steel frames and masonry solidly with mortar unless otherwise indicated.

3.5 MORTAR BEDDING AND JOINTING

A. General: Prepare mortar in accordance with current Portland Cement Association publications.

B. Prepare fresh mortar at the rate it will be used, in order to maintain consistent color and workability. Do not use mortar that has stiffened because of hydration. Discard when not used within the time recommended by mortar manufacturer or PCA publications, whichever is shorter. Retemper mortar carefully to avoid color changes, no more than twice per batch.

C. Measure mortar materials using cubic foot measuring box or other approved container of known volume, of size appropriate for operation. Use a consistent ratio of water to mortar materials, within the range recommended by the mortar manufacturer's written instructions.

1. Measurement of sand by shovel shall not be permitted.

D. Tool exposed joints slightly concave when thumbprint hard, using a jointer larger than joint thickness unless otherwise indicated.

3.6 ANCHORED MASONRY VENEERS

A. Anchor masonry veneers to wall framing with masonry-veneer anchors to comply with the following requirements:

1. Fasten screw-attached anchors through insulation and sheathing to wall framing with metal fasteners of type indicated. Use two fasteners unless anchor design only uses one fastener.
2. Embed tie sections in masonry joints.
3. Locate anchor sections to allow maximum vertical differential movement of ties up and down.
4. Space anchors as indicated, but not more than 16 inches o.c. vertically and horizontally. Install additional anchors within 12 inches of openings and at intervals, not exceeding 24 inches, around perimeter.

B. Provide not less than 1 inch of airspace between back of masonry veneer and face of insulation.

1. Keep airspace clean of mortar droppings and other materials during construction. Bevel beds away from airspace, to minimize mortar protrusions into airspace. Do not attempt to trowel or remove mortar fins protruding into airspace.

3.7 ANCHORING MASONRY TO STRUCTURAL STEEL AND CONCRETE

A. Anchor masonry to structural steel and concrete, where masonry abuts or faces structural steel or concrete to comply with the following:

1. Provide an open space not less than 1 inch wide between masonry and structural steel or concrete unless otherwise indicated. Keep open space free of mortar and other rigid materials.
2. Anchor masonry with anchors embedded in masonry joints and attached to structure.

3. Space anchors as indicated, but not more than 24 inches o.c. vertically and 36 inches o.c. horizontally.

3.8 EXPANSION JOINTS

A. General: Install expansion-joint materials in unit masonry as masonry progresses. Do not allow materials to span expansion joints without provision to allow for in-plane wall or partition movement.

B. Form expansion joints as follows:

1. Build in compressible joint fillers where indicated.
2. Form open joint full depth of brick wythe and of width indicated, but not less than 3/8 inch for installation of sealant and backer rod specified in Section 079200 "Joint Sealants."

C. Provide horizontal, pressure-relieving joints by either leaving an airspace or inserting a compressible filler of width required for installing sealant and backer rod specified in Section 079200 "Joint Sealants," but not less than 3/8 inch.

1. Locate horizontal, pressure-relieving joints beneath shelf angles supporting masonry.

3.9 LINTELS

A. Install steel lintels where indicated. Secure lintels immediately after placing into position to prevent movement and collapse. Unsecured lintels shall be removed and replaced when they can be secured immediately.

B. Provide offset angle supports where indicate and where openings of more than 12 inches for brick-size units and 24 inches for block-size units are indicated without structural steel or other supporting lintels.

C. Provide minimum bearing of 16 inches at each jamb unless otherwise indicated.

3.10 FLASHING AND WEEP VENTS

A. General: Install embedded flashing and weep vents in masonry at shelf angles, lintels, ledges, other obstructions to downward flow of water in wall, and where indicated. Install vents at shelf angles, ledges, and other obstructions to upward flow of air in cavities, and where indicated.

B. Install flashing as follows unless otherwise indicated:

1. Prepare masonry surfaces so they are smooth and free from projections that could puncture flashing. Where flashing is within mortar joint, place through-wall flashing on sloping bed of mortar and cover with mortar. Before covering with mortar, seal penetrations in flashing with adhesive, sealant, or tape as recommended by flashing manufacturer.
2. Extend flashing through veneer, across airspace behind veneer, and up face of sheathing at least 8 inches; with upper edge tucked under water-resistive barrier, lapping at least 4 inches. Fasten upper edge of flexible flashing to sheathing through termination bar.
3. At lintels and shelf angles, extend flashing a minimum of 6 inches into masonry at each end. At heads and sills, extend flashing 6 inches at ends and turn up not less than 2 inches to form end dams.
4. Cut flexible flashing off flush with face of wall after masonry wall construction is completed.

C. Install reglets and nailers for flashing and other related construction where they are indicated to be built into masonry.

D. Install weep vents in veneers in head joints of first course of masonry immediately above embedded flashing.

1. Use specified weep/cavity vent products to form weep vents.Space weep vents 24 inches o.c. unless otherwise indicated.

E. Place cavity drainage material in airspace behind veneers to comply with configuration requirements for cavity drainage material in "Accessories" Article.

3.11 FIELD QUALITY CONTROL

A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections. Allow inspectors access to scaffolding and work areas as needed to perform tests and inspections. Retesting of materials that fail to comply with specified requirements will be at Contractor's expense.

B. Flashing Inspections: Prior to concealment by closure of wall, coordinate and schedule inspection of through-wall flashings with Architect.

3.12 REPAIRING, POINTING, AND CLEANING

A. Remove and replace masonry units that are loose, chipped, broken, stained, or otherwise damaged or that do not match adjoining units. Install new units to match adjoining units; install in fresh mortar, pointed to eliminate evidence of replacement.

B. Pointing: During the tooling of joints, enlarge voids and holes, except weep holes, and completely fill with mortar. Point up joints, including corners, openings, and adjacent construction, to provide a neat, uniform appearance. Prepare joints for sealant application, where indicated.

C. In-Progress Cleaning: Clean unit masonry as work progresses by dry brushing to remove mortar fins and smears before tooling joints.

D. Final Cleaning: After mortar is thoroughly set and cured, clean exposed masonry as follows:

1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
2. Test cleaning methods on sample wall panel; leave one-half of panel uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of masonry.
3. Protect adjacent stone and nonmasonry surfaces from contact with cleaner by covering them with liquid strippable masking agent or polyethylene film and waterproof masking tape.
4. Wet wall surfaces with water before applying cleaners; remove cleaners promptly by rinsing surfaces thoroughly with clear water.
5. Clean brick by bucket-and-brush hand-cleaning method described in BIA Technical Notes 20 or low-pressure spray method, using a proprietary acidic cleaner applied according to manufacturer's written instructions.

3.13 MASONRY WASTE DISPOSAL

A. Salvageable Materials: Unless otherwise indicated, excess masonry materials are Contractor's property. At completion of unit masonry work, remove from Project site.

END OF SECTION 042613

This page intentionally left blank.

SECTION 051200 - STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Structural steel.
2. Field-installed shear connectors.
3. Grout.

B. Related Requirements:

1. Section 051213 "Architecturally Exposed Structural Steel Framing" for additional requirements for architecturally exposed structural steel.
2. Section 053100 "Steel Decking" for field installation of shear connectors through deck.
3. Section 055000 "Metal Fabrications" for steel lintels and shelf angles not attached to structural-steel frame, miscellaneous steel fabrications and other steel items not defined as structural steel.
4. Division 9 for coating requirements.

1.3 DEFINITIONS

A. Structural Steel: Elements of the structural frame indicated on Drawings and as described in AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."

B. Seismic-Load-Resisting System: Elements of structural-steel frame designated as "SLRS" or along grid lines designated as "SLRS" on Drawings, including columns, beams, and braces and their connections.

C. Heavy Sections: Rolled and built-up sections as follows:

1. Shapes included in ASTM A 6/A 6M with flanges thicker than 1-1/2 inches.
2. Welded built-up members with plates thicker than 2 inches.
3. Column base plates thicker than 2 inches.

D. Protected Zone: Structural members or portions of structural members indicated as "Protected Zone" on Drawings. Connections of structural and nonstructural elements to protected zones are limited.

E. Demand Critical Welds: Those welds, the failure of which would result in significant degradation of the strength and stiffness of the Seismic-Load-Resisting System and which are indicated as "Demand Critical" or "Seismic Critical" on Drawings.

1.4 COORDINATION

A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.

B. Coordinate installation of anchorage items to be embedded in or attached to other construction without delaying the Work. Provide setting diagrams, sheet metal templates, instructions, and directions for installation.

1.5 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.6 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show fabrication of structural-steel components.

1. Include details of cuts, connections, splices, camber, holes, and other pertinent data.
2. Include embedment Drawings.
3. Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld. Show backing bars that are to be removed and supplemental fillet welds where backing bars are to remain.
4. Indicate type, size, and length of bolts, distinguishing between shop and field bolts. Identify pretensioned and slip-critical, high-strength bolted connections.
5. Identify members and connections of the Seismic-Load-Resisting System.
6. Indicate locations and dimensions of protected zones.
7. Identify demand critical welds.

C. Welding Procedure Specifications (WPSs) and Procedure Qualification Records (PQRs): Provide according to AWS D1.1/D1.1M, "Structural Welding Code - Steel," for each welded joint qualified by testing, including the following:

1. Power source (constant current or constant voltage).
2. Electrode manufacturer and trade name, for demand critical welds.

D. Delegated-Design Submittal – AISC Code of Standard Practice Option 3: For structural-steel connections, all connections shall be designed to comply with design loads or requirements on the contract documents, include analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.7 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and fabricator.

B. Welding certificates.

C. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.

D. Mill test reports for structural steel, including chemical and physical properties.

E. Product Test Reports: For the following:

1. Bolts, nuts, and washers including mechanical properties and chemical analysis.
2. Direct-tension indicators.
3. Tension-control, high-strength, bolt-nut-washer assemblies.
4. Shear stud connectors.
5. Shop primers.
6. Nonshrink grout.

F. Source quality-control reports.

G. Field quality-control and special inspection reports.

1.8 QUALITY ASSURANCE

A. Fabricator Qualifications: A qualified fabricator that participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant, Category STD, or is accredited by the IAS Fabricator Inspection Program for Structural Steel (AC 172).

B. Installer Qualifications: A qualified installer who participates in the AISC Quality Certification Program and is designated an AISC-Certified Erector, Category CSE.

C. Shop-Painting Applicators: Qualified according to AISC's Sophisticated Paint Endorsement P1 or to SSPC-QP 3, "Standard Procedure for Evaluating Qualifications of Shop Painting Applicators."

D. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

E. Comply with applicable provisions of the following specifications and documents:

1. AISC 303.
2. AISC 341 and AISC 341s1.
3. AISC 360.
4. RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

1.9 DELIVERY, STORAGE, AND HANDLING

A. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from corrosion and deterioration.

1. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.

B. Store fasteners in a protected place in sealed containers with manufacturer's labels intact.

1. Fasteners may be repackaged provided Owner's testing and inspecting agency observes repackaging and seals containers.
2. Clean and relubricate bolts and nuts that become dry or rusty before use.
3. Comply with manufacturers' written recommendations for cleaning and lubricating ASTM F 3125/F 3125M, Grade F1852 bolt assemblies and for retesting bolt assemblies after lubrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Connections – AISC Code of Standard Practice – Option 3: Provide details of simple shear connections required by the Contract Documents to be selected or completed by structural-steel fabricator, including comprehensive engineering analysis by a qualified professional engineer, to withstand loads indicated and comply with other information and restrictions indicated.

1. Select and complete connections using schematic details indicated and AISC 360.
2. Use Allowable Stress Design; data are given at service-load level.

B. Moment Connections: Type FR, fully restrained.

C. Construction: Combined system of moment frame, braced frame, and shear walls.

2.2 STRUCTURAL-STEEL MATERIALS

A. W-Shapes: ASTM A 992 or ASTM A 572, Grade 50.

B. Channels, Angles-Shapes: ASTM A 36 or ASTM A 572, Grade 50.

C. Plate and Bar: ASTM A 36 or ASTM A 572, Grade 50.

D. Corrosion-Resisting Structural-Steel Shapes, Plates, and Bars: ASTM A 588, Grade 50.

E. Cold-Formed Hollow Structural Sections: ASTM A 500, Grade B or Grade C, structural tubing.

F. Corrosion-Resisting, Cold-Formed Hollow Structural Sections: ASTM A 847/A 847M, structural tubing.

G. Steel Pipe: ASTM A 53, Type E or Type S, Grade B.

1. Weight Class: Standard, unless noted otherwise.
2. Finish: Black except where indicated to be galvanized.

H. Steel Castings: ASTM A 216, Grade WCB with supplementary requirement S11.

I. Steel Forgings: ASTM A 668.

J. Welding Electrodes: Comply with AWS requirements.

2.3 BOLTS, CONNECTORS, AND ANCHORS

A. High-Strength Bolts, Nuts, and Washers: ASTM F 3125, Grade A325, Type 1, heavy-hex steel structural bolts; ASTM A 563, Grade DH, heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers; all with plain finish.

1. Direct-Tension Indicators: ASTM F 959, Type 325-1, compressible-washer type with plain finish.

B. Zinc-Coated High-Strength Bolts, Nuts, and Washers: ASTM F 3125, Grade A325, Type 1, heavy-hex steel structural bolts; ASTM A 563, Grade DH, heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers.

1. Finish: Hot-dip zinc coating.
2. Direct-Tension Indicators: ASTM F 959, Type 325-1, compressible-washer type with mechanically deposited zinc coating finish.

C. Tension-Control, High-Strength Bolt-Nut-Washer Assemblies: ASTM F 3125, Grade F1852, Type 1, heavy-hex head assemblies consisting of steel structural bolts with splined ends; ASTM A 563, Grade DH, heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers.

1. Finish: Plain.

D. Shear Connectors: ASTM A 108, Grades 1015 through 1020, headed-stud type, cold-finished carbon steel; AWS D1.1, Type B.

E. Unheaded Anchor Rods: ASTM F 1554, Grade 36, unless noted otherwise.

1. Configuration: Straight.
2. Nuts: ASTM A 563 heavy-hex carbon steel.
3. Plate Washers: ASTM A 36 carbon steel.
4. Washers: ASTM F 436, Type 1, hardened carbon steel.
5. Finish: Plain.

F. Headed Anchor Rods: ASTM F 1554, Grade 36, straight.

1. Nuts: ASTM A 563 heavy-hex carbon steel.
2. Plate Washers: ASTM A 36 carbon steel.
3. Washers: ASTM F 436, Type 1, hardened carbon steel.

4. Finish: Plain.

G. Eye Bolts and Nuts: Made from cold-finished carbon steel bars, ASTM A 108, Grade 1030.

H. Sleeve Nuts: Made from cold-finished carbon steel bars, ASTM A 108, Grade 1018.

2.4 PRIMER

A. Primer: SSPC-Paint 25, Type II, zinc oxide, alkyd, linseed oil primer.

B. Galvanizing Repair Paint: ASTM A 780.

2.5 GROUT

A. Metallic, Shrinkage-Resistant Grout: ASTM C 1107/C 1107M, factory-packaged, metallic aggregate grout, mixed with water to consistency suitable for application and a 30-minute working time.

B. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107/C 1107M, factory-packaged, nonmetallic aggregate grout, noncorrosive and nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

2.6 FABRICATION

A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate according to AISC 303, "Code of Standard Practice for Steel Buildings and Bridges," and to AISC 360.

1. Camber structural-steel members where indicated.
2. Fabricate beams with rolling camber up.
3. Identify high-strength structural steel according to ASTM A 6/A 6M and maintain markings until structural steel has been erected.
4. Mark and match-mark materials for field assembly.
5. Complete structural-steel assemblies, including welding of units, before starting shop-priming operations.

B. Thermal Cutting: Perform thermal cutting by machine to greatest extent possible.

1. Plane thermally cut edges to be welded to comply with requirements in AWS D1.1/D1.1M.

C. Bolt Holes: Cut, drill, mechanically thermal cut, or punch standard bolt holes perpendicular to metal surfaces.

D. Finishing: Accurately finish ends of columns and other members transmitting bearing loads.

E. Cleaning: Clean and prepare steel surfaces that are to remain unpainted according to SSPC-SP 1, "Solvent Cleaning."

F. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1/D1.1M and manufacturer's written instructions.

G. Steel Wall-Opening Framing: Select true and straight members for fabricating steel wall-opening framing to be attached to structural-steel frame. Straighten as required to provide uniform, square, and true members in completed wall framing. Build up welded framing, weld exposed joints continuously, and grind smooth.

H. Welded Door Frames: Build up welded door frames attached to structural-steel frame. Weld exposed joints continuously and grind smooth. Plug-weld fixed steel bar stops to frames. Secure removable stops to frames with countersunk machine screws, uniformly spaced not more than 10 inches o.c. unless otherwise indicated.

I. Holes: Provide holes required for securing other work to structural steel and for other work to pass through steel members.

1. Cut, drill, or punch holes perpendicular to steel surfaces. Do not thermally cut bolt holes or enlarge holes by burning.
2. Baseplate Holes: Cut, drill, mechanically thermal cut, or punch holes perpendicular to steel surfaces.
3. Weld threaded nuts to framing and other specialty items indicated to receive other work.

2.7 SHOP CONNECTIONS

A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.

1. Joint Type: Snug tightened.

B. Weld Connections: Comply with AWS D1.1 for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.

1. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in AISC 303 for mill material.

2.

2.8 SHOP PRIMING

A. Shop prime steel surfaces except the following:

1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches.
2. Surfaces to be field welded.
3. Surfaces of high-strength bolted, slip-critical connections.
4. Surfaces to receive sprayed fire-resistive materials (applied fireproofing).
5. Galvanized surfaces.

6. Surfaces enclosed in interior construction.

B. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to the following specifications and standards:

1. SSPC-SP 2, "Hand Tool Cleaning."
2. SSPC-SP 3, "Power Tool Cleaning."

C. Priming: Immediately after surface preparation, apply primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness of 1.5 mils. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.

1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
2. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

2.9 GALVANIZING

A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123.

1. Fill vent and drain holes that are exposed in the finished Work unless they function as weep holes, by plugging with zinc solder and filing off smooth.
2. Galvanize lintels attached to structural-steel frame and located in exterior walls.

2.10 SOURCE QUALITY CONTROL

A. Testing Agency: Owner will engage a qualified testing agency to perform shop tests and inspections.

1. Provide testing agency with access to places where structural-steel work is being fabricated or produced to perform tests and inspections.

B. Bolted Connections: Inspect and test shop-bolted connections according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

C. Welded Connections: Visually inspect shop-welded connections according to AWS D1.1and the following inspection procedures, at testing agency's option:

1. Liquid Penetrant Inspection: ASTM E 165.
2. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration are not accepted.
3. Ultrasonic Inspection: ASTM E 164.
4. Radiographic Inspection: ASTM E 94.

D. In addition to visual inspection, test and inspect shop-welded shear connectors according to requirements in AWS D1.1/D1.1M for stud welding and as follows:

1. Perform bend tests if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.
2. Conduct tests according to requirements in AWS D1.1 on additional shear connectors if weld fracture occurs on shear connectors already tested.

E. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify, with certified steel erector present, elevations of concrete- and masonry-bearing surfaces and locations of anchor rods, bearing plates, and other embedments for compliance with requirements.

1. Prepare a certified survey of existing conditions. Include bearing surfaces, anchor rods, bearing plates, and other embedments showing dimensions, locations, angles, and elevations.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place unless otherwise indicated.

1. Do not remove temporary shoring supporting composite deck construction until cast-in-place concrete has attained its design compressive strength.

3.3 ERECTION

A. Set structural steel accurately in locations and to elevations indicated and according to AISC 303 and AISC 360.

B. Baseplates, Bearing Plates and Leveling Plates: Clean concrete- and masonry-bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting plates. Clean bottom surface of plates.

1. Set plates for structural members on wedges, shims, or setting nuts as required.
2. Weld plate washers to top of baseplate.
3. Snug-tighten anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of plate before packing with grout.
4. Promptly pack grout solidly between bearing surfaces and plates so no voids remain. Neatly finish exposed surfaces; protect grout and allow to cure. Comply with manufacturer's written installation instructions for shrinkage-resistant grouts.

C. Maintain erection tolerances of structural steel within AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."

D. Align and adjust various members that form part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that are in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.

1. Level and plumb individual members of structure.
2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.

E. Splice members only where indicated.

F. Do not use thermal cutting during erection unless approved by Architect. Finish thermally cut sections within smoothness limits in AWS D1.1/D1.1M.

G. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.

H. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1/D1.1M and manufacturer's written instructions.

3.4 FIELD CONNECTIONS

A. High-Strength Bolts: Install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.

1. Joint Type: Snug tightened.

B. Weld Connections: Comply with AWS D1.1 for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.

1. Comply with AISC 303 and AISC 360 for bearing, alignment, adequacy of temporary connections, and removal of paint on surfaces adjacent to field welds.
2. Remove backing bars or runoff tabs, back gouge, and grind steel smooth.
3. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in AISC 303, "Code of Standard Practice for Steel Buildings and Bridges," for mill material.

3.5 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a qualified special inspector to perform the following special inspections:

1. Verify structural-steel materials and inspect steel frame joint details.
2. Verify weld materials and inspect welds.

3. Verify connection materials and inspect high-strength bolted connections.

B. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

C. Bolted Connections: Inspect and test bolted connections according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

D. Welded Connections: Visually inspect field welds according to AWS D1.1/D1.1M.

1. In addition to visual inspection, test and inspect field welds according to AWS D1.1/D1.1M and the following inspection procedures, at testing agency's option:

a. Liquid Penetrant Inspection: ASTM E 165.
b. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration are not accepted.
c. Ultrasonic Inspection: ASTM E 164.
d. Radiographic Inspection: ASTM E 94.

2. Test 10% of all field welds along with weld gage measurement; test 20% of all full and partial penetration welds.

E. In addition to visual inspection, test and inspect field-welded shear connectors according to requirements in AWS D1.1/D1.1M for stud welding and as follows:

1. Perform bend tests if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.
2. Conduct tests according to requirements in AWS D1.1/D1.1M on additional shear connectors if weld fracture occurs on shear connectors already tested.

F. Correct deficiencies in Work that test reports and inspections indicate does not comply with the Contract Documents.

3.6 REPAIRS AND PROTECTION

A. Galvanized Surfaces: Clean areas where galvanizing is damaged or missing and repair galvanizing to comply with ASTM A 780/A 780M.

B. Touchup Painting: Immediately after erection, clean exposed areas where primer is damaged or missing and paint with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.

1. Clean and prepare surfaces by SSPC-SP 2 hand-tool cleaning or SSPC-SP 3 power-tool cleaning.

END OF SECTION 051200

This page intentionally left blank.

SECTION 053100 - STEEL DECKING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Roof deck.
2. Noncomposite form deck.

B. Related Requirements:

1. Section 033000 "Cast-in-Place Concrete" for normal-weight and lightweight structural concrete fill over steel deck.
2. Section 035216 "Lightweight Insulating Concrete" for lightweight insulating concrete fill over steel deck.
3. Section 051200 "Structural Steel Framing" for shop- and field-welded shear connectors.
4. Section 055000 "Metal Fabrications" for framing deck openings with miscellaneous steel shapes.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of deck, accessory, and product indicated.

B. Shop Drawings:

1. Include layout and types of deck panels, anchorage details, reinforcing channels, pans, cut deck openings, special jointing, accessories, and attachments to other construction.

1.4 INFORMATIONAL SUBMITTALS

A. Welding certificates.

B. Product Certificates: For each type of steel deck.

C. Product Test Reports: For tests performed by a qualified testing agency, indicating that each of the following complies with requirements:

1. Power-actuated mechanical fasteners.
2. Acoustical roof deck.

D. Evaluation Reports: For steel deck, from ICC-ES.

E. Field quality-control reports.

1.5 QUALITY ASSURANCE

A. Testing Agency Qualifications: Qualified according to ASTM E 329 for testing indicated.

B. Welding Qualifications: Qualify procedures and personnel according to AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel."

1.6 DELIVERY, STORAGE, AND HANDLING

A. Protect steel deck from corrosion, deformation, and other damage during delivery, storage, and handling.

B. Stack steel deck on platforms or pallets and slope to provide drainage. Protect with a waterproof covering and ventilate to avoid condensation.

1. Protect and ventilate acoustical cellular roof deck with factory-installed insulation to maintain insulation free of moisture.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. AISI Specifications: Comply with calculated structural characteristics of steel deck according to AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members."

B. Fire-Resistance Ratings: Comply with ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

2.2 ROOF DECK

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Steel Deck:

a. ASC Profiles, Inc.
b. Canam Steel Corp.;The Canam Manac Group.
c. Consolidated Systems, Inc.
d. DACS, Inc.
e. Epic Metals Corporation.
f. Marlyn Steel Decks, Inc.
g. New Millennium Building Systems, LLC.

h. Nucor Corp.; Vulcraft Division.
i. Roof Deck, Inc.
j. United Steel Deck, Inc.
k. Valley Joist; Division of EBSCO Industries, Inc.
l. Verco Manufacturing Co.
m. Wheeling Corrugating Company; Div. of Wheeling-Pittsburgh Steel Corporation.

B. Roof Deck: Fabricate panels, without top-flange stiffening grooves, to comply with "SDI Specifications and Commentary for Steel Roof Deck," in SDI Publication No. 31, and with the following:

1. Galvanized Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33, G90 zinc coating.
2. Deck Profile: As indicated.
3. Profile Depth: As indicated.
4. Design Uncoated-Steel Thickness: As indicated.
5. Span Condition: Triple span or more.
6. Side Laps: Overlapped.

2.3 NONCOMPOSITE FORM DECK

A. Noncomposite Form Deck: Fabricate ribbed-steel sheet noncomposite form-deck panels to comply with "SDI Specifications and Commentary for Noncomposite Steel Form Deck," in SDI Publication No. 31, with the minimum section properties indicated, and with the following:

1. Galvanized Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 40, G90zinc coating.
2. Profile Depth: As indicated.
3. Design Uncoated-Steel Thickness: As indicated.
4. Span Condition: Double span or more.

2.4 ACCESSORIES

A. General: Provide manufacturer's standard accessory materials for deck that comply with requirements indicated.

B. Mechanical Fasteners: Corrosion-resistant, low-velocity, power-actuated or pneumatically driven carbon-steel fasteners; or self-drilling, self-threading screws.

C. Side-Lap Fasteners: Corrosion-resistant, hexagonal washer head; self-drilling, carbon-steel screws, No. 10 minimum diameter.

D. Flexible Closure Strips: Vulcanized, closed-cell, synthetic rubber.

E. Miscellaneous Sheet Metal Deck Accessories: Steel sheet, minimum yield strength of 33,000 psi, not less than 0.0359-inch design uncoated thickness, of same material and finish as deck; of profile indicated or required for application.

F. Pour Stops and Girder Fillers: Steel sheet, minimum yield strength of 33,000 psi, of same material and finish as deck, and of thickness and profile recommended by SDI Publication No. 31 for overhang and slab depth.

G. Column Closures, End Closures, Z-Closures, and Cover Plates: Steel sheet, of same material, finish, and thickness as deck unless otherwise indicated.

H. Piercing Hanger Tabs: Piercing steel sheet hanger attachment devices for use with floor deck.

I. Galvanizing Repair Paint: ASTM A 780.

J. Repair Paint: Manufacturer's standard rust-inhibitive primer of same color as primer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine supporting frame and field conditions for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install deck panels and accessories according to applicable specifications and commentary in SDI Publication No. 31, manufacturer's written instructions, and requirements in this Section.

B. Install temporary shoring before placing deck panels if required to meet deflection limitations.

C. Locate deck bundles to prevent overloading of supporting members.

D. Place deck panels on supporting frame and adjust to final position with ends accurately aligned and bearing on supporting frame before being permanently fastened. Do not stretch or contract side-lap interlocks.

1. Align cellular deck panels over full length of cell runs and align cells at ends of abutting panels.

E. Place deck panels flat and square and fasten to supporting frame without warp or deflection.

F. Cut and neatly fit deck panels and accessories around openings and other work projecting through or adjacent to deck.

G. Provide additional reinforcement and closure pieces at openings as required for strength, continuity of deck, and support of other work.

H. Comply with AWS requirements and procedures for manual shielded metal arc welding, appearance and quality of welds, and methods used for correcting welding work.

I. Mechanical fasteners may be used in lieu of welding to fasten deck. Locate mechanical fasteners and install according to deck manufacturer's written instructions.

3.3 ROOF-DECK INSTALLATION

A. Fasten roof-deck panels to steel supporting members by arc spot (puddle) welds of the surface diameter indicated or arc seam welds with an equal perimeter that is not less than 1-1/2 inches long, and as follows:

1. Mechanically fasten with Hilti X-EDN19THQ12 (joists) & Hilti X-ENP-19 L15 (beam with flange >1/4”) powder actuated fasteners installed in compliance with ICC ESR 2197 or equivalent by other manufacturers, based on base steel thickness.
2. Each sheet shall be fastened to each support at each edge and interior ribs of deck units and across the width of the sheet at intervals not exceeding patterns as shown on the drawings.

B. Side-Lap and Perimeter Edge Fastening: Fasten side laps and perimeter edges of panels between supports, at intervals not exceeding the lesser of one-half of the span or 18 inches, unless noted otherwise, and as follows:

1. Mechanically fasten with self-drilling, No. 12 diameter or larger, carbon-steel screws.
2. Or mechanically fasten with HILTI S-SLC-01 M HWH or HILTI S-SLC-2 M HWH screws.

C. End Bearing: Install deck ends over supporting frame with a minimum end bearing of 1-1/2 inches, with end joints as follows:

1. End Joints: Lapped 2 inches minimum.

D. Miscellaneous Roof-Deck Accessories: Install ridge and valley plates, finish strips, end closures, and reinforcing channels according to deck manufacturer's written instructions. Mechanically fasten to substrate to provide a complete deck installation.

1. Weld cover plates at changes in direction of roof-deck panels unless otherwise indicated.

E. Flexible Closure Strips: Install flexible closure strips over partitions, walls, and where indicated. Install with adhesive according to manufacturer's written instructions to ensure complete closure.

3.4 FLOOR-DECK INSTALLATION

A. Fasten floor-deck panels to steel supporting members by mechanical fasteners as follows:

1. Mechanically fasten with Hilti X-EDN19THQ12 (joists) & Hilti X-ENP-19 L15 (beam with flange >1/4”) powder actuated fasteners installed in compliance with ICC ESR 2197 or equivalent by other manufacturers, based on base steel thickness.
2. Each sheet shall have edge ribs of panels fastened to each support and additional fasteners not less than a 36/4 pattern as a minimum.

B. Side-Lap and Perimeter Edge Fastening: Fasten side laps and perimeter edges of panels between supports, at intervals not exceeding the lesser of one-half of the span or 36 inches, and as follows:

1. Mechanically fasten with self-drilling, No. 12 diameter or larger, carbon-steel screws.
2. Or mechanically fasten with HILTI S-SLC-01 M HWH or HILTI S-SLC-2 M HWH screws.

C. End Bearing: Install deck ends over supporting frame with a minimum end bearing of 1-1/2 inches, with end joints as follows:

1. End Joints: Lapped.

D. Pour Stops and Girder Fillers: Weld steel sheet pour stops and girder fillers to supporting structure according to SDI recommendations unless otherwise indicated.

E. Floor-Deck Closures: Weld steel sheet column closures, cell closures, and Z-closures to deck, according to SDI recommendations, to provide tight-fitting closures at open ends of ribs and sides of deck.

3.5 FIELD QUALITY CONTROL

A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

B. Field welds will be subject to inspection.

C. Prepare test and inspection reports.

3.6 PROTECTION

A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on both surfaces of deck with galvanized repair paint according to ASTM A 780/A 780M and manufacturer's written instructions.

B. Provide final protection and maintain conditions to ensure that steel deck is without damage or deterioration at time of Substantial Completion.

END OF SECTION 053100

SECTION 054000 - COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Exterior non-load-bearing wall framing.
2. Interior non-load-bearing wall framing.
3. Soffit framing.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for miscellaneous steel shapes, masonry shelf angles, and connections used with cold-formed metal framing.
2. Section 092116.23 "Gypsum Board Shaft Wall Assemblies" for interior non-load-bearing, metal-stud-framed, shaft-wall assemblies, with height limitations.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings:

1. Include layout, spacings, sizes, thicknesses, and types of cold-formed steel framing; fabrication; and fastening and anchorage details, including mechanical fasteners.
2. Indicate reinforcing channels, opening framing, supplemental framing, strapping, bracing, bridging, splices, accessories, connection details, and attachment to adjoining work.

C. Delegated-Design Submittal: For cold-formed steel framing.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For testing agency.

B. Welding certificates.

C. Product Certificates: For each type of code-compliance certification for studs and tracks.

D. Product Test Reports: For each listed product, for tests performed by manufacturer and witnessed by a qualified testing agency.

1. Steel sheet.
2. Expansion anchors.
3. Power-actuated anchors.
4. Mechanical fasteners.
5. Vertical deflection clips.
6. Horizontal drift deflection clips
7. Miscellaneous structural clips and accessories.

E. Evaluation Reports: For nonstandard cold-formed steel framing and power-actuated fasteners, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

1.6 QUALITY ASSURANCE

A. Engineering Responsibility: Preparation of Shop Drawings, design calculations, and other structural data by a qualified professional engineer.

B. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice and registered in the state of North Carolina and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of cold-formed metal framing that are similar to those indicated for this Project in material, design, and extent.

C. Testing Agency Qualifications: Qualified according to ASTM E 329 for testing indicated.

D. Product Tests: Mill certificates or data from a qualified independent testing agency, or in-house testing with calibrated test equipment, indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.

E. Code-Compliance Certification of Studs and Tracks: Provide documentation that framing members are certified according to the product-certification program of the Certified Steel Stud Association, the Steel Framing Industry Association, or the Steel Stud Manufacturers Association.

F. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
2. AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel."

1.7 DELIVERY, STORAGE, AND HANDLING

A. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling.

B. Store cold-formed metal framing, protect with a waterproof covering, and ventilate to avoid condensation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide cold-formed metal framing by one of the following:

1. Allied Studco.
2. AllSteel Products, Inc.
3. California Expanded Metal Products Company.
4. Clark Steel Framing.
5. Consolidated Fabricators Corp.; Building Products Division.
6. Craco Metals Manufacturing, LLC.
7. Custom Stud, Inc.
8. Dale/Incor.
9. Design Shapes in Steel.
10. Dietrich Metal Framing; a Worthington Industries Company.
11. Formetal Co. Inc. (The).
12. Innovative Steel Systems.
13. MarinoWare; a division of Ware Industries.
14. Quail Run Building Materials, Inc.
15. SCAFCO Corporation.
16. Southeastern Stud & Components, Inc.
17. Steel Construction Systems.
18. Steeler, Inc.
19. Super Stud Building Products, Inc.
20. The Steel Network
21. United Metal Products, Inc.

2.2 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer to design cold-formed steel framing.

B. Structural Performance: Provide cold-formed metal framing capable of withstanding design loads within limits and under conditions indicated.

1. Design Loads: As indicated.

2. Deflection Limits: Design framing systems to withstand design loads without deflections greater than the following:

   a. Interior Non-Load-Bearing Wall Framing: Horizontal deflection of 1/240 of the wall height under a horizontal load of 5 lbf/sq. ft..
   b. Exterior Non-Load-Bearing Framing: Horizontal deflection of 1/600 (lower wall studs) and 1/240 (2nd floor wall studs) of the wall height.

3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change of 120 deg F.

4. Design framing system to maintain clearances at openings, to allow for construction tolerances, and to accommodate live load deflection of primary building structure as follows:

   a. Upward and downward movement of 3/4 inch.

5. Design exterior non-load-bearing wall framing to accommodate horizontal deflection without regard for contribution of sheathing materials.

C. Cold-Formed Steel Framing Standards: Unless more stringent requirements are indicated, framing shall comply with AISI S100, AISI S200, and the following:

1. Wall Studs: AISI S211.
2. Headers: AISI S212.
3. Lateral Design: AISI S213.

D. Fire-Resistance Ratings: Comply with ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Indicate design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency acceptable to authorities having jurisdiction.

2.3 COLD-FORMED STEEL FRAMING MATERIALS

A. Steel Sheet: ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of grade and coating weight as follows:

1. Grade: As required by structural performance.
2. Coating: G90 or equivalent.

B. Steel Sheet for Vertical Deflection Clips: ASTM A 653/A 653M, structural steel, zinc coated, of grade and coating as follows:

1. Grade: 50, Class 1 or 2 and as required by structural performance.
2. Coating: G90.

2.4 EXTERIOR NON-LOAD-BEARING WALL FRAMING

A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0538 inch.
2. Flange Width: 2 inches.
3. Minimum Stud Depth: 6”

B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0677 inch.
2. Flange Width: 1-1/2 inches.

C. Vertical Deflection Clips: Manufacturer's standard bypass and head clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Dietrich Metal Framing; a Worthington Industries Company.
b. MarinoWare, a division of Ware Industries.
c. SCAFCO Corporation
d. The Steel Network, Inc.

2.5 INTERIOR NON-LOAD-BEARING WALL FRAMING

A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0428 inch.
2. Flange Width: 1-5/8 inches.

B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: Matching steel studs..
2. Flange Width: 1-1/4 inches.

C. Vertical Deflection Clips: Manufacturer's standard bypass and head clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Dietrich Metal Framing; a Worthington Industries Company.
b. MarinoWare, a division of Ware Industries.

c. SCAFCO Corporation
d. The Steel Network, Inc.

2.6 SOFFIT FRAMING

A. Exterior Soffit Frame: Manufacturer's standard C-shaped steel sections, of web depths indicated, with stiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0329 inch.
2. Flange Width: 1-5/8 inches, minimum.

2.7 FRAMING ACCESSORIES

A. Fabricate steel-framing accessories from ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated steel sheet, of same grade and coating designation used for framing members.

B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:

1. Supplementary framing.
2. Bracing, bridging, and solid blocking.
3. Web stiffeners.
4. Anchor clips.
5. End clips.
6. Foundation clips.
7. Gusset plates.
8. Stud kickers and knee braces.
9. Joist hangers and end closures.
10. Hole-reinforcing plates.
11. Backer plates.

2.8 ANCHORS, CLIPS, AND FASTENERS

A. Steel Shapes and Clips: ASTM A 36, zinc coated by hot-dip process according to ASTM A 123.

B. Anchor Bolts: ASTM F 1554, Grade 36, threaded carbon-steel hex-headed bolts, carbon-steel nuts, and flat, hardened-steel washers; zinc coated by hot-dip process according to ASTM A 153, Class C.

C. Power-Actuated Anchors: Fastener systems with working capacity greater than or equal to the design load, according to an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

D. Mechanical Fasteners: ASTM C 1513, corrosion-resistant-coated, self-drilling, self-tapping, steel drill screws.

1. Head Type: Low-profile head beneath sheathing; manufacturer's standard elsewhere.

E. Welding Electrodes: Comply with AWS standards.

2.9 MISCELLANEOUS MATERIALS

A. Galvanizing Repair Paint: ASTM A 780.

B. Cement Grout: Portland cement, ASTM C 150/C 150M, Type I; and clean, natural sand, ASTM C 404. Mix at ratio of 1 part cement to 2-1/2 parts sand, by volume, with minimum water required for placement and hydration.

C. Nonmetallic, Nonshrink Grout: Factory-packaged, nonmetallic, noncorrosive, nonstaining grout, complying with ASTM C 1107/C 1107M, and with a fluid consistency and 30-minute working time.

D. Shims: Load-bearing, high-density, multimonomer, nonleaching plastic; or cold-formed steel of same grade and metallic coating as framing members supported by shims.

E. Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch thick, selected from manufacturer's standard widths to match width of bottom track or rim track members as required.

2.10 FABRICATION

A. Fabricate cold-formed steel framing and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI's specifications and standards, manufacturer's written instructions, and requirements in this Section.

1. Fabricate framing assemblies using jigs or templates.
2. Cut framing members by sawing or shearing; do not torch cut.
3. Fasten cold-formed steel framing members by welding, screw fastening, clinch fastening, pneumatic pin fastening, or riveting as standard with fabricator. Wire tying of framing members is not permitted.

    a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
    b. Locate mechanical fasteners and install according to Shop Drawings, with screws penetrating joined members by no fewer than three exposed screw threads.

4. Fasten other materials to cold-formed steel framing by welding, bolting, pneumatic pin fastening, or screw fastening, according to Shop Drawings.

B. Reinforce, stiffen, and brace framing assemblies to withstand handling, delivery, and erection stresses. Lift fabricated assemblies by means that prevent damage or permanent distortion.

C. Tolerances: Fabricate assemblies level, plumb, and true to line to a maximum allowable variation of 1/8 inch in 10 feet and as follows:

1. Spacing: Space individual framing members no more than plus or minus 1/8 inch from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.
2. Squareness: Fabricate each cold-formed steel framing assembly to a maximum out-of-square tolerance of 1/8 inch.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, conditions, and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Before sprayed fire-resistive materials are applied, attach continuous angles, supplementary framing, or tracks to structural members indicated to receive sprayed fire-resistive materials.

B. After applying sprayed fire-resistive materials, remove only as much of these materials as needed to complete installation of cold-formed framing without reducing thickness of fire-resistive materials below that required to obtain fire-resistance ratings indicated. Protect remaining fire-resistive materials from damage.

C. Install load-bearing shims or grout between the underside of load-bearing wall bottom track and the top of foundation wall or slab at locations with a gap larger than 1/4 inch to ensure a uniform bearing surface on supporting concrete or masonry construction.

D. Install sealer gaskets at the underside of wall bottom track or rim track and at the top of foundation wall or slab at stud or joist locations.

3.3 INSTALLATION, GENERAL

A. Cold-formed steel framing may be shop or field fabricated for installation, or it may be field assembled.

B. Install cold-formed steel framing according to AISI S200, AISI S202, and manufacturer's written instructions unless more stringent requirements are indicated.

C. Install shop- or field-fabricated, cold-formed framing and securely anchor to supporting structure.

1. Screw, bolt, or weld wall panels at horizontal and vertical junctures to produce flush, even, true-to-line joints with maximum variation in plane and true position between fabricated panels not exceeding 1/16 inch.

D. Install cold-formed steel framing and accessories plumb, square, and true to line, and with connections securely fastened.

1. Cut framing members by sawing or shearing; do not torch cut.
2. Fasten cold-formed steel framing members by welding, screw fastening, clinch fastening, or riveting. Wire tying of framing members is not permitted.

a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
b. Locate mechanical fasteners, install according to Shop Drawings, and comply with requirements for spacing, edge distances, and screw penetration.

E. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.

F. Install temporary bracing and supports to secure framing and support loads equal to those for which structure was designed. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.

G. Do not bridge building expansion joints with cold-formed steel framing. Independently frame both sides of joints.

H. Install insulation, specified in Section 072100 "Thermal Insulation," in framing-assembly members, such as headers, sills, boxed joists, and multiple studs at openings, that are inaccessible on completion of framing work.

I. Fasten hole-reinforcing plate over web penetrations that exceed size of manufacturer's approved or standard punched openings.

3.4 EXTERIOR NON-LOAD-BEARING WALL INSTALLATION

A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure.

B. Fasten both flanges of studs to top and bottom track unless otherwise indicated. Space studs as follows:

1. Stud Spacing: As indicated on Shop Drawings.

C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.

D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.

1. Install single deep-leg deflection tracks and anchor to building structure.
2. Install double deep-leg deflection tracks and anchor outer track to building structure.
3. Connect vertical deflection clips to bypassing studs and anchor to building structure.
4. Connect drift clips to cold-formed steel framing and anchor to building structure.

E. Install horizontal bridging in wall studs, spaced vertically in rows indicated on Shop Drawings but not more than 48 inches apart. Fasten at each stud intersection.

1. Channel Bridging: Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.

2. Strap Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
3. Bar Bridging: Proprietary bridging bars installed according to manufacturer's written instructions.

F. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, and fasteners, to provide a complete and stable wall-framing system.

3.5 INTERIOR NON-LOAD-BEARING WALL INSTALLATION

A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure.

B. Fasten both flanges of studs to top and bottom track unless otherwise indicated. Space studs as follows:

1. Stud Spacing: As indicated on Shop Drawings.

C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.

D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.

1. Connect vertical deflection clips to studs and anchor to building structure.

E. Install horizontal bridging in wall studs, spaced vertically in rows indicated on Shop Drawings but not more than 48 inches apart. Fasten at each stud intersection.

1. Channel Bridging: Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
2. Strap Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
3. Bar Bridging: Proprietary bridging bars installed according to manufacturer's written instructions.

F. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, and fasteners, to provide a complete and stable wall-framing system.

3.6 ERECTION TOLERANCES

A. Install cold-formed steel framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet and as follows:

1. Space individual framing members no more than plus or minus 1/8 inch from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.7 FIELD QUALITY CONTROL

A. Testing: Owner will engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.

B. Field and shop welds will be subject to testing and inspecting.

C. Testing agency will report test results promptly and in writing to Contractor and Architect.

D. Cold-formed steel framing will be considered defective if it does not pass tests and inspections.

E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.8 REPAIRS AND PROTECTION

A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed steel framing with galvanized repair paint according to ASTM A 780/A 780M and manufacturer's written instructions.

B. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, that ensure that cold-formed steel framing is without damage or deterioration at time of Substantial Completion.

END OF SECTION 054000

This page intentionally left blank.

SECTION 055000 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Steel framing and supports for ceiling-hung toilet compartments.
2. Steel framing and supports for operable partitions.
3. Steel framing and supports for overhead doors and grilles.
4. Steel framing and supports for countertops.
5. Steel tube reinforcement for low partitions.
6. Steel framing and supports for mechanical and electrical equipment.
7. Steel framing and supports for applications where framing and supports are not specified in other Sections.
8. Elevator hoist beams.
9. Steel shapes for supporting elevator door sills.
10. Shelf angles.
11. Metal Ships ladders.
12. Elevator pit sump covers.
13. Structural-steel door frames.
14. Metal bollards.
15. Metal downspout boots.
16. Loose bearing and leveling plates for applications where they are not specified in other Sections.

B. Products furnished, but not installed, under this Section include the following:

1. Loose steel lintels.
2. Anchor bolts, steel pipe sleeves, slotted-channel inserts, and wedge-type inserts indicated to be cast into concrete or built into unit masonry.
3. Steel weld plates and angles for casting into concrete for applications where they are not specified in other Sections.

C. Related Requirements:

1. Section 033000 "Cast-in-Place Concrete" for installing anchor bolts, steel pipe sleeves, slotted-channel inserts, wedge-type inserts, and other items cast into concrete.
2. Section 042000 "Unit Masonry" for installing loose lintels, anchor bolts, and other items built into unit masonry.
3. Section 051200 "Structural Steel Framing."

1.3 COORDINATION

A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.

B. Coordinate installation of metal fabrications that are anchored to or that receive other work. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

1.4 ACTION SUBMITTALS

A. Shop Drawings: Show fabrication and installation details. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items. Provide Shop Drawings for the following:

1. Steel framing and supports for ceiling-hung toilet compartments.
2. Steel framing and supports for operable partitions.
3. Steel framing and supports for overhead doors and grilles.
4. Steel framing and supports for countertops.
5. Steel tube reinforcement for low partitions.
6. Steel framing and supports for mechanical and electrical equipment.
7. Steel framing and supports for applications where framing and supports are not specified in other Sections.
8. Elevator hoist beams.
9. Steel shapes for supporting elevator door sills.
10. Steel girders for supporting wood frame construction.
11. Steel pipe columns for supporting wood frame construction.
12. Prefabricated building columns.
13. Shelf angles.
14. Metal ships ladders.
15. Elevator pit sump covers.
16. Structural-steel door frames.
17. Metal bollards.
18. Loose steel lintels.

B. Delegated-Design Submittal: For Ships ladders, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For professional engineer.

B. Mill Certificates: Signed by stainless-steel manufacturers, certifying that products furnished comply with requirements.

C. Welding certificates.

D. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.

E. Research/Evaluation Reports: For post-installed anchors, from ICC-ES.

1.6 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

B. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."

1.7 FIELD CONDITIONS

A. Field Measurements: Verify actual locations of walls and other construction contiguous with metal fabrications by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design Ship ladders.

B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes acting on exterior metal fabrications by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 METALS

A. Metal Surfaces, General: Provide materials with smooth, flat surfaces unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.

B. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.

C. Stainless-Steel Sheet, Strip, and Plate: ASTM A 240/A 240M or ASTM A 666, Type 316L.

D. Stainless-Steel Bars and Shapes: ASTM A 276, Type 316L.

E. Rolled-Steel Floor Plate: ASTM A 786/A 786M, rolled from plate complying with ASTM A 36/A 36M or ASTM A 283/A 283M, Grade C or D.

F. Rolled-Stainless-Steel Floor Plate: ASTM A 793.

G. Steel Tubing: ASTM A 500/A 500M, cold-formed steel tubing.

H. Steel Pipe: ASTM A 53/A 53M, Standard Weight (Schedule 40) unless otherwise indicated.

I. Cast Iron: Either gray iron, ASTM A 48/A 48M, or malleable iron, ASTM A 47/A 47M, unless otherwise indicated.

J. Aluminum Plate and Sheet: ASTM B 209, Alloy 6061-T6.

K. Aluminum Extrusions: ASTM B 221, Alloy 6063-T6.

L. Aluminum-Alloy Rolled Tread Plate: ASTM B 632/B 632M, Alloy 6061-T6.

M. Aluminum Castings: ASTM B 26/B 26M, Alloy 443.0-F.

N. Bronze Extrusions: ASTM B 455, Alloy UNS No. C38500 (extruded architectural bronze).

O. Bronze Castings: ASTM B 584, Alloy UNS No. C83600 (leaded red brass) or No. C84400 (leaded semired brass).

P. Nickel Silver Extrusions: ASTM B 151/B 151M, Alloy UNS No. C74500.

Q. Nickel Silver Castings: ASTM B 584, Alloy UNS No. C97600 (20 percent leaded nickel bronze).

2.3 FASTENERS

A. General: Unless otherwise indicated, provide Type 316 stainless-steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5, at exterior walls. Select fasteners for type, grade, and class required.

1. Provide stainless-steel fasteners for fastening aluminum.
2. Provide stainless-steel fasteners for fastening stainless steel.
3. Provide stainless-steel fasteners for fastening nickel silver.
4. Provide bronze fasteners for fastening bronze.

B. Steel Bolts and Nuts: Regular hexagon-head bolts, ASTM A 307, Grade A; with hex nuts, ASTM A 563; and, where indicated, flat washers.

C. High-Strength Bolts, Nuts, and Washers: ASTM F 3125/F 3125M,Grade A325, Type 3, heavy-hex steel structural bolts; ASTM A 563, Grade DH3, heavy-hex carbon-steel nuts; and where indicated, flat washers.

D. Stainless-Steel Bolts and Nuts: Regular hexagon-head annealed stainless-steel bolts, ASTM F 593; with hex nuts, ASTM F 594; and, where indicated, flat washers; Alloy Group 1.

E. Anchor Bolts: ASTM F 1554, Grade 36, unless noted otherwise, of dimensions indicated; with nuts, ASTM A 563; and, where indicated, flat washers.

1. Hot-dip galvanize or provide mechanically deposited, zinc coating where item being fastened is indicated to be galvanized.

F. Anchors, General: Anchors capable of sustaining, without failure, a load equal to six times the load imposed when installed in unit masonry and four times the load imposed when installed in concrete, as determined by testing according to ASTM E 488/E 488M, conducted by a qualified independent testing agency.

G. Cast-in-Place Anchors in Concrete: Either threaded type or wedge type unless otherwise indicated; galvanized ferrous castings, either ASTM A 47/A 47M malleable iron or ASTM A 27/A 27M cast steel. Provide bolts, washers, and shims as needed, all hot-dip galvanized per ASTM F 2329.

H. Post-Installed Anchors: Torque-controlled expansion anchors or chemical anchors.

1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5, unless otherwise indicated.
2. Material for Exterior Locations and Where Stainless Steel Is Indicated: Alloy Group 1 stainless-steel bolts, ASTM F 593, and nuts, ASTM F 594.

2.4 MISCELLANEOUS MATERIALS

A. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79 and compatible with topcoat.

1. Use primer containing pigments that make it easily distinguishable from zinc-rich primer.

2. Provide weldable primer for structural steel members shown to require field welding of connections.

B. Shop Primer for Galvanized Steel: Primer formulated for exterior use over zinc-coated metal and compatible with finish paint systems indicated.

C. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.

D. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C 1107/C 1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.

E. Concrete: Comply with requirements in Section 033000 "Cast-in-Place Concrete" for normal-weight, air-entrained, concrete with a minimum 28-day compressive strength of 3000 psi.

2.5 FABRICATION, GENERAL

A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.

B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.

C. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.

D. Form exposed work with accurate angles and surfaces and straight edges.

E. Weld corners and seams continuously to comply with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

F. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners or welds where possible. Where exposed fasteners are required, use Phillips flat-head (countersunk) fasteners unless otherwise indicated. Locate joints where least conspicuous.

G. Fabricate seams and other connections that are exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.

H. Cut, reinforce, drill, and tap metal fabrications as indicated to receive finish hardware, screws, and similar items.

I. Provide for anchorage of type indicated; coordinate with supporting structure. Space anchoring devices to secure metal fabrications rigidly in place and to support indicated loads.

J. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors, 1/8 by 1-1/2 inches, with a minimum 6-inch embedment and 2-inch hook, not less than 8 inches from ends and corners of units and 24 inches o.c., unless otherwise indicated.

2.6 MISCELLANEOUS FRAMING AND SUPPORTS

A. General: Provide steel framing and supports not specified in other Sections as needed to complete the Work.

B. Fabricate units from steel shapes, plates, and bars of welded construction unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction.

1. Fabricate units from slotted channel framing where indicated.
2. Furnish inserts for units installed after concrete is placed.

C. Fabricate supports for operable partitions from continuous steel beams of sizes indicated with attached bearing plates, anchors, and braces as indicated. Drill or punch bottom flanges of beams to receive partition track hanger rods; locate holes where indicated on operable partition Shop Drawings.

D. Galvanize miscellaneous framing and supports where indicated.

E. Prime miscellaneous framing and supports with zinc-rich primer where indicated.

2.7 SHELF ANGLES

A. Fabricate shelf angles from steel angles of sizes indicated and for attachment to concrete framing. Provide horizontally slotted holes to receive 3/4-inch bolts, spaced not more than 6 inches from ends and 24 inches o.c., unless otherwise indicated.

1. Provide mitered and welded units at corners.
2. Provide open joints in shelf angles at expansion and control joints. Make open joint approximately 2 inches larger than expansion or control joint.

B. For cavity walls, provide vertical channel brackets to support angles from backup masonry and concrete.

C. Galvanize and prime shelf angles located in exterior walls.

D. Prime shelf angles located in exterior walls with zinc-rich primer.

E. Furnish wedge-type concrete inserts, complete with fasteners, to attach shelf angles to cast-in-place concrete.

2.8 METAL SHIPS' LADDERS

A. Provide metal ships' ladders where indicated. Fabricate of open-type construction with channel or plate stringers and pipe and tube railings unless otherwise indicated. Provide brackets and fittings for installation.

1. Treads are not to be less than 5 inches exclusive of nosing or less than 8-1/2 inches including the nosing, and riser height is not to be more than 9-1/2 inches.
2. Fabricate ships' ladders, including railings from steel or aluminum.
3. Fabricate treads from welded or pressure-locked steel bar or pressure-locked aluminum bar grating. Grating material shall match the side rail material. Limit openings in gratings to no more than 1/2 inch in least dimension.
4. Comply with applicable railing requirements in Section 055213 "Pipe and Tube Railings."

B. Galvanize steel ships' ladders including treads, railings, brackets, and fasteners.

2.9 MISCELLANEOUS STEEL TRIM

A. Unless otherwise indicated, fabricate units from steel shapes, plates, and bars of profiles shown with continuously welded joints and smooth exposed edges. Miter corners and use concealed field splices where possible.

B. Provide cutouts, fittings, and anchorages as needed to coordinate assembly and installation with other work.

1. Provide with integrally welded steel strap anchors for embedding in concrete or masonry construction.

C. Galvanize and prime exterior miscellaneous steel trim.

2.10 METAL BOLLARDS

A. Fabricate metal bollards from Schedule 40 steel pipe.

1. Cap bollards with 1/4-inch-thick steel plate.
2. Where bollards are indicated to receive controls for door operators, provide cutouts for controls and holes for wire.
3. Where bollards are indicated to receive light fixtures, provide cutouts for fixtures and holes for wire.

B. Fabricate bollards with 3/8-inch-thick steel baseplates for bolting to concrete slab. Drill baseplates at all four corners for 3/4-inch anchor bolts.

1. Where bollards are to be anchored to sloping concrete slabs, angle baseplates for plumb alignment of bollards.

C. Fabricate sleeves for bollard anchorage from steel pipe or tubing with 1/4-inch-thick steel plate welded to bottom of sleeve. Make sleeves not less than 8 inches deep and 3/4 inch larger than OD of bollard.

D. Fabricate internal sleeves for removable bollards from Schedule 40 steel pipe or 1/4-inch wall-thickness steel tubing with an OD approximately 1/16 inch less than ID of bollards. Match drill sleeve and bollard for 3/4-inch steel machine bolt.

E. Prime bollards with zinc-rich primer.

2.11 LOOSE BEARING AND LEVELING PLATES

A. Provide loose bearing and leveling plates for steel items bearing on masonry or concrete construction. Drill plates to receive anchor bolts and for grouting.

B. Galvanize plates.

C. Prime plates with zinc-rich primer.

2.12 LOOSE STEEL LINTELS

A. Fabricate loose steel lintels from steel angles and shapes of size indicated for openings and recesses in masonry walls and partitions at locations indicated. Fabricate in single lengths for each opening unless otherwise indicated. Weld adjoining members together to form a single unit where indicated.

B. Size loose lintels to provide bearing length at each side of openings equal to 1/12 of clear span, but not less than 8 inches unless otherwise indicated.

C. Galvanize and prime loose steel lintels located in exterior walls.

D. Prime loose steel lintels located in exterior walls with zinc-rich primer.

2.13 STEEL WELD PLATES AND ANGLES

A. Provide steel weld plates and angles not specified in other Sections, for items supported from concrete construction as needed to complete the Work. Provide each unit with no fewer than two integrally welded steel strap anchors for embedding in concrete.

2.14 FINISHES, GENERAL

A. Finish metal fabrications after assembly.

B. Finish exposed surfaces to remove tool and die marks and stretch lines, and to blend into surrounding surface.

2.15 STEEL AND IRON FINISHES

A. Galvanizing: Hot-dip galvanize items as indicated to comply with ASTM A 153/A 153M for steel and iron hardware and with ASTM A 123/A 123M for other steel and iron products.

1. Do not quench or apply post galvanizing treatments that might interfere with paint adhesion.

B. Preparation for Shop Priming Galvanized Items: After galvanizing, thoroughly clean railings of grease, dirt, oil, flux, and other foreign matter, and treat with metallic phosphate process.

C. Shop prime iron and steel items not indicated to be galvanized unless they are to be embedded in concrete, sprayed-on fireproofing, or masonry, or unless otherwise indicated.

1. Shop prime with universal shop primer indicated.

D. Preparation for Shop Priming: Prepare surfaces to comply with requirements indicated below:

1. Exterior Items: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
2. Items Indicated to Receive Zinc-Rich Primer: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."

3. Items Indicated to Receive Primers Specified in Section 099600 "High-Performance Coatings": SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
4. Other Items: SSPC-SP 3, "Power Tool Cleaning."

E. Shop Priming: Apply shop primer to comply with SSPC-PA 1, "Paint Application Specification No. 1: Shop, Field, and Maintenance Painting of Steel," for shop painting.

1. Stripe paint corners, crevices, bolts, welds, and sharp edges.

2.16 ALUMINUM FINISHES

A. As-Fabricated Finish: AA-M12.

B. Clear Anodic Finish: AAMA 611, Class I, AA-M12C22A41.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.

B. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.

C. Field Welding: Comply with the following requirements:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

D. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction. Provide threaded fasteners for use with concrete and masonry inserts, toggle bolts, through bolts, lag screws, wood screws, and other connectors.

E. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.

F. Corrosion Protection: Coat concealed surfaces of aluminum that come into contact with grout, concrete, masonry, wood, or dissimilar metals with the following:

1. Cast Aluminum: Heavy coat of bituminous paint.
2. Extruded Aluminum: Two coats of clear lacquer.

3.2 INSTALLING MISCELLANEOUS FRAMING AND SUPPORTS

A. General: Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings.

B. Anchor supports for ceiling hung toilet partitions, operable partitions, overhead doors, and overhead grilles securely to, and rigidly brace from, building structure.

C. Support steel girders on solid grouted masonry, concrete, or steel pipe columns. Secure girders with anchor bolts embedded in grouted masonry or concrete or with bolts through top plates of pipe columns.

1. Where grout space under bearing plates is indicated for girders supported on concrete or masonry, install as specified in "Installing Bearing and Leveling Plates" Article.

D. Install pipe columns on concrete footings with grouted baseplates. Position and grout column baseplates as specified in "Installing Bearing and Leveling Plates" Article.

1. Grout baseplates of columns supporting steel girders after girders are installed and leveled.

3.3 INSTALLATION OF METAL SHIPS' LADDERS

A. Secure top and bottom of ships' ladders to construction to comply with manufacturer's written instructions.

B. Secure pipe crossovers to construction to comply with manufacturer's written instructions.

3.4 INSTALLING METAL BOLLARDS

A. Fill metal-capped bollards solidly with concrete and allow concrete to cure seven days before installing.

1. Do not fill removable bollards with concrete.

B. Anchor bollards to existing construction with expansion anchors. Provide four 3/4-inch bolts at each bollard unless otherwise indicated.

1. Embed anchor bolts at least 4 inches in concrete.

C. Anchor bollards in concrete with pipe sleeves preset and anchored into concrete. Fill annular space around bollard solidly with nonshrink grout; mixed and placed to comply with grout manufacturer's written instructions. Slope grout up approximately 1/8 inch toward bollard.

D. Anchor bollards in place with concrete footings. Center and align bollards in holes 3 inches above bottom of excavation. Place concrete and vibrate or tamp for consolidation. Support and brace bollards in position until concrete has cured.

E. Anchor internal sleeves for removable bollards in concrete by inserting in pipe sleeves preset into concrete. Fill annular space around internal sleeves solidly with nonshrink grout; mixed and placed to comply with grout manufacturer's written instructions. Slope grout up approximately 1/8 inch toward internal sleeve.

F. Anchor internal sleeves for removable bollards in place with concrete footings. Center and align sleeves in holes 3 inches above bottom of excavation. Place concrete and vibrate or tamp for consolidation. Support and brace sleeves in position until concrete has cured.

G. Place removable bollards over internal sleeves and secure with 3/4-inch machine bolts and nuts. After tightening nuts, drill holes in bolts for inserting padlocks. Owner furnishes padlocks.

H. Fill bollards solidly with concrete, mounding top surface to shed water.

1. Do not fill removable bollards with concrete.

3.5 INSTALLING BEARING AND LEVELING PLATES

A. Clean concrete and masonry bearing surfaces of bond-reducing materials, and roughen to improve bond to surfaces. Clean bottom surface of plates.

B. Set bearing and leveling plates on wedges, shims, or leveling nuts. After bearing members have been positioned and plumbed, tighten anchor bolts. Do not remove wedges or shims but, if protruding, cut off flush with edge of bearing plate before packing with nonshrink grout. Pack grout solidly between bearing surfaces and plates to ensure that no voids remain.

3.6 ADJUSTING AND CLEANING

A. Touchup Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.

1. Apply by brush or spray to provide a minimum 2.0-mil dry film thickness.

B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780/A 780M.

END OF SECTION 055000

SECTION 055213 - PIPE AND TUBE RAILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior steel [pipe] [and] [tube] railings.

1.2 COORDINATION

A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.

B. Coordinate installation of anchorages for railings. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

C. Schedule installation so wall attachments are made only to completed walls. Do not support railings temporarily by any means that do not satisfy structural performance requirements.

1.3 ACTION SUBMITTALS

A. Product Data: For the following:

1. Manufacturer's product lines of mechanically connected railings.
2. Railing brackets.
3. Grout, anchoring cement, and paint products.

B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

C. Samples: For each type of exposed finish required.

D. Delegated-Design Submittal: For railings, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.4 INFORMATIONAL SUBMITTALS

A. Welding certificates.

B. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers certifying that shop primers are compatible with topcoats.

C. Product Test Reports: For pipe and tube railings, for tests performed by a qualified testing agency, according to ASTM E894 and ASTM E935.

1.5 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."

~~**2. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum."**~~

1.6 DELIVERY, STORAGE, AND HANDLING

A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

1.7 FIELD CONDITIONS

A. Field Measurements: Verify actual locations of walls and other construction contiguous with metal fabrications by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design railings, including attachment to building construction.

B. Structural Performance: Railings, including attachment to building construction, shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:

1. Handrails and Top Rails of Guards:

a. Uniform load of 50 lbf/ ft. applied in any direction.
b. Concentrated load of 200 lbf applied in any direction.
c. Uniform and concentrated loads need not be assumed to act concurrently.

2. Infill of Guards:

a. Concentrated load of 50 lbf applied horizontally on an area of 1 sq. ft.
b. Infill load and other loads need not be assumed to act concurrently.

C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 METALS, GENERAL

A. Metal Surfaces, General: Provide materials with smooth surfaces, without seam marks, roller marks, rolled trade names, stains, discolorations, or blemishes.

B. Brackets, Flanges, and Anchors: Cast or formed metal of same type of material and finish as supported rails unless otherwise indicated.

1. Provide type of bracket with flange tapped for concealed anchorage to threaded hanger bolt and that provides 1-1/2-inch clearance from inside face of handrail to finished wall surface.

2.3 STEEL AND IRON

A. Tubing: ASTM A500 (cold formed) or ASTM A513.

B. Pipe: ASTM A53/A53M, Type F or Type S, Grade A, Standard Weight (Schedule 40), unless another grade and weight are required by structural loads.

1. Provide galvanized finish for exterior installations and where indicated.

C. Plates, Shapes, and Bars: ASTM A36/A36M.

D. Cast Iron: Either gray iron, ASTM A48/A48M, or malleable iron, ASTM A47/A47M, unless otherwise indicated.

2.4 ~~**ALUMINUM**~~

A. ~~**Aluminum, General: Provide alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated, and with not less than the strength and durability properties of alloy and temper designated below for each aluminum form required.**~~

B. ~~**Extruded Bars and Tubing: ASTM B221, Alloy 6063-T5/T52.**~~

C. ~~**Extruded Structural Pipe and Round Tubing: ASTM B429/B429M, Alloy 6063-T6.**~~

1. ~~**Provide Standard Weight (Schedule 40) pipe unless otherwise indicated.**~~

D. ~~**Drawn Seamless Tubing: ASTM B210, Alloy 6063-T832.**~~

E. ~~**Plate and Sheet: ASTM B209, Alloy 6061-T6.**~~

F. Die and Hand Forgings: ~~**ASTM B247**~~, Alloy 6061-T6.

G. Castings: ASTM B26/B26M, Alloy A356.0-T6.

2.5 FASTENERS

A. General: Provide the following:

1. Ungalvanized-Steel Railings: Plated steel fasteners complying with ASTM B633 or ASTM F1941, Class Fe/Zn 5 for zinc coating.
2. **Hot-Dip Galvanized Railings: Type 304 stainless-steel or hot-dip zinc-coated steel fasteners complying with ASTM A153/A153M or ASTM F2329 for zinc coating.**
3. ~~Aluminum Railings: Type 316 stainless-steel fasteners.~~
4. Provide exposed fasteners with finish matching appearance, including color and texture, of railings.

B. Fasteners for Anchoring Railings to Other Construction: Select fasteners of type, grade, and class required to produce connections suitable for anchoring railings to other types of construction indicated and capable of withstanding design loads.

C. Fasteners for Interconnecting Railing Components:

1. Provide concealed fasteners for interconnecting railing components and for attaching them to other work, unless otherwise indicated.

2.6 MISCELLANEOUS MATERIALS

A. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.

1. ~~**For aluminum railings, provide type and alloy as recommended by producer of metal to be welded and as required for color match, strength, and compatibility in fabricated items.**~~

B. **Etching Cleaner for Galvanized Metal: Complying with MPI#25.**

C. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.

D. Shop Primers: Provide primers that comply with **Section 099113 "Exterior Painting" and** Section 099123 "Interior Painting."

E. Shop Primer for Galvanized Steel: Primer formulated for exterior use over zinc-coated metal and compatible with finish paint systems indicated.

~~**F. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D1187/D1187M.**~~

G. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C1107/C1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.

H. Anchoring Cement: Factory-packaged, nonshrink, nonstaining, hydraulic-controlled expansion cement formulation for mixing with water at Project site to create pourable anchoring, patching, and grouting compound.

2.7 FABRICATION

A. General: Fabricate railings to comply with requirements indicated for design, dimensions, member sizes and spacing, details, finish, and anchorage, but not less than that required to support structural loads.

B. Shop assemble railings to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for reassembly and coordinated installation. Use connections that maintain structural value of joined pieces.

C. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.

D. Form work true to line and level with accurate angles and surfaces.

E. Fabricate connections that are exposed to weather in a manner that excludes water. Provide weep holes where water may accumulate.

F. Cut, reinforce, drill, and tap as indicated to receive finish hardware, screws, and similar items.

G. Connections: Fabricate railings with welded connections unless otherwise indicated.

H. Welded Connections: Cope components at connections to provide close fit, or use fittings designed for this purpose. Weld all around at connections, including at fittings.

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove flux immediately.
4. At exposed connections, finish exposed surfaces smooth and blended so no roughness shows after finishing and welded surface matches contours of adjoining surfaces.

I. ~~**Welded Connections for Aluminum Pipe: Fabricate railings to interconnect members with concealed internal welds that eliminate surface grinding, using manufacturer's standard system of sleeve and socket fittings.**~~

J. Form Changes in Direction: As detailed.

K. For changes in direction made by bending, use jigs to produce uniform curvature for each repetitive configuration required. Maintain cross section of member throughout entire bend without buckling, twisting, cracking, or otherwise deforming exposed surfaces of components.

L. Close exposed ends of railing members with prefabricated end fittings.

M. Provide wall returns at ends of wall-mounted handrails unless otherwise indicated. Close ends of returns.

N. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors to interconnect railing members to other work unless otherwise indicated.

1. At brackets and fittings fastened to plaster or gypsum board partitions, provide crush-resistant fillers or other means to transfer loads through wall finishes to structural supports and prevent bracket or fitting rotation and crushing of substrate.

O. Provide inserts and other anchorage devices for connecting railings to concrete or masonry work. Fabricate anchorage devices capable of withstanding loads imposed by railings. Coordinate anchorage devices with supporting structure.

2.8 STEEL AND IRON FINISHES

A. **Galvanized Railings:**

1. **Hot-dip galvanize exterior steel railings, including hardware, after fabrication.**
2. Comply with ASTM A123/A123M for hot-dip galvanized railings.
3. Comply with ASTM A153/A153M for hot-dip galvanized hardware.
4. **Do not quench or apply post galvanizing treatments that might interfere with paint adhesion.**

B. **For galvanized railings, provide hot-dip galvanized fittings, brackets, fasteners, sleeves, and other ferrous components.**

C. Preparing Galvanized Railings for Shop Priming: After galvanizing, thoroughly clean railings of grease, dirt, oil, flux, and other foreign matter, and treat with etching cleaner.

D. For nongalvanized-steel railings, provide nongalvanized ferrous-metal fittings, brackets, fasteners, and sleeves; however, galvanize anchors to be embedded in exterior concrete or masonry.

E. Preparation for Shop Priming: Prepare uncoated ferrous-metal surfaces to comply with primer manufacturer's recommendations, but not less than SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."

1. **Exterior Railings: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."**
2. Railings Indicated to Receive Zinc-Rich Primer: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."

F. Primer Application: Apply shop primer to prepared surfaces of railings unless otherwise indicated. Comply with requirements in SSPC-PA 1, "Shop, Field, and Maintenance Painting of Steel," for shop painting. Primer need not be applied to surfaces to be embedded in concrete or masonry.

1. Shop prime uncoated railings with primers specified in Section 099123 "Interior Painting" unless zinc-rich primer is indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine plaster and gypsum board assemblies, where reinforced to receive anchors, to verify that locations of concealed reinforcements are clearly marked for Installer. Locate reinforcements and mark locations if not already done.

3.2 INSTALLATION, GENERAL

A. Fit exposed connections together to form tight, hairline joints.

B. Perform cutting, drilling, and fitting required for installing railings. Set railings accurately in location, alignment, and elevation; measured from established lines and levels and free of rack.

1. Do not weld, cut, or abrade surfaces of railing components that are coated or finished after fabrication and that are intended for field connection by mechanical or other means without further cutting or fitting.
2. Set posts plumb within a tolerance of 1/16 inch in 3 feet.
3. Align rails so variations from level for horizontal members and variations from parallel with rake of steps and ramps for sloping members do not exceed 1/4 inch in 12 feet.

C. Control of Corrosion: Prevent galvanic action and other forms of corrosion by insulating metals and other materials from direct contact with incompatible materials.

1. ~~**Coat, with a heavy coat of bituminous paint, concealed surfaces of aluminum that are in contact with grout, concrete, masonry, wood, or dissimilar metals.**~~

D. Adjust railings before anchoring to ensure matching alignment at abutting joints.

E. Fastening to In-Place Construction: Use anchorage devices and fasteners where necessary for securing railings and for properly transferring loads to in-place construction.

3.3 RAILING CONNECTIONS

A. Welded Connections: Use fully welded joints for permanently connecting railing components. Comply with requirements for welded connections in "Fabrication" Article whether welding is performed in the shop or in the field.

B. Expansion Joints: Install expansion joints at locations indicated but not farther apart than required to accommodate thermal movement. Provide slip-joint internal sleeve extending 2 inches beyond joint on either side, fasten internal sleeve securely to one side, and locate joint within 6 inches of post.

3.4 ANCHORING POSTS

A. Connect posts to stair framing by direct welding unless otherwise indicated.

B. Form or core-drill holes not less than 5 inches deep and 3/4 inch larger than OD of post for installing posts in concrete. Clean holes of loose material, insert posts, and fill annular space between post and concrete with nonshrink, nonmetallic grout or anchoring cement, mixed and placed to comply with anchoring material manufacturer's written instructions.

3.5 ATTACHING RAILINGS

A. Attach railings to wall with wall brackets. Locate brackets as indicated or, if not indicated, at spacing required to support structural loads.

B. Secure wall brackets and railing end flanges to building construction as follows:

1. For concrete and solid masonry anchorage, use drilled-in expansion shields and hanger or lag bolts.
2. For hollow masonry anchorage, use toggle bolts.
3. For steel-framed partitions, use self-tapping screws fastened to steel framing or to concealed steel reinforcements.

3.6 ADJUSTING AND CLEANING

A. ~~**Clean aluminum by washing thoroughly with clean water and soap and rinsing with clean water.**~~

B. Touchup Painting: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in **Section 099113 "Exterior Painting" and** Section 099123 "Interior Painting."

C. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas, and repair galvanizing to comply with ASTM A780/A780M.

END OF SECTION 055213

This page intentionally left blank.

SECTION 061053 - MISCELLANEOUS ROUGH CARPENTRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Wood blocking, cants, and nailers.
2. Plywood backing panels.

1.2 DEFINITIONS

A. Boards or Strips: Lumber of less than 2 inches nominal size in least dimension.

B. Dimension Lumber: Lumber of 2 inches nominal or greater size but less than 5 inches nominal size in least dimension.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
2. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
3. For fire-retardant treatments, include physical properties of treated lumber both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency according to ASTM D5664.
4. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.

1.4 INFORMATIONAL SUBMITTALS

A. Evaluation Reports: For the following, from ICC-ES:

1. Preservative-treated wood.
2. Fire-retardant-treated wood.

1.5 QUALITY ASSURANCE

A. Testing Agency Qualifications: For testing agency providing classification marking for fire-retardant-treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Stack lumber flat with spacers beneath and between each bundle to provide air circulation. Protect lumber from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, provide lumber that complies with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Provide lumber graded by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.

1. Factory mark each piece of lumber with grade stamp of grading agency.
2. For exposed lumber indicated to receive a stained or natural finish, mark grade stamp on end or back of each piece or omit grade stamp and provide certificates of grade compliance issued by grading agency.
3. Dress lumber, S4S, unless otherwise indicated.

B. Maximum Moisture Content of Lumber: 15 percent for 2-inch nominal thickness or less, 19 percent for more than 2-inch nominal thickness unless otherwise indicated.

2.2 WOOD-PRESERVATIVE-TREATED MATERIALS

A. Preservative Treatment by Pressure Process: AWPA U1; Use Category UC2 for interior construction not in contact with ground, Use Category UC3b for exterior construction not in contact with ground, and Use Category UC4a for items in contact with ground.

1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.
2. For exposed items indicated to receive a stained or natural finish, chemical formulations shall not require incising, contain colorants, bleed through, or otherwise adversely affect finishes.

B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or does not comply with requirements for untreated material.

C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.

D. Application: Treat items indicated on Drawings, and the following:

1. Wood cants, nailers, blocking, stripping, and similar members in connection with roofing, flashing, vapor barriers, and waterproofing.
2. Wood blocking, stripping, and similar concealed members in contact with masonry or concrete.

2.3 FIRE-RETARDANT-TREATED MATERIALS

A. General: Where fire-retardant-treated materials are indicated, materials shall comply with requirements in this article, that are acceptable to authorities having jurisdiction, and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.

B. Fire-Retardant-Treated Lumber and Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested according to ASTM E84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet beyond the centerline of the burners at any time during the test.

1. Treatment shall not promote corrosion of metal fasteners.
2. Exterior Type: Treated materials shall comply with requirements specified above for fire-retardant-treated lumber and plywood by pressure process after being subjected to accelerated weathering according to ASTM D2898. Use for exterior locations and where indicated.
3. Interior Type A: Treated materials shall have a moisture content of 28 percent or less when tested according to ASTM D3201 at 92 percent relative humidity. Use where exterior type is not indicated.

C. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Kiln-dry plywood after treatment to a maximum moisture content of 15 percent.

D. Identify fire-retardant-treated wood with appropriate classification marking of qualified testing agency.

1. For exposed lumber indicated to receive a stained or natural finish, mark end or back of each piece or omit marking and provide certificates of treatment compliance issued by inspection agency.

E. For exposed items indicated to receive a stained or natural finish, chemical formulations shall not bleed through, contain colorants, or otherwise adversely affect finishes.

F. Application: Treat items indicated on Drawings, and the following:

1. Concealed blocking.
2. Wood cants, nailers, blocking, and similar members in connection with roofing.
3. Plywood backing panels.

2.4 MISCELLANEOUS LUMBER

A. General: Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:

1. Blocking.
2. Nailers.
3. Cants.

B. Dimension Lumber Items: Construction or No. 2 grade lumber of any species.

C. Concealed Boards: 19 percent maximum moisture content of any of the following species and grades:

1. Mixed southern pine or southern pine, No. 2 grade; SPIB.
2. Spruce-pine-fir (south) or spruce-pine-fir, Construction or No. 2 Common grade; NeLMA, NLGA, WCLIB, or WWPA.
3. Eastern softwoods, No. 2 Common grade; NELMA.

D. For blocking not used for attachment of other construction, Utility, Stud, or No. 3 grade lumber of any species may be used provided that it is cut and selected to eliminate defects that will interfere with its attachment and purpose.

E. For blocking and nailers used for attachment of other construction, select and cut lumber to eliminate knots and other defects that will interfere with attachment of other work.

2.5 PLYWOOD BACKING PANELS

A. Equipment Backing Panels: Plywood, DOC PS 1, Exposure 1, C-D Plugged, fire-retardant treated, in thickness indicated or, if not indicated, not less than 1/2-inch nominal thickness.

2.6 FASTENERS

A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.

1. Where carpentry is exposed to weather, in ground contact, pressure-preservative treated, or in area of high relative humidity, provide fasteners of Type 304 stainless steel.

B. Nails, Brads, and Staples: ASTM F1667.

C. Screws for Fastening to Metal Framing: ASTM C954, length as recommended by screw manufacturer for material being fastened.

2.7 MISCELLANEOUS MATERIALS

A. Flexible Flashing: Composite, self-adhesive, high-temperature flashing product consisting of a pliable, butyl or SBS-modified asphalt compound, bonded to a high-density polyethylene film to produce an overall thickness of not less than 30 mils.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Set carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit carpentry accurately to other construction. Locate nailers, blocking, and similar supports to comply with requirements for attaching other construction.

B. Install plywood backing panels by fastening to studs; coordinate locations with utilities requiring backing panels. Install fire-retardant-treated plywood backing panels with classification marking of testing agency exposed to view.

C. Do not splice structural members between supports unless otherwise indicated.

D. Provide blocking as indicated and as required to support facing materials, fixtures, specialty items, and trim.

E. Provide fire blocking in furred spaces, stud spaces, and other concealed cavities as indicated and as follows:

1. Fire block furred spaces of walls, at each floor level, at ceiling, and at not more than 96 inches o.c. with solid wood blocking or noncombustible materials accurately fitted to close furred spaces.

F. Sort and select lumber so that natural characteristics do not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.

G. Comply with AWPA M4 for applying field treatment to cut surfaces of preservative-treated lumber.

1. Use inorganic boron for items that are continuously protected from liquid water.

2. Use copper naphthenate for items not continuously protected from liquid water.

H. Where wood-preservative-treated lumber is installed adjacent to metal decking, install continuous flexible flashing separator between wood and metal decking.

I. Securely attach carpentry work to substrate by anchoring and fastening as indicated, complying with the following:

1. Table 2304.9.1, "Fastening Schedule," in ICC's International Building Code.
2. ICC-ES evaluation report for fastener.

J. Use steel common nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood. Drive nails snug but do not countersink nail heads unless otherwise indicated.

3.2 INSTALLATION OF WOOD BLOCKING AND NAILER

A. Install where indicated and where required for attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.

B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.

3.3 PROTECTION

A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

B. Protect miscellaneous rough carpentry from weather. If, despite protection, miscellaneous rough carpentry becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION 061053

This page intentionally left blank.

SECTION 061600 - SHEATHING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Wall sheathing.
2. Parapet sheathing.

B. Related Requirements:

1. Section 061053 "Miscellaneous Rough Carpentry" for plywood backing panels.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

1.3 DELIVERY, STORAGE, AND HANDLING

A. Stack panels flat with spacers beneath and between each bundle to provide air circulation. Protect sheathing from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Resistance Ratings: As tested according to ASTM E119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Fire-Resistance Ratings: Indicated by design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency.

2.2 WALL SHEATHING

A. Glass-Mat Gypsum Sheathing: ASTM C1177/C1177M.

1. Product: Subject to compliance with requirements, provide one of the following:

a. CertainTeed Corporation; GlasRoc
b. Georgia-Pacific Gypsum LLC; DensGlass Gold
c. National Gypsum Company; eXP Sheathing
d. USG Corporation; Securock

2. Type and Thickness: Type X, 5/8 inch thick.
3. Size: 48 by 96 inches.

2.3 PARAPET SHEATHING

A. Glass-Mat Gypsum Sheathing: ASTM C1177/C1177M, factory primed.

1. Products: Subject to compliance with requirements, provide one of the following:
   a. CertainTeed Corporation; GlasRoc Roof Board
   b. Georgia-Pacific Gypsum LLC; DensDeck Prime.
   c. National Gypsum Company; DEXcell FA Glass Mat Roof Board.
   d. USG Corporation; Securock Glass-Mat Roof Board.
2. Type and Thickness: Type X, 5/8 inch thick.
3. Size: 48 by 96 inches.

2.4 FASTENERS

A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.
   1. For parapet and wall sheathing, provide fasteners with hot-dip zinc coating complying with ASTM A153/A153M.

B. Screws for Fastening Gypsum Sheathing to Cold-Formed Metal Framing: Steel drill screws, in length recommended by sheathing manufacturer for thickness of sheathing to be attached.
   1. For steel framing less than 0.0329 inch thick, use screws that comply with ASTM C1002.
   2. For steel framing from 0.033 to 0.112 inch thick, use screws that comply with ASTM C954.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Do not use materials with defects that impair quality of sheathing or pieces that are too small to use with minimum number of joints or optimum joint arrangement. Arrange joints so that pieces do not span between fewer than three support members.

B. Cut panels at penetrations, edges, and other obstructions of work; fit tightly against abutting construction unless otherwise indicated.

C. Securely attach to substrate by fastening as indicated, complying with the following:
   1. Table 2304.9.1, "Fastening Schedule," in the ICC's International Building Code.
   2. ICC-ES evaluation report for fastener.

D. Coordinate wall sheathing installation with flashing and joint-sealant installation so these materials are installed in sequence and manner that prevent exterior moisture from passing through completed assembly.

E. Do not bridge building expansion joints; cut and space edges of panels to match spacing of structural support elements.

F. Coordinate sheathing installation with installation of materials installed over sheathing so sheathing is not exposed to precipitation or left exposed at end of the workday when rain is forecast.

3.2 GYPSUM SHEATHING INSTALLATION

A. Comply with GA-253 and with manufacturer's written instructions.
   1. Fasten gypsum sheathing to cold-formed metal framing with screws.
   2. Install panels with a 3/8-inch gap where non-load-bearing construction abuts structural elements.

3. Install panels with a 1/4-inch gap where they abut masonry or similar materials that might retain moisture, to prevent wicking.

B. Apply fasteners so heads bear tightly against face of sheathing, but do not cut into facing.

C. Horizontal Installation: Abut ends over centers of studs, and stagger end joints of adjacent panels not less than one stud spacing. Attach at perimeter and within field of panel to each stud.

D. Sheathing Joint and Penetration Treatment: Refer to Section 072726 "Fluid-Applied Membrane Air Barriers" for joint and penetration treatment.

END OF SECTION 061600

This page intentionally left blank.

SECTION 064023 - INTERIOR ARCHITECTURAL WOODWORK

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Sculpted profile millwork panels.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings:

1. Include the following:

a. Dimensioned plans, elevations, and sections.
b. Attachment details.

2. Show large-scale details.

C. Samples: For each exposed product.

1.3 QUALITY ASSURANCE

A. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.

1. Build mockups of typical interior architectural woodwork as shown on Drawings.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Owner specifically approves such deviations by Change Order.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Comply with the Architectural Woodwork Standards, Section 2.

B. Do not deliver interior architectural woodwork until painting and similar finish operations that might damage woodwork have been completed in installation areas.

C. Store woodwork in installation areas or in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1. Handle and store fire-retardant-treated wood to comply with chemical treatment manufacturer's written instructions.

1.5 FIELD CONDITIONS

A. Environmental Limitations with Humidity Control: Do not deliver or install interior architectural woodwork until building is enclosed, wet-work is complete, and HVAC system is operating and

maintaining temperature between 60 and 90 deg F and relative humidity between 43 and 70 percent during the remainder of the construction period.

B. Field Measurements: Where interior architectural woodwork is indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL WOODWORK, GENERAL

A. Quality Standard: Unless otherwise indicated, comply with the Architectural Woodwork Standards for grades of interior architectural woodwork indicated for construction, finishes, installation, and other requirements.

1. The Contract Documents contain requirements that are more stringent than the Architectural Woodwork Standards. Comply with Contract Documents and Architectural Woodwork Standards.

2.2 SCULPTED PROFILE MILLWORK PANELS

A. Sculpted Profile Panels **(ACR-1)**: MDF panel, 3D sculpted profile with polyvinyl chloride (PVC) finish wrap.

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. 3Form; Meridian (Basis of Design)
b. Interlam
c. Modular Arts Inc.
d. Soelberg; Mare

2. Pattern: Linear pattern installed horizontally.
3. Metal Edge:

a. Material: Aluminum.
b. Finish: As selected by Architect from manufacturer's full range.

2.3 HARDWOOD SHEET MATERIALS

A. Composite Wood Products: Provide materials that comply with requirements of the Architectural Woodwork Standards for each type of interior architectural woodwork and quality grade specified unless otherwise indicated.

1. Medium-Density Fiberboard (MDF): ANSI A208.2, Grade 130.

2.4 MISCELLANEOUS MATERIALS

A. Installation Adhesive: Industrial grade silicone adhesive recommended by manufacturer for each substrate for secure anchorage.

2.5 FABRICATION

A. Fabricate interior architectural woodwork to dimensions, profiles, and details indicated.

B. Complete fabrication, including assembly, to maximum extent possible before shipment to Project site.

1. Disassemble components only as necessary for shipment and installation.
2. Where necessary for fitting at site, provide allowance for scribing, trimming, and fitting.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition interior architectural woodwork to humidity conditions in installation areas for not less than 72 hours prior to beginning of installation.

B. Before installing interior architectural woodwork, examine shop-fabricated work for completion and complete work as required, including removal of packing and backpriming of concealed surfaces.

3.2 INSTALLATION

A. Grade: Install interior architectural woodwork to comply with same grade as item to be installed.

B. Assemble interior architectural woodwork and complete fabrication at Project site to the extent that it was not completed during shop fabrication.

C. Install interior architectural woodwork level, plumb, true in line, and without distortion.

1. Shim as required with concealed shims.
2. Install level and plumb to a tolerance of 1/8 inch in 96 inches.

D. Scribe and cut interior architectural woodwork to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.

3.3 REPAIR

A. Repair damaged and defective interior architectural woodwork, where possible, to eliminate functional and visual defects and to result in interior architectural woodwork being in compliance with requirements of Architectural Woodwork Standards for the specified grade.

B. Where not possible to repair, replace defective woodwork.

C. Shop Finish: Touch up finishing work specified in this Section after installation of interior architectural woodwork.

3.4 CLEANING

A. Clean interior architectural woodwork on exposed and semiexposed surfaces.

END OF SECTION 064023

This page intentionally left blank.

SECTION 064116 - PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plastic-laminate-clad architectural cabinets and wall mounted shelves.
2. Cabinet hardware and accessories.
3. Wood furring, blocking, shims, and hanging strips for installing plastic-laminate-clad architectural cabinets that are not concealed within other construction.

1.2 COORDINATION

A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to support loads imposed by installed and fully loaded cabinets.

B. Hardware Coordination: Distribute copies of approved hardware schedule specified in Section 087100 "Door Hardware" to manufacturer of architectural cabinets; coordinate Shop Drawings and fabrication with hardware requirements.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include data for fire-retardant treatment from chemical-treatment manufacturer and certification by treating plant that treated materials comply with requirements.

B. Shop Drawings:

1. Include plans, elevations, sections, and attachment details.
2. Show large-scale details.
3. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
4. Show locations and sizes of cutouts and holes for items installed in plastic-laminate architectural cabinets.

C. Samples: For each exposed product and for each color and texture specified, in manufacturer's or manufacturer's standard size.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For manufacturer.

B. Product Certificates: For each type of product.

C. Field quality-control reports.

1.6 QUALITY ASSURANCE

A. Manufacturer's Qualifications: Employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

1. Manufacturer's Certification: Licensed participant in AWI's Quality Certification Program.

B. Installer Qualifications: Manufacturer of products.

C. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.

1. Build mockups of typical architectural cabinets as shown on Drawings.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Do not deliver cabinets until painting and similar finish operations that might damage architectural cabinets have been completed in installation areas. Store cabinets in installation areas or in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1.8 FIELD CONDITIONS

A. Environmental Limitations without Humidity Control: Do not deliver or install cabinets until building is enclosed, wet-work is complete, and HVAC system is operating and maintaining temperature and relative humidity at levels planned for building occupants during the remainder of the construction period.

B. Field Measurements: Where cabinets are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

1. Locate concealed framing, blocking, and reinforcements that support cabinets by field measurements before being enclosed/concealed by construction, and indicate measurements on Shop Drawings.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL CABINET MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Cabinets by Design, Duluth, GA
2. Cleora Sterling
3. LSI Corporation
4. Pridgen Millwork
5. Stephenson Millwork
6. Stevens Industries, Inc.

2.2 PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

A. Quality Standard: Unless otherwise indicated, comply with the Architectural Woodwork Standards for grades of cabinets indicated for construction, finishes, installation, and other requirements.

1. The Contract Documents contain requirements that are more stringent than the referenced quality standard. Comply with requirements of Contract Documents in addition to those of the referenced quality standard.

B. Architectural Woodwork Standards Grade: Custom.

C. Type of Construction: Frameless.

D. Door and Drawer-Front Style: Flush overlay.

E. High-Pressure Decorative Laminate **(PLM-1)**: NEMA LD 3, grades as indicated or if not indicated, as required by quality standard.

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated on Interior Finish Legend or comparable products by one of the following:

   a. Formica Corporation
   b. Nevamar
   c. Wilsonart

2. Colors, Patterns, and Finishes: As indicated on Interior Finish Legend.

F. Laminate Cladding for Exposed Surfaces:

1. Horizontal Surfaces: Grade HGS.
2. Postformed Surfaces: Grade HGP.
3. Vertical Surfaces: Grade VGS.
4. Edges: Grade HGS or Grade VGS.
5. Pattern Direction: Vertically for drawer fronts, doors, and fixed panels.

G. Materials for Semiexposed Surfaces:

1. Surfaces Other Than Drawer Bodies: Thermally fused laminate panels.

   a. Edges of Plastic-Laminate Shelves: PVC tape, 0.018-inch minimum thickness, matching laminate in color, pattern, and finish.
   b. Edges of Thermally Fused Laminate Panel Shelves: PVC or polyester edge banding.
   c. For semiexposed backs of panels with exposed plastic-laminate surfaces, provide surface of high-pressure decorative laminate, NEMA LD 3, Grade VGS.

2. Drawer Sides and Backs: Thermally fused laminate panels with PVC or polyester edge banding.
3. Drawer Bottoms: Hardwood plywood.

H. Dust Panels: 1/4-inch plywood or tempered hardboard above compartments and drawers unless located directly under tops.

I. Concealed Backs of Panels with Exposed Plastic-Laminate Surfaces: High-pressure decorative laminate, NEMA LD 3, Grade BKL.

J. Cabinet Construction: As required by referenced quality standard, but not less than the following:

1. Bottoms and Ends of Cabinets, and Tops of Wall Cabinets and Tall Cabinets: 3/4-inch particleboard, plastic-laminate faced on exposed surfaces, thermoset decorative panels on semiexposed surfaces.
2. Cabinet Joinery: Fixed body members shall be joined using dowels and assembled using glue and pressure.
3. Shelves: 3/4-inch thick particleboard, plastic-laminate faced or thermoset decorative panels.
4. Backs of Cabinets: 1/2-inch particleboard, plastic-laminate faced on exposed surfaces, thermoset decorative panels on semiexposed surfaces.

5. Drawer Fronts: 3/4-inch particleboard, plastic-laminate faced.
6. Drawer Sides and Backs: 1/2-inch particleboard or MDF, plastic-laminate faced, with glued dovetail or multiple-dowel joints.
7. Drawer Bottoms: 1/2-inch particleboard or MDF, plastic-laminate faced, glued and dadoed into front, back, and sides of drawers.
8. Doors: 3/4-inch particleboard or MDF, plastic-laminate faced.

2.3 WOOD MATERIALS

A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of architectural cabinet and quality grade specified unless otherwise indicated.

1. Wood Moisture Content: 5 to 10 percent.

B. Composite Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of architectural cabinet and quality grade specified unless otherwise indicated.

1. Medium-Density Fiberboard (MDF): ANSI A208.2, Grade 130.
2. Particleboard (Medium Density): ANSI A208.1, Grade M-2 or Grade M-2-Exterior Glue.
3. Softwood Plywood: DOC PS 1, medium-density overlay.
4. Thermally Fused Laminate (TFL) Panels: Particleboard or MDF finished with thermally fused, melamine-impregnated decorative paper and complying with requirements of NEMA LD 3, Grade VGL, for Test Methods 3.3, 3.4, 3.6, 3.8, and 3.10.

2.4 CABINET HARDWARE AND ACCESSORIES

A. General: Provide cabinet hardware and accessory materials associated with architectural cabinets except for items specified in Section 087100 "Door Hardware."

B. Frameless Concealed Hinges (European Type): ANSI/BHMA A156.9, B01602, 100 degrees of opening, soft-closing.

C. Back-Mounted Pulls: ANSI/BHMA A156.9, B02011.

D. Shelf Rests: ANSI/BHMA A156.9, B04013; metal.

E. Wall Mounted Shelf Brackets: Heavy duty workstation brackets. Under-counter support frames, legs and miscellaneous metal parts shall be aluminum or steel, welded, degreased, cleaned, treated and powder-coated.

F. Drawer Slides: ANSI/BHMA A156.9.

1. Heavy-Duty (Grade 1HD-100 and Grade 1HD-200): Undermount.

   a. Type: Full extension.
   b. Material: Stainless steel slides.
   c. Motion Feature: Soft close dampener.

2. Pencil drawers not more than 3 inches high and not more than 24 inches wide, provide 50 lb load capacity.
3. General-purpose drawers more than 3 inches high, but not more than 6 inches high and not more than 24 inches wide, provide 100 lb load capacity.
4. File drawers more than 6 inches high or more than 24 inches wide, provide 100 lb load capacity.
5. Computer keyboard tray, provide 75 lb load capacity.

G. Door Locks: ANSI/BHMA A156.11, E07121.

H. Drawer Locks: ANSI/BHMA A156.11, E07041.

I. Door and Drawer Silencers: ANSI/BHMA A156.16, L03011.

J. Exposed Hardware Finishes: For exposed hardware, provide finish that complies with ANSI/BHMA A156.18 for ANSI/BHMA finish number indicated.

1. Satin Stainless Steel: ANSI/BHMA 630.

K. For concealed hardware, provide manufacturer's standard finish that complies with product class requirements in ANSI/BHMA A156.9.

2.5 MISCELLANEOUS MATERIALS

A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln-dried to less than 15 percent moisture content.

B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.

C. Adhesive for Bonding Plastic Laminate: Manufacturer's standard.

2.6 FABRICATION

A. Fabricate architectural cabinets to dimensions, profiles, and details indicated.

B. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.

1. Notify Architect seven days in advance of the dates and times architectural cabinet fabrication will be complete.
2. Trial fit assemblies at manufacturer's shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.

C. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition cabinets to humidity conditions in installation areas for not less than 72 hours.

3.2 INSTALLATION

A. Architectural Woodwork Standards Grade: Install cabinets to comply with quality standard grade of item to be installed.

B. Assemble cabinets and complete fabrication at Project site to extent that it was not completed in the shop.

C. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with wafer-head cabinet installation screws.

D. Install cabinets level, plumb, and true in line to a tolerance of 1/8 inch in 96 inches using concealed shims.

1. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
2. Install cabinets without distortion so doors and drawers fit openings and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.
3. Fasten wall cabinets through back, near top and bottom, and at ends not more than 16 inches o.c. with No. 10 wafer-head screws sized for not less than 1-1/2-inch penetration into wood framing, blocking, or hanging strips.

3.3 ADJUSTING AND CLEANING

A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects. Where not possible to repair, replace architectural cabinets. Adjust joinery for uniform appearance.

B. Clean, lubricate, and adjust hardware.

C. Clean cabinets on exposed and semiexposed surfaces.

END OF SECTION 064116

SECTION 066400 - SOLID POLYMER FABRICATIONS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes solid polymer fabrications for interior applications.

1. Solid polymer resin sheets.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show fabrication and installation details for solid polymer resin sheets. Include the following:

1. Size and location of penetrations.
2. Type of decorative fabrications.
3. Paneling methods.
4. Mounting methods.
5. Attachments to other work.
6. Full-size details of edge profiles.

C. Samples for Verification: For the following products, in manufacturer's standard sizes:

1. Solid polymer resin sheets.
2. Hardware for mounting.

D. Product Schedule: For solid polymer resin sheets. Use same designations indicated on Drawings.

1.3 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For solid polymer resin sheets, for tests performed by manufacturer and witnessed by a qualified testing agency.

B. Sample Warranty: For manufacturer's warranty.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For solid polymer resin sheets to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Source Limitations: Obtain each type of solid polymer resin sheet through one source from a single manufacturer to provide products of consistent quality in appearance and physical properties.

B. Fire-Test-Response Characteristics: Provide solid polymer resin sheets identical to those tested for the following fire-test-response characteristics:

1. Flame Spread: Less than 75 per ASTM E84.
2. Smoke Developed: Less than 450 per ASTM E84.
3. Rate of Burning: Class CC1 for a nominal thickness of 1.5 mm (0.060 in.) per ASTM D635.

4. Self-Ignition Temperature: Greater than 650°F per ASTM D1929.
5. Density of Smoke: Less than 75% per ASTM D2843.

C. Impact Resistance: Provide Solid Polymer Fabrications that comply with the following requirements:

1. Impact Strength, Un-notched (23°), ASTM D4812: No breakage
2. Impact Strength, Notched (23°), ASTM D526: 88J/m (1/16).

D. Allowable Tolerances:

1. Maximum Deflection: 1/16 inch over 12 inches.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Comply with manufacturer's written instructions for shipping, storing, and handling solid polymer resin sheets and for removing protective coverings after installation.

B. Maintain protective coverings on sheets to avoid exposures to abrasive substances, excessive heat, and other sources of possible deterioration.

C. Move solid polymer resin sheet material into spaces where they are to be installed and allow it to reach room temperature prior to installation.

1.7 FIELD CONDITIONS

A. Environmental Limitations: Do not proceed with installing paneling sealants when ambient and substrate temperature conditions are outside limits permitted by paneling sealant manufacturers or below 40 deg F.

B. Field Measurements: Verify dimensions to fit by field measurements before fabrication and indicate measurements on Shop Drawings

1.8 WARRANTY

A. Manufacturer's Warranty: Manufacturer agrees to repair or replace solid polymer resin sheets that develop defects from normal use within specified warranty period.

1. Warranty Period: One year from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Solid Polymer Resin Sheets: Subject to compliance with requirements, provide products by one of the following:

1. 3Form. (Basis of Design)
2. Lumicor.

B. Color and Pattern: Frosted appearance as selected by Architect.

C. Thickness: As indicated on Drawings.

D. Finish: Honed.

2.2 SOLID POLYMER RESIN SHEET

A. General: Fabricate solid polymer resin sheet for decorative paneling in designs, sizes and thicknesses indicated and to comply with indicated standards.

B. Fabricate decorative paneling and provide other paneling products in sizes required for openings and surfaces indicated on Drawings, with edge and face clearances, edge and surface conditions complying with manufacturer’s written recommendations.

C. Machining: Acceptable means of machining are indicated below. Ensure that material is not chipped or warped by machining operations.

1. Sawing: Select equipment and blades suitable for type of cut required.
2. Drilling: Drills specifically designed for use with solid polymer resin sheet products.
3. Milling: Clean cut where possible.
4. Routing.
5. Tapping.

D. Forming: Form products to shapes indicated using appropriate methods indicated below. Comply with manufacturer’s written instructions.

1. Cold-bending.
2. Hot-bending.
3. Thermoforming; only on uncoated material.
4. Drape forming.
5. Matched mold forming.
6. Mechanical forming.

2.3 ACCESSORIES

A. Cleaners: Comply with manufacturer’s written recommendations.

B. Bonding Cement: Suitable for use with product and application and complying with manufacturer’s written recommendations.

C. Mounting Hardware: Mounting channel as indicated on Drawings and hardware as recommended by manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates areas and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Comply with combined written instructions of manufacturers of solid polymer resin sheet materials, sealants, gaskets, and related materials, unless more stringent requirements are indicated.

B. Install solid polymer resin sheets according to manufacturer's written instructions and approved Shop Drawings.

C. Protect solid polymer resin sheet surfaces from abrasion and other damage during handling and installation, according to the following requirements.

1. Retain solid polymer resin sheet manufacturer's protective covering or protect by other methods according to solid polymer resin sheet manufacturer's written instructions.
2. Remove covering at border of each piece before installing; remove remainder of covering immediately after installation where solid polymer resin sheets will be exposed to sunlight or where other conditions make later removal difficult.
3. Remove damaged solid polymer resin sheets from Project site and legally dispose of off-site. Damaged solid polymer resin sheets are those containing imperfections that, when installed, result in weakened paneling and impaired performance and appearance.

D. Set solid polymer resin sheets true in line with uniform orientation, pattern, draw, bow, and similar characteristics.

3.3 PROTECTION AND CLEANING

A. Protect solid polymer resin sheet fabrications from contact with contaminating substances from construction operations. If contaminating substances come into contact with solid polymer resin sheets, remove immediately and wash by method recommended in writing by solid polymer resin sheet manufacturer.

B. Remove and replace solid polymer resin sheets that are broken, chipped, cracked, abraded, or damaged in other ways during construction period.

C. Wash solid polymer resin sheets on both faces before date scheduled for inspections intended to establish date of Substantial Completion in each area of Project. Wash solid polymer resin sheets by method recommended in writing by solid polymer resin sheet manufacturer.

END OF SECTION 066400

SECTION 072100 - THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Extruded polystyrene foam-plastic board insulation.
2. Glass-fiber blanket insulation.

B. Related Requirements:

1. Section 075323 "Ethylene-Propylene-Diene-Monomer (EPDM) Roofing" for insulation specified as part of roofing construction.
2. Section 092900 "Gypsum Board" for sound attenuation blanket used as acoustic insulation.

1.2 ACTION SUBMITTALS

A. Product Data: For the following:

1. Extruded polystyrene foam-plastic board insulation.
2. Glass-fiber blanket insulation.

1.3 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For each product, for tests performed by a qualified testing agency.

B. Research Reports: For foam-plastic insulation, from ICC-ES.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Protect insulation materials from physical damage and from deterioration due to moisture, soiling, and other sources. Store inside and in a dry location. Comply with manufacturer's written instructions for handling, storing, and protecting during installation.

B. Protect foam-plastic board insulation as follows:

1. Do not expose to sunlight except to necessary extent for period of installation and concealment.
2. Protect against ignition at all times. Do not deliver foam-plastic board materials to Project site until just before installation time.
3. Quickly complete installation and concealment of foam-plastic board insulation in each area of construction.

PART 2 - PRODUCTS

2.1 EXTRUDED POLYSTYRENE FOAM-PLASTIC BOARD INSULATION

A. Extruded Polystyrene Board Insulation, Type IV: ASTM C578, Type IV, 25-psi minimum compressive strength; unfaced.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. DiversiFoam Products.
b. Dow Chemical Company (The).
c. Owens Corning.
d. Pactiv Building Products

2. Flame-Spread Index: Not more than 25 when tested in accordance with ASTM E84.
3. Smoke-Developed Index: Not more than 450 when tested in accordance with ASTM E84.
4. Labeling: Provide identification of mark indicating R-value of each piece of insulation 12 inches and wider in width.

2.2 GLASS-FIBER BLANKET INSULATION

A. Glass-Fiber Blanket Insulation, Unfaced: ASTM C665, Type I; passing ASTM E136 for combustion characteristics.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. CertainTeed Corporation.
b. Guardian Building Products, Inc.
c. Johns Manville; a Berkshire Hathaway company.
d. Knauf Insulation.
e. Owens Corning.

2. Flame-Spread Index: Not more than 25 when tested in accordance with ASTM E84.
3. Smoke-Developed Index: Not more than 50 when tested in accordance with ASTM E84.
4. Labeling: Provide identification of mark indicating R-value of each piece of insulation 12 inches and wider in width.

2.3 ACCESSORIES

A. Insulation for Miscellaneous Voids: Spray Polyurethane Foam Insulation, ASTM C1029, Type II, closed cell, with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, per ASTM E84.

B. Adhesive for Bonding Insulation: Product compatible with insulation and air and water barrier materials, and with demonstrated capability to bond insulation securely to substrates without damaging insulation and substrates.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean substrates of substances that are harmful to insulation, including removing projections capable of puncturing insulation or vapor retarders, or that interfere with insulation attachment.

3.2 INSTALLATION, GENERAL

A. Comply with insulation manufacturer's written instructions applicable to products and applications.

B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed to ice, rain, or snow at any time.

C. Install insulation with manufacturer's R-value label exposed after insulation is installed.

D. Extend insulation to envelop entire area to be insulated. Fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.

E. Provide sizes to fit applications and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units unless multiple layers are otherwise shown or required to make up total thickness or to achieve R-value.

3.3 INSTALLATION OF CAVITY-WALL AND WALL INSULATION

A. Foam-Plastic Board Insulation: Install pads of adhesive spaced approximately 24 inches o.c. both ways on inside face and as recommended by manufacturer.

1. Fit courses of insulation between obstructions, with edges butted tightly in both directions, and with faces flush.
2. Press units firmly against inside substrates.

3.4 INSTALLATION OF INSULATION IN FRAMED CONSTRUCTION

A. Blanket Insulation: Install in cavities formed by framing members according to the following requirements:

1. Use insulation widths and lengths that fill the cavities formed by framing members. If more than one length is required to fill the cavities, provide lengths that will produce a snug fit between ends.
2. Place insulation in cavities formed by framing members to produce a friction fit between edges of insulation and adjoining framing members.
3. Maintain 3-inch clearance of insulation around recessed lighting fixtures not rated for or protected from contact with insulation.
4. For metal-framed wall cavities where cavity heights exceed 96 inches, support unfaced blankets mechanically and support faced blankets by taping flanges of insulation to flanges of metal studs.

B. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:

1. Spray Polyurethane Insulation: Apply according to manufacturer's written instructions.

3.5 PROTECTION

A. Protect installed insulation from damage due to harmful weather exposures, physical abuse, and other causes.

B. Provide temporary coverings or enclosures where insulation is subject to abuse and cannot be concealed and protected by permanent construction immediately after installation.

END OF SECTION 072100

This page intentionally left blank.

SECTION 072419 - WATER-DRAINAGE EXTERIOR INSULATION AND FINISH SYSTEM (EIFS)

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. EIFS-clad drainage-wall assemblies that are field applied over substrate.
2. Water-resistive barrier coatings.

1.2 DEFINITIONS

A. Definitions in ASTM E2110 apply to Work of this Section.

B. EIFS: Exterior insulation and finish system(s).

C. IBC: International Building Code.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each EIFS component, trim, and accessory, including water-resistive barrier coatings.

B. Samples: For each exposed product and for each color and texture specified, 8 inches square in size.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Manufacturer Certificates: Signed by EIFS manufacturer, certifying the following:

1. EIFS complies with requirements.
2. Substrates to which EIFS is indicated to be attached are acceptable to EIFS manufacturer.
3. Accessory products installed with EIFS, including joint sealants, flashing, water-resistive barrier coatings, trim, whether or not furnished by EIFS manufacturer and whether or not specified in this Section, are acceptable to EIFS manufacturer.

C. Product Certificates: For insulation and joint sealant, from manufacturer.

D. Product Test Reports: For each EIFS assembly and component, and for water-resistive barrier coatings, for tests performed by a qualified testing agency.

E. Field quality-control reports.

F. Sample Warranty: For manufacturer's special warranty.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For EIFS to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: An installer who is certified in writing by AWCI International as qualified to install Class PB EIFS using trained workers.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, to set quality standards for materials and execution, and to set quality standards for fabrication and installation.

1. Build mockup of typical wall area as shown on Drawings.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver materials in original, unopened packages with manufacturers' labels intact and clearly identifying products.

B. Store materials inside and under cover; keep them dry and protected from weather, direct sunlight, surface contamination, aging, corrosion, damaging temperatures, construction traffic, and other causes.

1. Stack insulation board flat and off the ground.
2. Protect plastic insulation against ignition at all times. Do not deliver plastic insulating materials to Project site before installation time.
3. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

1.9 FIELD CONDITIONS

A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions and ambient outdoor air, humidity, and substrate temperatures permit EIFS to be applied, dried, and cured according to manufacturers' written instructions and warranty requirements.

1. Proceed with installation of adhesives or coatings only when ambient temperatures have remained, or are forecast to remain, above 40 deg F for a minimum of 24 hours before, during, and after application. Do not apply EIFS adhesives or coatings during rainfall.

1.10 WARRANTY

A. Manufacturer's Special Warranty: Manufacturer agrees to repair or replace components of EIFS-clad drainage-wall assemblies that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

   a. Bond integrity and weathertightness.
   b. Deterioration of EIFS finishes and other EIFS materials beyond normal weathering.

2. Warranty coverage includes the following components of EIFS-clad drainage-wall assemblies:

   a. EIFS finish, including base coats, finish coats, and reinforcing mesh.

b. Insulation installed as part of EIFS.
c. Insulation adhesive.
d. EIFS accessories, including trim components and flashing.
e. Water-resistive barrier coatings.
f. EIFS drainage components.

3. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable system by one of the following:

1. Dryvit Systems, Inc.; Outsulation Plus MD System (Basis of Design)
2. BASF Corporation.
3. Parex USA, Inc.
4. Sto Corp.

B. Source Limitations: Obtain EIFS from single source from single EIFS manufacturer and from sources approved by EIFS manufacturer as compatible with EIFS components.

2.2 PERFORMANCE REQUIREMENTS

A. EIFS Performance: Comply with ASTM E2568 and with the following:

1. Weathertightness: Resistant to uncontrolled water penetration from exterior, with a means to drain water entering EIFS to the exterior.
2. Structural Performance of Assembly and Components:

a. Wind Loads: Uniform pressure as indicated on Drawings.

3. Impact Performance: ASTM E2568, Standard impact resistance.
4. Abrasion Resistance of Finish Coat: Sample consisting of 1-inch- thick EIFS mounted on 1/2-inch- thick gypsum board; cured for a minimum of 28 days and shows no cracking, checking, or loss of film integrity after exposure to 528 quarts of sand when tested according to ASTM D968, Method A.
5. Mildew Resistance of Finish Coat: Sample applied to 2-by-2-inch clean glass substrate; cured for 28 days and shows no growth when tested according to ASTM D3273 and evaluated according to ASTM D3274.
6. Drainage Efficiency: 90 percent average minimum when tested according to ASTM E2273.

2.3 EIFS MATERIALS

A. Water-Resistive Barrier Coating: EIFS manufacturer's standard formulation and accessories for use as water-resistive barrier coating; compatible with substrate.

1. Water-Resistance: Comply with physical and performance criteria of ASTM E2570/E2570M.

B. Flexible-Membrane Flashing: Cold-applied, self-adhering, self-healing, rubberized-asphalt, and polyethylene-film composite sheet or tape and primer; EIFS manufacturer's standard or product recommended in writing by EIFS manufacturer.

C. Insulation Adhesive: EIFS manufacturer's standard formulation designed for indicated use; specifically formulated to be applied to back side of insulation in a manner that creates open vertical channels

designed to serve as an integral part of the water-drainage system of the EIFS-clad drainage-wall assembly; compatible with substrate; and complying with one of the following:

1. Factory-blended dry formulation of portland cement, dry polymer admixture, and fillers specified for base coat.
2. Factory-mixed noncementitious formulation designed for adhesive attachment of insulation to substrates of type indicated, as recommended by EIFS manufacturer.

D. Drainage:

1. Drainage Track: UV treated PVC "J" channel perforated with weep holes, complying with ASTM D 1784 and ASTM C 1063.
2. Drainage Strip: Corrugated plastic strip.

E. Molded, (Expanded) Rigid Cellular Polystyrene Board Insulation: Comply with ASTM E2430/E2430M, unless otherwise noted, and the following:

1. Flame-Spread and Smoke-Developed Indexes: 25 and 450 or less, respectively, according to ASTM E84.
2. Dimensions: Provide insulation boards of not more than 24 by 48 inches, with thickness indicated on Drawings.

F. Reinforcing Mesh: Balanced, alkali-resistant, open-weave, glass-fiber mesh treated for compatibility with other EIFS materials, made from continuous multiend strands with retained mesh tensile strength of not less than 120 lbf/in. according to ASTM E2098/E2098M and the following:

1. Reinforcing Mesh for EIFS, General: Not less than weight required to comply with impact-performance level specified in "Performance Requirements" Article.
2. Strip-Reinforcing Mesh: Not less than 3.75 oz./sq. yd.
3. Detail-Reinforcing Mesh: Not less than 4.0 oz./sq. yd.
4. Corner-Reinforcing Mesh: Not less than 7.2 oz./sq. yd.

G. Base Coat: EIFS manufacturer's standard mixture complying with one of the following:

1. Factory-blended dry formulation of portland cement, dry polymer admixture, and inert fillers to which only water is added at Project site.
2. Factory-mixed noncementitious formulation of polymer-emulsion adhesive and inert fillers that is ready to use without adding other materials.

H. Primer: EIFS manufacturer's standard factory-mixed, elastomeric-polymer primer for preparing base-coat surface for application of finish coat.

I. Finish Coat: EIFS manufacturer's hydrophobic (HDP) acrylic-based coating with integral color and enhanced mildew resistance complying with the following:

1. Factory-mixed formulation of polymer-emulsion binder, colorfast mineral pigments, sound stone particles, and fillers.
2. Colors: As selected by Architect from manufacturer's full range.
3. Textures: Equal to Dryvit; Finesse HDP, fine smooth texture.

J. Sealer: Manufacturer's waterproof, clear acrylic-based sealer for protecting finish coat.

K. Water: Potable.

L. Trim Accessories: Type as designated or required to suit conditions indicated and to comply with EIFS manufacturer's written instructions; manufactured from UV-stabilized PVC; and complying with ASTM D1784, manufacturer's standard cell class for use intended, and ASTM C1063.

1. Casing Bead: Prefabricated, one-piece type for attachment behind insulation, of depth required to suit thickness of coating and insulation, with face leg perforated for bonding to coating and back leg.
2. Weep Screed/Track: Prefabricated, one-piece type for attachment behind insulation with perforated face leg extended to form a drip and weep holes in track bottom, of depth required to suit thickness of coating and insulation, with face leg perforated for bonding to coating and back leg; designed to drain incidental moisture that gets into wall construction to the exterior at terminations of EIFS with drainage.
3. Expansion Joint: Closed-cell polyethylene backer rod and elastomeric sealant 3/4-inch- minimum.

2.4 MIXING

A. Comply with EIFS manufacturer's requirements for combining and mixing materials. Do not introduce admixtures, water, or other materials, except as recommended by EIFS manufacturer. Mix materials in clean containers. Use materials within time period specified by EIFS manufacturer or discard.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roof edges, wall framing, flashings, openings, substrates, and junctures at other construction for suitable conditions where EIFS will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

1. Begin coating application only after surfaces are dry.
2. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Protect contiguous work from moisture deterioration and soiling caused by application of EIFS. Provide temporary covering and other protection needed to prevent spattering of exterior finish coats on other work.

B. Protect EIFS, substrates, and wall construction behind them from inclement weather during installation. Prevent penetration of moisture behind drainage plane of EIFS and deterioration of substrates.

C. Prepare and clean substrates to comply with EIFS manufacturer's written instructions to obtain optimum bond between substrate and adhesive for insulation.

3.3 EIFS INSTALLATION, GENERAL

A. Comply with ASTM C1397, ASTM E2511, and EIFS manufacturer's written instructions for installation of EIFS as applicable to each type of substrate indicated.

3.4 SUBSTRATE PROTECTION APPLICATION

A. Water-Resistive Barrier Coating: Apply over sheathing to provide a water-resistive barrier.

1. Tape and seal joints, exposed edges, terminations, and inside and outside corners of sheathing unless otherwise indicated by EIFS manufacturer's written instructions.

B. Flexible-Membrane Flashing: Install over water-resistive barrier coating, applied and lapped to shed water; seal at openings, penetrations, and terminations. Prime substrates with flashing primer if required and install flashing.

3.5 TRIM INSTALLATION

A. Trim: Apply trim accessories at perimeter of EIFS, at expansion joints, and elsewhere as indicated. Coordinate with installation of insulation.

1. Weep Screed/Track: Use at bottom termination edges, at window and door heads of water-drainage EIFS unless otherwise indicated.
2. Expansion Joint: Use where indicated on Drawings.
3. Casing Bead: Use at other locations.

3.6 INSULATION INSTALLATION

A. Board Insulation: Adhesively attach insulation to substrate in compliance with ASTM C1397 and the following:

1. Apply adhesive to insulation by notched-trowel method, with notches oriented vertically to produce drainage channels that remain functional after the insulation is adhered to substrate.
2. Allow adhered insulation to remain undisturbed for not less than 24 hours, before beginning rasping and sanding insulation or applying base coat and reinforcing mesh.
3. Apply insulation over substrates in courses with long edges of boards oriented horizontally.
4. Begin first course of insulation from screed/track and work upward. Work from perimeter casing beads toward interior of panels if possible.
5. Stagger vertical joints of insulation boards in successive courses to produce running bond pattern. Locate joints, so no piece of insulation is less than 12 inches wide or 6 inches high. Offset joints not less than 6 inches from corners of window and door openings and not less than 4 inches from aesthetic reveals.

    a. Adhesive Attachment: Offset joints of insulation not less than 6 inches from horizontal and 4 inches from vertical joints in sheathing.

6. Interlock ends at internal and external corners.
7. Abut insulation tightly at joints within and between each course to produce flush, continuously even surfaces without gaps or raised edges between boards. If gaps greater than 1/16 inch occur, fill with insulation cut to fit gaps exactly; insert insulation without using adhesive or other material.
8. Cut insulation to fit openings, corners, and projections precisely and to produce edges and shapes complying with details indicated.
9. Rasp or sand flush entire surface of insulation to remove irregularities projecting more than 1/16 inch from surface of insulation and to remove yellowed areas due to sun exposure; do not create depressions deeper than 1/16 inch. Prevent airborne dispersal and immediately collect insulation raspings or sandings.
10. Cut aesthetic reveals in outside face of insulation with high-speed router and bit configured to produce grooves, rabbets, and other features that comply with profiles and locations indicated. Do not reduce insulation thickness at aesthetic reveals to less than 3/4 inch.
11. Interrupt insulation for expansion joints where indicated.
12. Form joints for sealant application with back-to-back casing beads for joints within EIFS and with perimeter casing beads at dissimilar adjoining surfaces. Make gaps between casing beads and between perimeter casing beads and adjoining surfaces of width indicated.

13. Before installing insulation and before applying field-applied reinforcing mesh, fully wrap board edges. Cover edges of board and extend encapsulating mesh not less than 2-1/2 inches over front and back face unless otherwise indicated on Drawings.
14. Treat exposed edges of insulation as follows:
    a. Except for edges forming substrates of sealant joints, encapsulate with base coat, reinforcing mesh, and finish coat.
    b. Encapsulate edges forming substrates of sealant joints within EIFS or between EIFS and other work with base coat and reinforcing mesh.
    c. At edges trimmed by accessories, extend base coat, reinforcing mesh, and finish coat over face leg of accessories.
15. Coordinate installation of flashing and insulation to produce wall assembly that does not allow water to penetrate behind flashing and water-resistive barrier coating.

B. Expansion Joints: Install at locations indicated, where required by EIFS manufacturer, and as follows:
1. At expansion joints in substrates behind EIFS.
2. Where EIFS adjoin dissimilar substrates, materials, and construction, including other EIFS.
3. At floor lines in multilevel wood-framed construction.
4. Where wall height or building shape changes.
5. Where EIFS manufacturer requires joints in long continuous elevations.

3.7 BASE-COAT APPLICATION

A. Base Coat: Apply full coverage to exposed insulation with not less than 1/16-inch dry-coat thickness.

B. Reinforcing Mesh: Embed reinforcing mesh in wet base coat to produce wrinkle-free installation with mesh continuous at corners, overlapped not less than 2-1/2 inches or otherwise treated at joints to comply with ASTM C1397. Do not lap reinforcing mesh within 8 inches of corners. Completely embed mesh, applying additional base-coat material if necessary, so reinforcing-mesh color and pattern are invisible.

C. Additional Reinforcing Mesh: Apply strip-reinforcing mesh around openings, extending 4 inches beyond perimeter. Apply additional 9-by-12-inch strip-reinforcing mesh diagonally at corners of openings (re-entrant corners). Apply 8-inch- wide, strip-reinforcing mesh at both inside and outside corners unless base layer of mesh is lapped not less than 4 inches on each side of corners.
1. At aesthetic reveals, apply strip-reinforcing mesh not less than 8 inches wide.
2. Embed strip-reinforcing mesh in base coat before applying first layer of reinforcing mesh.

D. Double Base-Coat Application: Where indicated, apply second base coat in same manner and thickness as first application, except without reinforcing mesh. Do not apply until first base coat has cured.

3.8 FINISH-COAT APPLICATION

A. Primer: Apply over dry base coat.

B. Finish Coat: Apply full-thickness coverage over dry primed base coat, maintaining a wet edge at all times for uniform appearance, to produce a uniform finish of color and texture matching approved sample and free of cold joints, shadow lines, and texture variations.

C. Sealer Coat: Apply over dry finish coat, in number of coats and thickness required by EIFS manufacturer.

3.9 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a qualified special inspector to perform special inspections as required.

B. EIFS will be considered defective if it does not pass inspections.

C. Prepare test and inspection reports.

3.10 CLEANING AND PROTECTION

A. Remove temporary covering and protection of other work. Promptly remove coating materials from window and door frames and other surfaces outside areas indicated to receive EIFS coatings.

END OF SECTION 072419

SECTION 072726 - FLUID-APPLIED MEMBRANE AIR BARRIERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Vapor-permeable, fluid-applied air barriers.

1.2 DEFINITIONS

A. ABAA: Air Barrier Association of America.

B. Air-Barrier Material: A primary element that provides a continuous barrier to the movement of air.

C. Air-Barrier Accessory: A transitional component of the air barrier that provides continuity.

D. Air-Barrier Assembly: The collection of air-barrier materials and accessories applied to an opaque wall, including joints and junctions to abutting construction, to control air movement through the wall.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review air-barrier requirements and installation, special details, mockups, air-leakage and bond testing, air-barrier protection, and work scheduling that covers air barriers.
2. Include Owner, Architect, Installer, Manufacturer’s technical representative, and installers of other construction affecting or connecting to air barrier, including roofing, waterproofing, architectural precast concrete, masonry, sealants, windows, glazed curtain walls, and door frames.
3. Review air barrier requirements including surface preparation, substrate condition and pretreatment, minimum substrate curing period, forecasted weather conditions, special details and sheet flashings, mockups, installation procedures including wet and dry film thicknesses and verification of thicknesses, sequence of installation, testing and inspecting procedures, and protection and repairs.

B. Review test assembly for compliance with NFPA 285.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include manufacturer's written instructions for evaluating, preparing, and treating each substrate; technical data; dry film thickness; and tested physical and performance properties of products.

B. Shop Drawings: Manufacturer to provide job-specific details for air-barrier assemblies.

1. Show locations and extent of air-barrier materials, accessories, and assemblies specific to Project conditions.
2. Include details for substrate joints and cracks, counterflashing strips, penetrations, inside and outside corners, terminations, and tie-ins with adjoining construction.
3. Include details of interfaces with other materials that form part of air barrier.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: From air-barrier manufacturer, certifying compatibility of air barriers and accessory materials with Project materials that connect to or that come in contact with the barrier.

C. Product Test Reports: For each air-barrier assembly, for tests performed by a qualified testing agency.

1.6 QUALITY ASSURANCE

A. Manufacturer's Technical Representative Qualification: An authorized full-time employee representative of manufacturer experienced in the installation and maintenance of the specified system and qualified to determine Installer's compliance with the requirements of this Project.

B. Installer Qualifications: A firm with three to five years experience in applying air barrier materials similar in material, design, complexity, and extent to those indicated for this Project, whose work has resulted in applications with a record of successful in-service performance

C. Installer Limitations: Each type of air barrier system material, fluid-applied and sheet membrane shall be installed by a single installation firm.

D. All associated products used in conjunction with air barrier membranes and forming an integral part of the waterproofing system must be furnished and approved by the air barrier manufacturer and covered by the applicable total system warranties.

E. Mockups: Build mockups to set quality standards for materials and execution.

1. Build integrated mockups of exterior wall assembly as indicated on Drawings, incorporating backup wall construction, external cladding, window, storefront, door frame and sill, insulation, ties and other penetrations, and flashing to demonstrate surface preparation, crack and joint treatment, application of air barriers, and sealing of gaps, terminations, and penetrations of air-barrier assembly.
   a. Coordinate construction of mockups to permit inspection and testing of air barrier before external insulation and cladding are installed.
   b. Include junction with roofing membrane, building corner condition, and foundation wall intersection.
   c. If Architect determines mockups do not comply with requirements, reconstruct mockups and apply air barrier until mockups are approved.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Deliver materials in their original undamaged packages, with labels intact and legible.

B. Store liquid materials in their original undamaged packages in a clean, dry, protected location and within temperature range required by air barrier manufacturer.

C. Remove and replace liquid materials that cannot be applied within their stated shelf life.

D. Protect stored materials from direct sunlight.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Apply air barrier within the range of ambient and substrate temperatures recommended in writing by air-barrier manufacturer.

1. Protect substrates from environmental conditions that affect air-barrier performance.
2. Do not apply air barrier to a damp or wet substrate or during snow, rain, fog, or mist.

B. Product and system selection shall be coordinated with construction sequence to ensure that manufacturer's exposure limits are adequate for anticipated schedule. Air barrier membrane exposed beyond the manufacturer's exposure limits shall be recoated or removed and reinstalled, per manufacturer's written instructions, re-inspected and reapproved at Contractor's own expense.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Source Limitations: Obtain primary air-barrier materials and air-barrier accessories from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Air-Barrier Performance: Air-barrier assembly and seals with adjacent construction shall be capable of performing as a continuous air barrier and as a liquid-water drainage plane flashed to discharge to the exterior incidental condensation or water penetration. Air-barrier assemblies shall be capable of accommodating substrate movement and of sealing substrate expansion and control joints, construction material changes, penetrations, tie-ins to installed waterproofing, and transitions at perimeter conditions without deterioration and air leakage exceeding specified limits.

B. Air barrier meets ABAA performance for vapor-permeable air barrier assemblies.

C. Air Barrier Assembly Air Leakage: Not to exceed 0.01 cfm x sq. ft. of surface area at 1.57 lbf/sq. ft.; ASTM E 283.

D. Water Resistance: Material shall resist 22 inches water for 5 hours before and after aging when tested per AATCC 127.

E. Nail Sealability: Material shall allow no water found on nail shanks, on underside of sheathing and/or between sheathing and product coating when tested per ASTM D 1970.

F. Flammability**:** Material shall allow a Flame Spread of less than 25 and Smoke Development of less than 450 when tested per ASTM E 84.

G. Fire-Test-Response Characteristics: For exterior walls assemblies, provide components tested as indicated below by UL or another testing and inspecting agency acceptable to authorities having jurisdiction.

1. Intermediate-Scale Multistory Fire Test: Tested mockup, representative of completed multistory wall assembly, complies with NFPA 285 for test method and required fire-test-response characteristics of exterior non-load-bearing wall panel assemblies containing foam-plastic insulation.
2. If acceptable to authorities having jurisdiction, provide engineering judgment by registered fire protection engineer in lieu of tested mockup.

H. Adhesion: Material shall exhibit a minimum adhesion of 15 psi when tested per ASTM D 4541.

I. Compatibility: Material shall be compatible with adjacent materials.

J. UV Stability: Material shall survive a minimum of 6 months UV Exposure during construction.

K. System Continuity: Manufacturer shall provide materials/system, including flashings, for an interface with windows, door and other penetrations that integrate into a compatible and continuous air barrier assembly.

2.3 HIGH-BUILD AIR BARRIERS, VAPOR PERMEABLE

A. High-Build, Vapor-Permeable Air Barrier: Synthetic polymer membrane with an installed dry film thickness, according to manufacturer's written instructions, of 35 mils or thicker over smooth, void-free substrates.

1. Products: Subject to compliance with requirements, provide one of the following:

   a. Carlisle Coatings & Waterproofing; Barritech VP.
   b. GCP Applied Technologies Inc.; Perm-A-Barrier VPL.
   c. Henry Company; Air-Bloc 17MR.
   d. Meadows, W.R.; Air-Shield LMP.
   e. Soprema; SopraSeal LM 204 VP (Basis of Design)
   f. Sto Corporation; AirSeal
   g. Tremco Incorporated; ExoAir 230.

2. Physical and Performance Properties:

   a. Air Permeance: Maximum 0.004 cfm/sq. ft. of surface area at 1.57-lbf/sq. ft. pressure difference; ASTM E2178.
   b. Vapor Permeance: Minimum 10 perms; ASTM E96/E96M, Desiccant Method, Procedure A.
   c. Ultimate Elongation: Minimum 200 percent; ASTM D412, Die C.
   d. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
   e. UV Resistance: Can be exposed to sunlight for recommended number of days according to manufacturer's written instructions.

2.4 ACCESSORY MATERIALS

A. Requirement: Provide primers, transition strips, termination strips, joint reinforcing fabric and strips, joint sealants, counterflashing strips, flashing sheets and metal termination bars, termination mastic, substrate patching materials, adhesives, tapes, foam sealants, lap sealants, and other accessory materials that are recommended in writing by air-barrier manufacturer to produce a complete air-barrier assembly and that are compatible with primary air-barrier material and adjacent construction to which they may seal.

B. Primer: Liquid waterborne primer recommended for substrate by air-barrier material manufacturer.

C. Elastomeric Flashing Sheet: ASTM D 2000, 2BC415 to 3BC620, minimum 50- to 65-mil- thick, cured sheet neoprene with manufacturer's recommended contact adhesives and lap sealant with stainless-steel termination bars and fasteners.

D. Transition Strip: Modified bituminous, 40-mil- thick, self-adhering sheet consisting of 32 mils of rubberized asphalt laminated to an 8-mil- thick, crosslaminated polyethylene film with release liner backing.

E. Joint Reinforcing Strip: Air barrier manufacturer's glass-fiber-mesh tape.

F. Substrate Patching Membrane: Manufacturer's standard trowel-grade substrate filler.

G. Adhesive and Tape: Air barrier manufacturer's standard adhesive and pressure-sensitive adhesive tape.

H. Termination Mastic: Air-barrier manufacturer's standard cold fluid-applied elastomeric liquid; trowel grade.

I. Stainless-Steel Sheet: ASTM A 240/A 240M, Type 304, 0.0187 inch thick, and Series 300 stainless-steel fasteners.

J. Sprayed Polyurethane Foam Sealant: 1- or 2-component, foamed-in-place, polyurethane foam sealant, 1.5 to 2.0 lb/cu. ft density; flame spread index of 25 or less according to ASTM E 162; with primer and noncorrosive substrate cleaner recommended by foam sealant manufacturer.

K. Joint Sealant: ASTM C 920, single-component, neutral-curing silicone; Class 100/50 (low-modulus), Grade NS, Use NT related to exposure, and, as applicable to joint substrates indicated, Use O. Comply with Section 079200 "Joint Sealants."

L. Preformed Silicone Extrusion: Manufacturer's standard system consisting of cured low-modulus silicone extrusion, sized to fit opening widths, with a single-component, neutral-curing, Class 100/50 (low-modulus) silicone sealant for bonding extrusions to substrates.

1. Products: Subject to compliance with requirements, provide one of the following:

a. GE Construction Sealants; Momentive Performance Materials Inc.
b. Pecora Corporation; Pecora XL-Span.
c. The Dow Chemical Company; Dow Corning® 123 Silicone Seal.
d. Tremco Incorporated; Spectrem Simple Seal.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

1. Verify that substrates are sound and free of oil, grease, dirt, excess mortar, or other contaminants.
2. Verify that substrates have cured and aged for minimum time recommended in writing by air-barrier manufacturer.
3. Verify that substrates are visibly dry and free of moisture. Test concrete substrates for capillary moisture by plastic sheet method according to ASTM D4263.
4. Verify that masonry joints are flush and completely filled with mortar.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 SURFACE PREPARATION

A. Clean, prepare, treat, fill, and seal substrate and joints and cracks in substrate according to manufacturer's written instructions and details. Provide clean, dust-free, and dry substrate for air-barrier application.

B. Mask off adjoining surfaces not covered by air barrier to prevent spillage and overspray affecting other construction.

C. Remove grease, oil, bitumen, form-release agents, paints, curing compounds, and other penetrating contaminants or film-forming coatings from concrete.

D. Remove fins, ridges, mortar, and other projections and fill honeycomb, aggregate pockets, holes, and other voids in concrete with substrate-patching material.

E. Remove excess mortar from masonry ties, shelf angles, and other obstructions.

F. At changes in substrate plane, apply sealant or termination mastic beads at sharp corners and edges to form a smooth transition from one plane to another.

G. Cover gaps in substrate plane and form a smooth transition from one substrate plane to another with stainless-steel sheet mechanically fastened to structural framing to provide continuous support for air barrier.

H. Bridge isolation joints expansion joints and discontinuous wall-to-wall, deck-to-wall, and deck-to-deck joints with air-barrier accessory material that accommodates joint movement according to manufacturer's written instructions and details.

3.3 JOINT TREATMENT

A. Gypsum Sheathing: Fill joints greater than 1/4 inch with sealant according to ASTM C 1193 and with air barrier manufacturer's written instructions. Apply first layer of fluid air barrier membrane at joints. Tape joints with joint reinforcing strip after first layer is dry. Apply a second layer of fluid air barrier membrane over joint reinforcing strip.

3.4 ACCESSORIES INSTALLATION

A. Install accessory materials according to air-barrier manufacturer's written instructions and details to form a seal with adjacent construction and ensure continuity of air and water barrier.

1. Coordinate the installation of air barrier with installation of roofing membrane and base flashing to ensure continuity of air barrier with roofing membrane.
2. Install transition strip on roofing membrane or base flashing so that a minimum of 3 inches of coverage is achieved over each substrate.

B. Apply primer to substrates at required rate and allow it to dry. Limit priming to areas that will be covered by air-barrier material on same day. Reprime areas exposed for more than 24 hours.

1. Prime glass-fiber-surfaced gypsum sheathing with number of prime coats needed to achieve required bond, with adequate drying time between coats.

C. Connect and seal exterior wall air-barrier material continuously to roofing-membrane air barrier, concrete below-grade structures, floor-to-floor construction, exterior glazing and window systems, glazed curtain-wall systems, storefront systems, exterior louvers, exterior door framing, and other construction used in exterior wall openings, using accessory materials.

D. At end of each working day, seal top edge of strips and transition strips to substrate with termination mastic.

E. Apply joint sealants forming part of air-barrier assembly within manufacturer's recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.

F. Wall Openings: Prime concealed, perimeter frame surfaces of windows, curtain walls, storefronts, and doors. Apply transition strip or preformed silicone extrusion so that a minimum of 3 inches of coverage is achieved over each substrate. Maintain 3 inches of full contact over firm bearing to perimeter frames, with not less than 1 inch of full contact.

1. Transition Strip: Roll firmly to enhance adhesion.
2. Preformed Silicone Extrusion: Set in full bed of silicone sealant applied to walls, frame, and air-barrier material.

G. Fill gaps in perimeter frame surfaces of windows, curtain walls, storefronts, and doors, and miscellaneous penetrations of air-barrier material with foam sealant.

H. Seal strips and transition strips around masonry reinforcing or ties and penetrations with termination mastic.

I. Seal top of through-wall flashings to air barrier with an additional 6-inch-wide, transition strip.

J. Seal exposed edges of strips at seams, cuts, penetrations, and terminations not concealed by metal counterflashings or ending in reglets with termination mastic.

K. Repair punctures, voids, and deficient lapped seams in strips and transition strips. Slit and flatten fishmouths and blisters. Patch with transition strips extending 6 inches beyond repaired areas in strip direction.

3.5 PRIMARY AIR-BARRIER MATERIAL INSTALLATION

A. Apply air-barrier material to form a seal with strips and transition strips and to achieve a continuous air barrier according to air-barrier manufacturer's written instructions and details. Apply air-barrier material within manufacturer's recommended application temperature ranges.

1. Unless manufacturer recommends in writing against priming, apply primer to substrates at required rate and allow it to dry.
2. Limit priming to areas that will be covered by air-barrier material on same day. Reprime areas exposed for more than 24 hours.
3. Where multiple prime coats are needed to achieve required bond, allow adequate drying time between coats.

B. High-Build Air Barriers: Apply continuous unbroken air-barrier material to substrates according to the following thickness. Apply air-barrier material in full contact around protrusions such as masonry ties.

1. Vapor-Permeable, High-Build Air Barrier: Total dry film thickness as recommended in writing by manufacturer to comply with performance requirements, but not less than 35 mils, applied in two equal coats.

C. Do not cover air barrier until it has been inspected by Manufacturer's Technical Representative.

D. Correct deficiencies in or remove air barrier that does not comply with requirements; repair substrates and reapply air-barrier components.

3.6 FIELD QUALITY CONTROL

A. Contractor/Installer Testing: Installer shall have a wet film thickness gauge at all times during application and shall periodically check thickness of membrane during application with wet film thickness gauge.

B. Manufacturer's Technical Representative: Contractor will engage a qualified Manufacturer's Technical Representative for a minimum of two full-time days to perform on-site inspections and prepare reports.

1. Manufacturer's representative shall conduct inspections at start of installation, twenty-five percent complete, fifty percent complete and final, with reports to Architect. Deficiencies shall be listed on the inspection reports and repairs/corrections certified completed with next or final report.

C. Inspections: Air-barrier materials, accessories, and installation are subject to inspection for compliance with requirements. Inspections may include the following:

1. Continuity of air-barrier system has been achieved throughout the building envelope with no gaps or holes.
2. Air-barrier dry film thickness.
3. Continuous structural support of air-barrier system has been provided.
4. Masonry and concrete surfaces are smooth, clean, and free of cavities, protrusions, and mortar droppings.
5. Site conditions for application temperature and dryness of substrates have been maintained.
6. Maximum exposure time of materials to UV deterioration has not been exceeded.
7. Surfaces have been primed, if applicable.
8. Laps in strips and transition strips have complied with minimum requirements and have been shingled in the correct direction (or mastic has been applied on exposed edges), with no fishmouths.
9. Termination mastic has been applied on cut edges.
10. Strips and transition strips have been firmly adhered to substrate.
11. Compatible materials have been used.
12. Transitions at changes in direction and structural support at gaps have been provided.
13. Connections between assemblies (air-barrier and sealants) have complied with requirements for cleanliness, surface preparation and priming, structural support, integrity, and continuity of seal.
14. All penetrations have been sealed.

D. Air barriers will be considered defective if they do not pass inspections.

1. Apply additional air-barrier material, according to manufacturer's written instructions, where inspection results indicate insufficient thickness.
2. Remove and replace deficient air-barrier components for reinspection as specified above.

E. Repair damage to air barriers caused by inspection; follow manufacturer's written instructions.

F. Prepare inspection reports and submit to Architect and Owner.

3.7 CLEANING AND PROTECTION

A. Protect air-barrier system from damage during application and remainder of construction period, according to manufacturer's written instructions.

1. Protect air barrier from exposure to UV light and harmful weather exposure as recommended in writing by manufacturer. If exposed to these conditions for longer than recommended, remove and replace air barrier or install additional, full-thickness, air-barrier application after repairing and preparing the overexposed materials according to air-barrier manufacturer's written instructions.
2. Protect air barrier from contact with incompatible materials and sealants not approved by air-barrier manufacturer.

B. Clean spills, stains, and soiling from construction that would be exposed in the completed work using cleaning agents and procedures recommended in writing by manufacturer of affected construction.

C. Remove masking materials after installation.

END OF SECTION 072726

This page intentionally left blank.

SECTION 074616 - ALUMINUM SIDING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Aluminum siding.
2. Aluminum soffit.

1.2 COORDINATION

A. Coordinate siding installation with flashings and other adjoining construction to ensure proper sequencing.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data Submittals: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Samples: For aluminum siding and soffit including related accessories.

1.5 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of aluminum siding and soffit.

B. Research/Evaluation Reports: For each type of aluminum siding required, from ICC-ES.

C. Sample Warranty: For special warranty.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of product, including related accessories, to include in maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Furnish full lengths of aluminum siding and soffit including related accessories, in a quantity equal to 2 percent of amount installed.

1.8 MOCKUPS

A. Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and to set quality standards for fabrication and installation.

1. Build mockups for siding and soffit including accessories.

a. Size: 48 inches long by 60 inches high.
b. Include outside corner on one end of mockup and inside corner on other end.

2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Deliver and store packaged materials in original containers with labels intact until time of use.

B. Store materials on elevated platforms, under cover, and in a dry location.

1.10 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace products that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including cracking, fading, and deforming.
b. Deterioration of metals, metal finishes, and other materials beyond normal weathering.

2. Fading is defined as loss of color, after cleaning with product recommended by manufacturer, of more than 5 Hunter color-difference units as measured in accordance with ASTM D2244.
3. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain products, including related accessories, from single source from single manufacturer.

2.2 ALUMINUM SIDING - SIMULATED WOOD

A. Aluminum Siding: Formed and coated product complying with AAMA 1402.

1. Product: Mayne Coatings Corp; Longboard

B. Horizontal Pattern: 6-inch Channel by 24-foot plank.

C. Texture: Wood grain.

D. Nominal Thickness: 1/16-inch.

E. Installation Pattern: Running bond.

F. Finish: Manufacturer's standard powder coated.

1. Colors: Light National Walnut.

2.3 ALUMINUM SOFFIT - SIMULATED WOOD

A. Aluminum Soffit: Formed and coated product complying with AAMA 1402.

1. Product: Mayne Coatings Corp; Longboard

B. Pattern: 6-inch exposure in V-grooved, single-board style.

C. Texture: Wood grain.

D. Ventilation: Provide unperforated or perforated soffit as shown on drawings.

E. Nominal Thickness: 1/16-inch.

F. Finish: Manufacturer's standard powder coated.

1. Colors: Light National Walnut.

2.4 ALUMINUM SIDING - GREY

A. Aluminum Siding: Formed and coated product complying with AAMA 1402.

1. Basis of Design: Pac-Clad

B. Horizontal Pattern: 25-foot long smooth planks. Width = per drawings.

C. Texture: Smooth.

D. Nominal Thickness: 0.32-inch.

E. Finish: Manufacturer's standard powder coated.

1. Colors: As selected by Architect from manufacturer's full range of colors.

2.5 ALUMINUM SOFFIT - GREY

A. Aluminum Soffit: Formed and coated product complying with AAMA 1402.

1. Basis of Design: Pac-Clad

B. Profile: As needed per drawings.

C. Texture: Smooth.

D. Ventilation: Provide unperforated soffit.

E. Finish: Manufacturer's standard powder coated.

1. Colors: As selected by Architect from manufacturer's full range of colors.

2.6 ACCESSORIES

A. Siding Accessories, General: Provide starter strips, edge trim, outside and inside corner caps, and other items as recommended by siding manufacturer for building configuration.

1. Provide accessories matching color and texture of adjacent siding unless otherwise indicated.

B. Aluminum Accessories: Where aluminum accessories are indicated, provide accessories complying with AAMA 1402.

1. Texture: Smooth.
2. Nominal Thickness: 1/16-inch.
3. Finish: Manufacturer's standard powder coated

C. Decorative Accessories: Provide the following aluminum decorative accessories as indicated:

1. Fasciae.
2. Moldings and trim.

D. Colors for Decorative Accessories: As selected by Architect from manufacturer's full range of colors.

E. Flashing: Provide aluminum flashing complying with Section 076200 "Sheet Metal Flashing and Trim" at window and door heads and where indicated.

1. Finish for Aluminum Flashing: Same as adjacent aluminum siding.

F. Fasteners:

1. For fastening to wood, use ribbed bugle-head screws of sufficient length to penetrate a minimum of 1 inch into substrate.
2. For fastening to metal, use ribbed bugle-head screws of sufficient length to penetrate a minimum of 1/4 inch, or three screw-threads, into substrate.
3. For fastening aluminum, use aluminum fasteners. Where fasteners are exposed to view, use prefinished aluminum fasteners in color to match item being fastened.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates for compliance with requirements for installation tolerances and other conditions affecting performance of aluminum siding and soffit and related accessories.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean substrates of projections and substances detrimental to application.

3.3 INSTALLATION

A. General: Comply with manufacturer's written installation instructions applicable to products and applications indicated unless more stringent requirements apply.

1. Center nails in elongated nailing slots without binding siding to allow for thermal movement.

B. Longboard siding is NOT to be cut to make the width less than the 6” as provided by the factor. Coordination will be needed onsite to make conditions work with adjusting the Pac-Clad system slightly to provide full width pieces of Longboard.

C. No site or installer fabricated shapes are to be used. All shapes are to come from Longboard or Pac-Clad for the purpose intended.

D. Install aluminum siding and soffit and related accessories in accordance with AAMA 1402.

1. Install fasteners no more than 24 inches o.c.

E. Install joint sealants as specified in Section 079200 "Joint Sealants" and to produce a weathertight installation.

F. Where aluminum siding contacts dissimilar metals, protect against galvanic action by painting contact surfaces with primer or by applying sealant or tape or installing nonconductive spacers as recommended by manufacturer for this purpose.

3.4 ADJUSTING AND CLEANING

A. Remove damaged, improperly installed, or otherwise defective materials and replace with new materials complying with specified requirements.

B. Clean finished surfaces in accordance with manufacturer's written instructions and maintain in a clean condition during construction.

END OF SECTION 074616

This page intentionally left blank.

SECTION 075323 - ETHYLENE-PROPYLENE-DIENE-MONOMER (EPDM) ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Adhered ethylene-propylene-diene-terpolymer (EPDM) roofing system.
2. Vapor retarder.
3. Roof insulation.
4. Cover board.
5. Walkways.

B. Related Requirements:

1. Section 061053 "Miscellaneous Rough Carpentry" for wood nailers, curbs, and blocking.
2. Section 076200 "Sheet Metal Flashing and Trim" for metal roof flashings and counterflashings.
3. Section 077100 "Roof Specialties" for manufactured copings.
4. Section 079200 "Joint Sealants" for joint sealants, joint fillers, and joint preparation.

1.2 DEFINITIONS

A. Roofing Terminology: Definitions in ASTM D1079 and glossary of NRCA's "The NRCA Roofing Manual: Membrane Roof Systems" apply to work of this Section.

1.3 PREINSTALLATION MEETINGS AND INSPECTIONS

A. Preinstallation Roofing Conference: Conduct conference at Project site.

1. Meet with Owner, Architect, Owner's insurer if applicable, testing and inspecting agency representative, roofing Installer, roofing system manufacturer's representative, deck Installer, air barrier Installer, and installers whose work interfaces with or affects roofing, including installers of roof accessories and roof-mounted equipment.
2. Review submittals required for the work of this Section.
3. Review methods and procedures related to roofing installation, including manufacturer's written instructions.
4. Review and finalize construction schedule, and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
5. Examine deck substrate conditions and finishes, including flatness.
6. Review structural loading limitations of roof deck during and after roofing.
7. Review base flashings, special roofing details, roof drainage, roof penetrations, equipment curbs, and condition of other construction that affects roofing system.
8. Review governing regulations and requirements for insurance and certificates if applicable.
9. Review temporary protection requirements for roofing system during and after installation.
10. Review roof observation and repair procedures after roofing installation.

B. Roof Inspections:

1. Contractor and Manufacturer's assigned representative shall inspect the roof deck, documenting deficiencies requiring correction prior to start of roofing as a condition of acceptance.
2. Manufacturer shall provide project start-up guidance and direction at start of installation and then provide inspections by manufacturer's field inspector at 25-percent, 50-percent, and final installations, with inspection reports submitted to the Roofing Installer, General Contractor, Architect, and Owner. Deficiencies shall be listed on the inspections reports and all repairs and

corrections shall be made and certified as completed and approved by inspector and submitted with next and final report.

3. Manufacturer's Final Completion and Warranty Inspection: Upon completion of the Work, the roofing manufacturer's representative, in the presence of the Owner and Architect, shall inspect the roofing work. Discrepancies shall be recorded and immediately rectified. Installer shall issue written confirmation certifying deficiencies have been properly corrected.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. For insulation and roof system component fasteners, include copy of SPRI's Directory of Roof Assemblies listing.

B. Shop Drawings: Include roof plans, sections, details, and attachments to other work specific to this Project, including the following:

1. Layout and thickness if insulation.
2. Base flashings and membrane terminations.
3. Flashing details at penetrations.
4. Tapered insulation, thickness, and slopes.
5. Roof plan showing orientation of steel roof deck and orientation of roof membrane and fastening spacings and patterns for mechanically fastened roofing system.
6. Insulation fastening patterns for corner, perimeter, and field-of-roof locations.
7. Tie-in with air barrier.

C. Samples for Verification: For the following products:

1. Roof membrane and flashings of color required.
2. Walkway pads or rolls, of color required.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and manufacturer.

B. Manufacturer Certificates:

1. Performance Requirement Certificate: Signed by roof membrane manufacturer, certifying that roofing system complies with requirements specified in "Performance Requirements" Article.

a. Submit evidence of complying with performance requirements.

2. Special Warranty Certificate: Signed by roof membrane manufacturer, certifying that all materials supplied under this Section are acceptable for special warranty.

C. Wind Uplift Resistance Submittal: For roofing system, indicating compliance with wind uplift performance requirements.

D. Product Test Reports: For components of roof membrane and insulation, for tests performed by a qualified testing agency, indicating compliance with specified requirements.

E. Evaluation Reports: For components of roofing system, from ICC-ES.

F. Sample Warranties: For manufacturer's warranties.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For roofing system to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Manufacturer Qualifications: A qualified manufacturer that is listed in SPRI's Directory of Roof Assemblies for roofing system identical to that used for this Project.

B. Installer Qualifications: A qualified firm that is approved, authorized, or licensed by roofing system manufacturer to install manufacturer's product and that is eligible to receive manufacturer's special warranty.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, approval or listing agency markings, and directions for storing and mixing with other components.

B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.

1. Discard and legally dispose of liquid material that cannot be applied within its stated shelf life.

C. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location. Comply with insulation manufacturer's written instructions for handling, storing, and protecting during installation.

D. Handle and store roofing materials, and place equipment in a manner to avoid permanent deflection of deck.

1.9 FIELD CONDITIONS

A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.

1.10 WARRANTY

A. Manufacturer's Warranty: Manufacturer agrees to repair or replace components of roofing system that fail in materials or workmanship within specified warranty period.

1. Special warranty includes roof membrane, base flashings, roof insulation, fasteners, cover boards, and other components of roofing system.
2. Warranty Period: 20 years from Date of Substantial Completion.
3. Wind Speed Warranty Provision: Manufacturer agrees to repair or replace components of roofing system that fail at wind speeds less than the design speeds specified, within specified warranty period.

a. Warranty shall not carry exclusions for named storms or hurricanes unless the storm's documented wind speeds exceed those specified for the design and construction of the roofing system.

B. Roofing Installer's Warranty: Submit roofing Installer's warranty, on warranty form at end of this Section, signed by Installer, covering the Work of this Section, including all components of roofing system such as roof membrane, base flashing, roof insulation, fasteners, cover boards, vapor retarders, and walkway products, for the following warranty period:

1. Warranty Period: Two years from Date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General Performance: Installed roofing system and base flashings shall withstand specified uplift pressures, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Roofing and flashings shall remain watertight.

1. Accelerated Weathering: Roof membrane shall withstand 2000 hours of exposure when tested according to ASTM G152, ASTM G154, or ASTM G155.
2. Impact Resistance: Roof membrane shall resist impact damage when tested according to ASTM D3746, ASTM D4272, or the Resistance to Foot Traffic Test in FM Approvals 4470.

B. Material Compatibility: Roofing materials shall be compatible with one another and adjacent materials under conditions of service and application required, as demonstrated by roof membrane manufacturer based on testing and field experience.

C. Wind Uplift Resistance: Design roofing system to resist the following wind uplift pressures:

1. Zone 1 : - +16.0/-38.4 PSF
2. Zone 2 : +35.1/-64.3 PSF
3. Zone 3 : +35.1/-64.3 PSF

D. SPRI's Directory of Roof Assemblies Listing: Roof membrane, base flashings, and component materials shall comply with requirements in FM Approvals 4474 as part of a roofing system, and shall be listed in SPRI's Directory of Roof Assemblies for roof assembly identical for that specified for this Project.

1. Wind Uplift Load Capacity: As indicated on Drawings.

E. Exterior Fire-Test Exposure: ASTM E108 or UL 790, Class A; for application and roof slopes indicated; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

2.2 ETHYLENE-PROPYLENE-DIENE-TERPOLYMER (EPDM) ROOFING

A. EPDM Sheet: ASTM D4637/D4637M, Type I, nonreinforced.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Carlisle SynTec Incorporated.
b. Firestone Building Products.
c. GenFlex Roofing Systems.
d. Johns Manville; a Berkshire Hathaway company.
e. Mule-Hide Products Co., Inc.
f. Versico Incorporated.

2. Thickness: 60 mils, nominal.
3. Exposed Face Color: [Gray on black].

4. Source Limitations: Obtain components for roofing system from roof membrane manufacturer or manufacturers approved by roof membrane manufacturer.

2.3 AUXILIARY ROOFING MATERIALS

A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with other roofing components.

1. Adhesive and Sealants: Comply with VOC limits of authorities having jurisdiction.

B. Sheet Flashing: EPDM, partially cured or cured, according to application.

1. Thickness: 60-mil- thick.

C. Protection Sheet: Epichlorohydrin or neoprene nonreinforced flexible sheet, 55 to 60 mils thick, recommended by EPDM manufacturer for resistance to hydrocarbons, non-aromatic solvents, grease, and oil.

D. Slip Sheet: Manufacturer's standard, of thickness required for application.

E. Prefabricated Pipe Flashings: As recommended by roof membrane manufacturer.

F. Bonding Adhesive: Manufacturer's standard.

G. Modified Asphaltic Fabric-Backed Membrane Adhesive: Roofing system manufacturer's standard modified asphalt, asbestos-free, cold-applied adhesive formulated for compatibility and use with fabric-backed membrane roofing.

H. Water-Based, Fabric-Backed Membrane Adhesive: Roofing system manufacturer's standard water-based, cold-applied adhesive formulated for compatibility and use with fabric-backed membrane roofing.

I. Low-Rise, Urethane, Fabric-Backed Membrane Adhesive: Roof system manufacturer's standard spray-applied, low-rise, two-component urethane adhesive formulated for compatibility and use with fabric-backed membrane roofing.

J. Seaming Material: Manufacturer's standard, synthetic-rubber polymer primer and 3-inch- wide minimum, butyl splice tape with release film.

K. Lap Sealant: Manufacturer's standard, single-component sealant, colored to match membrane roofing.

L. Water Cutoff Mastic: Manufacturer's standard butyl mastic sealant.

M. Metal Termination Bars: Manufacturer's standard, predrilled stainless steel or aluminum bars, approximately 1 by 1/8 inch thick; with anchors.

N. Metal Battens: Manufacturer's standard, aluminum-zinc-alloy-coated or zinc-coated steel sheet, approximately 1 inch wide by 0.05 inch thick, prepunched.

O. Miscellaneous Accessories: Provide pourable sealers, preformed cone and vent sheet flashings, molded pipe boot flashings, preformed inside and outside corner sheet flashings, reinforced EPDM securement strips, T-joint covers, in-seam sealants, termination reglets, cover strips, and other accessories.

1. Provide white flashing accessories for white EPDM membrane roofing.

P. Liquid Coating: Product specifically formulated for coating EPDM membrane roofing, as follows:

1. Type: Acrylic emulsion complying with ASTM D6083.
2. Color: As selected by Architect from manufacturer's full range.

2.4 ROOF INSULATION

A. General: Preformed roof insulation boards manufactured or approved by EPDM roof membrane manufacturer.

B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, glass-fiber mat facer on both major surfaces.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Atlas Roofing Corporation.
b. Carlisle SynTec Incorporated.
c. Firestone Building Products.
d. GAF.
e. Hunter Panels.
f. Johns Manville; a Berkshire Hathaway company.
g. Rmax, Inc.

2. Compressive Strength: 25 psi.
3. Thickness: As indicated on Drawings, or as required to achieve R-value indicated on Drawings.

C. 'Tapered Insulation: Provide factory-tapered insulation boards.

1. Material: Match roof insulation.
2. Minimum Thickness: 1/4 inch.
3. Slope:

a. Roof Field: 1/4 inch per foot unless otherwise indicated on Drawings.
b. Saddles and Crickets: 1/2 inch per foot unless otherwise indicated on Drawings.

2.5 INSULATION ACCESSORIES

A. General: Roof insulation accessories recommended by insulation manufacturer for intended use and compatibility with other roofing system components.

B. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening roof insulation and cover boards to substrate, and acceptable to roofing system manufacturer.

C. Insulation Adhesive: Insulation manufacturer's recommended adhesive formulated to attach roof insulation to substrate or to another insulation layer as follows:

1. Bead-applied, low-rise, one-component or multicomponent urethane adhesive.
2. Full-spread, spray-applied, low-rise, two-component urethane adhesive.

D. Cover Board: ASTM C1177/C1177M, glass-mat, water-resistant gypsum substrate, or ASTM C1278/C1278M, fiber-reinforced gypsum board.

1. Products: Subject to compliance with requirements, provide one of the following:

a. CertainTeed Corporation; GlasRoc Roof Board
b. Georgia-Pacific Gypsum LLC; DensDeck Prime.
c. National Gypsum Company; DEXcell FA Glass Mat Roof Board.
d. United States Gypsum Company; Securock Glass-Mat Roof Board.

2. Thickness: 1/2 inch.
3. Surface Finish: Factory primed.

2.6 WALKWAYS

A. Flexible Walkways: Factory-formed, nonporous, heavy-duty, slip-resisting, surface-textured walkway pads or rolls, approximately 3/16 inch thick and acceptable to roofing system manufacturer.

1. Size: Approximately 36 by 60 inches
2. Color: Contrasting with roof membrane.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

1. Verify that roof openings and penetrations are in place, curbs are set and braced, and roof-drain bodies are securely clamped in place.
2. Verify that wood blocking, curbs, and nailers are securely anchored to roof deck at penetrations and terminations and that nailers match thicknesses of insulation.
3. Verify that surface plane flatness and fastening of steel roof deck complies with requirements in Section 053100 "Steel Decking."

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean substrate of dust, debris, moisture, and other substances detrimental to roofing system installation according to roofing system manufacturer's written instructions. Remove sharp projections.

B. Prevent materials from entering and clogging roof drains and conductors and from spilling or migrating onto surfaces of other construction. Remove roof-drain plugs when no work is taking place or when rain is forecast.

3.3 INSTALLATION OF ROOFING, GENERAL

A. Install roofing system according to roofing system manufacturer's written instructions, SPRI's Directory of Roof Assemblies assembly requirements, and FM Global Property Loss Prevention Data Sheet 1-29.

B. Complete terminations and base flashings and provide temporary seals to prevent water from entering completed sections of roofing system at end of workday or when rain is forecast. Remove and discard temporary seals before beginning work on adjoining roofing.

C. Coordinate installation and transition of roofing system component serving as an air barrier with air barrier specified under Section 072726 "Fluid-Applied Membrane Air Barriers."

3.4 INSTALLATION OF INSULATION

A. Coordinate installing roofing system components so insulation is not exposed to precipitation or left exposed at end of workday.

B. Comply with roofing system and insulation manufacturer's written instructions for installing roof insulation.

C. Installation Over Metal Decking:

1. Install base layer of insulation with end joints staggered not less than 12 inches in adjacent rows and with long joints continuous at right angle to flutes of decking.

   a. Locate end joints over crests of decking.
   b. Where installing composite and noncomposite insulation in two or more layers, install noncomposite board insulation for bottom layer and intermediate layers, if applicable, and install composite board insulation for top layer.
   c. Trim insulation neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks.
   d. Make joints between adjacent insulation boards not more than 1/4 inch in width.
   e. At internal roof drains, slope insulation to create a square drain sump with each side equal to the diameter of the drain bowl plus 24 inches.

      1) Trim insulation so that water flow is unrestricted.

   f. Fill gaps exceeding 1/4 inch with insulation.
   g. Cut and fit insulation within 1/4 inch of nailers, projections, and penetrations.
   h. Loosely lay base layer of insulation units over substrate.
   i. Mechanically attach base layer of insulation using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to metal decks.

      1) Fasten insulation according to requirements in SPRI's Directory of Roof Assemblies for specified Wind Uplift Load Capacity.
      2) Fasten insulation to resist specified uplift pressure at corners, perimeter, and field of roof.

2. Install upper layers of insulation and tapered insulation with joints of each layer offset not less than 12 inches from previous layer of insulation.

   a. Staggered end joints within each layer not less than 24 inches in adjacent rows.
   b. Install with long joints continuous and with end joints staggered not less than 12 inches in adjacent rows.
   c. Trim insulation neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks.
   d. Make joints between adjacent insulation boards not more than 1/4 inch in width.
   e. At internal roof drains, slope insulation to create a square drain sump with each side equal to the diameter of the drain bowl plus 24 inches.
   f. Trim insulation so that water flow is unrestricted.
   g. Fill gaps exceeding 1/4 inch with insulation.
   h. Cut and fit insulation within 1/4 inch of nailers, projections, and penetrations.
   i. Loosely lay each layer of insulation units over substrate.
   j. Adhere each layer of insulation to substrate using adhesive according to SPRI's Directory of Roof Assemblies listed roof assembly requirements for specified Wind Uplift Load Capacity and FM Global Property Loss Prevention Data Sheet 1-29, as follows:

      1) Set each layer of insulation in a solid mopping of hot roofing asphalt, applied within plus or minus 25 deg F of equiviscous temperature.
      2) Set each layer of insulation in ribbons of bead-applied insulation adhesive, firmly pressing and maintaining insulation in place.
      3) Set each layer of insulation in a uniform coverage of full-spread insulation adhesive, firmly pressing and maintaining insulation in place.

3.5 '"INSTALLATION OF COVER BOARDS

A. Install cover boards over insulation with long joints in continuous straight lines with end joints staggered between rows. Offset joints of insulation below a minimum of 6 inches in each direction.

1. Trim cover board neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks.
2. At internal roof drains, conform to slope of drain sump.

   a. Trim cover board so that water flow is unrestricted.

3. Cut and fit cover board tight to nailers, projections, and penetrations.
4. Loosely lay cover board over substrate.
5. Adhere cover board to substrate using adhesive according to SPRI's Directory of Roof Assemblies listed roof assembly requirements for specified Wind Uplift Load Capacity and FM Global Property Loss Prevention Data Sheet 1-29, as follows:

   a. Set cover board in ribbons of bead-applied insulation adhesive, firmly pressing and maintaining insulation in place.
   b. Set cover board in a uniform coverage of full-spread insulation adhesive, firmly pressing and maintaining insulation in place.

B. Install slip sheet over cover board and immediately beneath roofing.

3.6 INSTALLATION OF ADHERED ROOF MEMBRANE

A. Adhere roof membrane over area to receive roofing according to roofing system manufacturer's written instructions.

B. Unroll membrane roof membrane and allow to relax before installing.

C. Start installation of roofing in presence of roofing system manufacturer's technical personnel.

D. Accurately align roof membrane, and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.

E. Bonding Adhesive: Apply to substrate and underside of roof membrane at rate required by manufacturer, and allow to partially dry before installing roof membrane. Do not apply to splice area of roof membrane.

F. In addition to adhering, mechanically fasten roof membrane securely at terminations, penetrations, and perimeters.

G. Apply roof membrane with side laps shingled with slope of roof deck where possible.

H. Adhesive Seam Installation: Clean both faces of splice areas, apply splicing cement.

1. Firmly roll side and end laps of overlapping roof membrane to ensure a watertight seam installation.
2. Apply lap sealant and seal exposed edges of roofing terminations.
3. Apply a continuous bead of in-seam sealant before closing splice if required by roofing system manufacturer.

I. Tape Seam Installation: Clean and prime both faces of splice areas, apply splice tape.

1. Firmly roll side and end laps of overlapping roof membrane to ensure a watertight seam installation.
2. Apply lap sealant and seal exposed edges of roofing terminations.

J. Repair tears, voids, and lapped seams in roof membrane that do not comply with requirements.

K. Spread sealant or mastic bed over deck-drain flange at roof drains, and securely seal roof membrane in place with clamping ring.

L. Adhere protection sheet over roof membrane at locations indicated.

3.7 INSTALLATION OF BASE FLASHING

A. Install sheet flashings and preformed flashing accessories, and adhere to substrates according to roofing system manufacturer's written instructions.

B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate, and allow to partially dry. Do not apply to seam area of flashing.

C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.

D. Clean splice areas, apply splicing cement, and firmly roll side and end laps of overlapping sheets to ensure a watertight seam installation. Apply lap sealant and seal exposed edges of sheet flashing terminations.

E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

3.8 INSTALLATION OF COATINGS

A. Apply coatings to roof membrane and base flashings according to manufacturer's written recommendations, by spray, roller, or other suitable application method.

3.9 INSTALLATION OF WALKWAYS

A. Flexible Walkways: Install walkway products according to manufacturer's written instructions.

1. Install flexible walkways at the following locations:
   a. Perimeter of each rooftop unit.
   b. Between each rooftop unit location, creating a continuous path connecting rooftop unit locations.
   c. Between each roof hatch and each rooftop unit location or path connecting rooftop unit locations.
   d. Top and bottom of each roof access ladder.
   e. Between each roof access ladder and each rooftop unit location or path connecting rooftop unit locations.
   f. Locations indicated on Drawings.
   g. As required by roof membrane manufacturer's warranty requirements.
2. Provide 6-inch clearance between adjoining pads.
3. Adhere walkway products to substrate with compatible adhesive according to roofing system manufacturer's written instructions.

3.10 PROTECTING AND CLEANING

A. Protect roofing system from damage and wear during remainder of construction period. When remaining construction does not affect or endanger roofing system, inspect roofing system for deterioration and damage, describing its nature and extent in a written report, with copies to Architect and Owner.

B. Correct deficiencies in or remove roofing system that does not comply with requirements, repair substrates, and repair or reinstall roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.

C. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

3.11 ROOFING INSTALLER'S WARRANTY

A. WHEREAS _____ of _____, herein called the "Roofing Installer," has performed roofing and associated work ("work") on the following project:

1. Owner: <**Insert name of Owner**>.
2. Address: <**Insert address**>.
3. Building Name/Type: <**Insert information**>.
4. Address: <**Insert address**>.
5. Area of Work: <**Insert information**>.
6. Acceptance Date: _____.
7. Warranty Period: <**Insert time**>.
8. Expiration Date: _____.

B. AND WHEREAS Roofing Installer has contracted (either directly with Owner or indirectly as a subcontractor) to warrant said work against leaks and faulty or defective materials and workmanship for designated Warranty Period,

C. NOW THEREFORE Roofing Installer hereby warrants, subject to terms and conditions herein set forth, that during Warranty Period Roofing Installer will, at Roofing Installer's own cost and expense, make or cause to be made such repairs to or replacements of said work as are necessary to correct faulty and defective work and as are necessary to maintain said work in a watertight condition.

D. This Warranty is made subject to the following terms and conditions:

1. Specifically excluded from this Warranty are damages to work and other parts of the building, and to building contents, caused by:

   a. lightning;
   b. peak gust wind speed exceeding <**Insert mph**>;
   c. fire;
   d. failure of roofing system substrate, including cracking, settlement, excessive deflection, deterioration, and decomposition;
   e. faulty construction of parapet walls, copings, chimneys, skylights, vents, equipment supports, and other edge conditions and penetrations of the work;
   f. vapor condensation on bottom of roofing; and
   g. activity on roofing by others, including construction contractors, maintenance personnel, other persons, and animals, whether authorized or unauthorized by Owner.

2. When work has been damaged by any of foregoing causes, Warranty shall be null and void until such damage has been repaired by Roofing Installer and until cost and expense thereof have been paid by Owner or by another responsible party so designated.
3. Roofing Installer is responsible for damage to work covered by this Warranty but is not liable for consequential damages to building or building contents resulting from leaks or faults or defects of work.
4. During Warranty Period, if Owner allows alteration of work by anyone other than Roofing Installer, including cutting, patching, and maintenance in connection with penetrations, attachment of other work, and positioning of anything on roof, this Warranty shall become null and void on date of said alterations, but only to the extent said alterations affect work covered by this

Warranty. If Owner engages Roofing Installer to perform said alterations, Warranty shall not become null and void unless Roofing Installer, before starting said work, shall have notified Owner in writing, showing reasonable cause for claim, that said alterations would likely damage or deteriorate work, thereby reasonably justifying a limitation or termination of this Warranty.

5. During Warranty Period, if original use of roof is changed and it becomes used for, but was not originally specified for, a promenade, work deck, spray-cooled surface, flooded basin, or other use or service more severe than originally specified, this Warranty shall become null and void on date of said change, but only to the extent said change affects work covered by this Warranty.
6. Owner shall promptly notify Roofing Installer of observed, known, or suspected leaks, defects, or deterioration and shall afford reasonable opportunity for Roofing Installer to inspect work and to examine evidence of such leaks, defects, or deterioration.
7. This Warranty is recognized to be the only warranty of Roofing Installer on said work and shall not operate to restrict or cut off Owner from other remedies and resources lawfully available to Owner in cases of roofing failure. Specifically, this Warranty shall not operate to relieve Roofing Installer of responsibility for performance of original work according to requirements of the Contract Documents, regardless of whether Contract was a contract directly with Owner or a subcontract with Owner's General Contractor.

E. IN WITNESS THEREOF, this instrument has been duly executed this _____ day of _____, _____.

1. Authorized Signature: _____.
2. Name: _____.
3. Title: _____.

END OF SECTION 075323

SECTION 076200 - SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Formed roof-drainage sheet metal fabrications.
2. Formed low-slope roof sheet metal fabrications.
3. Formed wall sheet metal fabrications.
4. Miscellaneous sheet metal fabrications.

B. Related Requirements:

1. Section 061053 "Miscellaneous Rough Carpentry" for wood nailers, curbs, and blocking.
2. Section 077100 "Roof Specialties" for manufactured copings, reglets, and counterflashings.

1.2 COORDINATION

A. Coordinate sheet metal flashing and trim layout and seams with sizes and locations of penetrations to be flashed, and joints and seams in adjacent materials.

B. Coordinate sheet metal flashing and trim installation with adjoining roofing and wall materials, joints, and seams to provide leakproof, secure, and noncorrosive installation.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review construction schedule. Verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review special roof details, roof drainage, roof-penetration flashing, equipment curbs, and condition of other construction that affect sheet metal flashing and trim.
3. Review sheet metal flashing observation and repair procedures after flashing installation.

1.4 ACTION SUBMITTALS

A. Product Data: For each of the following

1. Underlayment materials.
2. Elastomeric sealant.
3. Butyl sealant.
4. Epoxy seam sealer.

B. Shop Drawings: For sheet metal flashing and trim.

1. Include plans, elevations, sections, and attachment details.
2. Include identification of material, thickness, weight, and finish for each item and location in Project.
3. Include details for forming, including profiles, shapes, seams, and dimensions.
4. Include details for joining, supporting, and securing, including layout and spacing of fasteners, cleats, clips, and other attachments. Include pattern of seams.
5. Include details of termination points and assemblies.
6. Include details of roof-penetration flashing.

7. Include details of special conditions.
8. Include details of connections to adjoining work.
9. Detail formed flashing and trim at scale of not less than 1-1/2 inches per 12 inches.

C. Samples: For each exposed product and for each color and texture specified, 12 inches long by actual width.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

B. Sample Warranty: For special warranty.

1.6 CLOSEOUT SUBMITTALS

A. Special warranty.

1.7 QUALITY ASSURANCE

A. Fabricator Qualifications: Employs skilled workers who custom fabricate sheet metal flashing and trim similar to that required for this Project and whose products have a record of successful in-service performance.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for fabrication and installation.

1. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Owner specifically approves such deviations in writing.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Do not store sheet metal flashing and trim materials in contact with other materials that might cause staining, denting, or other surface damage.

1. Store sheet metal flashing and trim materials away from uncured concrete and masonry.
2. Protect stored sheet metal flashing and trim from contact with water.

B. Protect strippable protective covering on sheet metal flashing and trim from exposure to sunlight and high humidity, except to extent necessary for period of sheet metal flashing and trim installation.

1.9 WARRANTY

A. Special Warranty on Finishes: Manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested in accordance with ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Sheet metal flashing and trim assemblies, including cleats, anchors, and fasteners, shall withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight.

B. Sheet Metal Standard for Flashing and Trim: Comply with SMACNA's "Architectural Sheet Metal Manual" requirements for dimensions and profiles shown unless more stringent requirements are indicated.

C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 SHEET METALS

A. Protect mechanical and other finishes on exposed surfaces from damage by applying strippable, temporary protective film before shipping.

B. Aluminum Sheet: ASTM B209, alloy as standard with manufacturer for finish required, with temper as required to suit forming operations and performance required; with smooth, flat surface.

1. Exposed Coil-Coated Finish:

a. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent polyvinylidene fluoride (PVDF) resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions for seacoast and severe environments.

2. Color: As selected by Architect from manufacturer's full range.
3. Concealed Finish: Pretreat with manufacturer's standard white or light-colored acrylic or polyester backer finish, consisting of prime coat and wash coat with minimum total dry film thickness of 0.5 mil.

2.3 UNDERLAYMENT MATERIALS

A. Self-Adhering, High-Temperature Sheet Underlayment: Minimum 30 mils thick, consisting of a slip-resistant polyethylene- or polypropylene-film top surface laminated to a layer of butyl- or SBS-modified asphalt adhesive, with release-paper backing; specifically designed to withstand high metal temperatures beneath metal roofing. Provide primer in accordance with underlayment manufacturer's written instructions.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Atlas Roofing Corporation; WeatherMaster PolySeal.
b. Carlisle Coatings & Waterproofing Inc.; WIP 300HT.
c. CertainTeed Corporation; WinterGuard HT.
d. Drexel Metals Inc.; MetShield.
e. GAF Materials Corporation; Roof Pro.
f. GCP Applied Technologies; Grace Ice and Water Shield HT.

g. Henry Company; Blueskin PE200 HT.
h. InterWrap Inc.; Titanium PSU-30.
i. Kirsch Building Products, LLC; SharkSkin Ultra SA.
j. MFM Building Products Corp.; Ultra HT Wind and Water Seal.
k. Owens Corning; WeatherLock Specialty Tile & Metal.
l. Polyguard Products, Inc.; Deck Guard HT.
m. SPD Advanced Polymer Products, Inc.; Palisade-SA-HT.

2. Source Limitations: Obtain underlayment from single source from single manufacturer.
3. Low-Temperature Flexibility: ASTM D1970/D1970M; passes after testing at minus 20 deg F or lower.

2.4 MISCELLANEOUS MATERIALS

A. Provide materials and types of fasteners, protective coatings, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and as recommended by manufacturer of primary sheet metal unless otherwise indicated.

B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal.

1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.

a. Exposed Fasteners: Heads matching color of sheet metal using plastic caps or factory-applied coating. Provide metal-backed EPDM or PVC sealing washers under heads of exposed fasteners bearing on weather side of metal.
b. Blind Fasteners: High-strength aluminum or stainless steel rivets suitable for metal being fastened.

2. Fasteners for Aluminum Sheet: Aluminum or Series 300 stainless steel.

C. Sealant Tape: Pressure-sensitive, 100 percent solids, polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch wide and 1/8 inch thick.

D. Elastomeric Sealant: ASTM C920, elastomeric silicone polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.

E. Butyl Sealant: ASTM C1311, single-component, solvent-release butyl rubber sealant; polyisobutylene plasticized; heavy bodied for hooked-type expansion joints with limited movement.

F. Epoxy Seam Sealer: Two-part, noncorrosive, aluminum seam-cementing compound, recommended by aluminum manufacturer for exterior nonmoving joints, including riveted joints.

G. Bituminous Coating: Cold-applied asphalt emulsion in accordance with ASTM D1187/D1187M.

H. Asphalt Roofing Cement: ASTM D4586, asbestos free, of consistency required for application.

2.5 FABRICATION, GENERAL

A. Custom fabricate sheet metal flashing and trim to comply with details indicated and recommendations in cited sheet metal standard that apply to design, dimensions, geometry, metal thickness, and other characteristics of item required.

1. Fabricate sheet metal flashing and trim in shop to greatest extent possible.

2. Fabricate sheet metal flashing and trim in thickness or weight needed to comply with performance requirements, but not less than that specified for each application and metal.
3. Verify shapes and dimensions of surfaces to be covered and obtain field measurements for accurate fit before shop fabrication.
4. Form sheet metal flashing and trim to fit substrates without excessive oil-canning, buckling, and tool marks; true to line, levels, and slopes; and with exposed edges folded back to form hems.
5. Conceal fasteners and expansion provisions where possible. Do not use exposed fasteners on faces exposed to view.

B. Fabrication Tolerances:

1. Fabricate sheet metal flashing and trim that is capable of installation to a tolerance of 1/4 inch in 20 feet on slope and location lines indicated on Drawings and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.
2. Fabricate sheet metal flashing and trim that is capable of installation to tolerances specified.

C. Expansion Provisions: Form metal for thermal expansion of exposed flashing and trim.

1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with butyl sealant concealed within joints.
2. Use lapped expansion joints only where indicated on Drawings.

D. Sealant Joints: Where movable, nonexpansion-type joints are required, form metal in accordance with cited sheet metal standard to provide for proper installation of elastomeric sealant.

E. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.

F. Seams:

1. Fabricate nonmoving seams with flat-lock seams. Tin edges to be seamed, form seams, and solder.
2. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints where necessary for strength.

G. Do not use graphite pencils to mark metal surfaces.

2.6 ROOF-DRAINAGE SHEET METAL FABRICATIONS

A. Built-in Gutters:

1. Fabricate to cross section required, with riveted and soldered joints, complete with end pieces, outlet tubes, and other special accessories as required.
2. Fabricate in minimum 96-inch- long sections. Fabricate expansion joints and accessories from same metal as gutters unless otherwise indicated.
3. Fabricate gutters with built-in expansion joints[**and gutter-end expansion joints at walls**].
4. Accessories: [**Continuous, removable leaf screen with sheet metal frame and hardware cloth screen**] [**Bronze wire-ball downspout strainer**] [**Wire-ball downspout strainer**].
5. Fabricate from the following materials:

   a. Stainless Steel: [**0.0156 inch**] <**Insert dimension**> thick.
   b. Zinc: [**0.032 inch**] [**0.039 inch**] <**Insert dimension**> thick.

2.7 LOW-SLOPE ROOF SHEET METAL FABRICATIONS

A. Base Flashing: Shop fabricate interior and exterior corners. Fabricate from the following materials:

1. Aluminum: 0.040 inch thick.

B. Counterflashing: Refer to Section 077100 "Roof Specialties."

C. Flashing Receivers: Fabricate from the following materials:

1. Aluminum: 0.040 inch thick.

D. Roof-Penetration Flashing: Roofing membrane manufacturer’s approved system.

E. Roof-Drain Flashing: Roofing membrane manufacturer’s approved system.

2.8 WALL SHEET METAL FABRICATIONS

A. Through-Wall Flashing: Fabricate continuous flashings in minimum 96-inch- long, but not exceeding 12-foot- long, sections, under copings, and at shelf angles. Fabricate discontinuous lintel, sill, and similar flashings to extend 6 inches beyond each side of wall openings; and form with 2-inch- high, end dams. Fabricate from the following materials:

1. Stainless Steel: 0.0156 inch thick.

B. Opening Flashings in Frame Construction: Refer to Section 072726 "Fluid-Applied Membrane Air Barriers" for flexible flashings.

2.9 MISCELLANEOUS SHEET METAL FABRICATIONS

A. Pipe Penetrations: Premolded rubber or roof membrane manufacturer’s recommended elastomeric type.

1. Provide stainless steel clamp ring, sealant, and fasteners as recommended by manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with installer present, for compliance with requirements for installation tolerances, substrate, and other conditions affecting performance of the Work.

1. Verify compliance with requirements for installation tolerances of substrates.
2. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored.
3. Verify that air- or water-resistant barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF UNDERLAYMENT

A. Self-Adhering, High-Temperature Sheet Underlayment:

1. Install self-adhering, high-temperature sheet underlayment; wrinkle free.
2. Prime substrate if recommended by underlayment manufacturer.
3. Comply with temperature restrictions of underlayment manufacturer for installation; use primer for installing underlayment at low temperatures.
4. Apply in shingle fashion to shed water, with end laps of not less than 6 inches staggered 24 inches between courses.
5. Overlap side edges not less than 3-1/2 inches. Roll laps and edges with roller.
6. Roll laps and edges with roller.
7. Cover underlayment within 14 days.

3.3 INSTALLATION, GENERAL

A. Install sheet metal flashing and trim to comply with details indicated and recommendations of cited sheet metal standard that apply to installation characteristics required unless otherwise indicated on Drawings.

1. Install fasteners, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.
2. Install sheet metal flashing and trim true to line, levels, and slopes. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
3. Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement.
4. Install sheet metal flashing and trim to fit substrates and to result in watertight performance.
5. Install continuous cleats with fasteners spaced not more than 12 inches o.c.
6. Space individual cleats not more than 12 inches apart. Attach each cleat with at least two fasteners. Bend tabs over fasteners.
7. Install exposed sheet metal flashing and trim with limited oil-canning, and free of buckling and tool marks.
8. Do not field cut sheet metal flashing and trim by torch.
9. Do not use graphite pencils to mark metal surfaces.

B. Metal Protection: Where dissimilar metals contact each other, or where metal contacts pressure-treated wood or other corrosive substrates, protect against galvanic action or corrosion by painting contact surfaces with bituminous coating or by other permanent separation as recommended by sheet metal manufacturer or cited sheet metal standard.

1. Coat concealed side of uncoated-aluminum and stainless steel sheet metal flashing and trim with bituminous coating where flashing and trim contact wood, ferrous metal, or cementitious construction.
2. Underlayment: Where installing sheet metal flashing and trim directly on cementitious or wood substrates, install underlayment and cover with slip sheet.

C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim.

1. Space movement joints at maximum of 10 feet with no joints within 24 inches of corner or intersection.
2. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with sealant concealed within joints.
3. Use lapped expansion joints only where indicated on Drawings.

D. Fasteners: Use fastener sizes that penetrate substrate not less than recommended by fastener manufacturer to achieve maximum pull-out resistance.

E. Conceal fasteners and expansion provisions where possible in exposed work and locate to minimize possibility of leakage. Cover and seal fasteners and anchors as required for a tight installation.

F. Seal joints as required for watertight construction.

1. Use sealant-filled joints unless otherwise indicated.
   a. Embed hooked flanges of joint members not less than 1 inch into sealant.
   b. Form joints to completely conceal sealant.
   c. When ambient temperature at time of installation is between 40 and 70 deg F, set joint members for 50 percent movement each way.
   d. Adjust setting proportionately for installation at higher ambient temperatures.
      1) Do not install sealant-type joints at temperatures below 40 deg F.
2. Prepare joints and apply sealants to comply with requirements in Section 079200 "Joint Sealants."

G. Rivets: Rivet joints in uncoated aluminum where necessary for strength.

3.4 INSTALLATION OF ROOF-DRAINAGE SYSTEM

A. Install sheet metal roof-drainage items to produce complete roof-drainage system in accordance with cited sheet metal standard unless otherwise indicated. Coordinate installation of roof perimeter flashing with installation of roof-drainage system.

3.5 INSTALLATION OF ROOF FLASHINGS

A. Install sheet metal flashing and trim to comply with performance requirements and cited sheet metal standard.

1. Provide concealed fasteners where possible, and set units true to line, levels, and slopes.
2. Install work with laps, joints, and seams that are permanently watertight and weather resistant.

B. Pipe or Post Counterflashing: Install counterflashing umbrella with close-fitting collar with top edge flared for elastomeric sealant, extending minimum of 4 inches over base flashing. Install stainless steel draw band and tighten.

C. Counterflashing: Refer to Section 077100 "Roof Specialties."

D. Roof-Penetration Flashing: Coordinate installation of roof-penetration flashing with installation of roofing and other items penetrating roof. Seal with butylsealant and clamp flashing to pipes that penetrate roof.

3.6 INSTALLATION OF WALL FLASHINGS

A. Install sheet metal wall flashing to intercept and exclude penetrating moisture in accordance with cited sheet metal standard unless otherwise indicated. Coordinate installation of wall flashing with installation of wall-opening components such as windows, doors, and louvers.

B. Opening Flashings in Frame Construction: Install flexible flashings in accordance with Section 072726 "Fluid-Applied Membrane Air Barriers."

3.7 INSTALLATION OF MISCELLANEOUS FLASHING

A. Pipe Penetration Flashing: Install in accordance with roofing membrane manufacturer’s written instructions.

3.8 INSTALLATION TOLERANCES

A. Installation Tolerances: Shim and align sheet metal flashing and trim within installed tolerance of 1/4 inch in 20 feet on slope and location lines indicated on Drawings and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

3.9 CLEANING

A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.

B. Clean off excess sealants.

3.10 PROTECTION

A. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions.

B. On completion of sheet metal flashing and trim installation, remove unused materials and clean finished surfaces as recommended in writing by sheet metal flashing and trim manufacturer.

C. Maintain sheet metal flashing and trim in clean condition during construction.

D. Replace sheet metal flashing and trim that have been damaged or that have deteriorated beyond successful repair by finish touchup or similar minor repair procedures, as determined by Architect.

END OF SECTION 076200

This page intentionally left blank.

SECTION 077100 - ROOF SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Copings.
2. Reglets and counterflashings.

B. Preinstallation Conference: Conduct conference at Project site.

1. Meet with Owner, Architect, Owner's insurer if applicable, roofing-system testing and inspecting agency representative, roofing Installer, roofing-system manufacturer's representative, Installer, structural-support Installer, and installers whose work interfaces with or affects roof specialties, including installers of roofing materials and accessories.
2. Examine substrate conditions for compliance with requirements, including flatness and attachment to structural members.
3. Review special roof details, roof drainage, and condition of other construction that will affect roof specialties.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: For roof specialties.

1. Include plans, elevations, expansion-joint locations, keyed details, and attachments to other work. Distinguish between plant- and field-assembled work.
2. Include details for expansion and contraction; locations of expansion joints, including direction of expansion and contraction.
3. Indicate profile and pattern of seams and layout of fasteners, cleats, clips, and other attachments.
4. Detail termination points and assemblies, including fixed points.
5. Include details of special conditions.

C. Samples: For each type of roof specialty and for each color and texture specified.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For manufacturer.

B. Product Certificates: For each type of roof specialty.

C. Product Test Reports: For copings, for tests performed by a qualified testing agency.

D. Sample Warranty: For manufacturer's special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For roofing specialties to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications: A qualified manufacturer offering products meeting requirements that are SPRI ES-1 tested to specified design pressure.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and set quality standards for fabrication and installation.

1. Build mockup of typical roof edge, including fascia, approximately 10 feet long, including supporting construction, seams, attachments, and accessories.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Do not store roof specialties in contact with other materials that might cause staining, denting, or other surface damage. Store roof specialties away from uncured concrete and masonry.

B. Protect strippable protective covering on roof specialties from exposure to sunlight and high humidity, except to extent necessary for the period of roof-specialty installation.

1.7 FIELD CONDITIONS

A. Field Measurements: Verify profiles and tolerances of roof-specialty substrates by field measurements before fabrication, and indicate measurements on Shop Drawings.

B. Coordination: Coordinate roof specialties with flashing, trim, and construction of parapets, roof deck, roof and wall panels, and other adjoining work to provide a leakproof, secure, and noncorrosive installation.

1.8 WARRANTY

A. Special Warranty on Painted Finishes: Manufacturer agrees to repair finish or replace roof specialties that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Fluoropolymer Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General Performance: Roof specialties shall withstand exposure to weather and resist thermally induced movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, installation, or other defects in construction.

B. FM Approvals' Listing: Manufacture and install copings that are listed in FM Approvals' "RoofNav" and approved for windstorm classification, Class 1-120. Identify materials with FM Approvals' markings.

C. SPRI Wind Design Standard: Manufacture and install copings tested according to SPRI ES-1 and capable of resisting the following design pressures:

1. Design Pressure: As indicated on Drawings.

D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, hole elongation, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Provide clips that resist rotation and avoid shear stress as a result of thermal movements. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

2.2 COPINGS

A. Metal Copings: Manufactured coping system consisting of metal coping cap in section lengths not exceeding 12 feet, concealed anchorage; with corner units, end cap units, and concealed splice plates with finish matching coping caps.

1. Manufacturer: Subject to compliance with requirements, provide products by one of the following:

a. ATAS International, Inc.
b. Hickman Company, W. P.
c. Merchant & Evans, Inc.
d. Metal-Era, Inc.
e. Metal Roofing Systems
f. MM Systems Corporation
g. Petersen Aluminum Corporation

2. Formed Aluminum Sheet Coping Caps: Aluminum sheet, 0.050 inch thick.

a. Surface: Smooth, flat finish.
b. Finish: Two-coat fluoropolymer.
c. Color: As selected by Architect from manufacturer's full range.

3. Corners: Factory mitered and continuously welded.
4. Coping-Cap Attachment Method: Snap-on, fabricated from coping-cap material.

a. Snap-on Coping Anchor Plates: Concealed, galvanized-steel sheet, 12 inches wide, with integral cleats.

2.3 REGLETS AND COUNTERFLASHINGS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Fry Reglet Corporation.
2. Hickman Company, W. P.
3. Metal-Era, Inc.
4. MM Systems Corporation.

B. Reglets: Manufactured units formed to provide secure interlocking of separate reglet and counterflashing pieces, from the following exposed metal:

1. Formed Aluminum: 0.040 inch thick.
2. Corners: Factory mitered and continuously welded.

3. Surface-Mounted Type: Provide reglets with slotted holes for fastening to substrate, with neoprene or other suitable weatherproofing washers, and with channel for sealant at top edge.

C. Counterflashings: Manufactured units of heights to overlap top edges of base flashings by 4 inches and in lengths not exceeding 12 feet designed to snap into reglets and compress against base flashings with joints lapped, from the following exposed metal:

1. Formed Aluminum: 0.040 inch thick.

D. Accessories:

1. Counterflashing Wind-Restraint Clips: Provide clips to be installed before counterflashing to prevent wind uplift of counterflashing lower edge.

E. Aluminum Finish: Two-coat fluoropolymer.

1. Color: As selected by Architect from manufacturer's full range.

2.4 MATERIALS

A. Aluminum Sheet: ASTM B209, alloy as standard with manufacturer for finish required, with temper to suit forming operations and performance required.

2.5 MISCELLANEOUS MATERIALS

A. Fasteners: Manufacturer's recommended fasteners, suitable for application and designed to meet performance requirements. Furnish the following unless otherwise indicated:

1. Exposed Penetrating Fasteners: Gasketed screws with hex washer heads matching color of sheet metal.
2. Fasteners for Aluminum: Aluminum or Series 300 stainless steel.

B. Elastomeric Sealant: ASTM C920, elastomeric silicone polymer sealant of type, grade, class, and use classifications required by roofing-specialty manufacturer for each application.

C. Bituminous Coating: Cold-applied asphalt emulsion complying with ASTM D1187/D1187M.

D. Asphalt Roofing Cement: ASTM D4586, asbestos free, of consistency required for application.

2.6 FINISHES

A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

B. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

C. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

D. Coil-Coated Aluminum Sheet Finishes:

1. High-Performance Organic Finish: Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

a. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent polyvinylidene fluoride (PVDF) resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
b. Concealed Surface Finish: Apply pretreatment and manufacturer's standard acrylic or polyester backer finish consisting of prime coat and wash coat with a minimum total dry film thickness of 0.5 mil.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, to verify actual locations, dimensions, and other conditions affecting performance of the Work.

B. Examine walls, roof edges, and parapets for suitable conditions for roof specialties.

C. Verify that substrate is sound, dry, smooth, clean, sloped for drainage where applicable, and securely anchored.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install roof specialties according to manufacturer's written instructions. Anchor roof specialties securely in place, with provisions for thermal and structural movement. Use fasteners, solder, protective coatings, separators, underlayments, sealants, and other miscellaneous items as required to complete roof-specialty systems.

1. Install roof specialties level, plumb, true to line and elevation; with limited oil-canning and without warping, jogs in alignment, buckling, or tool marks.
2. Provide uniform, neat seams with minimum exposure of solder and sealant.
3. Install roof specialties to fit substrates and to result in weathertight performance. Verify shapes and dimensions of surfaces to be covered before manufacture.
4. Torch cutting of roof specialties is not permitted.
5. Do not use graphite pencils to mark metal surfaces.

B. Metal Protection: Protect metals against galvanic action by separating dissimilar metals from contact with each other or with corrosive substrates by painting contact surfaces with bituminous coating or by other permanent separation as recommended by manufacturer.

1. Coat concealed side of uncoated aluminum roof specialties with bituminous coating where in contact with wood, ferrous metal, or cementitious construction.
2. Bed flanges in thick coat of asphalt roofing cement where required by manufacturers of roof specialties for waterproof performance.

C. Expansion Provisions: Allow for thermal expansion of exposed roof specialties.

1. Space movement joints at a maximum of 12 feet with no joints within 18 inches of corners or intersections unless otherwise indicated on Drawings.
2. When ambient temperature at time of installation is between 40 and 70 deg F, set joint members for 50 percent movement each way. Adjust setting proportionately for installation at higher ambient temperatures.

D. Fastener Sizes: Use fasteners of sizes that penetrate substrate not less than recommended by fastener manufacturer to achieve maximum pull-out resistance.

E. Seal joints as required for weathertight construction. Place sealant to be completely concealed in joint. Do not install sealants at temperatures below 40 deg F.

3.3 INSTALLATION OF COPINGS

A. Install cleats, anchor plates, and other anchoring and attachment accessories and devices with concealed fasteners.

B. Anchor copings with manufacturer's required devices, fasteners, and fastener spacing to meet performance requirements.

1. Interlock face and back leg drip edges of snap-on coping cap into cleated anchor plates anchored to substrate at manufacturer's required spacing that meets performance requirements.

3.4 INSTALLATION OF REGLETS AND COUNTERFLASHINGS

A. Coordinate installation of reglets and counterflashings with installation of base flashings.

B. Surface-Mounted Reglets: Install reglets to receive flashings where flashing without embedded reglets is indicated on Drawings. Install at height so that inserted counterflashings overlap 4 inches over top edge of base flashings.

C. Counterflashings: Insert counterflashings into reglets or other indicated receivers; ensure that counterflashings overlap 4 inches over top edge of base flashings. Lap counterflashing joints a minimum of 4 inches and bed with butyl sealant. Fit counterflashings tightly to base flashings.

3.5 CLEANING AND PROTECTION

A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.

B. Clean and neutralize flux materials. Clean off excess solder and sealants.

C. Remove temporary protective coverings and strippable films as roof specialties are installed. On completion of installation, clean finished surfaces, including removing unused fasteners, metal filings, pop rivet stems, and pieces of flashing. Maintain roof specialties in a clean condition during construction.

D. Replace roof specialties that have been damaged or that cannot be successfully repaired by finish touchup or similar minor repair procedures.

END OF SECTION 077100

SECTION 077200 - ROOF ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Roof hatches.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for metal ladders for access to roof hatches.

1.2 COORDINATION

A. Coordinate layout and installation of roof accessories with roofing membrane and base flashing and interfacing and adjoining construction to provide a leakproof, weathertight, secure, and noncorrosive installation.

B. Coordinate dimensions with rough-in information or Shop Drawings of equipment to be supported.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of roof accessory.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: For roof accessories.

1. Include plans, elevations, keyed details, and attachments to other work. Indicate dimensions, loadings, and special conditions. Distinguish between plant- and field-assembled work.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Roof plans, drawn to scale, and coordinating penetrations and roof-mounted items. Show the following:

1. Size and location of roof accessories specified in this Section.
2. Method of attaching roof accessories to roof or building structure.
3. Other roof-mounted items including mechanical and electrical equipment, ductwork, piping, and conduit.
4. Required clearances.

B. Sample Warranties: For manufacturer's special warranties.

1.5 WARRANTY

A. Special Warranty on Painted Finishes: Manufacturer's standard form in which manufacturer agrees to repair finishes or replace roof accessories that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Powder Coat Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 5 years from date of Final Acceptance.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General Performance: Roof accessories shall withstand exposure to weather and resist thermally induced movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, installation, or other defects in construction.

2.2 ROOF HATCHES

A. Roof Hatches: Metal roof-hatch units with lids and insulated double-walled curbs, welded or mechanically fastened and sealed corner joints, continuous lid-to-curb counterflashing and weathertight perimeter gasketing, integral metal cant, and integrally formed deck-mounting flange at perimeter bottom.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Babcock-Davis
b. Bilco Company
c. J. L. Industries, Inc.
d. Milcor Inc.; Commercial Products Group of Hart & Cooley, Inc.
e. Nystrom
f. O’Keefes Inc.
g. Pate Company
h. SafePro

B. Type and Size: Single-leaf lid, size as indicated on Drawings, but not less than 48 by 48 inches.

C. Loads: Minimum 40-lbf/sq. ft. external live load and 20-lbf/sq. ft. internal uplift load.

D. Hatch Material: Aluminum sheet.

1. Thickness: Manufacturer's standard thickness for hatch size indicated.
2. Finish: Powder coat.
3. Color: As selected by Architect from manufacturer's full range.

E. Construction:

1. Insulation: 1-inch- thick, glass-fiber board.
2. Nailer: Factory-installed wood nailer continuous around hatch perimeter.
3. Hatch Lid: Opaque, insulated, and double walled, with manufacturer's standard metal liner of same material and finish as outer metal lid.
4. Curb Liner: Manufacturer's standard, of same material and finish as metal curb.
5. On ribbed or fluted metal roofs, form flange at perimeter bottom to conform to roof profile.
6. Fabricate curbs to minimum height of 12 inches above roofing surface unless otherwise indicated.
7. Sloping Roofs: Where slope or roof deck exceeds 1:48, fabricate curb with perimeter curb height that is tapered to accommodate roof slope so that top surfaces of perimeter curb are level. Equip hatch with water diverter or cricket on side that obstructs water flow.

F. Hardware: Spring operators, hold-open arm, stainless steel spring latch with turn handles, stainless steel butt- or pintle-type hinge system, and padlock hasps inside and outside.

G. Safety Railing System: Roof-hatch manufacturer's standard system including rails, clamps, fasteners, safety barrier at railing opening, and accessories required for a complete installation; attached to roof hatch and complying with 29 CFR 1910.23 requirements and authorities having jurisdiction.

1. Height: 42 inches above finished roof deck.
2. Posts and Rails: Galvanized-steel pipe, 1-1/4 inches in diameter or galvanized-steel tube, 1-5/8 inches in diameter. Fiberglass railings are not acceptable.
3. Flat Bar: Galvanized steel, 2 inches high by 3/8 inch thick.
4. Maximum Opening Size: System constructed to prevent passage of a sphere 21 inches in diameter.
5. Post and Rail Tops and Ends: Weather resistant, closed or plugged with prefabricated end fittings.
6. Provide weep holes or another means to drain entrapped water in hollow sections of handrail and railing members.
7. Fabricate joints exposed to weather to be watertight.
8. Fasteners: Manufacturer's standard, finished to match railing system.
9. Finish: Manufacturer's standard.

a. Color: As selected by Architect from manufacturer's full range.

H. Ladder-Assist Post: Roof-hatch manufacturer's standard device for attachment to roof-access ladder.

1. Operation: Post locks in place on full extension; release mechanism returns post to closed position.
2. Height: 42 inches above finished roof deck.
3. Material: Steel tube.
4. Post: 1-5/8-inch- diameter pipe.
5. Finish: Manufacturer's standard powder coat.

a. Color: As selected by Architect from manufacturer's full range.

2.3 METAL MATERIALS

A. Aluminum Sheet: ASTM B209, manufacturer's standard alloy for finish required, with temper to suit forming operations and performance required.

1. Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.
2. Concealed Finish: Pretreat with manufacturer's standard white or light-colored acrylic or polyester-backer finish consisting of prime coat and wash coat, with a minimum total dry film thickness of 0.5 mil.

B. Aluminum Extrusions and Tubes: ASTM B221, manufacturer's standard alloy and temper for type of use, finished to match assembly where used; otherwise mill finished.

C. Steel Shapes: ASTM A36/A36M, hot-dip galvanized according to ASTM A123/A123M unless otherwise indicated.

D. Galvanized-Steel Tube: ASTM A500/A500M, round tube, hot-dip galvanized according to ASTM A123/A123M.

E. Steel Pipe: ASTM A53/A53M, galvanized.

2.4 MISCELLANEOUS MATERIALS

A. Provide materials and types of fasteners, protective coatings, sealants, and other miscellaneous items required by manufacturer for a complete installation.

B. Glass-Fiber Board Insulation: ASTM C726, nominal density of 3 lb/cu. ft., thermal resistivity of 4.3 deg F x h x sq. ft./Btu x in. at 75 deg F, thickness as indicated.

C. Bituminous Coating: Cold-applied asphalt emulsion complying with ASTM D1187/D1187M.

D. Underlayment:

1. Slip Sheet: Building paper, 3 lb/100 sq. ft. minimum, rosin sized.
2. Self-Adhering, High-Temperature Sheet: Minimum 30 to 40 mils thick, consisting of slip-resisting polyethylene-film top surface laminated to layer of butyl or SBS-modified asphalt adhesive, with release-paper backing; cold applied. Provide primer when recommended by underlayment manufacturer.

E. Fasteners: Roof accessory manufacturer's recommended fasteners suitable for application and metals being fastened. Match finish of exposed fasteners with finish of material being fastened. Provide nonremovable fastener heads to exterior exposed fasteners. Furnish the following unless otherwise indicated:

1. Fasteners for Aluminum Sheet: Aluminum or Series 300 stainless steel.

F. Gaskets: Manufacturer's standard tubular or fingered design of neoprene, EPDM, PVC, or silicone or a flat design of foam rubber, sponge neoprene, or cork.

G. Elastomeric Sealant: ASTM C920, elastomeric silicone polymer sealant as recommended by roof accessory manufacturer for installation indicated; low modulus; of type, grade, class, and use classifications required to seal joints and remain watertight.

H. Asphalt Roofing Cement: ASTM D4586/D4586M, asbestos free, of consistency required for application.

2.5 GENERAL FINISH REQUIREMENTS

A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, to verify actual locations, dimensions, and other conditions affecting performance of the Work.

B. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored.

C. Verify dimensions of roof openings for roof accessories.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install roof accessories according to manufacturer's written instructions.

1. Install roof accessories level; plumb; true to line and elevation; and without warping, jogs in alignment, buckling, or tool marks.
2. Anchor roof accessories securely in place so they are capable of resisting indicated loads.
3. Use fasteners, separators, sealants, and other miscellaneous items as required to complete installation of roof accessories and fit them to substrates.
4. Install roof accessories to resist exposure to weather without failing, rattling, leaking, or loosening of fasteners and seals.

B. Metal Protection: Protect metals against galvanic action by separating dissimilar metals from contact with each other or with corrosive substrates by painting contact surfaces with bituminous coating or by other permanent separation as recommended by manufacturer.

1. Coat concealed side of uncoated aluminum roof accessories with bituminous coating where in contact with wood, ferrous metal, or cementitious construction.
2. Underlayment: Where installing roof accessories directly on cementitious or wood substrates, install a course of underlayment and cover with manufacturer's recommended slip sheet.
3. Bed flanges in thick coat of asphalt roofing cement where required by manufacturers of roof accessories for waterproof performance.

C. Roof-Hatch Installation:

1. Verify that roof hatch operates properly. Clean, lubricate, and adjust operating mechanism and hardware.
2. Attach safety railing system to roof-hatch curb.
3. Attach ladder-assist post according to manufacturer's written instructions.

D. Seal joints with elastomeric sealant as required by roof accessory manufacturer.

3.3 REPAIR AND CLEANING

A. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing according to ASTM A780/A780M.

B. Clean exposed surfaces according to manufacturer's written instructions.

C. Clean off excess sealants.

D. Replace roof accessories that have been damaged or that cannot be successfully repaired by finish touchup or similar minor repair procedures.

END OF SECTION 077200

This page intentionally left blank.

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Silicone joint sealants.
2. Nonstaining silicone joint sealants.
3. Mildew-resistant joint sealants.
4. Butyl joint sealants.
5. Latex joint sealants.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each joint-sealant product.

B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.

C. Joint-Sealant Schedule: Include the following information:

1. Joint-sealant application, joint location, and designation.
2. Joint-sealant manufacturer and product name.
3. Joint-sealant formulation.
4. Joint-sealant color.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified testing agency.

B. Product Test Reports: For each kind of joint sealant, for tests performed by a qualified testing agency.

C. Preconstruction Laboratory Test Reports: From sealant manufacturer, indicating the following:

1. Materials forming joint substrates and joint-sealant backings have been tested for compatibility and adhesion with joint sealants.
2. Interpretation of test results and written recommendations for primers and substrate preparation are needed for adhesion.

D. Sample Warranties: For special warranties.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: An authorized representative who is trained and approved by manufacturer.

B. Product Testing: Test joint sealants using a qualified testing agency.

1. Testing Agency Qualifications: Qualified according to ASTM C1021 to conduct the testing indicated.

C. Mockups: Install sealant in mockups of assemblies specified in other Sections that are indicated to receive joint sealants specified in this Section. Use materials and installation methods specified in this Section.

1.6 PRECONSTRUCTION TESTING

A. Preconstruction Laboratory Testing: Submit to joint-sealant manufacturers, for testing indicated below, samples of materials that will contact or affect joint sealants.

1. Adhesion Testing: Use ASTM C794 to determine whether priming and other specific joint preparation techniques are required to obtain rapid, optimum adhesion of joint sealants to joint substrates.
2. Compatibility Testing: Use ASTM C1087 to determine sealant compatibility when in contact with glazing and gasket materials.
3. Submit manufacturer's recommended number of pieces of each type of material, including joint substrates, joint-sealant backings, and miscellaneous materials.
4. Schedule sufficient time for testing and analyzing results to prevent delaying the Work.
5. For materials failing tests, obtain joint-sealant manufacturer's written instructions for corrective measures, including use of specially formulated primers.
6. Testing will not be required if joint-sealant manufacturers submit data that are based on previous testing, not older than 24 months, of sealant products for adhesion to, staining of, and compatibility with joint substrates and other materials matching those submitted.

1.7 FIELD CONDITIONS

A. Do not proceed with installation of joint sealants under the following conditions:

1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer.
2. When joint substrates are wet.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.8 WARRANTY

A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Two years from date of Substantial Completion.

B. Special Manufacturer's Warranty: Manufacturer agrees to furnish joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

C. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:

1. Movement of the structure caused by stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
2. Disintegration of joint substrates from causes exceeding design specifications.

3. Mechanical damage caused by individuals, tools, or other outside agents.
4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS

2.1 JOINT SEALANTS, GENERAL

A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.

B. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.2 SILICONE JOINT SEALANTS

A. Silicone, S, P, 100/50, T, NT: Single-component, pourable, plus 100 percent and minus 50 percent movement capability traffic- and nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade P, Class 100/50, Uses T and NT.

1. Products:

a. Dow Corning Corporation; 890-SL
b. Pecora Corporation; 300 SL
c. Sika Corporation; 728 SL
d. Tremco Incorporated; Spectrem 900 SL

2. Exterior Joint Locations:

a. Construction joints in cast-in-place concrete.
b. Other exterior horizontal traffic joints.

3. Interior Joint Locations:

a. Control and expansion joints in tile flooring.

2.3 NONSTAINING SILICONE JOINT SEALANTS

A. Nonstaining Joint Sealants: No staining of substrates when tested according to ASTM C1248.

B. Silicone, Nonstaining, S, NS, 100/50, NT: Nonstaining, single-component, nonsag, plus 100 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 100/50, Use NT. Field-tintable to match adjacent substrates.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Dow Corning Corporation; 790
b. GE Momentive SilPruf LM SCS2700
c. Pecora Corporation; 890
d. Sika Corporation; 290
e. Tremco Incorporated; Spectrem 1

2. Exterior Joint Locations:

a. Construction joints in cast-in-place concrete.
b. Joints in exterior insulation and finish systems.
c. Joints between different materials listed above.
d. Exterior perimeter joints between materials listed above and frames of doors, windows, and louvers.

e. Control and expansion joints in ceilings and other overhead surfaces.
f. Other vertical or horizontal non-traffic joints.

3. Interior Joint Locations:

a. Control and expansion joints on exposed interior surfaces of exterior walls.
b. Interior perimeter joints of exterior openings.

2.4 MILDEW-RESISTANT JOINT SEALANTS

A. Mildew-Resistant Joint Sealants: Formulated for prolonged exposure to humidity with fungicide to prevent mold and mildew growth.

B. Silicone, Mildew Resistant, Neutral Curing, S, NS, 25, NT: Mildew-resistant, single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 25, Use NT.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Dow Corning Corporation; 786
b. Pecora Corporation; 898
c. Sika Corporation; SikaSil N
d. Tremco; Tremsil 600 White

2. Interior Joint Locations:

a. Tile control and expansion joints.
b. Joints between plumbing fixtures and adjoining walls, floors, and counters.

2.5 BUTYL JOINT SEALANTS

A. Butyl-Rubber-Based Joint Sealants: ASTM C1311.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Bostik; Chem-Calk 300
b. Pecora; BC-158
c. Tremco; General Purpose Butyl Sealant

2. Exterior Joint Locations: Under door thresholds.

2.6 LATEX JOINT SEALANTS

A. Acrylic Latex: Acrylic latex or siliconized acrylic latex, ASTM C834, Type OP, Grade NF.

1. Products: Subject to compliance with requirements, provide one of the following:

a. BASF Building Systems; Sonolac
b. Bostik, Inc.; Chem-Calk 600
c. Pecora Corporation; AC-20+
d. Tremco Incorporated; Tremflex 834

2. Interior Joint Locations:

a. Perimeter joints between interior wall surfaces and frames of interior doors, windows and elevator entrances,

1) Color: Paintable white.

b. Other non-dynamic interior joints including between interior wall surfaces and casework.

1) Color: Clear.

2.7 JOINT-SEALANT BACKING

A. Sealant Backing Material, General: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C1330, Type C (closed-cell material with a surface skin), and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.

C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.8 MISCELLANEOUS MATERIALS

A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.

B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.

C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:

1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air.
3. Remove laitance and form-release agents from concrete.

4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.

B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.

B. Sealant Installation Standard: Comply with recommendations in ASTM C1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.

C. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.

1. Do not leave gaps between ends of sealant backings.
2. Do not stretch, twist, puncture, or tear sealant backings.
3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.

D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.

E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:

1. Place sealants so they directly contact and fully wet joint substrates.
2. Completely fill recesses in each joint configuration.
3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.

F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.

1. Remove excess sealant from surfaces adjacent to joints.
2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
3. Provide concave joint profile per Figure 8A in ASTM C1193 unless otherwise indicated.

3.4 CLEANING

A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.5 PROTECTION

A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

END OF SECTION 079200

This page intentionally left blank.

SECTION 079219 - ACOUSTICAL JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes acoustical joint sealants.

1.2 ACTION SUBMITTALS

A. Product Data: For each acoustical joint sealant.

B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.

C. Acoustical-Joint-Sealant Schedule: Include the following information:

1. Joint-sealant application, joint location, and designation.
2. Joint-sealant manufacturer and product name.
3. Joint-sealant formulation.
4. Joint-sealant color.

1.3 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For each kind of acoustical joint sealant, for tests performed by a qualified testing agency.

B. Sample Warranties: For special warranties.

1.4 WARRANTY

A. Special Installer's Warranty: Installer agrees to repair or replace acoustical joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Two years from date of Substantial Completion.

B. Special Manufacturer's Warranty: Manufacturer agrees to furnish acoustical joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Provide acoustical joint-sealant products that effectively reduce airborne sound transmission through perimeter joints and openings in building construction, as demonstrated by testing representative assemblies according to ASTM E90.

2.2 ACOUSTICAL JOINT SEALANTS

A. Acoustical Sealant for Exposed Joints: Manufacturer's standard nonsag, paintable, nonstaining latex acoustical sealant complying with ASTM C834.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. BASF Building Systems
   b. Hilti
   c. Pecora Corporation
   d. Tremco

2. Colors of Exposed Acoustical Joint Sealants: As selected by Architect from manufacturer's full range of colors.

B. Acoustical Sealant for Concealed Joints: Manufacturer's standard nonsag, nondrying, nonhardening, nonskinning, nonstaining, gunnable, synthetic-rubber acoustical sealant.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. BASF Building Systems
   b. Hilti
   c. Pecora Corporation
   d. Tremco

2.3 MISCELLANEOUS MATERIALS

A. Primer: Material recommended by acoustical-joint-sealant manufacturer where required for adhesion of sealant to joint substrates.

B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.

C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine joints indicated to receive acoustical joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Cleaning of Joints: Clean out joints immediately before installing acoustical joint sealants to comply with joint-sealant manufacturer's written instructions.

B. Joint Priming: Prime joint substrates where recommended by acoustical-joint-sealant manufacturer. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF ACOUSTICAL JOINT SEALANTS

A. Comply with acoustical joint-sealant manufacturer's written installation instructions unless more stringent requirements apply.

B. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical joint sealant. Install acoustical joint sealants at both faces of partitions, at perimeters, and through penetrations. Comply with ASTM C919, ASTM C1193, and manufacturer's written recommendations for closing off sound-flanking paths around or through assemblies, including sealing partitions to underside of floor slabs above acoustical ceilings.

C. Acoustical Ceiling Areas: Apply acoustical joint sealant at perimeter edge moldings of acoustical ceiling areas in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.

3.4 CLEANING

A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of acoustical joint sealants and of products in which joints occur.

3.5 PROTECTION

A. Protect acoustical joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated acoustical joint sealants immediately so installations with repaired areas are indistinguishable from original work.

END OF SECTION 079219

This page intentionally left blank.

SECTION 081113 - HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes:

1. Interior standard steel frames.
2. Exterior standard steel doors and frames.

1.2 DEFINITIONS

A. Minimum Thickness: Minimum thickness of base metal without coatings according to NAAMM-HMMA 803 or ANSI/SDI A250.8.

1.3 COORDINATION

A. Coordinate anchorage installation for hollow-metal frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.

B. Coordinate requirements for installation of door hardware, electrified door hardware, and access control and security systems.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, core descriptions, and finishes.

B. Shop Drawings: Include the following:

1. Elevations of each door type.
2. Details of doors, including vertical- and horizontal-edge details and metal thicknesses.
3. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
4. Locations of reinforcement and preparations for hardware.
5. Details of each different wall opening condition.
6. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
7. Details of anchorages, joints, field splices, and connections.
8. Details of accessories.
9. Details of moldings, removable stops, and glazing.

C. Product Schedule: For hollow-metal doors and frames, prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final door hardware schedule.

1.6 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For each type of fire-rated hollow-metal door and frame assembly thermally rated door assemblies for tests performed by a qualified testing agency indicating compliance with performance requirements.

1.7 CLOSEOUT SUBMITTALS

A. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver hollow-metal doors and frames palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use nonvented plastic.

1. Provide additional protection to prevent damage to factory-finished units.

B. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.

C. Store hollow-metal doors and frames vertically under cover at Project site with head up. Place on minimum 4-inch- high wood blocking. Provide minimum 1/4-inch space between each stacked door to permit air circulation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Amweld Building Products, LLC.
2. Ceco Door Products; an Assa Abloy Group company.
3. Curries Company; an Assa Abloy Group company.
4. Pioneer Industries, Inc.
5. Premier Products, Inc.
6. Republic Doors and Frames
7. Steelcraft; an Ingersoll-Rand company.

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Rated Door Assemblies: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings indicated on Drawings, based on testing at positive pressure according to NFPA 252 or UL 10C.

1. Smoke- and Draft-Control Door Assemblies: Listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing according to UL 1784 and installed in compliance with NFPA 105.

B. Thermally Rated Door Assemblies: Provide door assemblies with U-factor of not more than 0.55 deg Btu/F x h x sq. ft. when tested according to ASTM C518.

2.3 INTERIOR STANDARD STEEL FRAMES

A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.

B. Extra-Heavy-Duty Frames: ANSI/SDI A250.8.

1. Frames:

a. Materials: Uncoated steel sheet, minimum thickness of 0.053 inch.

1) Provide A60 galvanized coating at wet locations.

b. Construction: Full profile welded.

2. Exposed Finish: Prime.

2.4 EXTERIOR STANDARD STEEL DOORS AND FRAMES

A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.

B. Extra-Heavy-Duty Doors and Frames: ANSI/SDI A250.8, Level 3; ANSI/SDI A250.4, Level A.

1. Doors:

a. Type: As indicated in the Door and Frame Schedule.
b. Thickness: 1-3/4 inches.
c. Face: Metallic-coated steel sheet, minimum thickness of 0.053 inch, with minimum A60 coating.
d. Edge Construction: Model 2, Seamless.
e. Edge Bevel: Bevel lock and hinge edges 1/8 inch in 2 inches.
f. Top Edge Closures: Close top edges of doors with flush closures of same material as face sheets. Seal joints against water penetration.
g. Bottom Edges: Close bottom edges of doors with end closures or channels of same material as face sheets. Provide weep-hole openings in bottoms of exterior doors to permit moisture to escape.
h. Core: Manufacturer's standard, polystyrene, polyurethane, polyisocyanurate or vertical steel stiffener.

2. Frames:

a. Materials: Metallic-coated steel sheet, minimum thickness of 0.053 inch, with minimum A60 coating.
b. Construction: Full profile welded.

3. Exposed Finish: Prime.

2.5 BORROWED LITES

A. Fabricate of uncoated steel sheet, minimum thickness of 0.053 inch.

B. Construction: Full profile welded.

C. Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections due to shipping or handling limitations, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as metal as frames.

D. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.

2.6 FRAME ANCHORS

A. Jamb Anchors:

1. Type: Anchors of minimum size and type required by applicable door and frame standard, and suitable for performance level indicated.
2. Quantity: Minimum of three anchors per jamb, with one additional anchor for frames with no floor anchor. Provide one additional anchor for each 24 inches of frame height above 7 feet.
3. Postinstalled Expansion Anchor: Minimum 3/8-inch- diameter bolts with expansion shields or inserts, with manufacturer's standard pipe spacer.

B. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor.

C. Floor Anchors for Concrete Slabs with Underlayment: Adjustable-type anchors with extension clips, allowing not less than 2-inch height adjustment. Terminate bottom of frames at top of underlayment.

D. Material: ASTM A879/A879M, Commercial Steel (CS), 04Z coating designation; mill phosphatized.

1. For anchors built into exterior walls, steel sheet complying with ASTM A1008/A1008M or ASTM A1011/A1011M; hot-dip galvanized according to ASTM A153/A153M, Class B.

2.7 MATERIALS

A. Cold-Rolled Steel Sheet: ASTM A1008/A1008M, Commercial Steel (CS), Type B; suitable for exposed applications.

B. Hot-Rolled Steel Sheet: ASTM A1011/A1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.

C. Metallic-Coated Steel Sheet: ASTM A653/A653M, Commercial Steel (CS), Type B.

D. Inserts, Bolts, and Fasteners: Hot-dip galvanized according to ASTM A153/A153M.

E. Power-Actuated Fasteners in Concrete: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with clips or other accessory devices for attaching hollow-metal frames of type indicated.

F. Mineral-Fiber Insulation: ASTM C665, Type I (blankets without membrane facing); consisting of fibers manufactured from slag or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively; passing ASTM E136 for combustion characteristics.

G. Glazing: Comply with requirements in Section 088000 "Glazing."

2.8 FABRICATION

A. Door Astragals: Provide overlapping astragal on one leaf of pairs of doors where required by NFPA 80 for fire-performance rating or where indicated. Extend minimum 3/4 inch beyond edge of door on which astragal is mounted or as required to comply with published listing of qualified testing agency.

B. Hollow-Metal Frames: Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as frames.

1. Sidelite Frames: Provide closed tubular members with no visible face seams or joints, fabricated from same material as door frame. Fasten members at crossings and to jambs by welding, or by rigid mechanical anchors.
2. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
3. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers as follows. Keep holes clear during construction.

a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.

C. Hardware Preparation: Factory prepare hollow-metal doors and frames to receive templated mortised hardware, and electrical wiring; include cutouts, reinforcement, mortising, drilling, and tapping according to ANSI/SDI A250.6, the Door Hardware Schedule, and templates.

1. Reinforce doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.
2. Comply with BHMA A156.115 for preparing hollow-metal doors and frames for hardware.

D. Glazed Lites: Provide stops and moldings around glazed lites where indicated. Form corners of stops and moldings with butted or mitered hairline joints.

1. Provide stops and moldings flush with face of door, and with beveled stops unless otherwise indicated.
2. Multiple Glazed Lites: Provide fixed and removable stops and moldings so that each glazed lite is capable of being removed independently.
3. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames. Provide loose stops and moldings on inside of hollow-metal doors and frames.
4. Coordinate rabbet width between fixed and removable stops with glazing and installation types indicated.
5. Provide stops for installation with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

2.9 STEEL FINISHES

A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.

1. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with ANSI/SDI A250.10; recommended by primer manufacturer for substrate; compatible with substrate and field-applied coatings despite prolonged exposure.

PART 3 - EXECUTION

3.1 PREPARATION

A. Remove welded-in shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make repaired area smooth, flush, and invisible on exposed faces. Touch up factory-applied finishes where spreaders are removed.

B. Drill and tap doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.

3.2 INSTALLATION

A. Install hollow-metal doors and frames plumb, rigid, properly aligned, and securely fastened in place. Comply with approved Shop Drawings and with manufacturer's written instructions.

B. Hollow-Metal Frames: Comply with ANSI/SDI A250.11.

1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces without damage to completed Work.

   a. Where frames are fabricated in sections, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces. Touch-up finishes.
   b. Install frames with removable stops located on secure side of opening.

2. Fire-Rated Openings: Install frames according to NFPA 80.
3. Floor Anchors: Secure with postinstalled expansion anchors.

   a. Floor anchors may be set with power-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.

4. Solidly pack mineral-fiber insulation inside frames.
5. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with grout or mortar.
6. In-Place Concrete Construction: Secure frames in place with postinstalled expansion anchors. Countersink anchors, and fill and make smooth, flush, and invisible on exposed faces.
7. Installation Tolerances: Adjust hollow-metal frames to the following tolerances:

   a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
   b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
   c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
   d. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.

C. Hollow-Metal Doors: Fit and adjust hollow-metal doors accurately in frames, within clearances specified below.

1. Non-Fire-Rated Steel Doors: Comply with ANSI/SDI A250.8.
2. Fire-Rated Doors: Install doors with clearances according to NFPA 80.

3.3 FIELD QUALITY CONTROL

A. Inspection Agency: Owner may engage a qualified inspector to perform inspections and to furnish reports to Architect.

B. Inspections:

1. Fire-Rated Door Inspections: Inspect each fire-rated door according to NFPA 80, Section 5.2.
2. Egress Door Inspections: Inspect each door equipped with panic hardware, each door equipped with fire exit hardware, each door located in an exit enclosure, each electrically controlled egress door, and each door equipped with special locking arrangements according to NFPA 101, Section 7.2.1.15.

C. Repair or remove and replace installations where inspections indicate that they do not comply with specified requirements.

D. Reinspect repaired or replaced installations to determine if replaced or repaired door assembly installations comply with specified requirements.

E. Prepare and submit separate inspection report for each fire-rated door assembly indicating compliance with each item listed in [**NFPA 80**] [**and**] [**NFPA 101**].

3.4 CLEANING AND TOUCHUP

A. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.

B. Metallic-Coated Surface Touchup: Clean abraded areas and repair with galvanizing repair paint according to manufacturer's written instructions.

C. Touchup Painting: Cleaning and touchup painting of abraded areas of paint are specified in painting Sections.

END OF SECTION 081113

This page intentionally left blank.

SECTION 081216 - ALUMINUM FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior aluminum door frames and glazing frames.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: For aluminum frames:

1. Include elevations, sections, and installation details for each wall-opening condition.
2. Include details for each frame type, including dimensioned profiles and metal thicknesses.
3. Include locations of reinforcements and preparations for hardware.
4. Include details of anchorages, joints, field splices, connections, and accessories.
5. Include details of moldings, removable stops, and glazing.

C. Samples: For each exposed product and for each color and texture specified, in manufacturer's standard sizes.

D. Product Schedule: For aluminum frames. Use same designations indicated on Drawings. Coordinate with door hardware schedule and glazing.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For aluminum frames to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and to set quality standards for fabrication and installation.

1. Build mockup of each type of aluminum frame in typical wall area as shown on Drawings.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Kawneer; InFrame
2. Frameworks, Inc.; an ASSA ABLOY Group company.
3. Modulex Products, Inc.
4. RACO Interior Products, Inc.
5. Wilson Partitions; a division of Acradia, Inc.

B. Source Limitations: Obtain aluminum frames from single source from single manufacturer.

2.2 INTERIOR ALUMINUM DOOR FRAMES AND GLAZING FRAMES

A. Aluminum Framing: ASTM B221, with alloy and temper required to suit structural and finish requirements, and not less than 0.062 inch thick.

B. Door Frames: Extruded aluminum, reinforced for hinges, strikes, and closers.

C. Glazing Frames: Extruded aluminum, for indicated glass thickness.

D. Trim: Extruded aluminum, not less than 0.062 inch thick; removable, snap-in glazing stops and door stops, without exposed fasteners.

E. Doors: As specified in Section 081416 "Flush Wood Doors."

F. Frame and Trim Finish: Color-anodized aluminum.

1. Color: Dark bronze.

2.3 ACCESSORIES

A. Fasteners: Aluminum, nonmagnetic, stainless steel or other noncorrosive metal fasteners compatible with frames, stops, panels, reinforcement plates, hardware, anchors, and other items being fastened.

B. Door Silencers: Manufacturer's standard continuous mohair, wool pile, or vinyl seals in black color.

C. Glazing Gaskets: Manufacturer's standard extruded or molded rubber or plastic, to accommodate glazing thickness indicated; in black.

D. Glass: As specified in Section 088000 "Glazing."

1. Glass Thickness: 1/2-inch thick.

E. Door Hardware: As specified in Section 087100 "Door Hardware."

2.4 FABRICATION

A. Provide concealed corner reinforcements and alignment clips for accurately fitted hairline joints at butted and mitered connections.

B. Factory prepare aluminum frames to receive templated mortised hardware; include cutouts, reinforcements, mortising, drilling, and tapping, according to the Door Hardware Schedule and templates furnished as specified in Section 087100 "Door Hardware."

C. Fabricate frames for glazing with removable stops to allow glazing replacement without dismantling frame.

1. Locate removable stops on the inside of spaces accessed by keyed doors.

D. Fabricate components to allow secure installation without exposed fasteners.

2.5 GENERAL FINISH REQUIREMENTS

A. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.6 ALUMINUM FINISHES

A. Color Anodic Finish: AAMA 611, AA-M12C22A32/A34, Class II, 0.010 mm or thicker.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Verify that wall thickness does not exceed standard tolerances allowed by throat size of indicated aluminum frame.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install aluminum frames plumb, rigid, properly aligned, and securely fastened in place; according to manufacturer's written instructions.

B. Install frame components in the longest possible lengths with no piece less than 48 inches; components 96 inches or shorter shall be one piece.

1. Use concealed installation clips to produce tightly fitted and aligned splices and connections.
2. Secure clips to extruded main-frame components and not to snap-in or trim members.
3. Do not leave screws or other fasteners exposed to view when installation is complete.

C. Glass: Install glass according to Section 088000 "Glazing" and aluminum-frame manufacturer's written instructions.

D. Doors: Install doors aligned with frames and fitted with required hardware.

E. Door Hardware: Install according to Section 087100 "Door Hardware" and aluminum-frame manufacturer's written instructions.

3.3 ADJUSTING

A. Inspect installation, correct misalignments, and tighten loose connections.

B. Doors: Adjust doors to operate smoothly and easily, without binding or warping. Adjust hardware to function smoothly, and lubricate as recommended by manufacturer.

C. Clean exposed frame surfaces promptly after installation, using cleaning methods recommended in writing by frame manufacturer and according to AAMA 609 and 610.

D. Touch Up: Repair marred frame surfaces to blend inconspicuously with adjacent unrepaired surface so touchup is not visible from a distance of 48 inches as viewed by Architect. Remove and replace frames with damaged finish that cannot be satisfactorily repaired.

END OF SECTION 081216

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Five-ply flush wood veneer-faced doors for transparent finish.
2. Factory finishing flush wood doors.
3. Factory fitting flush wood doors to frames and factory machining for hardware.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product, including the following:

1. Door core materials and construction.
2. Door edge construction
3. Door face type and characteristics.
4. Door trim for openings.
5. Factory-machining criteria.
6. Factory- finishing specifications.

B. Shop Drawings: Indicate location, size, and hand of each door; elevation of each type of door; construction details not covered in Product Data; and the following:

1. Door schedule indicating door location, type, size, fire protection rating, and swing.
2. Door elevations, dimension and locations of hardware, lite cutouts, and glazing thicknesses.
3. Details of frame for each frame type, including dimensions and profile.
4. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
5. Dimensions and locations of blocking for hardware attachment.
6. Dimensions and locations of mortises and holes for hardware.
7. Clearances and undercuts.
8. Requirements for veneer matching.
9. Doors to be factory finished and application requirements.

C. Samples: For factory-finished doors.

1.3 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Special warranties.

1.5 QUALITY ASSURANCE

A. Manufacturer's Certification: Licensed participant in AWI's Quality Certification Program.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Comply with requirements of referenced standard and manufacturer's written instructions.

1.7 FIELD CONDITIONS

A. Environmental Limitations: Do not deliver or install doors until building is enclosed and weathertight, wet work is complete, and HVAC system is operating and maintaining temperature between 60 and 90 deg F and relative humidity between 43 and 70 percent during remainder of construction period.

1.8 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Delamination of veneer.
b. Warping (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section.
c. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span.

2. Warranty shall also include installation and finishing that may be required due to repair or replacement of defective doors.
3. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Lambton Doors
2. Masonite Architectural
3. Oshkosh Door Company
4. VT Industries, Inc./Eggers Industries (Basis of Design)

B. Source Limitations: Obtain flush wood doors from single manufacturer.

2.2 FLUSH WOOD DOORS, GENERAL

A. Quality Standard: In addition to requirements specified, comply with AWI/AWMAC/WI's "Architectural Woodwork Standards."

1. The Contract Documents contain requirements that are more stringent than the referenced quality standard. Comply with the Contract Documents in addition to those of the referenced quality standard.

2.3 SOLID-CORE FIVE-PLY FLUSH WOOD VENEER-FACED DOORS FOR TRANSPARENT FINISH

A. Interior Doors:

1. Performance Grade: ANSI/WDMA I.S. 1A Heavy Duty.
2. Architectural Woodwork Standards Grade: Custom.
3. Faces: Single-ply wood veneer not less than 1/50 inch thick.

a. Species: Select white maple.
b. Cut: Plain sliced (flat sliced).
c. Match between Veneer Leaves: Slip match.
d. Assembly of Veneer Leaves on Door Faces: Center-balance match.
e. Pair and Set Match: Provide for doors hung in same opening or separated only by mullions.
f. Room Match: Match door faces within each separate room or area of building. Corridor-door faces do not need to match where they are separated by 10 feet or more.

4. Exposed Vertical Edges: Same species as faces - Architectural Woodwork Standards edge Type A.

a. Fire-Rated Single Doors: Provide edge construction with intumescent seals concealed by outer stile. Comply with specified requirements for exposed vertical edges.

5. Core for Non-Fire-Rated Doors:

a. ANSI A208.1, Grade LD-2 particleboard.

1) Blocking: Provide wood blocking in particleboard-core doors as needed to eliminate through-bolting hardware.

a) 5-inch top-rail blocking, in doors indicated to have closers.
b) 5-inch bottom-rail blocking, in doors indicated to have kick, mop, or armor plates.
c) 5-inch midrail blocking, in doors indicated to have exit devices.

2) Provide doors with WDMA I.S. 10 structural-composite-lumber cores instead of particleboard cores for doors scheduled to receive exit devices in Section 087100 "Door Hardware."

6. Core for Fire-Rated Doors: As required to achieve fire-protection rating indicated on Drawings.

a. Blocking for Mineral-Core Doors: Provide composite blocking with improved screw-holding capability approved for use in doors of fire-protection ratings indicated on Drawings as needed to eliminate through-bolting hardware.

1) 5-inch top-rail blocking.
2) 5-inch bottom-rail blocking, in doors indicated to have protection plates.
3) 5-inch midrail blocking, in doors indicated to have armor plates.
4) 5-inch midrail blocking, in doors indicated to have exit devices.

7. Construction: Five plies, hot-pressed bonded (vertical and horizontal edging is bonded to core), with entire unit abrasive planed before veneering.

2.4 LIGHT FRAMES

A. Wood Beads for Light Openings in Wood Doors: Provide manufacturer's standard wood beads unless otherwise indicated.

1. Wood Species: Species compatible with door faces.
2. Profile: Manufacturer's standard shape.

2.5 FABRICATION

A. Factory fit doors to suit frame-opening sizes indicated.

1. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.
2. Comply with NFPA 80 requirements for fire-rated doors.

B. Factory machine doors for hardware that is not surface applied.

1. Locate hardware to comply with DHI-WDHS-3.
2. Comply with final hardware schedules, door frame Shop Drawings, ANSI/BHMA-156.115-W, and hardware templates.
3. Coordinate with hardware mortises in metal frames, to verify dimensions and alignment before factory machining.
4. For doors scheduled to receive electrified locksets, provide factory-installed raceway and wiring to accommodate specified hardware.
5. Metal Astragals: Factory machine astragals and formed-steel edges for hardware for pairs of fire-rated doors.

C. Openings: Factory cut and trim openings through doors.

1. Light Openings: Trim openings with moldings of material and profile indicated.
2. Glazing: Factory install glazing in doors indicated to be factory finished. Comply with applicable requirements in Section 088000 "Glazing."

2.6 FACTORY FINISHING

A. Comply with referenced quality standard for factory finishing.

1. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
2. Finish faces, all four edges, edges of cutouts, and mortises.
3. Stains and fillers may be omitted on bottom edges, edges of cutouts, and mortises.

B. Factory finish doors.

C. Transparent Finish:

1. Architectural Woodwork Standards Grade: Custom.
2. Finish: Architectural Woodwork Standards System-5, Varnish, Conversion or Architectural Woodwork Standards System-11, Polyurethane, Catalyzed.
3. Staining: Ravine RA18 to match Government Center.
4. Effect: Filled finish.
5. Sheen: Satin.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors and installed door frames, with Installer present, before hanging doors.

1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
2. Reject doors with defects.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Hardware: For installation, see Section 087100 "Door Hardware."

B. Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.

C. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.

D. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 ADJUSTING

A. Operation: Rehang or replace doors that do not swing or operate freely.

B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

END OF SECTION 081416

This page intentionally left blank.

SECTION 083323 - OVERHEAD COILING DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Insulated service doors.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for miscellaneous steel supports.
2. [**Section 099113 "Exterior Painting"**] [**and**] [**Section 099123 "Interior Painting"**] for finish painting of factory-primed doors.

1.2 ACTION SUBMITTALS

A. Product Data: For each type and size of overhead coiling door and accessory.

1. Include construction details, material descriptions, dimensions of individual components, profiles for slats, and finishes.
2. Include rated capacities, operating characteristics, electrical characteristics, and furnished accessories.

B. Shop Drawings: For each installation and for special components not dimensioned or detailed in manufacturer's product data.

1. Include plans, elevations, sections, and mounting details.
2. Include details of equipment assemblies, and indicate dimensions, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include points of attachment and their corresponding static and dynamic loads imposed on structure.
4. For exterior components, include details of provisions for assembly expansion and contraction and for excluding and draining moisture to the exterior.
5. Include diagrams for power, signal, and control wiring.

C. Samples: Manufacturer's finish charts showing full range of colors and textures available for units with factory-applied finishes.

1. Include similar Samples of accessories involving color selection.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Special warranty.

B. Maintenance Data: For overhead coiling doors to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer for both installation and maintenance of units required for this Project.

1.6 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of doors that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Two years from date of Final Acceptance.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain overhead coiling doors from single source from single manufacturer.

1. Obtain operators and controls from overhead coiling-door manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Accessibility Standard: Comply with applicable provisions in the ABA standards of the Federal agency having jurisdiction and ICC A117.1.

B. Structural Performance, Exterior Doors: Capable of withstanding the following design wind loads:

1. Design Wind Load: As indicated on Drawings.
2. Testing: According to ASTM E330/E330M.
3. Deflection Limits: Design overhead coiling doors to withstand design wind load without evidencing permanent deformation or disengagement of door components.

C. Seismic Performance: Overhead coiling doors are to withstand the effects of earthquake motions determined according to ASCE/SEI 7.

2.3 DOOR ASSEMBLY

A. Insulated Service Door: Overhead coiling door formed with curtain of interlocking metal slats.

1. Manufacturer: Subject to compliance with requirements, provide products by one of the following:

a. C.H.I. Overhead Doors, Inc.
b. Cookson Company
c. Cornell Iron Works, Inc.
d. McKeon Rolling Steel Door Company, Inc.
e. Overhead Door Corporation.

B. Operation Cycles: Door components and operators capable of operating for not less than 20,000. One operation cycle is complete when a door is opened from the closed position to the fully open position and returned to the closed position.

C. Air Infiltration: Maximum rate of 1.0 cfm/sq. ft. at 15 and 25 mph when tested according to ASTM E283.

D. Insulated Door Curtain R-Value: 4.5 deg F x h x sq. ft./Btu.

E. Insulated Door Assembly U-Factor: 0.90 Btu/deg F x h x sq. ft.

F. Door Curtain Material: Galvanized steel.

G. Door Curtain Slats: Flat profile slats of 3-1/4-inch center-to-center height.

1. Insulated-Slat Interior Facing: Metal.

H. Bottom Bar: Two angles, each not less than 1-1/2 by 1-1/2 by 1/8 inch thick; fabricated from steel and finished to match door.

I. Curtain Jamb Guides: Steel with exposed finish matching curtain slats.

J. Hood: Match curtain material and finish.

1. Shape: As indicated on Drawings.
2. Mounting: As indicated on Drawings.

K. Locking Devices: Equip manual door with locking device assembly.

1. Locking Device Assembly: Cremone-type, both jamb sides locking bars, operable from inside with thumbturn.

L. Manual Door Operator: Push-up operation.

M. Curtain Accessories: Equip door with weatherseals and push/pull handles.

N. Door Finish:

1. Powder-Coated Finish: Color as selected by Architect from manufacturer's full range.
2. Interior Curtain-Slat Facing: Match finish of exterior curtain-slat face.

2.4 MATERIALS, GENERAL

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.5 DOOR CURTAIN MATERIALS AND CONSTRUCTION

A. Door Curtains: Fabricate overhead coiling-door curtain of interlocking metal slats, designed to withstand wind loading indicated, in a continuous length for width of door without splices. Unless otherwise indicated, provide slats of thickness and mechanical properties recommended by door manufacturer for performance, size, and type of door indicated, and as follows:

1. Steel Door Curtain Slats: Zinc-coated (galvanized), cold-rolled structural-steel sheet; complying with ASTM A653/A653M, with G90 zinc coating; nominal sheet thickness (coated) of 0.028 inch; and as required.
2. Insulation: Fill slats for insulated doors with manufacturer's standard thermal insulation complying with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, according to ASTM E84 or UL 723. Enclose insulation completely within slat faces.
3. Metal Interior Curtain-Slat Facing: Match metal of exterior curtain-slat face, with minimum steel thickness of 0.010 inch.

B. Curtain Jamb Guides: Manufacturer's standard angles or channels and angles of same material as curtain slats, with sufficient depth and strength to retain curtain, to allow curtain to operate smoothly, and to

withstand loading. Slot bolt holes for guide adjustment. Provide removable stops on guides to prevent overtravel of curtain.

2.6 HOODS

A. General: Form sheet metal hood to entirely enclose coiled curtain and operating mechanism at opening head. Contour to fit end brackets to which hood is attached. Roll and reinforce top and bottom edges for stiffness. Form closed ends for surface-mounted hoods and fascia for any portion of between-jamb mounting that projects beyond wall face. Equip hood with intermediate support brackets as required to prevent sagging.

1. Galvanized Steel: Nominal 0.028-inch- thick, hot-dip galvanized-steel sheet with G90 zinc coating, complying with ASTM A653/A653M.
2. Exterior-Mounted Doors: Fabricate hood to act as weather protection and with a perimeter sealant-joint-bead profile for applying joint sealant.

2.7 CURTAIN ACCESSORIES

A. Weatherseals for Exterior Doors: Equip each exterior door with weather-stripping gaskets fitted to entire exterior perimeter of door for a weather-resistant installation unless otherwise indicated.

1. At door head, use 1/8-inch- thick, replaceable, continuous-sheet baffle secured to inside of hood or field-installed on the header.
2. At door jambs, use replaceable, adjustable, continuous, flexible, 1/8-inch- thick seals of flexible vinyl, rubber, or neoprene.

B. Push/Pull Handles: Equip each push-up-operated or emergency-operated door with lifting handles on each side of door, finished to match door.

2.8 COUNTERBALANCE MECHANISM

A. General: Counterbalance doors by means of manufacturer's standard mechanism with an adjustable-tension, steel helical torsion spring mounted around a steel shaft and contained in a spring barrel connected to top of curtain with barrel rings. Use grease-sealed bearings or self-lubricating graphite bearings for rotating members.

B. Counterbalance Barrel: Fabricate spring barrel of manufacturer's standard hot-formed, structural-quality, seamless carbon-steel pipe, of sufficient diameter and wall thickness to support rolled-up curtain without distortion of slats and to limit barrel deflection to not more than 0.03 in./ft. of span under full load.

C. Counterbalance Spring: One or more oil-tempered, heat-treated steel helical torsion springs. Size springs to counterbalance weight of curtain, with uniform adjustment accessible from outside barrel. Secure ends of springs to barrel and shaft with cast-steel barrel plugs.

D. Torsion Rod for Counterbalance Shaft: Fabricate of manufacturer's standard cold-rolled steel, sized to hold fixed spring ends and carry torsional load.

E. Brackets: Manufacturer's standard mounting brackets of either cast iron or cold-rolled steel plate.

2.9 MANUAL DOOR OPERATORS

A. Push-up Door Operation: Lift handles and pull rope for raising and lowering doors, with counterbalance mechanism designed so that required lift or pull for door operation does not exceed 25 lbf.

2.10 GENERAL FINISH REQUIREMENTS

A. Comply with NAAMM/NOMMA 500 for recommendations for applying and designating finishes.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.11 STEEL AND GALVANIZED-STEEL FINISHES

A. Powder-Coat Finish: Manufacturer's standard baked-on finish consisting of prime coat and thermosetting topcoat. Comply with coating manufacturer's written instructions for cleaning, pretreatment, application, and minimum dry film thickness.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates areas and conditions, with Installer present, for compliance with requirements for substrate construction and other conditions affecting performance of the Work.

B. Examine locations of electrical connections.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install overhead coiling doors and operating equipment complete with necessary hardware, anchors, inserts, hangers, and equipment supports; according to manufacturer's written instructions and as specified.

B. Install overhead coiling doors, hoods, controls, and operators at the mounting locations indicated for each door.

C. Accessibility: Install overhead coiling doors, switches, and controls along accessible routes in compliance with the accessibility standard.

3.3 ADJUSTING

A. Adjust hardware and moving parts to function smoothly so that doors operate easily, free of warp, twist, or distortion.

1. Adjust exterior doors and components to be weather resistant.

B. Lubricate bearings and sliding parts as recommended by manufacturer.

C. Adjust seals to provide tight fit around entire perimeter.

3.4 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain overhead coiling doors.

END OF SECTION 083323

SECTION 084113 - ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Aluminum-framed storefront systems.
2. Aluminum-framed entrance door systems.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review and discuss the finishing of aluminum storefront that is required to be coordinated with the finishing of other aluminum work for color and finish matching.
3. Review, discuss, and coordinate the interrelationship of aluminum storefront with other exterior wall components. Include provisions for structural anchorage, glazing, flashing, weeping, sealants, and protection of finishes.
4. Review and discuss the sequence of work required to construct a watertight and weathertight exterior building envelope.
5. Inspect and discuss the condition of substrate and other preparatory work performed by other trades.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: For aluminum-framed entrances and storefronts. Include plans, elevations, sections, full-size details, and attachments to other work.

1. Include details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.
2. Include full-size isometric details of each type of vertical-to-horizontal intersection of aluminum-framed entrances and storefronts, showing the following:

   a. Joinery, including concealed welds.
   b. Anchorage.
   c. Expansion provisions.
   d. Glazing.
   e. Flashing and drainage.

3. Show connection to and continuity with adjacent thermal, weather, air, and vapor barriers.
4. Include point-to-point wiring diagrams showing the following:

   a. Power requirements for each electrically operated door hardware.
   b. Location and types of switches, signal device, conduit sizes, and number and size of wires.

C. Samples: For each type of exposed finish required, in manufacturer's standard sizes.

D. Fabrication Sample: Of each vertical-to-horizontal intersection of assemblies, made from 12-inch lengths of full-size components and showing details of the following:

1. Joinery, including concealed welds.
2. Anchorage.
3. Expansion provisions.
4. Glazing.
5. Flashing and drainage.

E. Entrance Door Hardware Schedule: Prepared by or under supervision of supplier, detailing fabrication and assembly of entrance door hardware, as well as procedures and diagrams. Coordinate final entrance door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of entrance door hardware.

F. Delegated-Design Submittal: For aluminum-framed entrances and storefronts including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1. Detail fabrication and assembly of aluminum-framed systems.
2. Detail anchorage system to substrate.
3. Include design calculations.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data:

1. For Installer.
2. For professional engineer's experience with providing delegated-design engineering services of the kind indicated, including documentation that engineer is licensed in the jurisdiction in which Project is located.

B. Energy Performance Certificates: For aluminum-framed entrances and storefronts, accessories, and components, from manufacturer.

1. Basis for Certification: NFRC-certified energy performance values for each aluminum-framed entrance and storefront.

C. Product Test Reports: For aluminum-framed entrances and storefronts, for tests performed by a qualified testing agency.

D. Field quality-control reports.

E. Sample Warranties: For special warranties.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For aluminum-framed entrances and storefronts to include in maintenance manuals.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer and that employs a qualified glazing contractor for this Project who is certified under the North American Contractor Certification Program (NACC) for Architectural Glass & Metal (AG&M) contractors.

B. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.

1. Do not change intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If changes are proposed, submit comprehensive explanatory data to Architect for review.

1.7 MOCKUPS

A. Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for fabrication and installation.

1. Build mockup of typical wall area as shown on Drawings.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of aluminum-framed entrances and storefronts that do not comply with requirements or that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures, including, but not limited to, excessive deflection.
b. Noise or vibration created by wind and thermal and structural movements.
c. Deterioration of metals and other materials beyond normal weathering.
d. Water penetration through fixed glazing and framing areas.
e. Failure of operating components.

2. Warranty Period: Five years from date of Substantial Completion.

B. Special Finish Warranty, Anodized Finishes: Standard form in which manufacturer agrees to repair finishes or replace aluminum that shows evidence of deterioration of anodized finishes within specified warranty period.

1. Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested according to ASTM D 2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
c. Cracking, peeling, or chipping.

2. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain all components of aluminum-framed entrance and storefront system, including framing and accessories, from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design aluminum-framed entrances and storefronts.

B. General Performance: Comply with performance requirements specified, as determined by testing of aluminum-framed entrances and storefronts representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.

1. Aluminum-framed entrances and storefronts shall withstand movements of supporting structure, including, but not limited to, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.
2. Failure also includes the following:

a. Thermal stresses transferring to building structure.
b. Glass breakage.
c. Noise or vibration created by wind and thermal and structural movements.
d. Loosening or weakening of fasteners, attachments, and other components.
e. Failure of operating units.

C. Structural Loads:

1. Wind Loads: As indicated on Drawings.

D. Deflection of Framing Members Supporting Glass: At design wind load, as follows:

1. Deflection Normal to Wall Plane: Limited to 1/175 of clear span for spans of up to 13 feet 6 inches and to 1/240 of clear span plus 1/4 inch for spans greater than 13 feet 6 inches.
2. Deflection Parallel to Glazing Plane: Limited to amount not exceeding that which reduces glazing bite to less than 75 percent of design dimension and that which reduces edge clearance between framing members and glazing or other fixed components to less than 1/8 inch.

E. Structural: Test according to ASTM E330/E330M as follows:

1. When tested at positive and negative wind-load design pressures, storefront assemblies, including entrance doors, do not evidence deflection exceeding specified limits.
2. When tested at 150 percent of positive and negative wind-load design pressures, storefront assemblies, including entrance doors and anchorage, do not evidence material failures, structural distress, or permanent deformation of main framing members exceeding 0.2 percent of span.
3. Test Durations: As required by design wind velocity, but not less than 10 seconds.

F. Water Penetration under Static Pressure: Test according to ASTM E331 as follows:

1. No evidence of water penetration through fixed glazing and framing areas, including entrance doors, when tested according to a minimum static-air-pressure differential of 20 percent of positive wind-load design pressure, but not less than 6.24 lbf/sq. ft.

G. Water Penetration under Dynamic Pressure: Test according to AAMA 501.1 as follows:

1. No evidence of water penetration through fixed glazing and framing areas when tested at dynamic pressure equal to 20 percent of positive wind-load design pressure, but not less than 6.24 lbf/sq. ft.
2. Maximum Water Leakage: No uncontrolled water penetrating assemblies or water appearing on assemblies' normally exposed interior surfaces from sources other than condensation. Water leakage does not include water controlled by flashing and gutters, or water that is drained to exterior.

H. Seismic Performance: Aluminum-framed entrances and storefronts shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

I. Energy Performance: Certified and labeled by manufacturer for energy performance as follows:

1. Thermal Transmittance (U-factor):

a. Fixed Glazing and Framing Areas: U-factor for the system of not more than 0.45 Btu/sq. ft. x h x deg F as determined according to NFRC 100.
b. Entrance Doors: U-factor of not more than 0.77 Btu/sq. ft. x h x deg F as determined according to NFRC 100.

2. Solar Heat-Gain Coefficient (SHGC):

a. Fixed Glazing and Framing Areas: SHGC for the system of not more than 0.25 as determined according to NFRC 200.

3. Air Leakage:

a. Fixed Glazing and Framing Areas: Air leakage for the system of not more than 0.06 cfm/sq. ft. at a static-air-pressure differential of 6.24 lbf/sq. ft. when tested according to ASTM E283.
b. Entrance Doors: Air leakage of not more than 1.0 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft.

4. Condensation Resistance Factor (CRF):

a. Fixed Glazing and Framing Areas: CRF for the system of not less than 50 as determined according to AAMA 1503.

J. Thermal Movements: Allow for thermal movements resulting from ambient and surface temperature changes.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.3 STOREFRONT SYSTEMS

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

1. YKK AP America Inc. (Basis of Design)
2. Kawneer
3. EFCO Corporation
4. Oldcastle BuildingEnvelope
5. Tubelite
6. United States Aluminum
7. Wausau Window and Wall Systems

B. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads.

1. Exterior Framing Construction: Thermally broken.
2. Interior Vestibule Framing Construction: Nonthermal.
3. Glazing System: Retained mechanically with gaskets on four sides.
4. Glazing Plane: As indicated on Drawings.
5. Finish: Color anodic finish.
6. Fabrication Method: Field-fabricated stick system.
7. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
8. Steel Reinforcement: As required by manufacturer.

C. Backer Plates: Manufacturer's standard, continuous backer plates for framing members, if not integral, where framing abuts adjacent construction.

D. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.

E. Cap Extension: Manufacturer's standard aluminum extrusion designed to snap-on to aluminum framing for increasing profile depth.

1. Cap Extension Depth: As indicated on Drawings.

2.4 SUN CONTROL

A. Sunshades: Assemblies consisting of manufacturer's standard outrigger brackets, louvers, and fascia, designed for attachment to curtain wall with mechanical fasteners.

1. Basis of Design: YKK ThermaShade
2. Orientation: Horizontal.
3. Projection from Wall: As indicated on Drawings.
4. Outriggers: Straight with square edges.
5. Fasciae: Rectangular, unless otherwise indicated on Drawings.
6. Finish: Match adjacent glazed aluminum curtain wall.
7. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
8. Steel Reinforcement: As required by manufacturer.

2.5 ENTRANCE DOOR SYSTEMS

A. Entrance Doors: Manufacturer's standard glazed entrance doors for manual-swing or automatic operation.

1. Door Construction: 2- to 2-1/4-inch overall thickness, with minimum 0.125-inch- thick, extruded-aluminum tubular rail and stile members. Mechanically fasten corners with reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.

   a. Thermal Construction: High-performance plastic connectors separate aluminum members exposed to the exterior from members exposed to the interior.

2. Door Design: Wide stile; 5-inch nominal width.
3. Glazing Stops and Gaskets: Beveled, snap-on, extruded-aluminum stops and preformed gaskets.

   a. Provide nonremovable glazing stops on outside of door.

4. Finish: Match adjacent storefront framing finish.

2.6 ENTRANCE DOOR HARDWARE

A. Entrance Door Hardware: Hardware not specified in this Section is specified in Section 087100 "Door Hardware."

B. General: Provide entrance door hardware and entrance door hardware sets indicated in door and frame schedule for each entrance door, to comply with requirements in this Section.

1. Entrance Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and named manufacturers' products.
2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
3. Opening-Force Requirements:

   a. Egress Doors: Not more than 15 lbf to release the latch and not more than 30 lbf to set the door in motion and not more than 15 lbf to open the door to its minimum required width.
   b. Accessible Interior Doors: Not more than 5 lbf to fully open door.

C. Designations: Requirements for design, grade, function, finish, quantity, size, and other distinctive qualities of each type of entrance door hardware are indicated in "Entrance Door Hardware Sets" Article. Products are identified by using entrance door hardware designations as follows:

1. Named Manufacturers' Products: Manufacturer and product designation are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in "Entrance Door Hardware Sets" Article.
2. References to BHMA Standards: Provide products complying with these standards and requirements for description, quality, and function.

D. Pivot Hinges: BHMA A156.4, Grade 1.

1. Offset-Pivot Hinges: Provide top, bottom, and intermediate offset pivots at each door leaf.

E. Butt Hinges: BHMA A156.1, Grade 1, radius corner.

1. Nonremovable Pins: Provide setscrew in hinge barrel that, when tightened into a groove in hinge pin, prevents removal of pin while entrance door is closed.
2. Exterior Hinges: Stainless steel, with stainless-steel pin.
3. Quantities:

a. For doors up to 87 inches high, provide three hinges per leaf.
b. For doors more than 87 and up to 120 inches high, provide four hinges per leaf.

F. Continuous-Gear Hinges: BHMA A156.26.

G. Mortise Auxiliary Locks: BHMA A156.5, Grade 1.

H. Manual Flush Bolts: BHMA A156.16, Grade 1.

I. Automatic and Self-Latching Flush Bolts: BHMA A156.3, Grade 1.

J. Panic Exit Devices: BHMA A156.3, Grade 1, listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing according to UL 305.

K. Cylinders:

1. As specified in Section 087100 "Door Hardware."
2. BHMA A156.5, Grade 1.

a. Keying: Master key system. Permanently inscribe each key with a visual key control number and include notation "DO NOT DUPLICATE".

L. Strikes: Provide strike with black-plastic dust box for each latch or lock bolt; fabricated for aluminum framing.

M. Operating Trim: BHMA A156.6.

N. Removable Mullions: BHMA A156.3 extruded aluminum.

1. When used with panic exit devices, provide removable mullions listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing according to UL 305. Use only mullions that have been tested with exit devices to be used.

O. Closers: BHMA A156.4, Grade 1, with accessories required for a complete installation, sized as required by door size, exposure to weather, and anticipated frequency of use; adjustable to comply with field conditions and requirements for opening force.

P. Concealed Overhead Holders and Stops: BHMA A156.8, Grade 1.

Q. Door Stops: BHMA A156.16, Grade 1, floor or wall mounted, as appropriate for door location indicated, with integral rubber bumper.

R. Weather Stripping: Manufacturer's standard replaceable components.

1. Compression Type: Made of ASTM D2000 molded neoprene or ASTM D2287 molded PVC.
2. Sliding Type: AAMA 701/702, made of wool, polypropylene, or nylon woven pile with nylon-fabric or aluminum-strip backing.

S. Weather Sweeps: Manufacturer's standard exterior-door bottom sweep with concealed fasteners on mounting strip.

T. Thresholds: BHMA A156.21 raised thresholds beveled with a slope of not more than 1:2, with maximum height of 1/2 inch.

U. Finger Guards: Manufacturer's standard collapsible neoprene or PVC gasket anchored to frame hinge-jamb at center-pivoted doors.

2.7 ENTRANCE DOOR HARDWARE SETS

Doors 100A, 100B, 105A (exterior pairs):

(1) Set pivot hinges
(1) Mortise deadlock w/ thumbturn
(1) Mortise cylinder lock
(1) Set flush bolts
(2) Sets push/pull handles
(2) Closers
(1) Set weatherstrip
(2) Sweeps – 36"
(1) T-hold – 72"

Doors 100C, 100D exterior singles):

Stainless Steel Butts – Ball Bearing (Quantity determined by door height)
(1) Mortise deadlock w/ thumbturn
(1) Mortise cylinder lock
(1) Set push/ pull handles
(1) Closers
(1) Set weatherstrip
(1) Sweep – 36"
(1) T-hold – 36"

2.8 GLAZING

A. Glazing: Comply with Section 088000 "Glazing."

B. Glazing Gaskets: Manufacturer's standard sealed-corner pressure-glazing system of black, resilient elastomeric glazing gaskets, setting blocks, and shims or spacers.

C. Glazing Sealants: Comply with Section 088000 "Glazing."

D. Weatherseal Sealants: ASTM C920 for Type S; Grade NS; Class 25; Uses NT, G, A, and O; chemically curing silicone formulation that is compatible with structural sealant and other system components with which it comes in contact; recommended by structural-sealant, weatherseal-sealant, and structural-sealant-glazed storefront manufacturers for this use.

2.9 MATERIALS

A. Sheet and Plate: ASTM B209.

B. Extruded Bars, Rods, Profiles, and Tubes: ASTM B221.

C. Structural Profiles: ASTM B308/B308M.

D. Steel Reinforcement:

1. Structural Shapes, Plates, and Bars: ASTM A36/A36M.
2. Cold-Rolled Sheet and Strip: ASTM A1008/A1008M.
3. Hot-Rolled Sheet and Strip: ASTM A1011/A1011M.

E. Steel Reinforcement Primer: Manufacturer's standard zinc-rich, corrosion-resistant primer complying with SSPC-PS Guide No. 12.00; applied immediately after surface preparation and pretreatment. Select surface preparation methods according to recommendations in SSPC-SP COM, and prepare surfaces according to applicable SSPC standard.

2.10 ACCESSORIES

A. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.

1. Use self-locking devices where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration.
2. Reinforce members as required to receive fastener threads.
3. Use exposed fasteners with countersunk Phillips screw heads, finished to match framing system.

B. Anchors: Three-way adjustable anchors with minimum adjustment of 1 inch that accommodate fabrication and installation tolerances in material and finish compatible with adjoining materials and recommended by manufacturer.

C. Sill Pan: Provide high performance flashing by manufacturer. Extruded aluminum, factory fabricated to provide sealed end dams, finished to match storefront; designed to direct water away from building when installed horizontally at sill. If manufacturer offers a similar sill pan as part of aluminum-framed entrance and storefront system, submit details and product data including finishes, for consideration and approval by Architect. PVC is not acceptable.

D. Sill Extension: Extruded aluminum. Profile as indicated on Drawings.

E. Perimeter Filler: Provide perimeter filler / backer plate to close back of frame and facilitate placement of backer rod and sealant.

1. Back Plates: Furnish jamb and head framing members with manufacturer’s standard continuous back plates, unless continuous plates are integral to the design of the framing system.

F. Concealed Flashing: Dead-soft, 0.018-inch- thick stainless steel, complying with ASTM A240/A240M, of type recommended by manufacturer.

G. Bituminous Paint: Cold-applied asphalt-mastic paint containing no asbestos, formulated for 30-mil thickness per coat.

H. Rigid PVC Filler.

2.11 FABRICATION

A. Form or extrude aluminum shapes before finishing.

B. Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.

C. Fabricate components that, when assembled, have the following characteristics:

1. Profiles that are sharp, straight, and free of defects or deformations.
2. Accurately fitted joints with ends coped or mitered.
3. Physical and thermal isolation of glazing from framing members.
4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
5. Provisions for field replacement of glazing from interior for vision glass and exterior for spandrel glazing or metal panels.
6. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.

D. Mechanically Glazed Framing Members: Fabricate for flush glazing without projecting stops.

E. Entrance Door Frames: Reinforce as required to support loads imposed by door operation and for installing entrance door hardware.

1. At interior and exterior doors, provide compression weather stripping at fixed stops.

F. Entrance Doors: Reinforce doors as required for installing entrance door hardware.

1. At pairs of exterior doors, provide sliding-type weather stripping retained in adjustable strip and mortised into door edge.
2. At exterior doors, provide weather sweeps applied to door bottoms.

G. Entrance Door Hardware Installation: Factory install entrance door hardware to the greatest extent possible. Cut, drill, and tap for factory-installed entrance door hardware before applying finishes.

H. After fabrication, clearly mark components to identify their locations in Project according to Shop Drawings.

2.12 ALUMINUM FINISHES

A. Color Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.

1. Color: Dark bronze.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Comply with manufacturer's written instructions.

B. Do not install damaged components.

C. Fit joints to produce hairline joints free of burrs and distortion.

D. Rigidly secure nonmovement joints.

E. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.

F. Seal perimeter and other joints watertight unless otherwise indicated.

G. Metal Protection:

1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with materials recommended by manufacturer for this purpose or by installing nonconductive spacers.
2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.

H. Installation at Sill: Install sill pan system in accordance with manufacturer’s written instructions.

1. Set sill pan in a continuous bed of sealant or apply a nominal 6 inch wide strip of 60 mil self-adhering waterproofing membrane to the bottom of the pan and where a penetration might be required to comply with specified performance requirements.
2. Do not apply sealant between flashing pan and bottom of frame, except as required by manufacturer to comply with specified performance requirements. Set sill members in watertight sill flashing pan. Do not penetrate bottom of flashing pan and/or attach sill members to vertical leg of angle unless required by manufacturer to comply with specified performance requirements.

I. Install joint filler behind sealant as recommended by sealant manufacturer.

J. Install components plumb and true in alignment with established lines and grades.

3.3 INSTALLATION OF OPERABLE UNITS

A. Install operable units level and plumb, securely anchored, and without distortion. Adjust weather-stripping contact and hardware movement to produce proper operation.

3.4 INSTALLATION OF GLAZING

A. Install glazing as specified in Section 088000 "Glazing."

3.5 INSTALLATION OF ALUMINUM-FRAMED ENTRANCE DOORS

A. Install entrance doors to produce smooth operation and tight fit at contact points.

1. Exterior Doors: Install to produce weathertight enclosure and tight fit at weather stripping.

2. Field-Installed Entrance Door Hardware: Install surface-mounted entrance door hardware according to entrance door hardware manufacturers' written instructions using concealed fasteners to greatest extent possible.

3.6 ERECTION TOLERANCES

A. Install aluminum-framed entrances and storefronts to comply with the following maximum tolerances:

1. Plumb: 1/8 inch in 10 feet; 1/4 inch in 40 feet.
2. Level: 1/8 inch in 20 feet; 1/4 inch in 40 feet.
3. Alignment:
   a. Where surfaces abut in line or are separated by reveal or protruding element up to 1/2 inch wide, limit offset from true alignment to 1/16 inch.
   b. Where surfaces are separated by reveal or protruding element from 1/2 to 1 inch wide, limit offset from true alignment to 1/8 inch.
   c. Where surfaces are separated by reveal or protruding element of 1 inch wide or more, limit offset from true alignment to 1/4 inch.
4. Location: Limit variation from plane to 1/8 inch in 12 feet; 1/2 inch over total length.

3.7 FIELD QUALITY CONTROL

A. Contractor/Installer Testing: Contractor/Installer shall be prepared to provide the following minimum testing as part of the Work.

1. Testing shall be in compliance with AAMA 501.2. Testing shall be performed at approximately 10 percent and 50 percent completion. A minimum of 2 test areas to be tested at each phase. Additional testing may be required if installation crew changes of if construction is suspended and resumed after an extended period of time. Coordinate with Architect’s representative for areas to be tested, testing times, and representative’s availability to monitor tests.

B. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

C. Field Quality-Control Testing: Perform the following test on representative areas of aluminum-framed entrances and storefronts.

1. Air Leakage: ASTM E783 at 1.5 times the rate specified for laboratory testing in "Performance Requirements" Article but not more than 0.09 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft.
2. Water Penetration: ASTM E1105 at a minimum uniform and cyclic static-air-pressure differential of 0.67 times the static-air-pressure differential specified for laboratory testing in "Performance Requirements" Article, but not less than 6.24 lbf/sq. ft., and shall not evidence water penetration.

D. Aluminum-framed entrances and storefronts will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports.

3.8 MAINTENANCE SERVICE

A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of entrance door hardware.

END OF SECTION 084113

This page intentionally left blank.

SECTION 087100 - DOOR HARDWARE

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes:

1. Commercial door hardware for the following:

   a. Swinging doors.
   b. Sliding doors.
   c. Other doors to the extent indicated.

2. Special Requirements:

   a. Hardware Installation: The General Contractor shall not install door hardware. The Door Hardware Distributor/Supplier shall be responsible for the proper installation of the door hardware supplied to this project. If supplier has staff trained and performing installations (service available) the supplier shall install the hardware with its own forces. If the door hardware supplier does not have installation capabilities then it shall contract with an experienced hardware installation firm to install door hardware for this project. The hardware supplier shall be financially responsible for damages and correction costs involved with improperly installed door hardware.

      1) Experience requirements for the Door Hardware Installer: 3 years of door hardware installation and completion of 2 projects of similar size, scope, and complexity within the past year.

B. Products furnished, but not installed, under this Section include the following. Coordinating, purchasing, delivering, and scheduling remain requirements of this Section.

1. Hardware specified for other Sections.

1.2 ACTION SUBMITTALS

A. Product Data: Include construction and installation details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Samples for Verification: For exposed door hardware of each type, in specified finish, full size. Tag with full description for coordination with the door hardware sets. Submit Samples before, or concurrent with, submission of the final door hardware sets.

1. Samples will be returned to Contractor. Units that are acceptable and remain undamaged through submittal, review, and field comparison process may, after final check of operation, be incorporated into the Work, within limitations of keying requirements.

C. Door Hardware Sets: Prepared by or under the supervision of Architectural Hardware Consultant and sealed by the consultant, detailing fabrication and assembly of door hardware, as well as procedures and diagrams. Coordinate the final door hardware sets with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.

1. Format: Use same scheduling sequence and format and use same door numbers as in the Contract Documents.
2. Content: Include the following information:

   a. Identification number, location, hand, fire rating, and material of each door and frame.

b. Type, style, function, size, quantity, and finish of each door hardware item. Include description and function of each lockset and exit device.
c. Complete designations of every item required for each door or opening including name and manufacturer.
d. Fastenings and other pertinent information.
e. Location of each door hardware set, cross-referenced to Drawings, both on floor plans and in door and frame schedule.
f. Explanation of abbreviations, symbols, and codes contained in schedule.
g. Mounting locations for door hardware.
h. Door and frame sizes and materials.
i. List of related door devices specified in other Sections for each door and frame.

3. Submittal Sequence: Submit initial draft of final schedule along with essential Product Data to facilitate the fabrication of other work that is critical in Project construction schedule. Submit the final door hardware sets after Samples, Product Data, coordination with Shop Drawings of other work, delivery schedules, and similar information has been completed and accepted.
4. Do not proceed with ordering components, preparing doors and frames, or installation until the final Door Hardware Schedule is approved by the Architect.

D. Keying Schedule: Prepared by or under the supervision of Architectural Hardware Consultant, detailing Owner's final keying instructions for locks. Include schematic keying diagram and index each key set to unique door designations.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Warranty: Special warranty specified in this Section.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of door hardware to include in maintenance manuals. Include final hardware and keying schedule.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: An employer of workers trained and approved by lock manufacturer.

1. Installer's responsibilities include supplying and installing door hardware and providing a qualified Architectural Hardware Consultant available during the course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.
2. Installer shall have warehousing facilities in Project's vicinity.
3. Scheduling Responsibility: Preparation of door hardware and keying schedules.

B. Architectural Hardware Consultant Qualifications: A person who is currently certified by DHI as an Architectural Hardware Consultant and is currently a DHI seal member, and who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project.

1. Will make site visits as necessary to ensure proper installation of door hardware.
2. Will prepare door hardware and keying schedules.

C. Source Limitations: Obtain each type and variety of door hardware from a single manufacturer, unless otherwise indicated.

D. Means of Egress Doors (NFPA 101):

1. Latches do not require more than 15 lbf to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.
2. Door Closers: Not more than 30 lbf to set door in motion and not more than 15 lbf to open door to minimum required width.

E. Accessibility Requirements: For door hardware on doors in an accessible route, comply with the State Building Code, current edition, U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1, including but not limited to the following:

1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than 5 lbf.
2. Comply with the following maximum opening-force requirements:
   a. Interior, Non-Fire-Rated Hinged Doors: 5 lbf applied perpendicular to door.
   b. Sliding or Folding Doors: 5 lbf applied parallel to door at latch.
   c. Fire Doors: Minimum opening force allowable by authorities having jurisdiction.
   d. Exterior Doors: 8-1/2 lbf, applied perpendicular to door.
3. Bevel raised thresholds with a slope of not more than 1:2. Provide thresholds not more than 1/2 inch high (NFPA 101).
4. Adjust door closer sweep periods as indicated in Part 3 of this Section.

F. Keying Conference: Conduct conference at Project site to comply with requirements in Section 013100 "Project Management and Coordination." In addition to Owner, Contractor, and Architect, conference participants shall also include Installer's Architectural Hardware Consultant. Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including, but not limited to, the following:

1. Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
2. Preliminary key system schematic diagram.
3. Requirements for key control system.
4. Address for delivery of keys.

G. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Section 013100 "Project Management and Coordination." Review methods and procedures related to door hardware including, but not limited to, the following:

1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review required testing, inspecting, and certifying procedures.

1.6 COORDINATION

A. Templates: Distribute door hardware templates for doors, frames, and other work specified to be factory prepared for installing door hardware. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.

B. Coordinate door pulls with cylinder lock location to confirm pulls do not interfere with access to lock. Provide offset pulls if required.

C. Existing Openings: Where new hardware components are scheduled for application to existing construction or where modifications to existing door hardware are required, field verify existing conditions and coordinate installation of door hardware to suit opening conditions and to provide for proper operation.

1.7 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fails in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including excessive deflection, cracking, or breakage.
b. Faulty operation of operators and door hardware.
c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.

2. Warranty Period: Three years from date of Substantial Completion, except as follows:

a. Exit Devices: Two years from date of Substantial Completion.
b. Manual Closers: 10 years from date of Substantial Completion.
c. Locks and Latches: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SCHEDULED DOOR HARDWARE

A. Provide door hardware as indicated in Door Hardware Schedule at the end of this Section.

2.2 KEY LOCK BOX

A. Key Lock Box: Designed for storage of two keys, with tamper switches to connect to intrusion detection system.

1. Manufacturers:

a. ABLOY Security, Inc.; an ASSA ABLOY Group company
b. Knox Company
c. Supra Products

2. Mounting: Recessed.
3. Finish: Powder coating.

a. Color: As selected by Architect.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire door assembly construction, wall and floor construction, and other conditions affecting performance.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Steel Doors and Frames: Comply with DHI A115 Series.

1. Surface-Applied Door Hardware: Drill and tap doors and frames according to ANSI A250.6.

B. Wood Doors: Comply with DHI A115-W Series.

3.3 INSTALLATION

A. Mounting Heights: Mount door hardware units at heights indicated on Drawings and as follows unless otherwise indicated or required to comply with governing regulations.

1. Steel Doors and Frames: DHI's "Recommended Locations for Architectural Hardware for Standard Steel Doors and Frames."
2. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."
3. Exit devices to be mounted at 37 inches AFF.

B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work specified in Division 09 Sections. Do not install surface-mounted items until finishes have been completed on substrates involved.

1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.

C. Key Lock Box:

1. Coordinate location with local fire department and authorities having jurisdiction. Coordinate with AHJ for quantity, locations, and mounting heights.
2. Install in accordance with manufacturer's written installation instructions.

D. Thresholds: Set thresholds for exterior and acoustical doors in full bed of sealant complying with requirements specified in Section 079200 "Joint Sealants."

3.4 FIELD QUALITY CONTROL

A. Independent Architectural Hardware Consultant: Owner may engage a qualified independent Architectural Hardware Consultant to perform inspections and to prepare inspection reports.

1. Independent Architectural Hardware Consultant will inspect door hardware and state in each report whether installed work complies with or deviates from requirements, including whether door hardware is properly installed and adjusted.

3.5 ADJUSTING

A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.

1. Door Closers: Unless otherwise required by authorities having jurisdiction, adjust sweep period so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point 3 inches from the latch, measured to the leading edge of the door.

3.6 CLEANING AND PROTECTION

A. Clean adjacent surfaces soiled by door hardware installation.

B. Clean operating items as necessary to restore proper function and finish.

C. Provide final protection and maintain conditions that ensure that door hardware is without damage or deterioration at time of Substantial Completion.

3.7 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes. Refer to Section 017900 "Demonstration and Training."

3.8 DOOR HARDWARE SCHEDULE

Set #02

Doors 105, 106, 107, 108, 109, 110, 111

3	Hinges	FBB179 4 ½ X 4 ½	US26D	ST
1	Lockset	45H-7AB15HPATD CORMAX PATENTED	626 BE	
1	Wall Bumper	1270CX	626 TR	
3	Door Silencer	307D	GREY	HA

Set #03

Doors 104B, 104C, 104D, 105A, 105B, 129A

3	Hinges	FBB179 4 ½ X 4 ½	US26D	ST
1	Lockset	45H-7AB15HPATD CORMAX PATENTED	626 BE	
1	Closer	HD7016 AO8P	689 BE	
1	Wall Bumper	1270CX	626 TR	
3	Door Silencer	307D	GREY	HA

NOTE: BALANCE OF ACCESS CONTROL BY OTHERS (AT APPLICABLE LOCATIONS)

Set #05

Doors 101, 114, 115A, 115B, 116, 123, 127, 130

3	Hinges	FBB179 4 ½ X 4 ½	US26D	ST
1	Lockset	45H-7D15H PATD CORMAX PATENTED	626 BE	
1	Closer	HD7016 AO8P	689 BE	
1	Wall Bumper	1270CX	626 TR	
3	Door Silencer	307D	GREY	HA

NOTE: BALANCE OF ACCESS CONTROL BY OTHERS (AT APPLICABLE LOCATIONS)

Set #08

Doors 101, 102, 117, 118, 119

3	Hinges	FBB179 4 ½ X 4 ½	US26D	ST
1	Privacy Set	45H-0L15H	626 BE	
1	Closer	HD7016 AO8P	689 BE	
1	Kick Plate	K0050 8" x 34"	630 TR	
1	Mop Plate	KM050 4" x 35"	630 TR	
1	Wall Bumper	1270CX	626 TR	
3	Door Silencer	307D	GREY	HA

Set #17

Doors 100A, 100B, 100C, 100D, 104A, 124

2	Mortise Cylinder	1E-74 PATD CORMAX PATENTED KEYING	626 BE

NOTE: BALANCE OF HARDWARE BY GLASS DOOR AND ALUMINUM DOOR SUPPLIER

NOTE: BALANCE OF ACCESS CONTROL AND AUTO OPERATOR BY OTHERS (AT APPLICABLE LOCATIONS)

Set #19

Doors 121

6	Hinges	FBB191 4 ½ X 4 ½ NRP	US32D ST
1	Set Auto Flush Bolts	3815L X 3850	626 BE
1	Lockset	45H-7D15H PATD CORMAX PATENTED KEYING	626 BE
1	Coordinator	3094B2	BLACK TR
2	Closer	HD8016 AF80P	689 BE
2	Door Stop	1209	630 TR
1	Astragal Set	9115 A SET 84"	NA
1	Gasketing	152V 1 X 72" 2 X 84"	NA
1	Drip Cap	16 A 76"	NA
2	Door Sweep	200 NA 36"	NA
1	Threshold	896 V 72"	AL NA

NOTE: BALANCE OF ACCESS CONTROL BY OTHERS (AT APPLICABLE LOCATIONS

Set #23

Door 129B, 140

3	Hinges	FBB191 4 ½ X 4 ½ NRP	US32D ST
1	Lockset	45H-7D15H PATD CORMAX PATENTED KEYING	626 BE
1	Closer	HD8016 AF80P	689 BE
1	Door Stop	1209	630 TR
1	Gasketing	152V 1 X 36" 2 X 84"	NA
1	Drip Cap	16 A 40"	NA

1	Door Sweep	200 NA 36"		NA
1	Threshold	896 V 36"	AL	NA

END OF SECTION 087100

This page intentionally left blank.

SECTION 087113 - AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Low-energy door operators for swinging doors.

1.2 DEFINITIONS

A. AAADM: American Association of Automatic Door Manufacturers.

B. Activation Device: A control that, when actuated, sends an electrical signal to the door operator to open the door.

C. Double-Egress (Doors): A pair of doors that simultaneously swing, with the two doors moving in opposite directions with no mullion between them.

D. Double-Swing (Doors): A pair of doors that swing, with the two doors moving in opposite directions with a mullion between them; each door functioning as a single-swing door.

E. Safety Device: A control that, to avoid injury, prevents a door from opening or closing.

F. For automatic door terminology, see BHMA A156.10 and BHMA A156.19 for definitions of terms.

1.3 COORDINATION

A. Coordinate sizes and locations of recesses in concrete floors for recessed control mats that control automatic door operators. Concrete, reinforcement, and formwork requirements are specified elsewhere.

B. Templates: Distribute for doors, frames, and other work specified to be factory prepared and reinforced for installing automatic door operators.

C. Coordinate hardware for doors with operators to ensure proper size, thickness, hand, function, and finish.

D. Electrical System Roughing-in: Coordinate layout and installation of automatic door operators with connections to the following:

1. Power supplies.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for automatic door operators.

2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

B. Shop Drawings: For automatic door operators.

1. Include plans, elevations, sections, hardware mounting heights, and attachment details.
2. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Indicate locations of activation and safety devices.
4. Include diagrams for power, signal, and control wiring.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and Certified Inspector.

B. Product Certificates: For each type of automatic door operator.

C. Field quality-control reports.

D. Sample Warranties: For manufacturer's special warranties.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For automatic door operators, safety devices, and control systems, to include in maintenance manuals.

1.8 QUALITY ASSURANCE

A. Installer Qualifications: An authorized representative who is trained and approved by manufacturer for installation and maintenance of units required for this Project and who employs a Certified Inspector.

1. Maintenance Proximity: Not more than two hours' normal travel time from Installer's place of business to Project site.

B. Certified Inspector Qualifications: Certified by AAADM.

1.9 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of automatic door operators that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Faulty or sporadic operation of automatic door operator, including controls.
b. Deterioration of metals, metal finishes, and other materials beyond normal weathering or use.

2. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. DORMA USA, Inc.
2. Horton Automatics; a division of Overhead Door Corporation
3. LCN; an Allegion brand
4. Norton Door Controls; An ASSA ABLOY company
5. record-usa
6. Stanley Access Technologies

B. Source Limitations: Obtain automatic door operators, including activation and safety devices, from single source from single manufacturer.

2.2 AUTOMATIC DOOR OPERATORS, GENERAL

A. General: Provide operators of size recommended by manufacturer for door size, weight, and movement; for condition of exposure; and for long-term, maintenance-free operation under normal traffic load for occupancy type indicated; and in accordance with UL 325. Coordinate operator mechanisms with door operation, hinges, and activation and safety devices.

B. Electromechanical Operating System: Self-contained unit powered by permanent-magnet dc motor; with closing speed controlled mechanically by gear train and dynamically by braking action of electric motor, connections for power and activation- and safety-device wiring, and manual operation, including spring closing when power is off.

C. Cover for Surface-Mounted Operators: Fabricated from 0.125-inch- thick, extruded or formed aluminum; continuous over full width of operator-controlled door opening; with enclosed end caps, provision for maintenance access, and fasteners concealed when door is in closed position.

D. Brackets and Reinforcements: Fabricated from aluminum with nonstaining, nonferrous shims for aligning system components.

E. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.3 LOW-ENERGY DOOR OPERATORS FOR SWINGING DOORS

A. Standard: BHMA A156.19.

B. Performance Requirements:

1. Opening Force if Power Fails: Not more than 15 lbf required to release latch if provided, not more than 30 lbf required to manually set door in motion, and not more than 15 lbf required to fully open door.
2. Entrapment-Prevention Force: Not more than 15 lbf required to prevent stopped door from closing or opening.

C. Configuration:

1. Traffic Pattern: Two way.
2. Operator Mounting: Surface.

D. Operation: Power opening and spring closing. Provide time delay for door to remain open before initiating closing cycle as required by BHMA A156.19. When not in automatic mode, door operator shall function as manual door closer, with or without electrical power.

E. Operating System: Electromechanical.

F. Microprocessor Control Unit: Solid-state controller.

G. Features:

1. Adjustable opening and closing speed.
2. Adjustable opening and closing force.
3. Adjustable backcheck.
4. Adjustable hold-open time from zero to 30 seconds.
5. Adjustable time delay.
6. Adjustable acceleration.
7. Obstruction recycle.
8. On-off/hold-open switch to control electric power to operator.

H. Activation Device: Push-plate switch on each side of door to activate door operator.

I. Exposed Finish: Class I, color anodic finish.

1. Color: Dark bronze.

2.4 MATERIALS

A. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.

1. Extrusions: ASTM B221.
2. Sheet: ASTM B209.

B. Fasteners and Accessories: Corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.

2.5 CONTROLS

A. General: Provide controls, including activation and safety devices, in accordance with BHMA standards; for condition of exposure; and for long-term, maintenance-free operation under normal traffic load for occupancy type indicated. Coordinate activation and safety devices with door operation and door operator mechanisms.

B. Push-Plate Switch: Momentary-contact door control switch with flat push-plate actuator with contrasting-colored, engraved message.

1. Configuration: Square push plate with 4-by-4-inch junction box.

a. Mounting:

1) Interior: Recess mounted, semiflush in wall.
2) Exterior: Post mounted or recess mounted, semiflush in wall as directed by Architect.

2. Push-Plate Material: Stainless steel as selected by Architect from manufacturer's full range.
3. Message: International symbol of accessibility and "Push to Open."

C. Electrical Interlocks: Unless units are equipped with self-protecting devices or circuits, provide electrical interlocks to prevent activation of operator when door is locked, latched, or bolted.

2.6 ACCESSORIES

A. Signage: As required by cited BHMA standard for type of door and its operation.

1. Application Process: Operator manufacturer's standard process.
2. Provide sign materials with instructions for field application when operators are installed.

2.7 FABRICATION

A. Factory fabricate automatic door operators to comply with indicated standards.

B. Form aluminum shapes before finishing.

C. Fabricate exterior components to drain condensation and water-passing joints within operator enclosure to the exterior.

D. Use concealed fasteners to greatest extent possible. Where exposed fasteners are required, use countersunk Phillips flat-head machine screws, finished to match operator.

2.8 GENERAL FINISH REQUIREMENTS

A. Protect mechanical finishes on exposed surfaces from damage by applying strippable, temporary, protective covering before shipping.

B. Apply organic and anodic finishes to formed metal after fabrication unless otherwise indicated.

C. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within range of approved Samples and are assembled or installed to minimize contrast.

2.9 ALUMINUM FINISHES

A. Color Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances, door and frame preparation and reinforcements, and other conditions affecting performance of automatic door operators.

B. Examine roughing-in for electrical systems to verify actual locations of power connections before automatic door operator installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install automatic door operators in accordance with manufacturer's written instructions and cited BHMA standard for type of door operation and direction of pedestrian travel, including signage, controls, wiring, remote power units if any, and connection to building's power supply.

1. Do not install damaged components. Fit joints to produce hairline joints free of burrs and distortion.

2. Install operators true in alignment with established lines and door geometry without warp or rack. Anchor securely in place.

B. Controls: Install activation and safety devices in accordance with manufacturer's written instructions and cited BHMA standard for operator type and direction of pedestrian travel. Connect control wiring in accordance with Division 26.

C. Signage: Apply on both sides of each door as required by cited BHMA standard for type of door operator and direction of pedestrian travel.

3.3 FIELD QUALITY CONTROL

A. Certified Inspector: Engage a Certified Inspector to test and inspect components, assemblies, and installations, including connections.

B. Perform the following tests and inspections with the assistance of a factory-authorized service representative:

1. Test and inspect each automatic door operator installation, using AAADM inspection forms, to determine compliance of installed systems with applicable BHMA standards.

C. Automatic door operators will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports.

3.4 ADJUSTING

A. Adjust automatic door operators to function smoothly, and lubricate as recommended by manufacturer; comply with requirements of applicable BHMA standards.

1. Adjust operators on exterior doors for tight closure.

B. After completing installation of automatic door operators, inspect exposed finishes on doors and operators. Repair damaged finish to match original finish.

C. Readjust automatic door operators and controls after repeated operation of completed installation equivalent to three days' use by normal traffic (100 to 300 cycles).

D. Occupancy Adjustment: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.5 MAINTENANCE SERVICE

A. Initial Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by skilled employees of automatic door operator Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper door operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.

1. Engage a Certified Inspector to perform safety inspection after each adjustment or repair and at end of maintenance period. Furnish completed inspection reports to Owner.
2. Perform maintenance, including emergency callback service, during normal working hours.

3.6 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain automatic door operators.

END OF SECTION 087113

This page intentionally left blank.

SECTION 088000 - GLAZING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Glass products.
2. Insulating glass.
3. Glazing sealants.
4. Glazing tapes.
5. Miscellaneous glazing materials.

1.2 DEFINITIONS

A. Glass Manufacturers: Firms that produce primary glass, fabricated glass, or both, as defined in referenced glazing publications.

B. Glass Thicknesses: Indicated by thickness designations in millimeters in accordance with ASTM C1036.

C. IBC: International Building Code.

D. Interspace: Space between lites of an insulating-glass unit.

1.3 COORDINATION

A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances to achieve proper safety margins for glazing retention under each design load case, load case combination, and service condition.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review temporary protection requirements for glazing during and after installation.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Glass Samples: For each type of glass product other than clear monolithic vision glass; 12 inches square.

C. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

D. Delegated Design Submittal: For glass indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by qualified professional engineer responsible for their preparation.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For fabricated glass and glazing sealants, for tests performed by a qualified testing agency.

1. For glazing sealants, provide test reports based on testing current sealant formulations within previous 36-month period.

C. Preconstruction adhesion and compatibility test report.

D. Sample Warranties: For special warranties.

1.7 QUALITY ASSURANCE

A. Fabricated-Glass Manufacturer Qualifications: A qualified manufacturer of fabricated glass units who is approved and certified by primary glass manufacturer.

B. Installer Qualifications: A qualified glazing contractor for this Project who is certified under the North American Contractor Certification Program (NACC) for Architectural Glass & Metal (AG&M) contractors.

C. Glass Testing Agency Qualifications: A qualified independent testing agency accredited according to the NFRC CAP 1 Certification Agency Program.

D. Sealant Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021 to conduct the testing indicated.

E. Mockups: Build mockups to demonstrate aesthetic effects and to set quality standards for materials and execution.

1. Install glazing in mockups specified in Section 084113 "Aluminum-Framed Entrances and Storefronts" to match glazing systems required for Project, including glazing methods.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 PRECONSTRUCTION TESTING

A. Preconstruction Adhesion and Compatibility Testing: Test each glass product, tape sealant, gasket, glazing accessory, and glass-framing member for adhesion to and compatibility with elastomeric glazing sealants.

1. Testing is not required if data are submitted based on previous testing of current sealant products and glazing materials matching those submitted.
2. Use ASTM C1087 to determine whether priming and other specific joint-preparation techniques are required to obtain rapid, optimum adhesion of glazing sealants to glass, tape sealants, gaskets, and glazing channel substrates.
3. Test no fewer than eight Samples of each type of material, including joint substrates, shims, sealant backings, secondary seals, and miscellaneous materials.
4. Schedule enough time for testing and analyzing results to prevent delaying the Work.
5. For materials failing tests, submit sealant manufacturer's written instructions for corrective measures including use of specially formulated primers.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Protect glazing materials in accordance with manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.

B. Comply with insulating-glass manufacturer's written instructions for venting and sealing units to avoid hermetic seal ruptures due to altitude change.

1.10 FIELD CONDITIONS

A. Environmental Limitations: Do not proceed with glazing when ambient and substrate temperature conditions are outside limits permitted by glazing material manufacturers and when glazing channel substrates are wet from rain, frost, condensation, or other causes.

1. Do not install glazing sealants when ambient and substrate temperature conditions are outside limits permitted by sealant manufacturer or are below 40 deg F.

1.11 WARRANTY

A. Manufacturer's Special Warranty for Coated-Glass Products: Manufacturer agrees to replace coated-glass units that deteriorate within specified warranty period. Deterioration of coated glass is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning coated glass contrary to manufacturer's written instructions. Defects include peeling, cracking, and other indications of deterioration in coating.

1. Warranty Period: 10 years from date of Substantial Completion.

B. Manufacturer's Special Warranty for Insulating Glass: Manufacturer agrees to replace insulating-glass units that deteriorate within specified warranty period. Deterioration of insulating glass is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating glass contrary to manufacturer's written instructions. Evidence of failure is obstruction of vision by dust, moisture, or film on interior surfaces of glass.

1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

1. Guardian SuperNeutral; SNX 51/23 (Basis of Design)
2. Cardinal Glass.
3. Vitro Glass

B. Source Limitations for Glass: Obtain glass from single source from single manufacturer.

C. Source Limitations for Glazing Accessories: For each product and installation method, obtain from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. General: Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.

B. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design glazing.

C. Structural Performance: Glazing shall withstand the following design loads within limits and under conditions indicated determined in accordance with the IBC and ASTM E1300:

1. Design Wind Pressures: As indicated on Drawings.
2. Design Snow Loads: As indicated on Drawings.
3. Maximum Lateral Deflection: For glass supported on all four edges, limit center-of-glass deflection at design wind pressure to not more than 1/50 times the short-side length or 1 inch, whichever is less.
4. Thermal Loads: Design glazing to resist thermal stress breakage induced by differential temperature conditions and limited air circulation within individual glass lites and insulated glazing units.

D. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.

E. Thermal and Optical Performance Properties: Provide glass with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below:

1. For monolithic-glass lites, properties are based on units with lites 6 mm thick.
2. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.
3. U-Factors: Center-of-glazing values, in accordance with NFRC 100 and based on most current non-beta version of LBL's WINDOW computer program, expressed as Btu/sq. ft. x h x deg F.
4. SHGC and Visible Transmittance: Center-of-glazing values, in accordance with NFRC 200 and based on most current non-beta version of LBL's WINDOW computer program.
5. Visible Reflectance: Center-of-glazing values, in accordance with NFRC 300.

2.3 GLASS PRODUCTS, GENERAL

A. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.

1. NGA Publications: "Glazing Manual."
2. IGMA Publication for Insulating Glass: SIGMA TM-3000, "North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use."

B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of the SGCC or another certification agency acceptable to authorities having jurisdiction. Label shall indicate manufacturer's name, type of glass, thickness, and safety glazing standard with which glass complies.

C. Insulating-Glass Certification Program: Permanently marked either on spacers or on at least one component lite of units with appropriate certification label of the IGCC.

D. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass that complies with performance requirements and is not less than thickness indicated.

1. Minimum Glass Thickness for Exterior Lites: 6 mm.
2. Thickness of Tinted Glass: Provide same thickness for each tint color indicated throughout Project.

E. Strength: Where annealed float glass is indicated, provide annealed float glass, heat-strengthened float glass, or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where heat-strengthened float glass is indicated, provide heat-strengthened float glass or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where fully tempered float glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

A. Fully Tempered Float Glass: ASTM C1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

2.5 INSULATING GLASS

A. Insulating-Glass Units: Factory-assembled units consisting of sealed lites of glass separated by a dehydrated interspace, qualified in accordance with ASTM E2190.

1. Sealing System: Dual seal, with manufacturer's standard primary and secondary sealants.
2. Perimeter Spacer: Manufacturer's standard spacer material and construction.
3. Desiccant: Molecular sieve or silica gel, or a blend of both.

2.6 GLAZING SEALANTS

A. General:

1. Compatibility: Compatible with one another and with other materials they contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
2. Suitability: Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.
3. Colors of Exposed Glazing Sealants: As selected by Architect from manufacturer's full range of industry colors.

B. Neutral-Curing Silicone Glazing Sealant, Class 100/50: Complying with ASTM C920, Type S, Grade NS, Use NT.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Dow Corning Corporation; 790 Silicone Building Sealant.
b. GE Construction Sealants; Momentive Performance Materials Inc.; SCS2700 SilPruf LM.
c. May National Associates, Inc.; a subsidiary of Sika Corporation; Bondaflex Sil 290.
d. Pecora Corporation; 890NST.
e. Sika Corporation; SikaSil WS-290.
f. Tremco Incorporated; Spectrem 1.

2.7 GLAZING TAPES

A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C1281 and AAMA 800 for products indicated below:

1. AAMA 804.3 tape, where indicated.
2. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.
3. AAMA 807.3 tape, for glazing applications in which tape is not subject to continuous pressure.

B. Expanded Cellular Glazing Tapes: Closed-cell, PVC foam tapes; factory coated with adhesive on both surfaces; and complying with AAMA 800 for the following types:

1. AAMA 810.1, Type 1, for glazing applications in which tape acts as primary sealant.
2. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

2.8 MISCELLANEOUS GLAZING MATERIALS

A. General: Provide products of material, size, and shape complying with referenced glazing standard, recommended in writing by manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.

B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.

C. Setting Blocks:

1. Elastomeric material with Shore A durometer hardness of 85, plus or minus 5.
2. Type recommended in writing by sealant or glass manufacturer.

D. Spacers:

1. Elastomeric blocks or continuous extrusions of hardness required by glass manufacturer to maintain glass lites in place for installation indicated.
2. Type recommended in writing by sealant or glass manufacturer.

E. Edge Blocks:

1. Elastomeric material with Shore A durometer hardness per manufacturer's written instructions.
2. Type recommended in writing by sealant or glass manufacturer.

F. Cylindrical Glazing Sealant Backing: ASTM C1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

2.9 FABRICATION OF GLAZING UNITS

A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing publications, to comply with system performance requirements.

1. Allow for thermal movements from ambient and surface temperature changes acting on glass framing members and glazing components.

   a. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.

C. Grind smooth and polish exposed glass edges and corners.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:

1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
2. Presence and functioning of weep systems.
3. Minimum required face and edge clearances.
4. Effective sealing between joints of glass-framing members.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.

B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.

3.3 GLAZING, GENERAL

A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.

B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.

C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.

D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.

E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.

F. Provide spacers for glass lites where length plus width is larger than 50 inches.

1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.

2. Provide 1/8-inch- minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.

G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and in accordance with requirements in referenced glazing publications.

H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.

I. Set glass lites with proper orientation so that coatings face exterior or interior as specified.

J. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.

K. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended in writing by gasket manufacturer.

3.4 TAPE GLAZING

A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.

B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.

C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.

D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.

E. Do not remove release paper from tape until right before each glazing unit is installed.

F. Apply heel bead of elastomeric sealant.

G. Center glass lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.

H. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.5 GASKET GLAZING (DRY)

A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.

B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.

C. Installation with Drive-in Wedge Gaskets: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward

centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.

D. Installation with Pressure-Glazing Stops: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.

E. Install gaskets so they protrude past face of glazing stops.

3.6 SEALANT GLAZING (WET)

A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.

B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.

C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.7 CLEANING AND PROTECTION

A. Immediately after installation, remove nonpermanent labels and clean surfaces.

B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.

1. If, despite such protection, contaminating substances do contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.

C. Remove and replace glass that is damaged during construction period.

D. Wash glass on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

3.8 MONOLITHIC GLASS SCHEDULE

A. Clear Glass Type **(GL3)**: Fully tempered float glass.

1. Minimum Thickness: 6 mm.
2. Safety glazing required.

B. Clear Glass Type **(GL8)**: Fully tempered float glass.

1. Minimum Thickness: 12 mm.
2. Safety glazing required.

3.9 INSULATING GLASS SCHEDULE

A. Low-E-Coated, Clear Insulating Glass Type **(GL1)**:

1. Overall Unit Thickness: 1 inch.
2. Minimum Thickness of Each Glass Lite: 6 mm.
3. Outdoor Lite: Heat-strengthened and fully tempered float glass, locations as indicated on Drawings.
4. Interspace Content: Air.
5. Indoor Lite: Heat-strengthened and fully tempered float glass, locations as indicated on Drawings.
6. Low-E Coating: Sputtered on second surface.
7. Winter Nighttime U-Factor: 0.29 maximum.
8. Summer Daytime U-Factor: 0.27 maximum.
9. Visible Light Transmittance: 51 percent minimum.
10. SGHC: 0.23 maximum.
11. Safety glazing required.

END OF SECTION 088000

SECTION 088700 - GLAZING SURFACE FILMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes the decorative film overlays.

1.2 ACTION SUBMITTALS

A. Product Data: For each decorative-glass and glazing product indicated.

B. Samples: For the following products, 12 inches square:

1. Each pattern of film applied to clear glass.

C. Product Schedule: For decorative glass films overlay. Use same designations indicated on Drawings.

1.3 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of decorative film overlay to include in maintenance manuals.

1.4 QUALITY ASSURANCE

A. Mockups: Build mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for fabrication and installation.

1. Build mockups in the location and of the size indicated or, if not indicated, as directed by Architect.
2. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Protect decorative glass film overlays materials according to manufacturer's written instructions.

1.6 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install decorative glass film overlays until spaces are enclosed and weathertight, wet work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

B. Field Measurements: Verify actual dimensions of glass lites by field measurements.

PART 2 - PRODUCTS

A. Decorative Film Overlay **(FILM-1)**: Translucent, dimensionally stable, cast PVC film, 2-mil- minimum thickness, with pressure-sensitive, clear adhesive back for adhering to glass and releasable protective backing.

1. Manufacturer: Subject to compliance with requirements, provide products by one of the following:
   a. 3M; Night Vision
   b. Solyx Glass Finishes; a trademark of Decorative Films, LLC.
2. Use: Suitable for interior and exterior applications.
3. Appearance: One-way visibility privacy film.
4. Color: Silver/grey.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean glass immediately before application of glazing film overlay.

3.2 APPLICATION

A. Decorative Film Overlay: Apply squarely aligned to glass edges, uniformly smooth, and free from tears, air bubbles, wrinkles, and rough edges, in single sheet completely overlaying the back face of clean glass, according to manufacturer's written instructions, including surface preparation and application temperature limitations.

3.3 CLEANING AND PROTECTION

A. Protect glass from contact with contaminating substances resulting from construction operations. If, despite such protection, contaminating substances do come into contact with glass film overlay, remove substances immediately as recommended in writing by glass film overlay manufacturer.

END OF SECTION 088113

SECTION 089200 - LOUVERED EQUIPMENT ENCLOSURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fixed, louvered equipment enclosures.

1.2 DEFINITIONS

A. Louvered Equipment Enclosure Terminology: Definitions of terms for metal louvers contained in AMCA 501 apply to this Section unless otherwise defined in this Section or in referenced standards.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For equipment enclosures. Include plans, elevations, sections, details, and attachments to other work. Show frame profiles and blade profiles, angles, and spacing.

C. Samples: For each type of metal finish required.

1.4 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum."

1.5 FIELD CONDITIONS

A. Field Measurements: Verify actual dimensions of openings by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain louvered equipment enclosures from single source from a single manufacturer where indicated to be of same type, design, or factory-applied color finish.

2.2 PERFORMANCE REQUIREMENTS

A. Structural Performance: Louvered equipment enclosures shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated without permanent deformation of equipment enclosure components, noise or metal fatigue caused by louver-blade rattle or flutter, or permanent damage to fasteners and anchors. Wind pressures shall be considered to act normal to the face of the building.

1. Wind Loads: Determine loads based on pressures as indicated on Drawings.

B. Seismic Performance: As indicated on Drawings.

C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

D. SMACNA Standard: Comply with recommendations in SMACNA's "Architectural Sheet Metal Manual" for fabrication, construction details, and installation procedures.

2.3 FIXED, EXTRUDED-ALUMINUM ROOF TOP EQUIPMENT SCREEN

A. Horizontal Blade Louvered Roof Top Equipment Screen:

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable product by one of the following:

a. Architectural Louvers; V4JS Equipment Screens (Basis of Design)
b. Airolite Company, LLC (The).
c. American Warming and Ventilating; a Mestek company.
d. Arrow United Industries; a division of Mestek, Inc.
e. Construction Specialties, Inc (C/S Group).
f. Greenheck Fan Corporation.
g. Ruskin Company

2. Louver Blade Depth: 4 inches.
3. Blade Profile: Plain blade without center baffle.
4. Blade Nominal Thickness: Not less than 0.080 inch.
5. Framing Support Nominal Thickness: Not less than 0.125 inch.
6. Louver Performance Requirements:

a. Free Area: Not less than 8.0 sq. ft. (51 percent) for 48-inch- wide by 48-inch- high louver assembly.
b. Horizontal Drag Coefficient: Not greater than 0.63 on a cross sectional profile, allowing for a 37% reduction in wind load imposed horizontally upon supporting structural framing.

2.4 MATERIALS

A. Aluminum Extrusions: ASTM B 221, Alloy 6063-T5, T-52, or T6.

B. Aluminum Sheet: ASTM B 209, Alloy 3003 or 5005 with temper as required for forming, or as otherwise recommended by metal producer for required finish.

C. Fasteners: Use types and sizes to suit unit installation conditions.

1. Use tamper-resistant screws for exposed fasteners unless otherwise indicated.
2. For fastening aluminum, use aluminum or 300 series stainless-steel fasteners.

D. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D 1187.

2.5 FABRICATION

A. Factory assemble louvered equipment enclosures to minimize field splicing and assembly. Disassemble units as necessary for shipping and handling limitations. Clearly mark units for reassembly and coordinated installation.

B. Maintain equal blade spacing, including separation between blades and frames at head and sill, to produce uniform appearance.

C. Include supports, anchorages, and accessories required for complete assembly.

D. Join frame members to each other and to fixed louver blades with fillet welds concealed from view unless otherwise indicated or size of louver assembly makes bolted connections between frame members necessary.

2.6 ALUMINUM FINISHES

A. Finish louvered equipment enclosures after assembly.

B. High-Performance Organic Finish: Two-coat fluoropolymer finish complying with AAMA 2605 and containing not less than 70 percent PVDF resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Color and Gloss: As indicated by manufacturer's designations.

PART 3 - EXECUTION

3.1 PREPARATION

A. Coordinate setting drawings, diagrams, templates, instructions, and directions for installation of anchorages that are to be embedded in concrete or masonry construction. Coordinate delivery of such items to Project site.

3.2 INSTALLATION

A. Locate and place louvered equipment enclosures level, plumb, and at indicated alignment with adjacent work.

B. Use concealed anchorages where possible. Provide brass or lead washers fitted to screws where required to protect metal surfaces and to make a weathertight connection.

C. Form closely fitted joints with exposed connections accurately located and secured.

3.3 ADJUSTING AND CLEANING

A. Clean exposed equipment enclosure surfaces that are not protected by temporary covering, to remove fingerprints and soil during construction period. Do not let soil accumulate during construction period.

B. Before final inspection, clean exposed surfaces with water and a mild soap or detergent not harmful to finishes. Thoroughly rinse surfaces and dry.

C. Restore louvered equipment enclosures damaged during installation and construction so no evidence remains of corrective work. If results of restoration are unsuccessful, as determined by Architect, remove damaged units and replace with new units.

1. Touch up minor abrasions in finishes with air-dried coating that matches color and gloss of, and is compatible with, factory-applied finish coating.

END OF SECTION 089200

SECTION 092216 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Non-load-bearing steel framing systems for interior partitions.
2. Suspension systems for interior ceilings and soffits.
3. Grid suspension systems for gypsum board ceilings.

B. Related Requirements:

1. Section 054000 "Cold-Formed Metal Framing" for exterior and interior load-bearing and exterior non-load-bearing wall studs; floor joists; and roof rafters and ceiling joists.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include Limiting Heights Table for each application.
2. For partitions requiring seismic bracing, submit coordinated set of partition anchorage drawings prior to installation including:

   a. Description, layout, and location of items to be anchored or braced with anchorage or brace points noted and dimensioned.
   b. Details of anchorage or bracing at large scale with all members, parts brackets shown, together with all connections, bolts, and welds clearly identified.
   c. Numerical value of design seismic brace loads.

1.3 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of code-compliance certification for studs and tracks.

B. Evaluation Reports: For embossed, high-strength steel studs and tracks, firestop tracks, post-installed anchors, and power-actuated fasteners, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated on Drawings, according to ASTM E90 and classified according to ASTM E413 by an independent testing agency.

2.2 FRAMING SYSTEMS

A. Framing Members, General: Comply with ASTM C754 for conditions indicated.

1. Steel Sheet Components: Comply with ASTM C645 requirements for steel unless otherwise indicated.

2. Protective Coating: ASTM A653/A653M, G60, hot-dip galvanized unless otherwise indicated.

B. Studs and Tracks: ASTM C645. Use either conventional steel studs and tracks or embossed, high-strength steel studs and tracks.

1. Conventional Steel Studs and Runners:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) Formetal Company, Inc.
2) Phillips Manufacturing Co.
3) Steel Network, Inc. (The).
4) Telling Industries.

b. Minimum Base-Steel Thickness: As indicated in manufacturer’s published "Limiting Heights" tables based on the following criteria, but not less than 0.0269 inch and 0.0312 for tile backing panels.

1) Yield Strength of steel.
2) Deflection Limits:

a) Gypsum Wallboard: L/240.
b) Ceramic Tile: L/360.

3) Limiting Heights: As indicated on Drawings.
4) Spans: As indicated on Drawings or as recommended by manufacturer.
5) Applied loads, composite or non-composite construction, as appropriate:

a) Gypsum Wallboard: 5 psf.
b) Ceramic tile, one side: 15 psf.
c) Ceramic tile, two sides: 30 psf.

c. Depth: As indicated on Drawings.

2. Embossed, High Strength Steel Studs and Tracks: Roll-formed and embossed with surface deformations to stiffen the framing members so that they are structurally comparable to conventional ASTM C645 steel studs and tracks.

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) ClarkDietrich Building Systems.
2) Marino\WARE.
3) Phillips Manufacturing Co.
4) Steel Network, Inc. (The).
5) Telling Industries.

b. Minimum Base-Steel Thickness: Of equivalent thickness to conventional studs and runners, based on criteria above, and validated by independent, qualified third party testing.
c. Depth: As indicated on Drawings.

2.3 FRAMING ACCESSORIES

A. Manufacturers: Unless indicated otherwise, provide framing accessories manufactured or approved by the manufacturer of the basic framing system.

B. Slip-Type Head Joints: Provide one of the following:

1. Single Long-Leg Track System: ASTM C645 top track with 2-inch- deep flanges in thickness not less than indicated for studs, installed with studs friction fit into top track and with continuous bridging located within 12 inches of the top of studs to provide lateral bracing.
2. Double-Track System: ASTM C645 top outer tracks, inside track with 2-inch- deep flanges in thickness not less than indicated for studs and fastened to studs, and outer track sized to friction-fit over inner track.
3. Deflection Track: Steel sheet top track manufactured to prevent cracking of finishes applied to interior partition framing resulting from deflection of structure above; in thickness not less than indicated for studs and in width to accommodate depth of studs.

C. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated.

1. Minimum Base-Steel Thickness: 0.0329 inch.

D. Backing Plates (Contractor's Option): In lieu of flat steel straps provide ClarkDietrich Danback fire-retardant treated flexible wood backing plate system for the attachment of cabinets, handrails, wall fixtures.

E. Cold-Rolled Channel Bridging: Steel, 0.0538-inch minimum base-steel thickness, with minimum 1/2-inch- wide flanges.

1. Depth: As indicated on Drawings.
2. Clip Angle: Not less than 1-1/2 by 1-1/2 inches, 0.068-inch- thick, galvanized steel.

F. Hat-Shaped, Rigid Furring Channels: ASTM C645.

1. Minimum Base-Steel Thickness: 0.033 inch.
2. Depth: As indicated on Drawings.

G. Resilient Furring Channels: 1/2-inch- deep, steel sheet members designed to reduce sound transmission.

1. Configuration: Asymmetrical or hat shaped.

H. Cold-Rolled Furring Channels: 0.053-inch uncoated-steel thickness, with minimum 1/2-inch- wide flanges.

1. Depth: As indicated on Drawings.
2. Furring Brackets: Adjustable, corrugated-edge-type steel sheet with minimum uncoated-steel thickness of 0.0329 inch.
3. Tie Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper, 0.062-inch- diameter wire, or double strand of 0.048-inch- diameter wire.

2.4 SUSPENSION SYSTEMS

A. Tie Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper, 0.062-inch- diameter wire, or double strand of 0.048-inch- diameter wire.

B. Hanger Attachments to Concrete:

1. Post-Installed Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01, AC193, AC58, or AC308 as appropriate for the substrate.

a. Uses: Securing hangers to structure.
b. Type: Torque-controlled, expansion anchor.
c. Material for Interior Locations: Carbon-steel components zinc-plated to comply with ASTM B633 or ASTM F1941, Class Fe/Zn 5, unless otherwise indicated.

d. Material for Exterior or Interior Locations and Where Stainless Steel Is Indicated: Alloy Group 1 stainless-steel bolts, ASTM F593, and nuts, ASTM F594.

2. Power-Actuated Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

C. Wire Hangers: ASTM A641/A641M, Class 1 zinc coating, soft temper, 0.16 inch in diameter.

D. Carrying Channels (Main Runners): Cold-rolled, commercial-steel sheet with a base-steel thickness of 0.0538 inch and minimum 1/2-inch- wide flanges.

1. Depth: As indicated on Drawings.

E. Furring Channels (Furring Members):

1. Cold-Rolled Channels: 0.0538-inch uncoated-steel thickness, with minimum 1/2-inch- wide flanges, 3/4 inch deep.
2. Steel Studs and Tracks: ASTM C645.

a. Minimum Base-Steel Thickness: 0.033 inch.
b. Depth: As indicated on Drawings.

3. Embossed, High-Strength Steel Studs and Tracks: ASTM C645.

a. Minimum Base-Steel Thickness: Not less than 0.0190 inch.
b. Depth: As indicated on Drawings.

4. Hat-Shaped, Rigid Furring Channels: ASTM C645, 7/8 inch deep.

a. Minimum Base-Steel Thickness: Not less than 0.033 inch.

5. Resilient Furring Channels: 1/2-inch- deep members designed to reduce sound transmission.

a. Configuration: Asymmetrical.

F. Grid Suspension System for Gypsum Board Ceilings (Contractor's Option): ASTM C 645, direct-hung system composed of main beams and cross-furring members that interlock.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Armstrong World Industries, Inc.; Drywall Grid Systems.
b. Chicago Metallic Corporation; Drywall Grid System.
c. USG Corporation; Drywall Suspension System.

G. Corridor Suspension Systems for Gypsum Board Ceilings: System consisting of single runners that span width of corridors up to 7 feet without hanger wires and up to 14 feet with one hanger wire and are supported by wall angles.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Chicago Metallic Corporation; SpanFast Drywall Suspension System.
b. USG Corporation; Drywall Wall-to-Wall Suspension System.

2.5 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards.

1. Fasteners for Steel Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.

B. Isolation Strip at Exterior Walls: Provide the following:

1. Foam Gasket: Adhesive-backed, closed-cell vinyl foam strips that allow fastener penetration without foam displacement, 1/8 inch thick, in width to suit steel stud size.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates, with Installer present, and including welded hollow-metal frames, cast-in anchors, and structural framing, for compliance with requirements and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Suspended Assemblies: Coordinate installation of suspension systems with installation of overhead structure to ensure that inserts and other provisions for anchorages to building structure have been installed to receive hangers at spacing required to support the Work and that hangers will develop their full strength.

1. Furnish concrete inserts and other devices indicated to other trades for installation in advance of time needed for coordination and construction.

3.3 INSTALLATION, GENERAL

A. Installation Standard: ASTM C754.

1. Gypsum Board Assemblies: Also comply with requirements in ASTM C840 that apply to framing installation.

B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.

C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.

D. Install bracing at terminations in assemblies.

E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

3.4 INSTALLING FRAMED ASSEMBLIES

A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

1. Single-Layer Application: As required by horizontal deflection performance requirements unless otherwise indicated.
2. Multilayer Application: As required by horizontal deflection performance requirements unless otherwise indicated.
3. Tile Backing Panels: As required by horizontal deflection performance requirements unless otherwise indicated.

B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.

C. Install studs so flanges within framing system point in same direction.

D. Install tracks at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts that penetrate partitions above ceiling.

1. Slip-Type Head Joints: Where framing extends to overhead structural supports, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install track section (for cripple studs) at head and secure to jamb studs.

   a. Install two studs at each jamb unless otherwise indicated.
   b. Install cripple studs at head adjacent to each jamb stud, with a minimum 1/2-inch clearance from jamb stud to allow for installation of control joint in finished assembly.
   c. Extend jamb studs through suspended ceilings and attach to underside of overhead structure.

3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
4. Sound-Rated Partitions: Install framing to comply with sound-rated assembly indicated.

E. Direct Furring:

1. Screw to framing.
2. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches o.c.

F. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch from the plane formed by faces of adjacent framing.

3.5 INSTALLING CEILING SUSPENSION SYSTEMS

A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

1. Hangers: 48 inches o.c.
2. Carrying Channels (Main Runners): 48 inches o.c.
3. Furring Channels (Furring Members): 16 inches o.c.

B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.

C. Suspend hangers from building structure as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.

   a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.

2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.

   a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards.

3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.
4. Do not attach hangers to steel roof deck.
5. Do not attach hangers to permanent metal forms. Furnish cast-in-place hanger inserts that extend through forms.
6. Do not attach hangers to rolled-in hanger tabs of composite steel floor deck.
7. Do not connect or suspend steel framing from ducts, pipes, or conduit.

D. Seismic Bracing: Sway-brace suspension systems with hangers used for support.

E. Grid Suspension Systems: Attach perimeter wall track or angle where grid suspension systems meet vertical surfaces. Mechanically join main beam and cross-furring members to each other and butt-cut to fit into wall track.

F. Installation Tolerances: Install suspension systems that are level to within 1/8 inch in 12 feet measured lengthwise on each member that will receive finishes and transversely between parallel members that will receive finishes.

END OF SECTION 092216

This page intentionally left blank.

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior gypsum board.
2. Tile backing panels.

1.2 ACTION SUBMITTALS

A. Product Data: For the following:

1. Gypsum board, Type X.
2. Gypsum ceiling board.
3. Mold-resistant gypsum board.
4. Cementitious backer units.
5. Interior trim.
6. Joint treatment materials.
7. Sound-attenuation blankets.
8. Acoustical sealant.

1.3 QUALITY ASSURANCE

A. Mockups: Build mockups of at least 100 sq. ft. in surface area to demonstrate aesthetic effects and to set quality standards for materials and execution.

1. Build mockups for the following:

   a. Each level of gypsum board finish indicated for use in exposed locations.

2. Apply or install final decoration indicated, including painting and wallcoverings, on exposed surfaces for review of mockups.
3. Simulate finished lighting conditions for review of mockups.
4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.4 DELIVERY, STORAGE AND HANDLING

A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.5 FIELD CONDITIONS

A. Environmental Limitations: Comply with ASTM C840 requirements or gypsum board manufacturer's written instructions, whichever are more stringent.

B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.

C. Do not install panels that are wet, moisture damaged, and mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E90 and classified according to ASTM E413 by an independent testing agency.

2.2 GYPSUM BOARD, GENERAL

A. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.3 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. American Gypsum.
2. Certainteed Corporation
3. Georgia-Pacific Gypsum LLC
4. National Gypsum Company
5. USG Corporation.

2.4 INTERIOR GYPSUM BOARD

A. Gypsum Board, Type X: ASTM C1396/C1396M.

1. Thickness: 5/8 inch.
2. Long Edges: Tapered and featured (rounded or beveled) for prefilling.

B. Gypsum Ceiling Board: ASTM C1396/C1396M.

1. Thickness: 5/8 inch.
2. Long Edges: Tapered.

C. Mold-Resistant Gypsum Board: ASTM C1396/C1396M. With moisture- and mold-resistant core and paper surfaces.

1. Core: 5/8 inch, Type X.
2. Long Edges: Tapered.
3. Mold Resistance: ASTM D3273, score of 10 as rated according to ASTM D3274.

2.5 SPECIALTY GYPSUM BOARD

A. Gypsum Board, Type C: ASTM C1396/C1396M. Manufactured to have increased fire-resistive capability.

1. <Double click here to find, evaluate, and insert list of manufacturers and products.>
2. Thickness: As required by fire-resistance-rated assembly indicated on Drawings.

3. Long Edges: Tapered.

2.6 TILE BACKING PANELS

A. Cementitious Backer Units: ANSI A118.9 and ASTM C1288 or ASTM C1325, with manufacturer's standard edges.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. C-Cure
b. CertainTeed Corporation; Saint-Gobain North America.
c. Custom Building Products.
d. FinPan, Inc.
e. James Hardie Building Products, Inc.
f. National Gypsum Company.
g. USG Corporation.

2. Thickness: 5/8 inch.
3. Mold Resistance: ASTM D3273, score of 10 as rated according to ASTM D3274.

2.7 TRIM ACCESSORIES

A. Interior Trim: ASTM C1047.

1. Material: Galvanized or aluminum-coated steel sheet or rolled zinc.
2. Shapes:

a. Cornerbead.
b. LC-Bead: J-shaped; exposed long flange receives joint compound.
c. L-Bead: L-shaped; exposed long flange receives joint compound.
d. U-Bead: J-shaped; exposed short flange does not receive joint compound.
e. Expansion (control) joint.

B. Partition Closures: Two-piece spring-loaded extruded aluminum partition closure. Provide continuous length for height of wall up to ten feet.

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable product by one of the following:

a. Gordon, Inc.; Mullion Mate (Basis of Design)
b. Mull It Over Products

2. Aluminum: Alloy and temper with not less than the strength and durability properties of ASTM B 221, Alloy 6063-T5.
3. Finish: Class I, dark bronze anodized to match window mullion.

2.8 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C475/C475M.

B. Joint Tape: Paper.

C. Joint Compound for Interior Gypsum Board: For each coat, use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints, rounded or beveled panel edges, and damaged surface areas, use setting-type taping compound.

2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use joint setting compound.
3. Fill Coat: For second coat, use joint setting compound.
4. Finish Coat: For third coat, use drying-type compound.
5. Level 4 Finish Coat: For final coat of Level 4 finish, use high build interior coating product designed for application by airless sprayer and to be used instead of skim coat.

D. Joint Compound for Tile Backing Panels:

1. Cementitious Backer Units: As recommended by backer unit manufacturer.

2.9 AUXILIARY MATERIALS

A. Provide auxiliary materials that comply with referenced installation standards and manufacturer's written instructions.

B. Laminating Adhesive: Adhesive or joint compound recommended for directly adhering gypsum panels to continuous substrate.

C. Steel Drill Screws: ASTM C1002 unless otherwise indicated.

1. Use screws complying with ASTM C954 for fastening panels to steel members from 0.033 to 0.112 inch thick.
2. For fastening cementitious backer units, use screws of type and size recommended by panel manufacturer.

D. Sound-Attenuation Blankets: ASTM C665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.

1. Fire-Resistance-Rated Assemblies: Comply with mineral-fiber requirements of assembly.

E. Acoustical Sealant: As specified in Section 079219 "Acoustical Joint Sealants."

F. Thermal Insulation: As specified in Section 072100 "Thermal Insulation."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates including welded hollow-metal frames and support framing, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION AND FINISHING OF PANELS, GENERAL

A. Comply with ASTM C840.

B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.

C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch of open space between panels. Do not force into place.

D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.

E. Form control and expansion joints with space between edges of adjoining gypsum panels.

F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc.), except in chases braced internally.

1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than 8 sq. ft. in area.
2. Fit gypsum panels around ducts, pipes, and conduits.
3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow 1/4- to 3/8-inch- wide joints to install sealant.

G. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments. Provide 1/4- to 1/2-inch- wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.

H. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.

I. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C919 and with manufacturer's written instructions for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.

J. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.3 INSTALLATION OF INTERIOR GYPSUM BOARD

A. Single-Layer Application:

1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.
2. On partitions/walls, apply gypsum panels vertically (parallel to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.
   a. Stagger abutting end joints not less than one framing member in alternate courses of panels.
   b. At stairwells and other high walls, install panels horizontally unless otherwise indicated or required by fire-resistance-rated assembly.
3. On Z-shaped furring members, apply gypsum panels vertically (parallel to framing) with no end joints. Locate edge joints over furring members.
4. Fastening Methods: Apply gypsum panels to supports with steel drill screws.

B. Multilayer Application:

1. On ceilings, apply gypsum board indicated for base layers before applying base layers on walls/partitions; apply face layers in same sequence. Apply base layers at right angles to framing members and offset face-layer joints one framing member, 16 inches minimum, from parallel base-layer joints, unless otherwise indicated or required by fire-resistance-rated assembly.
2. On partitions/walls, apply gypsum board indicated for base layers and face layers vertically (parallel to framing) with joints of base layers located over stud or furring member and face-layer joints offset at least one stud or furring member with base-layer joints unless otherwise indicated or required by fire-resistance-rated assembly. Stagger joints on opposite sides of partitions.
3. Fastening Methods: Fasten base layers and face layers separately to supports with screws.

C. Laminating to Substrate: Where gypsum panels are indicated as directly adhered to a substrate (other than studs, joists, furring members, or base layer of gypsum board), comply with gypsum board manufacturer's written instructions and temporarily brace or fasten gypsum panels until fastening adhesive has set.

3.4 INSTALLATION OF TILE BACKING PANELS

A. Cementitious Backer Units: ANSI A108.11, at locations indicated to receive tile.

B. Where tile backing panels abut other types of panels in same plane, shim surfaces to produce a uniform plane across panel surfaces.

3.5 INSTALLATION OF TRIM ACCESSORIES

A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.

B. Control Joints: Install control joints according to ASTM C840 and in specific locations approved by Architect for visual effect.

C. Interior Trim: Install in the following locations:

1. Cornerbead: Use at outside corners unless otherwise indicated.
2. LC-Bead: Use at exposed panel edges.
3. L-Bead: Use where indicated.
4. U-Bead: Use at exposed panel edges.

3.6 FINISHING GYPSUM BOARD

A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.

B. Prefill open joints, rounded or beveled edges, and damaged surface areas.

C. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.

D. Gypsum Board Finish Levels: Finish panels to levels indicated below and according to ASTM C840:

1. Level 0: This level of finish shall be used in temporary construction only. No taping, finishing, or accessories required unless indicated or specified as in dust proof partitions.
2. Level 1: This level shall be used in ceiling plenum areas and concealed areas unless a higher level of finish is required for fire-resistance-rated assemblies and sound-rated assemblies. Embed tape at joints.

3. Level 2: This level of finish shall be used where water resistant gypsum backing board is used as a substrate for tile. Embed tape and apply separate first coat of joint compound to tape, fasteners, and trim flanges where indicated.
4. Level 3: This level of finish shall be used in areas to receive heavy textured, thick (1/8 inch or greater) wall coverings and where indicated. Embed tape and apply separate first and finish coats of joint compound to tape, fasteners, and trim flanges.
5. Level 4: This level of finish shall be used for areas to receive smooth paint finish. Embed tape and apply separate first, fill, and finish coats of joint compound to tape, fasteners, and trim flanges at panel surfaces. Apply high build interior coating to entire surface.

    a. Tape joints require joint compound and feathering of joint to a minimum of 12 inches each side of joint.
    b. Tape joints that are visible through finished walls are not acceptable.

E. Cementitious Backer Units: Finish according to manufacturer's written instructions.

3.7 FIELD QUALITY CONTROL

A. Above-Ceiling Observation: Before Contractor installs gypsum board ceilings, Owner will conduct an above-ceiling observation and report deficiencies in the Work observed. Do not proceed with installation of gypsum board to ceiling support framing until deficiencies have been corrected.

1. Notify Owner seven days in advance of date and time when Project, or part of Project, will be ready for above-ceiling observation.
2. Before notifying Owner, complete the following in areas to receive gypsum board ceilings:

    a. Installation of 80 percent of lighting fixtures, powered for operation.
    b. Installation, insulation, and leak and pressure testing of water piping systems.
    c. Installation of air-duct systems.
    d. Installation of air devices.
    e. Installation of mechanical system control-air tubing.
    f. Installation of ceiling support framing.
    g. Installation of through-penetration firestopping and fire-resistant joint sealants, with identification labels.

3.8 PROTECTION

A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Repair surfaces stained, marred, or otherwise damaged during drywall application.

B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.

C. Remove and replace panels that are wet, moisture damaged, and mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 092900

This page intentionally left blank.

SECTION 093013 - CERAMIC TILING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Porcelain tile.
2. Thresholds.
3. Crack isolation membranes.

B. Related Requirements:

1. Section 079200 "Joint Sealants" for sealing of expansion, contraction, control, and isolation joints in tile surfaces.
2. Section 092900 "Gypsum Board" for cementitious backer units.

1.2 DEFINITIONS

A. General: Definitions in the ANSI A108 series of tile installation standards and in ANSI A137.1 apply to Work of this Section unless otherwise specified.

B. Face Size: Actual tile size, excluding spacer lugs.

C. Module Size: Actual tile size plus joint width indicated.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review requirements in ANSI A108.01 for substrates and for preparation by other trades.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show locations of each type of tile and tile pattern. Show widths, details, and locations of expansion, contraction, control, and isolation joints in tile substrates and finished tile surfaces.

C. Samples: For tile, grout, and accessories involving color selection.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Master Grade Certificates: For each shipment, type, and composition of tile, signed by tile manufacturer and Installer.

C. Product Certificates: For each type of product.

D. Product Test Reports: For tile-setting and -grouting products.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.
2. Grout: Furnish quantity of grout equal to 3 percent of amount installed for each type, composition, and color indicated.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: Engage an experienced installer who has completed tile installations similar in material, design, and extent to that indicated for this Project and with a record of successful in-service performance.

B. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Build mockup of each type of floor tile installation.
2. Build mockup of each type of wall tile installation.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in ANSI A137.1 for labeling tile packages.

B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.

C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.

D. Store liquid materials in unopened containers and protected from freezing.

1.9 FIELD CONDITIONS

A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations for Tile: Obtain tile of each type and color or finish from single source or producer.

1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.

B. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar, adhesive, and grout component from single manufacturer and each aggregate from single source or producer.

1. Obtain setting and grouting materials, except for unmodified Portland cement and aggregate, from single manufacturer.

C. Source Limitations for Other Products: Obtain each of the following products specified in this Section from a single manufacturer:

1. Stone thresholds.
2. Crack isolation membrane.

2.2 PRODUCTS, GENERAL

A. ANSI Ceramic Tile Standard: Provide tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated.

1. Provide tile complying with Standard grade requirements.

B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.

C. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.

2.3 TILE PRODUCTS

A. Porcelain Tile Type **(PTF-1, PTW-1)**:

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. Del Conca USA; Tudor Stone, Item No. 70TUDGRA1224 (Basis of Design)
b. Ceramiche - Piemme, Purestone, Color - Girgio
c. Crossville; Sands by Edimax

2. Face Size: 12 by 24 inches.
3. Face Size Variation: Rectified.
4. Face: Plain with cushion edges.
5. Dynamic Coefficient of Friction: Not less than 0.42.
6. Tile Color, Glaze, and Pattern: As indicated on Interior Finish Legend.
7. Grout Color: As selected by Architect from manufacturer's full range.
8. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:

a. Base **(PTB-1)**: Same as adjoining flat tile, 6 by 24 inches, with metal trim.

B. Porcelain Tile Type **(PTF-2)**:

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. Atlas Concorde; Marine, Item No. 15SHOMAR1224 and 15SHOMAR2448 (Basis of Design)
b. Florida Tile; Sequence, Color - Drift
c. Best Tile

2. Face Size: 24 by 48 inches.

3. Face Size Variation: Rectified.
4. Face: Plain with cushion edges.
5. Dynamic Coefficient of Friction: Not less than 0.42.
6. Tile Color, Glaze, and Pattern: As indicated on Interior Finish Legend.
7. Grout Color: As selected by Architect from manufacturer's full range.
8. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:

    a. Base **(PTB-2)**: Cove base, 6 by 12 inches.

2.4 THRESHOLDS

A. General: Fabricate to sizes and profiles indicated or required to provide transition between adjacent floor finishes.

1. Bevel edges at 1:2 slope, with lower edge of bevel aligned with or up to 1/16 inch above adjacent floor surface. Finish bevel to match top surface of threshold. Limit height of threshold to 1/2 inch or less above adjacent floor surface.

B. Marble Thresholds: ASTM C503/C503M, with a minimum abrasion resistance of 10 according to ASTM C1353 or ASTM C241/C241M and with honed finish.

1. Description: Uniform, fine- to medium-grained white stone with gray veining.

2.5 CRACK ISOLATION MEMBRANES

A. General: Manufacturer's standard product, selected from the following, that complies with ANSI A118.12 for standard performance and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.

B. Fabric-Reinforced, Fluid-Applied Membrane: System consisting of liquid-latex rubber or elastomeric polymer and fabric reinforcement.

1. Products: Subject to compliance with requirements, provide one of the following:

    a. Bonsal American; an Oldcastle company; B 6000 Waterproof Membrane with Glass Fabric
    b. Custom Building Products; 9240 Waterproofing and Anti-Fracture Membrane
    c. Laticrete International, Inc.; Laticrete Blue 92 Anti-Fracture Membrane
    d. MAPEI Corporation; Mapelastic HPG with MAPEI Fiberglass Mesh

2.6 SETTING MATERIALS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Bonsal American; an Oldcastle company
2. Custom Building Products
3. Laticrete International, Inc.
4. MAPEI Corporation
5. Southern Grouts & Mortars, Inc.
6. Summitville Tiles, Inc.
7. TEC; a subsidiary of H. B. Fuller Company

B. Modified Dry-Set Mortar (Thinset): ANSI A118.4.

1. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.

2. Provide prepackaged, dry-mortar mix combined with acrylic resin or styrene-butadiene-rubber liquid-latex additive at Project site.
3. For wall applications, provide mortar that complies with requirements for nonsagging mortar in addition to the other requirements in ANSI A118.4.

C. Medium-Bed, Modified Dry-Set Mortar: Comply with requirements in ANSI A118.4. Provide product that is approved by manufacturer for application thickness of 5/8 inch.

1. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.
2. Provide prepackaged, dry-mortar mix combined with acrylic resin or styrene-butadiene-rubber liquid-latex additive at Project site.

2.7 GROUT MATERIALS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Bonsal American; an Oldcastle company
2. Custom Building Products
3. Laticrete International, Inc.
4. MAPEI Corporation
5. Southern Grouts & Mortars, Inc.
6. Summitville Tiles, Inc.
7. TEC; a subsidiary of H. B. Fuller Company

B. High-Performance Tile Grout: ANSI A118.7.

1. Polymer Type: Ethylene vinyl acetate or acrylic additive, in dry, redispersible form, prepackaged with other dry ingredients.

2.8 MISCELLANEOUS MATERIALS

A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.

B. Metal Edge Trim: Stainless steel, brushed finish.

1. Basis of Design: Schluter; SCHIENE

C. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.

D. Floor Sealer: Manufacturer's standard product for sealing grout joints and that does not change color or appearance of grout.

2.9 MIXING MORTARS AND GROUT

A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.

B. Add materials, water, and additives in accurate proportions.

C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

1. Verify that substrates for setting tile are firm; dry; clean; free of coatings that are incompatible with tile-setting materials, including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
2. Verify that concrete substrates for tile floors comply with surface finish requirements in ANSI A108.01 for installations indicated.

   a. Verify that surfaces that received a steel trowel finish have been mechanically scarified.
   b. Verify that protrusions, bumps, and ridges have been removed by sanding or grinding.

3. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
4. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with thinset mortar with trowelable leveling and patching compound specifically recommended by tile-setting material manufacturer.

B. Where indicated, prepare substrates to receive waterproof membrane by applying a reinforced mortar bed that complies with ANSI A108.1A and is sloped 1/4 inch per foot toward drains.

C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

3.3 INSTALLATION OF CERAMIC TILE

A. Comply with TCNA's "Handbook for Ceramic, Glass, and Stone Tile Installation" for TCNA installation methods specified in tile installation schedules. Comply with parts of the ANSI A108 series "Specifications for Installation of Ceramic Tile" that are referenced in TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.

1. For the following installations, follow procedures in the ANSI A108 series of tile installation standards for providing 95 percent mortar coverage:

   a. Tile floors in wet areas.
   b. Tile floors consisting of tiles 8 by 8 inches or larger.
   c. Tile floors consisting of rib-backed tiles.

B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.

C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.

D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.

E. Where accent tile differs in thickness from field tile, vary setting-bed thickness so that tiles are flush.

F. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.

1. For tile mounted in sheets, make joints between tile sheets same width as joints within tile sheets so joints between sheets are not apparent in finished work.
2. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
3. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.

G. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:

1. Porcelain Tile: 1/4 inch.

H. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.

I. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.

1. Where joints occur in concrete substrates, locate joints in tile surfaces directly above them.

J. Stone Thresholds: Install stone thresholds in same type of setting bed as adjacent floor unless otherwise indicated.

1. Do not extend cleavage membrane, waterproof membrane, or crack isolation membrane under thresholds set in modified dry-set mortar. Fill joints between such thresholds and adjoining tile set on cleavage membrane, waterproof membrane, or crack isolation membrane with elastomeric sealant.

K. Metal Edge Strips: Install at locations indicated.

L. Floor Sealer: Apply floor sealer to grout joints in tile floors according to floor-sealer manufacturer's written instructions. As soon as floor sealer has penetrated grout joints, remove excess sealer and sealer from tile faces by wiping with soft cloth.

3.4 INSTALLATION OF CRACK ISOLATION MEMBRANES

A. Install crack isolation membrane to comply with ANSI A108.17 and manufacturer's written instructions to produce membrane of uniform thickness that is bonded securely to substrate.

B. Allow crack isolation membrane to cure before installing tile or setting materials over it.

3.5 ADJUSTING AND CLEANING

A. Remove and replace tile that is damaged or that does not match adjoining tile. Provide new matching units, installed as specified and in a manner to eliminate evidence of replacement.

B. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.

1. Remove grout residue from tile as soon as possible.
2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.

3.6 PROTECTION

A. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.

B. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.

C. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.7 INTERIOR CERAMIC TILE INSTALLATION SCHEDULE

A. Interior Floor Installations, Concrete Subfloor:

1. TCNA F111: Cement mortar bed (medium bed) with cleavage membrane.

a. Ceramic Tile Type: Porcelain floor tile.
b. Bond Coat for Cured-Bed Method: Medium-bed, modified dry-set mortar.
c. Grout: High-performance sanded grout.

B. Interior Wall Installations, Wood or Metal Studs or Furring:

1. TCNA W244C or TCNA W244F: Thinset mortar on cementitious backer units or fiber-cement backer board.

a. Ceramic Tile Type: Porcelain wall tile.
b. Thinset Mortar: Modified dry-set mortar.
c. Grout: High-performance unsanded grout.

END OF SECTION 093013

SECTION 095113 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes acoustical panels and exposed suspension systems for interior ceilings.

B. Products furnished, but not installed under this Section, include anchors, clips, and other ceiling attachment devices to be cast in concrete.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified, 6 inches in size.

C. Delegated-Design Submittal: For seismic restraints for ceiling systems.

1. Include design calculations for seismic restraints including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Ceiling suspension-system members.
2. Structural members to which suspension systems will be attached.
3. Method of attaching hangers to building structure.
   a. Furnish layouts for cast-in-place anchors, clips, and other ceiling attachment devices whose installation is specified in other Sections.
4. Carrying channels or other supplemental support for hanger-wire attachment where conditions do not permit installation of hanger wires at required spacing.
5. Size and location of initial access modules for acoustical panels.
6. Items penetrating finished ceiling and ceiling-mounted items including the following:
   a. Lighting fixtures.
   b. Diffusers.
   c. Grilles.
   d. Speakers.
   e. Sprinklers.
   f. Access panels.
   g. Perimeter moldings.
7. Show operation of hinged and sliding components covered by or adjacent to acoustical panels.
8. Minimum Drawing Scale: 1/8 inch = 1 foot.

B. Evaluation Reports: For each acoustical panel ceiling suspension system and anchor and fastener type, from ICC-ES.

C. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For finishes to include in maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Acoustical Ceiling Units: Full-size panels equal to 2 percent of quantity installed.
2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed.
3. Hold-Down Clips: Equal to 2 percent of quantity installed.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Deliver acoustical panels, suspension-system components, and accessories to Project site and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.

B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Do not install acoustical panel ceilings until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

1. Pressurized Plenums: Operate ventilation system for not less than 48 hours before beginning acoustical panel ceiling installation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain each type of acoustical ceiling panel and its supporting suspension system from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design seismic restraints for ceiling systems.

B. Seismic Performance: Suspended ceilings shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

C. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: Class A according to ASTM E1264.
2. Smoke-Developed Index: 50 or less.

D. Fire-Resistance Ratings: Comply with ASTM E119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Indicate design designations from UL or from the listings of another qualified testing agency.

2.3 ACOUSTICAL PANELS

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable product by one of the following:

1. Armstrong World Industries.
2. CertainTeed Corp.
3. Hunter Douglas
4. USG Corp.

B. Acoustical Panel Standard: Provide manufacturer's standard panels according to ASTM E1264 and designated by type, form, pattern, acoustical rating, and light reflectance unless otherwise indicated.

C. Acoustical Panel Ceilings: **(ACT-1)**

1. Basis of Design: Armstrong; Ultima 1912.
2. Type and Form: Type IV, mineral base with membrane-faced overlay; Form 2, water felted.
3. Pattern: E (lightly textured).
4. Color: White.
5. Light Reflectance (LR): Not less than 0.88.
6. Ceiling Attenuation Class (CAC): Not less than 35.
7. Noise Reduction Coefficient (NRC): Not less than 0.75.
8. Edge/Joint Detail: Beveled tegular.
9. Thickness: 3/4 inch.
10. Modular Size: 24 by 24 inches.

D. Acoustical Panel Ceilings: **(ACT-2)**

1. Basis of Design: Armstrong; Ultima 1915.
2. Type and Form: Type IV, mineral base with membrane-faced overlay; Form 2, water felted.
3. Pattern: E (lightly textured).
4. Color: White.
5. Light Reflectance (LR): Not less than 0.88.
6. Noise Reduction Coefficient (NRC): Not less than 0.75.
7. Articulation Class (AC): Not less than 190.
8. Edge/Joint Detail: Square tegular.
9. Thickness: 1-inch.
10. Modular Size: 24 by 48 inches.

2.4 METAL SUSPENSION SYSTEM

A. Manufacturers: Subject to compliance with requirements, provide products from one of the following:

1. Armstrong World Industries.
2. CertainTeed Corp.
3. USG Corp.

B. Metal Suspension-System Standard: Provide manufacturer's standard, direct-hung, metal suspension system and accessories according to ASTM C635/C635M and designated by type, structural classification, and finish indicated.

1. High-Humidity Finish: Where indicated, provide coating tested and classified for "severe environment performance" according to ASTM C635/C635M.

C. Narrow-Face, Capped, Double-Web, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; prepainted, electrolytically zinc coated, or hot-dip galvanized, G30 coating designation; with prefinished 9/16-inch- wide metal caps on flanges.

1. Basis of Design: Armstrong World Industries; Suprafine XL
2. Structural Classification: Intermediate-duty system.
3. End Condition of Cross Runners: Override (stepped) type.
4. Face Design: Flat, flush.
5. Cap Material: Cold-rolled steel.
6. Cap Finish: Painted white.

2.5 ACCESSORIES

A. Attachment Devices: Size for five times the design load indicated in ASTM C635/C635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.

B. Wire Hangers, Braces, and Ties: Provide wires as follows:

1. Zinc-Coated, Carbon-Steel Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper.
2. Size: Wire diameter sufficient for its stress at three times hanger design load (ASTM C635/C635M, Table 1, "Direct Hung") will be less than yield stress of wire, but not less than 0.106-inch- diameter wire.

C. Hold-Down Clips: Manufacturer's standard hold-down.

D. Seismic Clips: Manufacturer's standard seismic clips designed to secure acoustical panels in place during a seismic event.

E. Seismic Stabilizer Bars: Manufacturer's standard perimeter stabilizers designed to accommodate seismic forces.

F. Seismic Struts: Manufacturer's standard compression struts designed to accommodate seismic forces.

2.6 METAL EDGE MOLDINGS AND TRIM

A. Basis of Design: Subject to compliance with requirements, provide products by one of the following:

1. Armstrong World Industries.
2. CertainTeed Corp.
3. USG Corp.

B. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.

1. Edge moldings shall fit acoustical panel edge details and suspension systems indicated and match width and configuration of exposed runners unless otherwise indicated.

2. For lay-in panels with reveal edge details, provide stepped edge molding that forms reveal of same depth and width as that formed between edge of panel and flange at exposed suspension member.
3. For circular penetrations of ceiling, provide edge moldings fabricated to diameter required to fit penetration exactly.
4. For sprinkler heads and other penetrations, provide 2-inch oversized ring or sleeve through the ceiling to allow for free movement of at least 1 inch in all horizontal directions.
5. Wall Angle: 7/8-inch wide, approved for use in seismic areas.
    a. Armstrong Seismic RX with BERC2 Clips.
    b. Certainteed; CTSPC clips system
    c. USG; DX main and cross runners with ACM7 clips.

2.7 AUXILIARY MATERIALS

A. Acoustical Sealant: As specified in Section 079219 "Acoustical Joint Sealants."

B. Sound Attenuation Blankets: ASTM C 665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.
    1. Fire-Resistance-Rated Assemblies: Comply with mineral-fiber requirements of assembly.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.

B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders unless otherwise indicated, and comply with layout shown on reflected ceiling plans.

B. Layout openings for penetrations centered on the penetrating items.

3.3 INSTALLATION

A. Install acoustical panel ceilings according to ASTM C636/C636M, seismic design requirements, and manufacturer's written instructions.

B. Suspend ceiling hangers from building's structural members and as follows:
    1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
    2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.

3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly to structure or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
5. Do not support ceilings directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts, postinstalled mechanical or adhesive anchors, or power-actuated fasteners that extend through forms into concrete.
6. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
7. Do not attach hangers to steel deck tabs.
8. Do not attach hangers to steel roof deck. Attach hangers to structural members.
9. Space hangers not more than 48 inches o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches from ends of each member.
10. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards.
11. Install hanger wire as specified above within 6 inches of each corner of the grid at every light, air diffuser, air return grille, and other equipment items which are installed within or penetrate the ceiling system.

C. Where area of ceiling exceeds 2500 square feet provide seismic separation joints as indicated, or, if not indicated, as directed by Architect.

D. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.

1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.
2. Screw attach moldings to substrate at intervals not more than 16 inches o.c. and not more than 3 inches from ends. Miter corners accurately and connect securely.
3. Do not use exposed fasteners, including pop rivets, on moldings and trim.
4. Install seismic edge molding in accordance with manufacturer’s written recommendations with all accessories necessary to comply with ICC evaluation report.

E. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.

F. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide precise fit.

1. Arrange directionally patterned acoustical panels as follows:

   a. As indicated on reflected ceiling plans.

2. For square-edged panels, install panels with edges fully hidden from view by flanges of suspension-system runners and moldings.
3. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
4. For reveal-edged panels on suspension-system members with box-shaped flanges, install panels with reveal surfaces in firm contact with suspension-system surfaces and panel faces flush with bottom face of runners.
5. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.

6. Install seismic clips in areas indicated; space according to panel manufacturer's written instructions unless otherwise indicated.
7. Install hold-down clips at entrances and in areas required by authorities having jurisdiction; space as recommended by panel manufacturer's written instructions, unless otherwise indicated.
8. Protect lighting fixtures and air ducts according to requirements indicated for fire-resistance-rated assembly.

3.4 ERECTION TOLERANCES

A. Suspended Ceilings: Install main and cross runners level to a tolerance of 1/8 inch in 12 feet, non-cumulative.

B. Moldings and Trim: Install moldings and trim to substrate and level with ceiling suspension system to a tolerance of 1/8 inch in 12 feet, non-cumulative.

3.5 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a qualified special inspector to perform the following special inspections:

1. Periodic inspection during the installation of suspended ceiling grids according to ASCE/SEI 7.

B. Acoustical panel ceiling hangers, anchors, and fasteners will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports.

3.6 CLEANING

A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage.

B. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095113

This page intentionally left blank.

SECTION 095426 - SUSPENDED WOOD CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid-wood, grille-panel ceilings.

1.2 DEFINITIONS

A. NRC: Noise Reduction Coefficient.

1.3 COORDINATION

A. Coordinate layout and installation of wood ceilings and suspension systems with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, fire-suppression system, and partition assemblies.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For suspended wood ceilings.

1. Include reflected ceiling plans, sections, and details, drawn to scale, showing the following:

a. Wood ceiling patterns and joints.
b. Ceiling suspension members.
c. Method of attaching hangers to building structure and locations of cast-in-place anchors, clips, and other ceiling attachment devices whose installation is specified in other Sections.
d. Ceiling-mounted items including, but not limited to, light fixtures, diffusers, grilles, speakers, sprinklers, and access panels.
e. Ceiling perimeter and penetrations through ceiling; trim and moldings.

C. Samples: For each exposed product and for each type, color, and finish specified, 12 inches long by 12 inches wide or full width in size.

1.6 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For each suspended wood ceiling, for tests performed by a qualified testing agency.

B. Evaluation Reports: For suspended-wood-ceiling framing systems.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For finishes to include in maintenance manuals.

1.8 QUALITY ASSURANCE

A. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and to set quality standards for materials and execution.

1. Build mockup of each type of suspended wood ceiling as shown on Drawings.

a. Demonstrate treatment of exposed field cuts.

2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Deliver ceiling components and accessories to Project site in original, unopened packages and store them in a fully enclosed, conditioned space where they are protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.

1. Store materials flat and level, raised from the floor.

B. Handle ceiling components and accessories in a manner that prevents damage.

1.10 PROJECT CONDITIONS

A. Environmental Limitations: Do not install interior ceilings until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, work above ceilings is complete, and HVAC system is operating and maintaining temperature and relative humidity at levels planned for building occupants during the remainder of the construction period.

1. Store and acclimatize wood products in the spaces where they will be installed for a minimum of 72 hours immediately before ceiling installation.

PART 2 - PRODUCTS

2.1 SOLID-WOOD, GRILLE-PANEL CEILING **(LWC-1)**

A. Wood Grille Panels: Manufacturer's standard kiln-dried, solid-wood rails free of knots and without finger joints, cracks, checks, and warp secured to wood panel backing that maintains equal rail spacing and prevents rail twisting and warping.

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. CertainTeed; 4005B1 (Basis of Design)
b. 9Wood, Inc.
c. Rulon International.

2. Wood Species: Maple.
3. Wood Cut: Plain sliced (flat cut).
4. Rail Dimensions: 5/8-inch wide by 1-3/8-inch high.
5. Rail Spacing: 2 inches.
6. Rail Profile: Square exposed, horizontal face.
7. Stabilizing Backer Strips: Manufacturer's standard flat type that attaches rails together; spaced at not more than 12 inches o.c.

a. Material and Finish: Solid wood with manufacturer's standard black finish applied on every surface.

8. Panel Module: 12 by 96 inches.
9. Panel Type: Lay-in installation on grid suspension system.
10. Rail Factory Finish: Manufacturer's standard finish; applied on every wood surface.

a. Type: Clear.
b. Stain: Custom stain to match flush wood doors.
c. Gloss: Manufacturer's standard.

B. Wood-Grille-Panel Accessories: Wood-grille-panel manufacturer's accessories required to provide a complete installation of ceiling in accordance with manufacturer's written installation instructions.

1. Acoustic Infill Panels: Manufacturer's standard, with flame-spread index of 25 or less and smoke-developed index of 50 or less as determined by testing in accordance with ASTM E84.
2. Acoustic Felt: Manufacturer's standard, factory applied, black, backer with flame-spread index of 25 or less and smoke-developed index of 450 or less as determined by testing in accordance with ASTM E84.
3. Wood Trim: As required for complete, finished system; in wood species and finished to match rails; with trim connectors recommended in writing by ceiling and suspension-system manufacturers.

C. Grid Suspension System: ASTM C635/C635M; recommended in writing by ceiling and suspension-system manufacturers for applications indicated; main- and cross-runner system complete with suspension-system components required to support ceiling units and other ceiling-supported construction.

1. Material: ASTM A653/A653M, hot-dip galvanized, cold-rolled sheet steel, G60 coating designation.
2. Structural Classification: Heavy-duty system.
3. Face Width: 15/16 inch.
4. Finish: Flat black.

2.2 SUSPENSION-SYSTEM HANGERS, BRACES, AND TIES

A. Attachment Devices: Size for 5 times the design load indicated in ASTM C635/C635M, Table 1, Direct Hung, unless otherwise indicated.

B. Wire Hangers, Braces, and Ties: Provide wire complying with the following requirements:

1. Zinc-Coated, Carbon-Steel Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper.
2. Stainless Steel Wire: ASTM A580/A580M, Type 304, nonmagnetic.
3. Nickel-Copper-Alloy Wire: ASTM B164 nickel-copper alloy UNS No. N04400.
4. Size: Select wire diameter so its stress at 3 times the hanger design load indicated in ASTM C635/C635M, Table 1, Direct Hung is less than yield stress of wire, but provide not less than 0.106-inch- diameter wire.

C. Hanger Rods: Mild steel, zinc coated or protected with rust-inhibitive paint.

D. Flat Hangers: Mild steel, zinc coated or protected with rust-inhibitive paint.

E. Angle Hangers: Angles with legs not less than 7/8 inch wide; formed from 0.04-inch- thick, galvanized-steel sheet complying with ASTM A653/A653M, G90 coating designation; with bolted connections and 5/16-inch- diameter bolts.

F. Seismic Stabilizer Bars: Grid-suspension-system manufacturer's standard perimeter stabilizers designed to accommodate seismic forces.

G. Seismic Struts: Suspension-system manufacturer's standard compression struts designed to accommodate seismic forces.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, including structural framing and substrates to which suspended wood ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage, and with requirements for installation tolerances and other conditions affecting performance of suspended wood ceilings.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Measure each ceiling area and establish layout of suspended wood ceilings.

1. Balance border widths at opposite edges of each ceiling.
2. Avoid using less-than-half-width units.

3.3 INSTALLATION

A. Comply with ASTM C636/C636M and seismic requirement indicated, in accordance with manufacturer's written instructions and CISCA's "Ceiling Systems Handbook."

B. Suspend ceiling hangers from building's structural members and as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
4. Secure wire hangers to ceiling suspension members and to supports above with a minimum of three tight turns in 3 inches. Connect hangers directly either to structures or to inserts, eye screws, or other devices that are secure and appropriate for substrate to which hangers are attached and for type of hanger involved.
5. Secure flat, angle, channel, and rod hangers to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices that are secure and appropriate for both structure to which hangers are attached and type of hanger involved. Install hangers in a manner that does not cause them to deteriorate or fail due to age, corrosion, or elevated temperatures.
6. Do not support ceilings directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts or postinstalled mechanical or adhesive anchors that extend through forms into concrete.
7. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
8. Do not attach hangers to steel deck tabs.
9. Do not attach hangers to steel roof deck. Attach hangers to structural members.
10. Space hangers not more than 48 inches o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches from ends of each member.

11. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards and publications.

C. Secure bracing wires to ceiling suspension members and to supports with a minimum of four tight turns in 1-1/2 inches. Suspend bracing from building's structural members as required for hangers and without attaching to permanent metal forms, steel deck, or steel deck tabs. Fasten bracing wires into concrete with cast-in-place or postinstalled anchors.

D. Install edge moldings and trim at perimeter of ceiling area and where necessary to conceal edges and ends of wood units.

1. Screw-attach metal moldings to substrate at intervals of not more than 16 inches o.c. and not more than 3 inches from ends, leveling with ceiling suspension system to a tolerance of 1/8 inch in 12 feet. Miter corners accurately and connect securely.
2. Do not use exposed fasteners on moldings and trim.

E. Grid Suspension Systems: Space main beams at 48 inches o.c.

1. Install cross tees to form modules sized in accordance with manufacturer's written installation instructions.
2. Remove and replace dented, bent, or kinked members.

F. Linear-Carrier Suspension Systems: Install carriers at no more than 24 inches o.c. aligned and securely interlocked with one another.

1. Install stabilizer channels, tees, and bars at regular intervals to stabilize carriers and at light fixtures, air-distribution equipment, access doors, and other equipment; spaced as standard with manufacturer for use indicated.
2. Remove and replace dented, bent, or kinked members.

G. Install wood components and accessories in accordance with manufacturer's written instructions and to accommodate natural expansion and contraction of wood products resulting from fluctuations in humidity.

H. Cut wood components for accurate fit at borders and at interruptions and penetrations by other work through ceilings.

1. Stiffen edges of cut wood components as required to eliminate variations in flatness.

I. Treat field-cut edges of wood components in accordance with manufacturer's written recommendations; finish exposed field cuts to match factory finish.

1. Solid-Wood Planks: Use solid-wood end caps to conceal exposed field-cut edges.

J. Install wood components in coordination with suspension system and moldings and trim.

3.4 CLEANING

A. Clean exposed surfaces of ceilings, including trim and edge moldings. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage, including dented units.

END OF SECTION 095426

This page intentionally left blank.

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermoplastic-rubber base.
2. Rubber molding accessories.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified, not less than 12 inches long.

C. Product Schedule: For resilient base and accessory products. Use same designations indicated on Drawings.

1.3 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Furnish not less than 10 linear feet for every 500 linear feet or fraction thereof, of each type, color, pattern, and size of resilient product installed.

1.4 QUALITY ASSURANCE

A. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.

1. Coordinate mockups in this Section with mockups specified in other Sections.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F or more than 90 deg F.

1.6 FIELD CONDITIONS

A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 95 deg F, in spaces to receive resilient products during the following periods:

1. 48 hours before installation.
2. During installation.
3. 48 hours after installation.

B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F or more than 95 deg F.

C. Install resilient products after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 THERMOPLASTIC-RUBBER BASE **(RBS-1)**

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable product by one of the following:

1. Tarkett; Traditional Duracove (Basis of Design)
2. Armstrong
3. Mannington

B. Product Standard: ASTM F1861, Type TP (rubber, thermoplastic).

1. Group: I (solid, homogeneous).
2. Style and Location: Style B, Cove.

C. Thickness: 0.125 inch.

D. Height: 4 inches.

E. Lengths: Coils in manufacturer's standard length.

F. Outside Corners: Preformed.

G. Inside Corners: Job formed.

H. Colors: As indicated on Interior Finish Legend.

2.2 RUBBER MOLDING ACCESSORY

A. Description: Rubber reducer strips and transition strips.

B. Profile and Dimensions: As selected by Architect.

C. Colors and Patterns: As selected by Architect from manufacturer's full range.

2.3 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based or blended hydraulic-cement-based formulation provided or approved by resilient-product manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by resilient-product manufacturer for resilient products and substrate conditions indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

1. Installation of resilient products indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.

B. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.

C. Do not install resilient products until materials are the same temperature as space where they are to be installed.

1. At least 48 hours in advance of installation, move resilient products and installation materials into spaces where they will be installed.

D. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient products.

3.3 RESILIENT BASE INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient base.

B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.

C. Install resilient base in lengths as long as practical without gaps at seams and with tops of adjacent pieces aligned.

D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.

E. Do not stretch resilient base during installation.

F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.

G. Preformed Corners: Install preformed corners before installing straight pieces.

H. Job-Formed Corners:

1. Inside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches in length.

a. Miter or cope corners to minimize open joints.

3.4 RESILIENT ACCESSORY INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient accessories.

B. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of floor covering that would otherwise be exposed.

3.5 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protecting resilient products.

B. Perform the following operations immediately after completing resilient-product installation:

1. Remove adhesive and other blemishes from surfaces.
2. Sweep and vacuum horizontal surfaces thoroughly.
3. Damp-mop horizontal surfaces to remove marks and soil.

C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Cover resilient products subject to wear and foot traffic until Substantial Completion.

END OF SECTION 096513

SECTION 096519 - RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Vinyl composition floor tile.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product specified.

B. Shop Drawings: For each type of floor tile. Include floor tile layouts, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets, and cutouts.

1. Show details of special patterns.

C. Samples: Tiles of each different color and pattern of resilient floor tile specified, showing the full range of variations expected in these characteristics.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: Signed by manufacturers of resilient products certifying that each product furnished complies with requirements.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For resilient floor tile to include in the maintenance manuals specified in Division 01.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Engage an experienced installer to perform work of this Section who has specialized in installing resilient products similar to those required for this Project and with a record of successful in-service performance.

B. Fire-Test-Response Characteristics: As determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.

1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

C. Mockups: Build mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Build mockups for floor tile including resilient base and accessories.
2. Size: Minimum 100 sq. ft. for each type, color, and pattern in locations directed by Architect.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Deliver products to Project site in manufacturer's original, unopened cartons and containers, each bearing names of product and manufacturer, Project identification, and shipping and handling instructions.

B. Store products in dry spaces protected from the weather, with ambient temperatures maintained between 50 and 90 deg F. Store tiles on flat surfaces.

C. Move products into spaces where they will be installed at least 48 hours before installation, unless longer conditioning period is recommended in writing by manufacturer.

1.7 PROJECT CONDITIONS

A. Maintain a temperature of not less than 70 deg F or more than 95 deg F in spaces to receive products for at least 48 hours before installation, during installation, and for at least 48 hours after installation, unless manufacturer's written recommendations specify longer time periods. After post-installation period, maintain a temperature of not less than 55 deg F or more than 95 deg F.

B. Do not install products until they are at the same temperature as the space where they are to be installed.

C. Close spaces to traffic during flooring installation and for time period after installation recommended in writing by manufacturer.

D. Install tiles and accessories after other finishing operations, including painting, have been completed.

E. Do not install flooring over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive, as determined by flooring manufacturer's recommended bond and moisture test.

1.8 EXTRA MATERIALS

A. Furnish extra materials described below that match products installed, are packaged with protective covering for storage, and are identified with labels describing contents.

1. Furnish not less than one box of each type, color, pattern, class, wearing surface, and size of resilient tile flooring installed.
2. Deliver extra materials to Owner.

PART 2 - PRODUCTS

2.1 VINYL COMPOSITION FLOOR TILE

A. Vinyl Composition Floor Tile **(VCT-1)**: ASTM F 1066

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. Armstrong Flooring; Imperial Standard Excelon (Basis of Design)
b. Johnsonite
c. Tarkett

2. Class: Class 2 (through-pattern tile).
3. Wearing Surface: Smooth.
4. Thickness: 0.125 inch.
5. Size: 12 by 12 inches.
6. Color: As indicated on Interior Finish Legend.

2.2 ACCESSORIES

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based formulation provided or approved by flooring manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by manufacturer to suit resilient products and substrate conditions indicated.

C. Floor Polish: Provide protective liquid floor polish products as recommended by manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions where installation of resilient products will occur, with Installer present, for compliance with manufacturer's requirements. Verify that substrates and conditions are satisfactory for resilient product installation and comply with requirements specified.

B. Concrete Subfloors: Verify that concrete slabs comply with ASTM F 710 and the following:

1. Slab substrates are dry and free of curing compounds, sealers, hardeners, and other materials that may interfere with adhesive bond. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by flooring manufacturer.
2. Subfloor finishes comply with requirements specified in Section 033000 "Cast-in-Place Concrete" for slabs receiving resilient flooring.
3. Subfloors are free of cracks, ridges, depressions, scale, and foreign deposits.

C. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. General: Comply with resilient product manufacturer's written installation instructions for preparing substrates indicated to receive resilient products.

B. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, and depressions in substrates.

C. Remove coatings, including curing compounds, and other substances that are incompatible with flooring adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.

D. Sweep and vacuum clean substrates to be covered immediately before product installation. After cleaning, examine substrates for moisture, alkaline salts, carbonation, or dust. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.3 TILE INSTALLATION

A. General: Comply with tile manufacturer's written installation instructions.

B. Lay out tiles from center marks established with principal walls, discounting minor offsets, so tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half of a tile at perimeter.

1. Lay tiles square with room axis, unless otherwise indicated.

C. Match tiles for color and pattern by selecting tiles from cartons in the same sequence as manufactured and packaged, if so numbered. Cut tiles neatly around all fixtures. Discard broken, cracked, chipped, or deformed tiles.

1. Lay tiles with grain direction alternating in adjacent tiles (basket-weave pattern).
2. At ramps, install tile so that joints do not occur at changes of plane in substrate.

D. Scribe, cut, and fit tiles to butt neatly and tightly to vertical surfaces and permanent fixtures, including built-in furniture, cabinets, pipes, outlets, edgings, door frames, thresholds, and nosings.

E. Extend tiles into toe spaces, door reveals, closets, and similar openings.

F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on finish flooring as marked on subfloor. Use chalk or other nonpermanent, nonstaining marking device.

G. Adhere tiles to flooring substrates using a full spread of adhesive applied to substrate to comply with tile manufacturer's written instructions, including those for trowel notching, adhesive mixing, and adhesive open and working times.

1. Provide completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

H. Hand roll tiles according to tile manufacturer's written instructions.

3.4 CLEANING AND PROTECTING

A. Comply with manufacturer's written instructions for cleaning and protecting floor tile.

B. Perform the following operations immediately after completing floor tile installation:

1. Remove adhesive and other blemishes from surfaces.
2. Sweep and vacuum surfaces thoroughly.
3. Damp-mop surfaces to remove marks and soil.

C. Protect floor tile from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Floor Polish: Remove soil, adhesive, and blemishes from floor tile surfaces before applying liquid floor polish.

1. Apply three coat(s).

E. Cover floor tile until Substantial Completion.

END OF SECTION 096519

SECTION 096520 - RESILIENT PLANK FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Luxury vinyl floor planks.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product indicated.

B. Shop Drawings: Include floor plank layouts, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets, and cutouts.

C. Samples: Full-size units of each color and pattern required.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of floor plank to include in maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Floor Planks: Furnish one box for every 50 boxes or fraction thereof, of each type, color, and pattern of floor planks installed.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: Engage an experienced installer to perform work of this Section who has specialized in installing resilient products similar to those required for this Project and with a record of successful in-service performance.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.

1. Coordinate mockups in this Section with mockups specified in other Sections.

a. Size: Minimum 100 sq. ft. for each type, color, and pattern.

2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 PROJECT CONDITIONS

A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 95 deg F, in spaces to receive floor planks during the following periods:

1. 48 hours before installation.
2. During installation.
3. 48 hours after installation.

B. Until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer.

C. Close spaces to traffic during flooring installation and for 48 hours after flooring installation.

D. Install flooring after other finishing operations, including painting, have been completed.

E. Do not install flooring over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive, as determined by flooring manufacturer's recommended bond and moisture test.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics: For resilient floor planks, as determined by testing identical products according to ASTM E648 or NFPA 253 by a qualified testing agency.

1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

2.2 LUXURY VINYL FLOOR PLANKS

A. Luxury Vinyl Planks **(LVT-1**): Products complying with ASTM F 1700, Class III - printed film vinyl, Type B - embossed surface.

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. Patcraft; Natural Slate 1533V (Basis of Design)
b. EF Contract
c. Tarkett/Tandus

2. Color: As indicated on Interior Finish Legend.
3. Size: Nominal 8 by 59 inches.
4. Thickness: 0.118 inches
5. Wear Layer Thickness: 20 mil.

2.3 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by manufacturer to suit flooring and substrate conditions indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of floor planks.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.

B. Concrete Substrates: Prepare according to ASTM F 710.

1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.
3. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer. Proceed with installation only after substrates pass testing.
4. Moisture Testing: Perform tests recommended by floor covering manufacturer. Proceed with installation only after substrates pass testing.

C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.

D. Do not install floor planks until they are same temperature as space where they are to be installed.

1. Move resilient products and installation materials into spaces where they will be installed at least 48 hours in advance of installation.

E. Sweep and vacuum clean substrates to be covered by resilient products immediately before installation.

3.3 FLOOR INSTALLATION

A. Comply with manufacturer's written instructions for installing floor planks.

B. Apply leveling compound at transitions from tile to resilient flooring and feather out over two feet.

C. Lay out floor planks from center marks established with principal walls, discounting minor offsets, so planks at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half plank at perimeter.

1. Lay planks in pattern indicated, or if not indicated, install square with room axis.

D. Match floor planks for color and pattern by selecting planks from cartons in the same sequence as manufactured and packaged, if so numbered. Discard broken, cracked, chipped, or deformed planks.

1. Lay planks with grain running in one direction.

E. Scribe, cut, and fit floor planks to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.

F. Extend floor planks into toe spaces, door reveals, closets, and similar openings. Extend floor planks to center of door openings.

G. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor planks as marked on substrates. Use chalk or other nonpermanent, nonstaining marking device.

H. Adhere floor planks to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

I. Hand roll resilient flooring according to manufacturer's written instructions.

3.4 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protecting floor planks.

B. Perform the following operations immediately after completing floor plank installation:

1. Remove adhesive and other blemishes from surfaces.
2. Sweep and vacuum surfaces thoroughly.
3. Damp-mop surfaces to remove marks and soil.

C. Protect floor planks from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Cover floor planks until Substantial Completion.

END OF SECTION 096520

SECTION 096536 - STATIC-CONTROL RESILIENT FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Static-dissipative, vinyl composition floor tile.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Include floor covering layouts, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets, and cutouts.

1. Show details of special patterns.
2. Submit grounding diagram showing location of grounding strips and connections.

C. Samples: For each type of static-control resilient flooring.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified Installer.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of static-control resilient flooring to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: A qualified installer who employs workers for this Project who are competent in techniques required by manufacturer for floor covering installation indicated.

1. Engage an installer who employs workers for this Project who are trained or certified by manufacturer for installation techniques required.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Store static-control resilient flooring and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer but not less than 50 deg F or more than 90 deg F.

1. Floor Tile: Store on flat surfaces.

1.7 PROJECT CONDITIONS

A. Maintain ambient temperatures within range recommended by manufacturer in spaces to receive floor coverings during the following time periods:

1. 48 hours before installation.
2. During installation.

3. 48 hours after installation.

B. Until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F or more than 95 deg F.

C. Close spaces to traffic during, and 48 hours after, floor covering installation.

D. Install floor coverings after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Static-Dissipative Properties: Provide floor coverings with static-control properties indicated as determined by testing identical products per test method indicated by an independent testing and inspecting agency.

1. Electrical Resistance: Test per ESD-STM-7.1.

a. Average greater than 1 megohm and less than or equal to 1000 megohms when test specimens are tested surface to ground.
b. Average no less than 1 megohm and less than or equal to 1000 megohms when installed floor coverings are tested surface to ground.

2. Static Generation: Less than 300 V when tested per AATCC-134 at 20 percent relative humidity with conductive footwear.
3. Static Decay: 5000 to 0 V in less than 0.25 seconds when tested per FED-STD-101C/4046.1.

B. Fire-Test-Response Characteristics: As determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.

1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

2.2 STATIC-DISSIPATIVE RESILIENT FLOOR COVERINGS

A. Static-Dissipative, Vinyl Composition Floor Tile **(VCT-2)**: ASTM F 1066 (vinyl composition floor tile, nonasbestos formulated), Class 2 (through-pattern tile).

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. Armstrong; Excelon SDT (Basis of Design)
b. Johnsonite
c. Tarkett

2. Thickness: 0.125 inch.
3. Size: 12 by 12 inches.
4. Color: As indicated on Interior Finish Legend.

2.3 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.

B. Static-Control Adhesive: Provided or approved by manufacturer; type that maintains electrical continuity of floor covering system to ground connection.

C. Grounding Strips: Provided or approved by manufacturer; type and size that maintains electrical continuity of floor covering system to ground connection.

D. Floor Polish: Provide protective, static-control liquid floor polish products recommended in writing by floor-covering manufacturer.

PART 3 - EXECUTION

3.1 PREPARATION

A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of floor coverings and electrical continuity of floor covering systems.

B. Concrete Substrates: Prepare according to ASTM F 710.

1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
2. Remove substrate coatings and other substances that are incompatible with floor covering adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.
3. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer. Proceed with installation only after substrates pass testing.
4. Moisture Testing: Perform tests recommended by manufacturer. Proceed with installation only after substrates pass testing.

C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.

D. Do not install floor coverings until they are same temperature as space where they are to be installed.

1. Move floor coverings and installation materials into spaces where they will be installed at least 48 hours in advance of installation.

E. Sweep and vacuum clean substrates to be covered by floor coverings immediately before installation.

3.2 INSTALLATION, GENERAL

A. Install static-control resilient flooring according to manufacturer's written instructions.

B. Embed grounding strips in static-control adhesive. Extend grounding strips beyond perimeter of static-control resilient floor covering surfaces to ground connections.

C. Scribe, cut, and fit floor coverings to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.

D. Extend floor coverings into toe spaces, door reveals, closets, and similar openings. Extend floor covering to center of door openings.

E. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor coverings as marked on substrates. Use chalk or other nonpermanent, nonstaining marking device.

F. Install floor coverings on covers for telephone and electrical ducts, and similar items in installation areas. Maintain overall continuity of color and pattern with pieces of floor coverings installed on covers. Tightly adhere floor covering edges to substrates that abut covers and to cover perimeters.

G. Adhere floor coverings to substrates using a full spread of static-control adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

3.3 FLOOR-TILE INSTALLATION

A. Comply with manufacturer's written instructions for installing floor tile.

B. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so floor tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half floor tile at perimeter.

1. Lay floor tiles square with room axis.

C. Match floor tiles for color and pattern by selecting floor tiles from cartons in same sequence as manufactured and packaged if so numbered. Discard broken, cracked, chipped, or deformed floor tiles.

3.4 FIELD QUALITY CONTROL

A. Testing: Owner may engage a qualified testing agency to test electrical resistance of static-control resilient floor covering systems for compliance with requirements.

1. Arrange for testing after installation static-control adhesives have fully cured and floor covering systems have stabilized to ambient conditions and after ground connections are completed.

B. Static-control resilient flooring will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

3.5 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protection of flooring.

B. Perform the following operations immediately after completing floor covering installation:

1. Remove static-control adhesive and other blemishes from exposed surfaces.
2. Sweep and vacuum surfaces thoroughly.
3. Damp-mop surfaces to remove marks and soil.

C. Protect floor coverings from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

1. Do not wax static-control resilient flooring.
2. If recommended in writing by manufacturer, apply protective static-control floor polish formulated to maintain or enhance floor covering's electrical properties. Before polishing, do the following:

a. Ensure that static-control resilient flooring surfaces are free from soil, static-control adhesive, and surface blemishes.
b. Verify that both floor polish and its application method are approved by manufacturer and that floor polish will not leave an insulating film that reduces static-control resilient flooring's effectiveness for static control.

D. Cover static-control resilient flooring until Substantial Completion.

END OF SECTION 096536

SECTION 096813 - TILE CARPETING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Modular carpet tile.

B. Related Requirements:

1. Section 096513 "Resilient Base and Accessories" for resilient wall base and accessories installed with carpet tile.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review methods and procedures related to carpet tile installation including, but not limited to, the following:

a. Review delivery, storage, and handling procedures.
b. Review ambient conditions and ventilation procedures.
c. Review subfloor preparation procedures.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include manufacturer's written data on physical characteristics, durability, and fade resistance.
2. Include manufacturer's written installation recommendations for each type of substrate.

B. Shop Drawings: For carpet tile installation, plans showing the following:

1. Columns, doorways, enclosing walls or partitions, built-in cabinets, and locations where cutouts are required in carpet tiles.
2. Carpet tile type, color, and dye lot.
3. Type of subfloor.
4. Type of installation.
5. Pattern of installation.
6. Pattern type, location, and direction.
7. Pile direction.
8. Type, color, and location of insets and borders.
9. Type, color, and location of edge, transition, and other accessory strips.
10. Transition details to other flooring materials.

C. Samples: For each of the following products and for each color and texture required. Label each Sample with manufacturer's name, material description, color, pattern, and designation indicated on Drawings and in schedules.

1. Carpet Tile: Full-size Sample.
2. Exposed Edge, Transition, and Other Accessory Stripping: 12-inch- long Samples.

D. Product Schedule: For carpet tile. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For carpet tile, for tests performed by a qualified testing agency.

C. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For carpet tiles to include in maintenance manuals. Include the following:

1. Methods for maintaining carpet tile, including cleaning and stain-removal products and procedures and manufacturer's recommended maintenance schedule.
2. Precautions for cleaning materials and methods that could be detrimental to carpet tile.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Carpet Tile: Full-size units equal to 5 percent of amount installed for each type indicated, but not less than 10 sq. yd.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Comply with the Carpet and Rug Institute's CRI 104.

1.8 FIELD CONDITIONS

A. Comply with the Carpet and Rug Institute's CRI 104 for temperature, humidity, and ventilation limitations.

B. Environmental Limitations: Do not deliver or install carpet tiles until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and ambient temperature and humidity conditions are maintained at levels planned for building occupants during the remainder of the construction period.

C. Do not install carpet tiles over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive and concrete slabs have pH range recommended by carpet tile manufacturer.

D. Where demountable partitions or other items are indicated for installation on top of carpet tiles, install carpet tiles before installing these items.

1.9 WARRANTY

A. Special Warranty for Carpet Tiles: Manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.

1. Warranty does not include deterioration or failure of carpet tile due to unusual traffic, failure of substrate, vandalism, or abuse.
2. Failures include, but are not limited to, the following:

a. More than 10 percent edge raveling, snags, and runs.
b. Dimensional instability.

c. Excess static discharge.
d. Loss of tuft-bind strength.
e. Loss of face fiber.
f. Delamination.

3. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 CARPET TILE

A. Carpet Tile **(CPT-1)**:

1. Basis of Design: Shaw; Noble Materials, Slab Tile 5T133.
2. Color: Forge 33518, unless otherwise indicated on Material Finishes Legend.
3. Fiber Content: 100 percent nylon 6, 6.
4. Pile Characteristic: Multi-Level Pattern Cut/Loop.
5. Density: 5778 oz./cu. yd.
6. Total Thickness: 0.310 inches.
7. Stitches: 8.0 per inch.
8. Gage: 1/10 inch.
9. Tufted Weight: 26 oz./sq. yd. for finished carpet tile.
10. Primary Backing/Backcoating: Manufacturer's standard synthetic materials.
11. Secondary Backing: Manufacturer's standard material.
12. Size: 24 by 24 inches.

B. Carpet Tile **(CPT-2)**:

1. Basis of Design: Shaw; Noble Materials, Form Tile 5T136.
2. Color: Forge Platinum 33518, unless otherwise indicated on Material Finishes Legend.
3. Fiber Content: 100 percent nylon 6, 6.
4. Pile Characteristic: Multi-Level Pattern Cut/Loop.
5. Density: 6765 oz./cu. yd.
6. Total Thickness: 0.299 inches.
7. Stitches: 8.0 per inch.
8. Gage: 1/10 inch.
9. Tufted Weight: 28 oz./sq. yd. for finished carpet tile.
10. Primary Backing/Backcoating: Manufacturer's standard synthetic materials.
11. Secondary Backing: Manufacturer's standard material.
12. Size: 24 by 24 inches.

C. Carpet Tile **(CPT-3)**:

1. Basis of Design: Shaw; Noble Materials, Alchemy Tile 5T135.
2. Color: Forge Platinum 33518, unless otherwise indicated on Material Finishes Legend.
3. Fiber Content: 100 percent nylon 6, 6.
4. Pile Characteristic: Multi-Level Pattern Cut/Loop.
5. Density: 9231 oz./cu. yd.
6. Total Thickness: 0.301 inches.
7. Stitches: 8.0 per inch.
8. Gage: 1/10 inch.
9. Tufted Weight: 30 oz./sq. yd. for finished carpet tile.
10. Primary Backing/Backcoating: Manufacturer's standard synthetic materials.
11. Secondary Backing: Manufacturer's standard material.
12. Size: 24 by 24 inches.

D. Applied Treatments:

1. Soil-Resistance Treatment: Manufacturer's standard treatment.
2. Antimicrobial Treatment: Manufacturer's standard treatment that protects carpet tiles as follows:

a. Antimicrobial Activity: Not less than 2-mm halo of inhibition for gram-positive bacteria, not less than 1-mm halo of inhibition for gram-negative bacteria, and no fungal growth, according to AATCC 174.

E. Performance Characteristics:

1. Appearance Retention Rating: Heavy traffic, 3.0 minimum according to ASTM D7330.
2. Critical Radiant Flux Classification: Not less than 0.45 W/sq. cm according to NFPA 253.
3. Dry Breaking Strength: Not less than 100 lbf according to ASTM D2646.
4. Delamination: Not less than 3.5 lbf/in. according to ASTM D3936.
5. Dimensional Tolerance: Within 1/32 inch of specified size dimensions, as determined by physical measurement.
6. Dimensional Stability: 0.2 percent or less according to ISO 2551 (Aachen Test).
7. Colorfastness to Crocking: Not less than 4, wet and dry, according to AATCC 165.

2.2 INSTALLATION ACCESSORIES

A. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended by carpet tile manufacturer.

B. Adhesives: Water-resistant, mildew-resistant, nonstaining, pressure-sensitive type to suit products and subfloor conditions indicated, that comply with flammability requirements for installed carpet tile, and are recommended by carpet tile manufacturer for releasable installation.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for maximum moisture content, alkalinity range, installation tolerances, and other conditions affecting carpet tile performance.

B. Examine carpet tile for type, color, pattern, and potential defects.

C. Concrete Slabs: Verify that finishes comply with requirements specified in Section 033000 "Cast-in-Place Concrete" and that surfaces are free of cracks, ridges, depressions, scale, and foreign deposits.

1. Moisture Testing: Perform tests recommended by manufacturer. Proceed with installation only after substrates pass testing.

a. Perform additional moisture tests recommended in writing by adhesive and carpet tile manufacturers. Proceed with installation only after substrates pass testing.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. General: Comply with the Carpet and Rug Institute's CRI 104 and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile.

B. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions 1/8 inch wide or wider, and protrusions more than 1/32 inch unless more stringent requirements are required by manufacturer's written instructions.

C. Concrete Substrates: Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by adhesive and carpet tile manufacturers.

D. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 INSTALLATION

A. General: Comply with the Carpet and Rug Institute's CRI 104, Section 10, "Carpet Tile," and with carpet tile manufacturer's written installation instructions.

B. Installation Method: As recommended in writing by carpet tile manufacturer.

C. Maintain dye-lot integrity. Do not mix dye lots in same area.

D. Maintain pile-direction patterns indicated on Drawings, or recommended in writing by carpet tile manufacturer.

E. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosings. Bind or seal cut edges as recommended by carpet tile manufacturer.

F. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.

G. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on carpet tile as marked on subfloor. Use nonpermanent, nonstaining marking device.

H. Install pattern parallel to walls and borders.

3.4 CLEANING AND PROTECTION

A. Perform the following operations immediately after installing carpet tile:

1. Remove excess adhesive and other surface blemishes using cleaner recommended by carpet tile manufacturer.
2. Remove yarns that protrude from carpet tile surface.
3. Vacuum carpet tile using commercial machine with face-beater element.

B. Protect installed carpet tile to comply with the Carpet and Rug Institute's CRI 104, Section 13.7.

C. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION 096813

This page intentionally left blank.

SECTION 099113 - EXTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Primers.
2. Finish coatings.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include preparation requirements and application instructions.
2. Indicate VOC content.

B. Samples: For each type of topcoat product.

C. Samples for Verification: For each type of paint system and each color and gloss of topcoat.

1. Submit Samples on rigid backing, 8 inches square.
2. Apply coats on Samples in steps to show each coat required for system.
3. Label each coat of each Sample.
4. Label each Sample for location and application area.

D. Product Schedule: Use same designations indicated on Drawings and in the Exterior Painting Schedule to cross-reference paint systems specified in this Section. Include color designations.

1.3 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Paint Products: 5 percent, but not less than 1 gal. of each material and color applied.

1.4 QUALITY ASSURANCE

A. Mockups: Apply mockups of each paint system indicated and each color and finish selected to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.

1. Architect will select one surface to represent surfaces and conditions for application of each paint system.

   a. Vertical and Horizontal Surfaces: Provide samples of at least 100 sq. ft.
   b. Other Items: Architect will designate items or areas required.

2. Final approval of color selections will be based on mockups.

   a. If preliminary color selections are not approved, apply additional mockups of additional colors selected by Architect at no added cost to Owner.

3. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.

4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.

1. Maintain containers in clean condition, free of foreign materials and residue.
2. Remove rags and waste from storage areas daily.

1.6 FIELD CONDITIONS

A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F.

B. Do not apply paints in snow, rain, fog, or mist; when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

1. Benjamin Moore
2. PPG
3. Sherwin-Williams

B. Source Limitations: Obtain each paint product from single source from single manufacturer.

2.2 PAINT PRODUCTS, GENERAL

A. Material Compatibility:

1. Provide materials for use within each paint system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer based on testing and field experience.
2. For each coat in a paint system, provide products recommended in writing by topcoat manufacturer for use in paint system and on substrate indicated.

B. Colors: As selected by Architect from manufacturer's full range.

2.3 FINISH COATINGS

A. Exterior, Water-Based, Light Industrial Coating, Semigloss: Corrosion-resistant, water-based, pigmented, emulsion coating formulated for resistance to blocking (sticking of two painted surfaces), water, alkalis, moderate abrasion, and mild chemical exposure and for use on exterior, primed, wood and metal surfaces.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Benjamin Moore; Super Spec HP DTM Acrylic Semi-Gloss, P29
b. PPG; Pitt-Tech Plus Int/Ext Semi-Gloss DTM Industrial Enamel, 90-1210

c. Sherwin-Williams; Pro Industrial DTM Acrylic Semi-Gloss, B66W01151

2. Gloss Level: Manufacturer's standard semigloss finish.

2.4 PAINT ADDITIVES

A. Mildewcide Additive: Manufacturer's recommended broad-spectrum fungicide additive compatible with paint. Mix in accordance with manufacturer's written instructions.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

B. Verify suitability of substrates, including surface conditions and compatibility, with finishes and primers.

C. Proceed with coating application only after unsatisfactory conditions have been corrected.

1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Comply with manufacturer's written instructions applicable to substrates and paint systems indicated.

B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.

1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection.

C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.

1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems specified in this Section.

D. Concrete Substrates: Remove release agents, curing compounds, efflorescence, and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces to be painted exceeds that permitted in manufacturer's written instructions.

1. Clean tilt-up concrete panels in accordance with manufacturer's recommended methods.

E. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and areas where shop paint is abraded. Paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed surfaces.

F. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized sheet metal by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.

3.3 INSTALLATION

A. Apply paints in accordance with manufacturer's written instructions.

1. Use applicators and techniques suited for paint and substrate indicated.
2. Paint surfaces behind movable items same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed items with prime coat only.
3. Paint both sides and edges of exterior doors and entire exposed surface of exterior door frames.
4. Paint entire exposed surface of window frames and sashes.
5. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
6. Primers specified in the Exterior Painting Schedule may be omitted on items that are factory primed or factory finished if compatible with intermediate and topcoat coatings and acceptable to intermediate and topcoat paint manufacturers.

B. Tint undercoats same color as topcoat, but tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of same material are to be applied. Provide sufficient difference in shade of undercoats to distinguish each separate coat.

C. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.

D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

3.4 CLEANING AND PROTECTION

A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.

1. Do not clean equipment with free-draining water and prevent solvents, thinners, cleaners, and other contaminants from entering into waterways, sanitary and storm drain systems, and ground.
2. Dispose of contaminants in accordance with requirements of authorities having jurisdiction.
3. Allow empty paint cans to dry before disposal.
4. Collect waste paint by type and deliver to recycling or collection facility.

B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.

C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.

D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.5 EXTERIOR PAINTING SCHEDULE

A. Galvanized-Metal Substrates:

1. Water-Based, Light Industrial Coating System:

a. Prime Coat: Shop primed.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Exterior, water-based, light industrial coating, semigloss.

END OF SECTION 099113

This page intentionally left blank.

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Primers.
2. Water-based finish coatings.
3. Floor sealers.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include preparation requirements and application instructions.

1. Include preparation requirements and application instructions.
2. Indicate VOC content.

B. Samples: For each type of topcoat product.

C. Samples for Verification: For each type of paint system and each color and gloss of topcoat.

1. Submit Samples on rigid backing, 8 inches square.
2. Apply coats on Samples in steps to show each coat required for system.
3. Label each coat of each Sample.
4. Label each Sample for location and application area.

D. Product Schedule: Use same designations indicated on Drawings and in the Interior Painting Schedule to cross-reference paint systems specified in this Section. Include color designations.

1.3 CLOSEOUT SUBMITTALS

A. Mix Formula: For each color provided.

1.4 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Paint Products: 5 percent, but not less than 1 gal. of each material and color applied.

1.5 QUALITY ASSURANCE

A. Mockups: Apply mockups of each paint system indicated and each color and finish selected to verify preliminary selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Architect will select one surface to represent surfaces and conditions for application of each paint system.

   a. Vertical and Horizontal Surfaces: Provide samples of at least 100 sq. ft.
   b. Other Items: Architect will designate items or areas required.

2. Final approval of color selections will be based on mockups.

a. If preliminary color selections are not approved, apply additional mockups of additional colors selected by Architect at no added cost to Owner.

3. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.

1. Maintain containers in clean condition, free of foreign materials and residue.
2. Remove rags and waste from storage areas daily.

1.7 FIELD CONDITIONS

A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F.

B. Do not apply paints when relative humidity exceeds 85 percent; at temperatures of less than 5 deg F above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Benjamin Moore (Basis of Design)
2. PPG
3. Sherwin-Williams

B. Source Limitations: Obtain each paint product from single source from single manufacturer.

2.2 PAINT PRODUCTS, GENERAL

A. Material Compatibility:

1. Materials for use within each paint system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
2. For each coat in a paint system, products shall be recommended in writing by topcoat manufacturers for use in paint system and on substrate indicated.

B. Colors: As selected by Architect from manufacturer's full range.

2.3 PRIMERS

A. Interior, Institutional Low-Odor/VOC Primer Sealer: Water-based primer sealer with low-odor characteristics and a VOC of less than 10 grams per liter for use on new interior plaster, concrete, and gypsum wallboard surfaces that are subsequently to be painted with latex finish coats.

1. Benjamin Moore; Ultra Spec 500 Zero VOC Primer, N534
2. PPG; Speedhide Interior Zero VOC Latex Sealer, 6-4900XI
3. Sherwin-Williams; ProMar 200 Zero Interior Latex Primer, B28W02600

B. Wood-Knot Sealer: White shellac or other sealer recommended in writing by manufacturer for this purpose.

C. Interior Latex Primer for Wood: Waterborne-emulsion primer formulated for resistance to extractive bleeding, mold, and microbials; for hiding stains; and for use on interior wood subject to extractive bleeding.

1. Benjamin Moore; Insl-X Prime All Multi-Surface Latex Primer Sealer (AP-1000).
2. PPG; Seal Grip Int/Ext Stain Blocking Primer, 17-921
3. Sherwin-Williams; Synthetic Shellac, B49W60

D. Water-Based Rust-Inhibitive Primer: Corrosion-resistant, water-based-emulsion primer formulated for resistance to flash rusting when applied to cleaned, interior ferrous metals subject to mildly corrosive environments.

1. Benjamin Moore; Ultra Spec HP Acrylic Metal Primer, HP04
2. PPG; Pitt-Tech Plus Int/Ext DTM Industrial Primer, 90-912
3. Sherwin-Williams; Pro-Industrial Pro-Cryl Universal Primer, B66W310

E. Water-Based Galvanized-Metal Primer: Corrosion-resistant, acrylic primer; formulated for use on cleaned/etched, exterior, galvanized metal to prepare it for subsequent water-based coatings.

1. Benjamin Moore; Ultra Spec HP Acrylic Metal Primer, HP04
2. PPG; Pitt-Tech Plus Int/Ext DTM Industrial Primer, 90-912
3. Sherwin-Williams; Pro Industrial Pro-Cryl Universal Primer, B66W310

2.4 WATER-BASED FINISH COATS

A. Interior, Latex, Institutional Low Odor/VOC, Flat: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Benjamin Moore; Ultra Spec 500 Interior Flat, N536
2. PPG; Speedhide Zero Interior Zero-VOC Latex Flat 6-4110XI
3. Sherwin-Williams; ProMar 200 Zero VOC Flat, B30W2600 Series

B. Interior, Latex, Institutional Low Odor/VOC, Low Sheen: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Benjamin Moore; Ultra Spec 500 Interior Eggshell, N538
2. PPG; Speedhide Zero Interior Zero-VOC Latex Eggshell 6-4310XI
3. Sherwin-Williams; ProMar 200 Eg-Shel Latex, B20W2600 Series

C. Interior, Latex, Institutional Low Odor/VOC, Semigloss: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Benjamin Moore; Ultra Spec 500 Interior Semi-Gloss Finish, N539
2. PPG; Speedhide Zero Interior Zero-VOC Latex Semi-Gloss 6-4510XI

3. Sherwin-Williams; ProMar 200 Zero VOC Interior Latex Semi-Gloss, B31W2600 Series

2.5 EPOXY PAINTS

A. Interior Pre-Catalyzed Epoxy, (Eggshell):

1. Products: Subject to compliance with requirements, provide one of the following products:

a. Benjamin Moore; Pre Catalyzed Epoxy Eggshell, V342.
b. PPG; Pitt-Glaze WB1 Pre-Catalyzed Epoxy Eggshell, 16-310C
c. Sherwin-Williams; Pro Industrial Pre-Catalyzed Epoxy Eg-Shel, K45-151 Series

2.6 FLOOR SEALERS

A. Water-Based Concrete Floor Sealer: Clear, water-based, acrylic-copolymer-emulsion sealer formulated for oil, gasoline, alkali, and water resistance and for use on concrete traffic surfaces.

1. Benjamin Moore; Concrete Waterproofing Sealer, 075
2. PPG; Porter Plex-Seal W.B. Sealer 3215
3. Sherwin-Williams; H & C Concrete & Masonry Waterproofing Sealer 50.043054

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:

1. Concrete: 12 percent.
2. Wood: 15 percent.
3. Gypsum Board: 12 percent.

C. Verify suitability of substrates, including surface conditions and compatibility, with existing finishes and primers.

D. Proceed with coating application only after unsatisfactory conditions have been corrected.

1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Comply with manufacturer's written instructions and recommendations applicable to substrates and paint systems indicated.

B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.

1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.

C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.

1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.

D. Concrete Substrates: Remove release agents, curing compounds, efflorescence, and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces to be painted exceeds that permitted in manufacturer's written instructions.

E. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.

F. Steel Substrates: Remove rust, loose mill scale, and shop primer, if any. Clean using methods recommended in writing by paint manufacturer.

G. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and areas where shop paint is abraded. Paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed surfaces.

H. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized sheet metal by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.

I. Wood Substrates:

1. Scrape and clean knots, and apply coat of knot sealer before applying primer.
2. Sand surfaces that will be exposed to view, and dust off.
3. Prime edges, ends, faces, undersides, and backsides of wood.
4. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.

3.3 INSTALLATION

A. Apply paints according to manufacturer's written instructions.

1. Use applicators and techniques suited for paint and substrate indicated.
2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
3. Paint front and backsides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
4. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
5. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.

B. Tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of same material are to be applied. Tint undercoats to match color of topcoat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.

C. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.

D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

E. Painting Fire-Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:

1. Paint the following work where exposed in equipment rooms:

a. Equipment, including panelboards and switch gear.
b. Uninsulated metal piping.
c. Uninsulated plastic piping.
d. Pipe hangers and supports.
e. Metal conduit.
f. Plastic conduit.
g. Tanks that do not have factory-applied final finishes.
h. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.

2. Paint the following work where exposed in occupied spaces:

a. Equipment, including panelboards.
b. Uninsulated metal piping.
c. Uninsulated plastic piping.
d. Pipe hangers and supports.
e. Metal conduit.
f. Plastic conduit.
g. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.
h. Other items as directed by Architect.

3. Paint portions of internal surfaces of metal ducts, without liner, behind air inlets and outlets that are visible from occupied spaces.

3.4 CLEANING AND PROTECTION

A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.

1. Do not clean equipment with free-draining water and prevent solvents, thinners, cleaners, and other contaminants from entering into waterways, sanitary and storm drain systems, and ground.
2. Dispose of contaminants in accordance with requirements of authorities having jurisdiction.
3. Allow empty paint cans to dry before disposal.
4. Collect waste paint by type and deliver to recycling or collection facility.

B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.

C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.

D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.5 INTERIOR PAINTING SCHEDULE

A. Concrete Substrates, Traffic Surfaces:

1. Water-Based Concrete Floor Sealer System:

a. First Coat: Matching topcoat.
b. Topcoat: Water-based concrete floor sealer.

B. Steel Substrates:

1. Institutional Low-Odor/VOC Latex System:

    a. Prime Coat: Water-based rust-inhibitive primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, institutional low odor/VOC, semigloss.

C. Galvanized-Metal Substrates:

1. Institutional Low-Odor/VOC Latex System:

    a. Prime Coat: Water-based galvanized primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, institutional low odor/VOC, semigloss.

D. Wood Substrates:

1. Institutional Low-Odor/VOC Latex System:

    a. Prime Coat: Interior latex primer for wood.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, institutional low odor/VOC, semigloss.

E. Gypsum Board Substrates:

1. Institutional Low-Odor/VOC Latex System:

    a. Prime Coat: Interior, institutional low-odor/VOC primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat for Ceilings: Interior, latex, institutional low odor/VOC, flat.
    d. Topcoat for Walls: Interior, latex, institutional low odor/VOC, low sheen.

2. Epoxy System:

    a. Prime Coat: Institutional low-odor/VOC interior latex primer/sealer.
    b. Intermediate Coat: Interior pre-catalyzed epoxy, (eggshell), matching topcoat.
    c. Topcoat: Interior pre-catalyzed epoxy, (eggshell).

END OF SECTION 099123

This page intentionally left blank.

SECTION 101419 - DIMENSIONAL LETTER SIGNAGE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cast dimensional characters.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For signs.

1. Include fabrication and installation details and attachments to other work.
2. Show sign mounting heights, locations of supplementary supports to be provided by other installers, and accessories.
3. Show message list, typestyles, graphic elements, and layout for each sign at least half size.

C. Samples for Initial Selection: For each type of sign assembly, exposed component, and exposed finish.

D. Product Schedule: For dimensional letter signs. Use same designations indicated on Drawings or specified.

1.3 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For special warranty.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: Manufacturer of products.

1.5 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Deterioration of finishes beyond normal weathering.
b. Separation or delamination of sheet materials and components.

2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 DIMENSIONAL CHARACTERS

A. Cast Characters: Characters with uniform faces, sharp corners, and precisely formed lines and profiles, and as follows:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. A. R. K. Ramos
   b. Avalis Wayfinding Solutions
   c. Best Manufacturing
   d. Matthews International, Inc.
   e. Metallic Arts, Inc.
   f. Signage Industries Corporation
2. Character Material: Cast aluminum.
3. Character Height: As indicated on Drawings.
4. Thickness: Manufacturer's standard for size of character.
5. Finishes:
   a. Powder-Coat Finish: Manufacturer's standard, in color as selected by Architect from manufacturer's full range.
6. Mounting: Projecting studs.
7. Typeface: As selected by Architect from manufacturer's standard options.

2.2 DIMENSIONAL CHARACTER MATERIALS

A. Aluminum Castings: ASTM B26/B26M, alloy and temper recommended by sign manufacturer for casting process used and for type of use and finish indicated.

B. Aluminum Sheet and Plate: ASTM B209, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.

C. Aluminum Extrusions: ASTM B221, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.

2.3 ACCESSORIES

A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signs, noncorrosive and compatible with each material joined, and complying with the following:
   1. Use concealed fasteners and anchors unless indicated to be exposed.
   2. Sign Mounting Fasteners:
      a. Projecting Studs: Threaded studs with sleeve spacer, welded or brazed to back of sign material, screwed into back of sign assembly, or screwed into tapped lugs cast integrally into back of cast sign material, unless otherwise indicated.

B. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D1187/D1187M.

2.4 FABRICATION

A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.
   1. Castings: Fabricate castings free of warp, cracks, blowholes, pits, scale, sand holes, and other defects that impair appearance or strength. Grind, wire brush, sandblast, and buff castings to remove seams, gate marks, casting flash, and other casting marks before finishing.

2.5 GENERAL FINISH REQUIREMENTS

A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.6 ALUMINUM FINISHES

A. Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance.

B. Verify that sign-support surfaces are within tolerances to accommodate signs without gaps or irregularities between backs of signs and support surfaces unless otherwise indicated.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF DIMENSIONAL CHARACTERS

A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.

1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
2. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.
3. Corrosion Protection: Coat concealed surfaces of exterior aluminum in contact with grout, concrete, masonry, wood, or dissimilar metals, with a heavy coat of bituminous paint.

B. Mounting Methods:

1. Projecting Studs: Using a template, drill holes in substrate aligning with studs on back of sign. Remove loose debris from hole and substrate surface.

a. Masonry Substrates: Fill holes with adhesive. Leave recess space in hole for displaced adhesive. Place spacers on studs, place sign in position, and push until spacers are pinched between sign and substrate, embedding the stud ends in holes. Temporarily support sign in position until adhesive fully sets.
b. Thin or Hollow Surfaces: Place spacers on studs, place sign in position with spacers pinched between sign and substrate, and install washers and nuts on stud ends projecting through opposite side of surface, and tighten.

3.3 ADJUSTING AND CLEANING

A. Remove and replace damaged or deformed characters and signs that do not comply with specified requirements. Replace characters with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.

B. Remove temporary protective coverings and strippable films as signs are installed.

C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions, and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

END OF SECTION 101419

SECTION 101423.16 - ROOM-IDENTIFICATION PANEL SIGNAGE

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes room-identification signs that are directly attached to the building.

1.2 DEFINITIONS

A. Accessible: In accordance with the accessibility standard.

1.3 COORDINATION

A. Furnish templates for placement of sign-anchorage devices embedded in permanent construction by other installers.

B. Furnish templates for placement of electrical service embedded in permanent construction by other installers.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For room-identification signs.

1. Include fabrication and installation details and attachments to other work.
2. Show sign mounting heights, locations of supplementary supports to be provided by other installers, and accessories.
3. Show message list, typestyles, graphic elements, including raised characters and Braille, and layout for each sign at least half size.

C. Samples: For each type of sign assembly, exposed component, and exposed finish.

1. Include representative Samples of available typestyles and graphic symbols.

D. Product Schedule: For room-identification signs. Use same designations indicated on Drawings or specified.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Sample Warranty: For special warranty.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For signs to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: Manufacturer of products.

1.8 FIELD CONDITIONS

A. Field Measurements: Verify locations of anchorage devices embedded in permanent construction by other installers by field measurements before fabrication, and indicate measurements on Shop Drawings.

1.9 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Deterioration of finishes beyond normal weathering.
b. Deterioration of embedded graphic image.
c. Separation or delamination of sheet materials and components.

2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Accessibility Standard: Comply with applicable provisions in the ABA standards of the Federal agency having jurisdiction and ICC A117.1

2.2 ROOM-IDENTIFICATION SIGNS

A. Unframed Panel Signs: Fabricate unframed panel signs with edges mechanically and smoothly finished to conform with the following requirements:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. ASI Sign Systems
b. Best Sign Systems, Inc.
c. Poblocki Sign Company
d. Signature Signs
e. 2/90 Sign Systems, Inc.
f. Takeform

2. Signs: Nominal 3/16-inch-thick, plastic or phenolic, with the following:

a. Raised characters, 1/32 inch minimum, at least 5/8 inch high but not higher than 2 inches;
b. Raised numbers, 1/32 inch minimum, at least 1-inch high numbers;
c. Raised Braille, 1/32 inch minimum, Grade 2;
d. Signs shall be etched and have raised integral symbols and letters. Applied symbols and letters are not acceptable.
e. Each room sign shall list the room number and a room identification name in both Braille and in the characters and numbers described above.

3. Character Font: As selected by Architect.
4. Size: As indicated on Drawings.

5. Exterior Signs: Provide fiberglass units for exterior applications.
6. Signs Mounted on Glass: Provide opaque sheet matching sign material and finish onto opposite side of glass to conceal back of sign.
   a. Color: Color matching sign or black. Confirm final color selection with Architect.
7. Copy for each sign shall be provided during the Construction Phase of the project.
8. Handicapped Symbols: Provide one combination handicapped symbol, male and female caricatures, and room identification sign for every room where handicapped facilities are provided, such as toilet rooms.
9. Color: Color for background and letter colors as selected by Architect from manufacturer's full range in non-glare finish.
10. Mounting Height Above Floor: 48 inches minimum above floor measure to baseline of lowest raised character and 60 inches maximum above floor measured to baseline of highest raised character.

2.3 SIGN MATERIALS

A. Aluminum Sheet and Plate: ASTM B209, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.

B. Aluminum Extrusions: ASTM B221, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.

C. Plastic Laminate: Provide high-pressure laminate engraving stock with face and core plies.
   1. Color: As selected by Architect from manufacturer's full range.

2.4 ACCESSORIES

A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signs, noncorrosive and compatible with each material joined, and complying with the following:
   1. Use concealed fasteners and anchors unless indicated to be exposed.
   2. For exterior exposure, furnish stainless-steel devices unless otherwise indicated.

B. Adhesive: As recommended by sign manufacturer.

C. Two-Face Tape: Manufacturer's standard high-bond, foam-core tape, 0.045 inch thick, with adhesive on both sides.

2.5 FABRICATION

A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.
   1. Preassemble signs and assemblies in the shop to greatest extent possible. Disassemble signs and assemblies only as necessary for shipping and handling limitations. Clearly mark units for reassembly and installation; apply markings in locations concealed from view after final assembly.
   2. Mill joints to a tight, hairline fit. Form assemblies and joints exposed to weather to resist water penetration and retention.
   3. Conceal connections if possible; otherwise, locate connections where they are inconspicuous.
   4. Provide rabbets, lugs, and tabs necessary to assemble components and to attach to existing work. Drill and tap for required fasteners. Use concealed fasteners where possible; use exposed fasteners that match sign finish.

B. Subsurface-Etched Graphics: Reverse etch back face of clear face-sheet material. Fill resulting copy with manufacturer's standard enamel. Apply opaque manufacturer's standard background color coating over enamel-filled copy.

2.6 GENERAL FINISH REQUIREMENTS

A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.7 ALUMINUM FINISHES

A. Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.

1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
2. Install signs so they do not protrude or obstruct according to the accessibility standard.
3. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.

B. Accessibility: Install signs in locations on walls as indicated on Drawings and according to the accessibility standard.

C. Mounting Methods:

1. Interior Signage: Manufacturer's standard two-face tape and silicone-adhesive mounting, unless otherwise indicated.

   a. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position, and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.
   b. Two-Face Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage. Keep strips away from edges to prevent visibility at sign edges. Place sign in position, and push to engage tape adhesive.

2. Exterior Signage: Drill holes in substrate using predrilled holes in sign as template. Countersink holes in sign if required. Place sign in position and flush to surface. Install through fasteners and tighten.

3.2 ADJUSTING AND CLEANING

A. Remove and replace damaged or deformed signs and signs that do not comply with specified requirements. Replace signs with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.

B. Remove temporary protective coverings and strippable films as signs are installed.

C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions, and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

END OF SECTION 101423.16

This page intentionally left blank.

SECTION 102800 - TOILET ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Public-use washroom accessories.
2. Childcare accessories.
3. Custodial accessories.

1.2 COORDINATION

A. Coordinate accessory locations with other work to prevent interference with clearances required for access by people with disabilities, and for proper installation, adjustment, operation, cleaning, and servicing of accessories.

B. Deliver inserts and anchoring devices set into concrete or masonry as required to prevent delaying the Work.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Include anchoring and mounting requirements, including requirements for cutouts in other work and substrate preparation.

B. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.

1. Identify locations using room designations indicated.
2. Identify accessories using designations indicated.

1.4 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For manufacturer's special warranties.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For accessories to include in maintenance manuals.

1.6 WARRANTY

A. Manufacturer's Special Warranty for Mirrors: Manufacturer agrees to repair or replace mirrors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, visible silver spoilage defects.
2. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 OWNER-FURNISHED MATERIALS

A. Owner-Furnished Materials:

1. Freestanding waste receptacles.

2.2 PERFORMANCE REQUIREMENTS

A. Structural Performance: Design accessories and fasteners to comply with the following requirements:

1. Grab Bars: Installed units are able to resist 250 lbf concentrated load applied in any direction and at any point.

2.3 MANUFACTURERS

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

1. American Specialties, Inc. (ASI)
2. Bobrick Washroom Equipment.
3. Bradley Corp.
4. GAMCO Specialty Accessories.

2.4 PUBLIC-USE WASHROOM ACCESSORIES

A. Source Limitations: Obtain each type of public-use washroom accessory from single source from single manufacturer.

B. Toilet Tissue (Roll) Dispenser **(TT)**: Owner Furnished / Contractor Installed

C. Automatic Paper Towel (Roll) Dispenser **(PTF)**: Owner Furnished / Contractor Installed

D. Automatic Soap Dispenser – Stand-Alone **(SD)**: Owner Furnished / Contractor Installed

E. Grab Bar **(GB18, GB36, GB42)**:

1. Basis of Design: ASI; 3800-P
2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel, 0.05 inch thick.

a. Finish: Smooth, ASTM A480/A480M No. 4 finish (satin) on ends and slip-resistant texture in grip area.

4. Outside Diameter: 1-1/2 inches.
5. Configuration and Length: As indicated on Drawings.

F. Sanitary-Napkin Disposal Unit **(SDU)**:

1. Basis of Design: ASI; 0852.
2. Mounting: Surface mounted.
3. Door or Cover: Self-closing, disposal-opening cover.
4. Receptacle: Unit is emptied by opening top door and removing wax paper collection bag. Bags provided by others.
5. Capacity: 1.2 gal.

6. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

G. Mirror Unit **(MM)**:

1. Basis of Design: ASI; 0600 SERIES.
2. Frame: Stainless steel angle, 0.05 inch thick.
   a. Corners: Welded and ground smooth.
3. Size: 18- by 36-inches.
4. Hangers: Manufacturer's standard rigid, tamper and theft resistant.

H. Hook **(RB1)**:

1. Basis of Design: ASI; 7308
2. Description: Single-prong unit.
3. Mounting: Concealed.
4. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (Satin).

2.5 CHILDCARE ACCESSORIES

A. Source Limitations: Obtain each type of childcare accessory from single source from single manufacturer.

B. Diaper-Changing Station **(DCS)**:

1. Basis of Design: ASI 9013-9 Roval
2. Description: Horizontal unit that opens by folding down from stored position and with child-protection strap.
   a. Engineered to support minimum of 250-lb static load when opened.
3. Mounting: Surface mounted, with unit projecting not more than 4 inches from wall when closed.
4. Operation: By pneumatic shock-absorbing mechanism.
5. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin), exterior shell with rounded plastic corners; HDPE interior in manufacturer's standard color.
6. Liner Dispenser: Provide built-in dispenser for disposable sanitary liners.
7. Location: Provide one unit in TLT 101.

2.6 CUSTODIAL ACCESSORIES

A. Source Limitations: Obtain each type of custodial accessory from single source from single manufacturer.

B. Custodial Mop and Broom Holder **(MBH)**:

1. Basis of Design: Bradley Corp.; 9953 Mop and Broom Holder, 3 Holders.
2. Description: Spring-activated rubber cams on plated steel retainers. Will hold a mop or broom handle with a diameter between 5/8-inch and 1-inch..
3. Length: 36 inches.
4. Mop/Broom Holders: Three, spring-loaded, rubber hat, cam type.
5. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
   a. Shelf: Not less than nominal 0.05-inch- thick stainless steel.
   b. Rod: Approximately 1/4-inch- diameter stainless steel.

2.7 MATERIALS

A. Stainless Steel: ASTM A240/A240M or ASTM A666, Type 304, 0.031-inch- minimum nominal thickness unless otherwise indicated.

B. Fasteners: Screws, bolts, and other devices of same material as accessory unit, unless otherwise recommended by manufacturer or specified in this Section, and tamper and theft resistant where exposed, and of stainless or galvanized steel where concealed.

C. Mirrors: ASTM C1503, Mirror Glazing Quality, clear-glass mirrors, nominal 6.0 mm thick.

2.8 FABRICATION

A. General: Fabricate units with tight seams and joints, and exposed edges rolled. Hang doors and access panels with full-length, continuous hinges. Equip units for concealed anchorage and with corrosion-resistant backing plates.

B. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner's representative.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install accessories according to manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.

1. Remove temporary labels and protective coatings.

B. Grab Bars: Install to comply with specified structural-performance requirements.

3.2 ADJUSTING AND CLEANING

A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.

B. Clean and polish exposed surfaces according to manufacturer's written instructions.

END OF SECTION 102800

SECTION 104413 - FIRE PROTECTION CABINETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fire-protection cabinets for portable fire extinguisher.

B. Related Requirements:

1. Section 104416 "Fire Extinguishers" for portable, hand-carried fire extinguishers accommodated by fire-protection cabinets

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Show door hardware, cabinet type, trim style, and panel style. Include roughing-in dimensions and details showing mounting method and relationships of box and trim to surrounding construction.

B. Shop Drawings: For fire-protection cabinets.

1. Include plans, elevations, sections, details, and attachments to other work.

C. Product Schedule: For fire-protection cabinets. Indicate whether recessed, semirecessed, or surface mounted. Coordinate final fire-protection cabinet schedule with fire-extinguisher schedule to ensure proper fit and function.

1.3 COORDINATION

A. Coordinate size of fire-protection cabinets to ensure that type and capacity of fire extinguishers indicated are accommodated.

B. Coordinate sizes and locations of fire-protection cabinets with wall depths.

C. Provide fire rated cabinets where indicated to be installed in fire rated walls.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturer: Subject to compliance with requirements, provide products by one of the following:

1. Amerex Corporation
2. Ansul Incorporated; Tyco International
3. Babcock-Davis
4. Badger Fire Protection; a Kidde company
5. JL Industries
6. Kidde Residential and Commercial Division; Subsidiary of Kidde plc.
7. Larsens Manufacturing Company
8. Potter Roemer LLC

B. Source Limitations: Obtain fire-protection cabinets, accessories, and fire extinguishers from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

2.3 FIRE-PROTECTION CABINET

A. Cabinet Type: Suitable for fire extinguisher.

B. Cabinet Construction: Nonrated as required to match rating of wall assembly.

C. Cabinet Material: Cold-rolled steel sheet.

1. Shelf: Same metal and finish as cabinet.

D. Semirecessed Cabinet (FEC1): One-piece combination trim and perimeter door frame overlapping surrounding wall surface, with exposed trim face and wall return at outer edge (backbend).

1. Rolled-Edge Trim: 2-1/2-inch backbend depth.

E. Surface-Mounted Cabinet (FEC2): Cabinet box fully exposed and mounted directly on wall with no trim.

F. Cabinet Trim Material: Steel sheet.

G. Door Material: Steel sheet.

H. Door Style: Vertical duo panel with frame.

I. Door Glazing: Tempered float glass (clear).

J. Door Hardware: Manufacturer's standard door-operating hardware of proper type for cabinet type, trim style, and door material and style indicated.

1. Provide projecting lever handle with cam-action latch.
2. Provide concealed hinge, permitting door to open 180 degrees.

K. Accessories:

1. Mounting Bracket: Manufacturer's standard steel, designed to secure fire extinguisher to fire-protection cabinet, of sizes required for types and capacities of fire extinguishers indicated, with plated or baked-enamel finish.
2. Door Lock: Cam lock that allows door to be opened during emergency by pulling sharply on door handle.
3. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as directed by Architect.

a. Identify fire extinguisher in fire-protection cabinet with the words "FIRE EXTINGUISHER."

1) Location: Applied to cabinet door or cabinet glazing.
2) Application Process: Decals or pressure-sensitive vinyl letters.
3) Lettering Color: Red.
4) Orientation: Vertical.

L. Materials:

1. Cold-Rolled Steel: ASTM A1008/A1008M, Commercial Steel (CS), Type B.

a. Finish: Baked enamel, TGIC polyester powder coat, HAA polyester powder coat, epoxy powder coat, or polyester/epoxy hybrid powder coat, complying with AAMA 2603.
b. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
c. Color: As selected by Architect from manufacturer's full range.

2. Tempered Float Glass: ASTM C1048, Kind FT, Condition A, Type I, Quality q3, 3 mm thick, Class 1 (clear).

2.4 FABRICATION

A. Fire-Protection Cabinets: Provide manufacturer's standard box (tub) with trim, frame, door, and hardware to suit cabinet type, trim style, and door style indicated.

1. Weld joints and grind smooth.
2. Provide factory-drilled mounting holes.

B. Cabinet Doors: Fabricate doors according to manufacturer's standards, from materials indicated and coordinated with cabinet types and trim styles.

1. Fabricate door frames with tubular stiles and rails and hollow-metal design, minimum 1/2 inch thick.
2. Miter and weld perimeter door frames and grind smooth.

C. Cabinet Trim: Fabricate cabinet trim in one piece with corners mitered, welded, and ground smooth.

2.5 GENERAL FINISH REQUIREMENTS

A. Comply with NAAMM's AMP 500, "Metal Finishes Manual for Architectural and Metal Products," for recommendations for applying and designating finishes.

B. Protect mechanical finishes on exposed surfaces of fire-protection cabinets from damage by applying a strippable, temporary protective covering before shipping.

C. Finish fire-protection cabinets after assembly.

D. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine walls and partitions for suitable framing depth and blocking where semirecessed cabinets will be installed.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Prepare recesses for semirecessed fire-protection cabinets as required by type and size of cabinet and trim style.

3.3 INSTALLATION

A. General: Install fire-protection cabinets in locations and at mounting heights indicated or, if not indicated, at heights acceptable to authorities having jurisdiction.

B. Fire-Protection Cabinets: Fasten cabinets to structure, square and plumb.

1. Fasten mounting brackets to inside surface of fire-protection cabinets, square and plumb.

C. Identification: Apply vinyl lettering.

3.4 ADJUSTING AND CLEANING

A. Remove temporary protective coverings and strippable films, if any, as fire-protection cabinets are installed unless otherwise indicated in manufacturer's written installation instructions.

B. Adjust fire-protection cabinet doors to operate easily without binding. Verify that integral locking devices operate properly.

C. On completion of fire-protection cabinet installation, clean interior and exterior surfaces as recommended by manufacturer.

D. Touch up marred finishes, or replace fire-protection cabinets that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by fire-protection cabinet and mounting bracket manufacturers.

E. Replace fire-protection cabinets that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 104413

SECTION 104416 - FIRE EXTINGUISHERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes portable, hand-carried fire extinguishers and mounting brackets for fire extinguishers.

B. Related Requirements:

1. Section 104413 "Fire Protection Cabinets."

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include rating and classification, material descriptions, dimensions of individual components and profiles, and finishes for fire extinguisher and mounting brackets.

B. Product Schedule: For fire extinguishers.

1.3 INFORMATIONAL SUBMITTALS

A. Warranty: Sample of special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For fire extinguishers to include in maintenance manuals.

1.5 COORDINATION

A. Coordinate type and capacity of fire extinguishers with fire-protection cabinets to ensure fit and function.

1.6 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace fire extinguishers that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Faulty operation of valves or release levers.

2. Warranty Period: Six years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. NFPA Compliance: Fabricate and label fire extinguishers to comply with NFPA 10, "Portable Fire Extinguishers."

B. Fire Extinguishers: Listed and labeled for type, rating, and classification by an independent testing agency acceptable to authorities having jurisdiction.

1. Provide fire extinguishers approved, listed, and labeled by FM Global.

2.2 PORTABLE, HAND-CARRIED FIRE EXTINGUISHERS

A. Fire Extinguishers: Type, size, and capacity for each mounting bracket indicated.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Amerex Corporation.
b. Ansul Incorporated; Tyco International Ltd.
c. Badger Fire Protection; a Kidde company.
d. J.L. Industries, Inc.
e. Kidde Residential and Commercial Division; Subsidiary of Kidde plc.
f. Larsen's Manufacturing Company.
g. Potter-Roemer; Div. of Smith Industries, Inc.

2. Source Limitations: Obtain fire extinguishers, fire-protection cabinets, and accessories, from single source from single manufacturer.
3. Valves: Manufacturer's standard.
4. Handles and Levers: Manufacturer's standard.
5. Instruction Labels: Include pictorial marking system complying with NFPA 10, Appendix B, and bar coding for documenting fire-extinguisher location, inspections, maintenance, and recharging.

B. Multipurpose Dry-Chemical Type in Steel Container: UL-rated 4-A:60-B:C, 10-lb nominal capacity, with monoammonium phosphate-based dry chemical in enameled-steel container.

2.3 MOUNTING BRACKETS

A. Mounting Brackets: Manufacturer's standard steel, designed to secure fire extinguisher to wall or structure, of sizes required for types and capacities of fire extinguishers indicated, with plated or baked-enamel finish.

1. Source Limitations: Obtain mounting brackets and fire extinguishers from single source from single manufacturer.

B. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as indicated by Architect.

1. Identify bracket-mounted fire extinguishers with the words "FIRE EXTINGUISHER" in red letter decals applied to mounting surface.

a. Orientation: Vertical.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine fire extinguishers for proper charging and tagging.

1. Remove and replace damaged, defective, or undercharged fire extinguishers.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Install fire extinguishers and mounting brackets in locations indicated and in compliance with requirements of authorities having jurisdiction.

1. Mounting Brackets: Top of fire extinguisher to be at 42 inches above finished floor.

B. Mounting Brackets: Fasten mounting brackets to surfaces, square and plumb, at locations indicated.

END OF SECTION 104416

This page intentionally left blank.

SECTION 107326 - METAL CANOPIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Wall hung canopies.

1.2 SYSTEM DESCRIPTION

A. General: Provide a complete, integrated set of canopy manufacturer's standard mutually dependent components and assemblies that form a canopy capable of withstanding structural and other loads, thermally induced movement, and exposure to weather without failure or infiltration of water into building interior. Include primary and secondary framing, metal roof panels, and accessories complying with requirements indicated.

1. Provide canopy of size and with spacings, slopes, and spans indicated.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: Show fabrication and installation details for canopy.

1. Include plans, elevations, and at least 3/4-inch scale sections of typical members and other components. Show anchors, reinforcement, accessories, layout, and installation details.

C. Samples for Verification: For each type of product indicated, of size below:

1. Aluminum: For each form, finish, and color, on 6-inch- long sections of extrusions and squares of sheet at least 4 by 4 inches.

D. Delegated-Design Submittal: For manufactured canopy indicated to comply with performance requirements, including analysis data and calculations signed and sealed by the qualified professional engineer responsible for their preparation.

1. Detail fabrication and assembly of canopy systems.
2. Include design calculations.

1.4 INFORMATIONAL SUBMITTALS

A. Warranty: Sample of special warranty.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: An authorized representative of canopy manufacturer for installation of units required for this Project.

B. Source Limitations: Obtain canopy components through one source from a single manufacturer.

C. Preinstallation Conference: Conduct conference at Project site.

1.6 PROJECT CONDITIONS

A. Field Measurements: Verify actual dimensions of construction contiguous with canopies by field measurements prior to fabrication and indicate on Shop Drawings.

1.7 COORDINATION

A. Coordinate installation of anchorages for canopies. Furnish setting drawings, templates, and directions for installing anchorages and other items that are to be embedded in concrete. Deliver such items to Project site in time for installation.

B. Coordinate with lighting fixtures as required in electrical drawings and specifications. Use specific cut sheet for fixture to verify clearances, wiring, and transition from fixture to canopy metal to be seamless with a from manufacturer appearance.

C. Coordinate with EIFS manufacturer's flashing and build out details for connection to building.

D. Coordinate delivery time so canopies can be installed within 24 hours of receipt at Project site.

1.8 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace metal canopies that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

B. Special Finish Warranty, Factory-Applied Finishes: Standard form in which manufacturer agrees to repair finishes or replace aluminum that shows evidence of deterioration of factory-applied finishes within specified warranty period.

1. Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested in accordance with ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Design manufactured canopy, including comprehensive engineering analysis by a qualified professional engineer, using performance requirements and design criteria indicated.

B. Seismic Performance: Design and engineer canopies capable of withstanding the effects of earthquake motions determined according to ASCE 7.

C. Structural Performance: Provide canopy capable of withstanding the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:

1. Design Loads: As indicated on Structural Drawings.
2. Live Loads: Include vertical loads induced by maintenance workers, materials, and equipment for roof live loads.
3. Roof Snow Loads: As indicated on Structural Drawings.

4. Deflection Limits: Engineer assemblies to withstand design loads with deflections no greater than the following:
   a. Purlins and Rafters: Vertical deflection of 1/180 of the span.
   b. Metal Roof Panels: Vertical deflection of 1/180 of the span.

D. Thermal Movements: Provide canopy that allow for thermal movements resulting from the following maximum change (range) in ambient and surface temperatures by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

2.2 WALL-HUNG CANOPIES

A. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

1. Mapes Industries, Inc.; Super Lumideck Flat Soffit (Basis of Design)
2. Dittmer Architectural Aluminum
3. East Coast TVM, LLC
4. Peachtree Protective Covers
5. Tennessee Valley Metals, Inc.
6. Carolina Awning, Inc

B. General: All sizes and thickness shall be designed and manufactured to meet span requirements and to resist design loads.

C. Deck: Extruded aluminum.

1. Thickness: Min. 0.078 inch.
2. Depth: 3 inches.
3. Width: 6 inches.
4. Interlocking flat bottom to provide flush flat pan appearance from exposed underside.

D. Fascia: Extruded aluminum.

1. Thickness: 0.125 minimum.
2. Depth: 8 inches.
3. Style: J profile.

E. Intermediate Framing: Extruded aluminum.

1. Thickness: As required to meet performance requirements.

F. Hanger Rod: Manufacturer's tested and recommended assembly for performance requirements and attachment to structure.

G. Drainage: Internal beam gutter pitched to drain and discharge as indicated on Drawings.

2.3 ACCESSORIES

A. Fasteners: Use concealed fasteners fabricated from metals that are noncorrosive to canopies material and mounting surface.

B. Hardware:

1. Fasteners: Plated non-corrosive Type 18-8 stainless steel, sealed with neoprene "O" rings beneath flat washers.
2. Hanger Rod: Stainless steel, threaded to allow for adjustment to ensure drainage from canopies as indicated.

C. Anchors and Inserts: Use stainless steel or hot-dip galvanized anchors and inserts. Use torque-controlled expansion-bolt devices for drilled-in-place anchors.

2.4 MATERIALS

A. Aluminum Sheet and Plate: ASTM B 209, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated, and with at least the strength and durability properties of alloy 5005-H15.

B. Aluminum Extrusions: Alloy 6061-T6, 6063-T5, and 6063-T6 as required by profile and design.

1. Thickness: As required by design, complying with minimum thickness requirement specified.

C. Aluminum Sheet: Alloy 3105-H28 or 3004-H34.

D. Threaded Rods: Stainless steel, Type 316.

2.5 FABRICATION, GENERAL

A. General: Provide canopies consisting of extruded aluminum canopies supported on aluminum structural framing system and wall hangers.

1. Welded Connections: Comply with AWS standards for recommended practices in shop welding. Provide welds without distortion or discoloration of exposed side.
2. Mill joints to a tight, hairline fit. Form joints exposed to weather to exclude water penetration.
3. Conceal fasteners if possible; otherwise, locate fasteners where they will be inconspicuous.

2.6 ALUMINUM FINISHES

A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

B. Finish designations prefixed by AA comply with the system established by the Aluminum Association for designating aluminum finishes.

C. High-Performance Organic Finish: Two-coat fluoropolymer finish complying with AAMA 2605 and containing not less than 70 percent PVDF resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Color: Custom color equal to Mapes Charcoal Grey. Final color to be approved by architect and owner.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify all dimensions existing and provided.

B. Make reasonable adjustments in fabrication and erection to provide acceptable finished canopies.

3.2 INSTALLATION

A. General: Install canopies in strict accordance with manufacturer’s written recommendations and approved Shop Drawings.

B. Set embedded items required for installation of canopies. Use templates furnished by suppliers of items to be attached.

C. Install canopies level, plumb, and at height and slope indicated, with surfaces free from distortion or other defects in appearance.

1. Hanger Rod: Attach hanger rod to imbedded anchor plate in accordance with approved shop drawings.
2. Roof Panels:
   a. Fabricate roof panels to required lengths.
   b. Install level and square to beams to avoid "out of square" conditions at beam ends.
   c. Secure each contact point with a minimum of three stainless steel fasteners with 3/4 inch flat neoprene washers.
3. Joints Sealants and Flashing:
   a. Seal fabrication joints and seams away from view where required.
   b. Seal all other points where water penetration might be expected.
   c. Properly flash connection to walls where canopies contact surface of building.
      1) Note: Sealants are not acceptable for closure/flashing between building and canopy system.

3.3 CLEANING

A. At completion of installation, clean soiled surfaces of canopies according to manufacturer's written instructions.

1. Remove protective film from members. Clean canopies of dirt, grease, handprints, and other blemishes. Leave area in a neat, clean, and acceptable condition.

B. Protect canopies from damage from other construction operations. Provide temporary barricades where necessary.

END OF SECTION 107326

This page intentionally left blank.

SECTION 122413 - ROLLER WINDOW SHADES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Manually operated roller shades with single rollers.
2. Motor-operated roller shades with single rollers.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, features, finishes, and operating instructions for roller shades.

B. Shop Drawings: Show fabrication and installation details for roller shades, including shadeband materials, their orientation to rollers, and their seam and batten locations.

1. Motor-Operated Shades: Include details of installation and diagrams for power, signal, and control wiring.

C. Samples: For each type and color of shadeband material.

1. Include Samples of accessories involving color selection.

D. Product Schedule: For roller shades.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: For each type of shadeband material.

C. Product Test Reports: For each type of shadeband material, for tests performed by a qualified testing agency.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For roller shades to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Fabricator of products.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for fabrication and installation.

1. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Deliver roller shades in factory packages, marked with manufacturer, product name, and location of installation using same designations indicated on Drawings.

1.7 FIELD CONDITIONS

A. Environmental Limitations: Do not install roller shades until construction and finish work in spaces, including painting, is complete and dry and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

B. Field Measurements: Where roller shades are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Allow clearances for operating hardware of operable glazed units through entire operating range. Notify Architect of installation conditions that vary from Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain roller shades from single source from single manufacturer.

B. Manufacturers: Subject to compliance with requirements, provide product by one of the following:

1. Draper Inc. (Basis of Design)
2. Lutron Shading Solutions
3. MechoShade Systems, Inc.

2.2 MANUALLY OPERATED SHADES WITH SINGLE ROLLERS **(SHD-1)**

A. Chain-and-Clutch Operating Mechanisms: Manufacturer's heavy-duty operating hardware, with continuous-loop bead chain and clutch that stops shade movement when bead chain is released; permanently adjusted and lubricated.

1. Bead Chains: Nickel-plated metal.

a. Loop Length: Full length of roller shade.
b. Limit Stops: Provide upper and lower ball stops.
c. Chain-Retainer Type: Chain tensioner, jamb mounted.

2. Spring Lift-Assist Mechanisms: Manufacturer's heavy-duty mechanism for balancing roller shade weight and for lifting heavy roller shades.

a. Provide for shadebands that weigh more than 10 lb or for shades as recommended by manufacturer, whichever criterion is more stringent.

B. Rollers: Corrosion-resistant steel or extruded-aluminum tubes of diameters and wall thicknesses required to accommodate operating mechanisms and weights and widths of shadebands indicated without deflection. Provide with permanently lubricated drive-end assemblies and idle-end assemblies designed to facilitate removal of shadebands for service.

1. Roller Drive-End Location: As standard with manufacturer to suit installation.
2. Direction of Shadeband Roll: Regular, from back (exterior face) of roller.
3. Shadeband-to-Roller Attachment: Manufacturer's standard method.

C. Mounting Hardware: Heavy-duty brackets or endcaps, corrosion resistant and compatible with roller assembly, operating mechanism, installation accessories, and mounting location and conditions indicated.

D. Roller-Coupling Assemblies: Coordinated with operating mechanism and designed to join up to three inline rollers into a multiband shade that is operated by one roller drive-end assembly.

E. Shadebands:

1. Shadeband Material: Light-filtering fabric.
2. Shadeband Bottom (Hem) Bar: Steel or extruded aluminum.

a. Type: Enclosed in sealed pocket of shadeband material.
b. Color and Finish: As selected by Architect from manufacturer's full range.

F. Installation Accessories:

1. Front Fascia: Aluminum extrusion that conceals front and underside of roller and operating mechanism and attaches to roller endcaps without exposed fasteners.

a. Shape: L-shaped.
b. Height: Manufacturer's standard height required to conceal roller and shadeband assembly when shade is fully open, but not less than 3 inches.

2. Endcap Covers: To cover exposed endcaps.
3. Installation Accessories Color: As selected from manufacturer's full range.

2.3 MOTOR-OPERATED, SINGLE-ROLLER SHADES **(SHD-2)**

A. Motorized Operating Systems: Provide factory-assembled, shade-operator systems of size and capacity and with features, characteristics, and accessories suitable for conditions indicated, complete with electric motor and factory-prewired motor controls, power disconnect switch, enclosures protecting controls and operating parts, and accessories required for reliable operation without malfunction. Include wiring from motor controls to motors. Coordinate operator wiring requirements and electrical characteristics with building electrical system.

1. Electrical Components: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
2. Electric Motor: Manufacturer's heavy-duty tubular, enclosed in rollers.

a. Electrical Characteristics: 110-V ac.
b. Maximum Total Shade Width: As required to operate roller shades indicated.
c. Maximum Shade Drop: As required to operate roller shades indicated.
d. Maximum Weight Capacity: As required to operate roller shades indicated.

3. Remote Control: Electric controls with NEMA ICS 6, Type 1 enclosure for recessed or flush mounting. Provide the following for remote-control activation of shades:

a. Individual/Group Control Station: Momentary-contact, three-position, rocker-style, wall-switch-operated control station with open, close, and center off functions for individual and group control.
b. Color: As selected by Architect from manufacturer's full range.

4. Crank-Operator Override: Crank and gearbox operate shades in event of power outage or motor failure.
5. Limit Switches: Adjustable switches, interlocked with motor controls and set to stop shade movement automatically at fully raised and fully lowered positions.

B. Rollers: Corrosion-resistant steel or extruded-aluminum tubes of diameters and wall thicknesses required to accommodate operating mechanisms and weights and widths of shadebands indicated without

deflection. Provide with permanently lubricated drive-end assemblies and idle-end assemblies designed to facilitate removal of shades for service.

1. Drive-End Location: As standard with manufacturer to suit installation.
2. Direction of Shadeband Roll: Regular, from back (exterior face) of roller.
3. Shadeband-to-Roller Attachment: Manufacturer's standard method.

C. Mounting Hardware: Brackets or endcaps, corrosion resistant and compatible with roller mounting configuration, roller assemblies, operating mechanisms, installation accessories, and installation locations and conditions indicated.

D. Roller-Coupling Assemblies: Coordinated with operating mechanism and designed to join up to three inline rollers into a multiband shade that is operated by one roller drive-end assembly.

E. Shadebands:

1. Shadeband Material: Light-filtering fabric.
2. Shadeband Bottom (Hem) Bar: Steel or extruded aluminum.

a. Type: Enclosed in sealed pocket of shadeband material.
b. Color: As selected by Architect from manufacturer's full range.

F. Installation Accessories:

1. Front Fascia: Aluminum extrusion that conceals front and underside of roller and operating mechanism and attaches to roller endcaps without exposed fasteners.

a. Shape: L-shaped.
b. Height: Manufacturer's standard height required to conceal roller and shadeband assembly when shade is fully open, but not less than 3 inches.

2. Endcap Covers: To cover exposed endcaps.
3. Installation Accessories Color: As selected from manufacturer's full range.

2.4 SHADEBAND MATERIALS

A. Shadeband Material Flame-Resistance Rating: Comply with NFPA 701. Testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

B. Light-Filtering Fabric: Woven fabric, stain and fade resistant.

1. Source: Roller shade manufacturer.
2. Type: PVC-coated polyester.
3. Orientation on Shadeband: Railroaded.
4. Openness Factor: 3 percent.
5. Color: As indicated on Interior Finish Legend.

2.5 ROLLER SHADE FABRICATION

A. Product Safety Standard: Fabricate roller shades to comply with WCMA A 100.1, including requirements for flexible, chain-loop devices; lead content of components; and warning labels.

B. Unit Sizes: Fabricate units in sizes to fill window and other openings as follows, measured at 74 deg F:

1. Between (Inside) Jamb Installation: Width equal to jamb-to-jamb dimension of opening in which shade is installed less 1/4 inch per side or 1/2-inch total, plus or minus 1/8 inch. Length equal to head-to-sill or -floor dimension of opening in which shade is installed less 1/4 inch, plus or minus 1/8 inch.

C. Shadeband Fabrication: Fabricate shadebands without battens or seams to extent possible, except as follows:

1. Railroaded Materials: Railroad material where material roll width is less than the required width of shadeband and where indicated. Provide battens and seams as required by railroaded material to produce shadebands with full roll-width panel(s) plus, if required, one partial roll-width panel located at top of shadeband.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, operational clearances, locations of connections to building electrical system, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 ROLLER SHADE INSTALLATION

A. Install roller shades level, plumb, and aligned with adjacent units according to manufacturer's written instructions.

B. Electrical Connections: Connect motor-operated roller shades to building electrical system.

C. Roller Shade Locations: At exterior windows.

3.3 ADJUSTING

A. Adjust and balance roller shades to operate smoothly, easily, safely, and free from binding or malfunction throughout entire operational range.

3.4 CLEANING AND PROTECTION

A. Clean roller shade surfaces, after installation, according to manufacturer's written instructions.

B. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, that ensure that roller shades are without damage or deterioration at time of Substantial Completion.

C. Replace damaged roller shades that cannot be repaired, in a manner approved by Architect, before time of Substantial Completion.

3.5 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain motor-operated roller shades.

END OF SECTION 122413

This page intentionally left blank.

SECTION 123623.13 - PLASTIC-LAMINATE-CLAD COUNTERTOPS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plastic-laminate-clad countertops.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For plastic-laminate-clad countertops.

1. Include plans, sections, details, and attachments to other work. Detail fabrication and installation, including field joints.
2. Show locations and sizes of cutouts and holes for items installed in plastic-laminate-clad countertops.

C. Samples: Plastic laminates in each type, color, pattern, and surface finish required in manufacturer's standard size.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

1.4 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

1. Shop Certification: AWI's Quality Certification Program accredited participant.

B. Installer Qualifications: Fabricator of products.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Deliver countertops only after casework and supports on which they will be installed have been completed in installation areas.

B. Store countertops in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

C. Keep surfaces of countertops covered with protective covering during handling and installation.

1.6 FIELD CONDITIONS

A. Environmental Limitations without Humidity Control: Do not deliver or install countertops until building is enclosed, wet-work is complete, and HVAC system is operating and maintaining temperature and

relative humidity at levels planned for building occupants during the remainder of the construction period.

B. Field Measurements: Where countertops are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

PART 2 - PRODUCTS

2.1 FABRICATORS

A. Fabricators: Subject to compliance with requirements, provide products by one of the following:

1. Cabinets by Design, Duluth, GA
2. Cleora Sterling
3. LSI Corporation
4. Pridgen Millwork
5. Stephenson Millwork
6. Stevens Industries, Inc.

2.2 PLASTIC-LAMINATE-CLAD COUNTERTOPS

A. Quality Standard: Unless otherwise indicated, comply with the "Architectural Woodwork Standards" for grades of plastic-laminate-clad countertops indicated for construction, finishes, installation, and other requirements.

1. The Contract Documents contain requirements that are more stringent than the referenced quality standard. Comply with requirements of Contract Documents in addition to those of the referenced quality standard.

B. Grade: Custom.

C. High-Pressure Decorative Laminate **(PLM-2)**: NEMA LD 3, Grade HGS.

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated on Interior Finish Legend or comparable products by one of the following:

a. Formica Corporation (Basis of Design)
b. Nevamar
c. Wilsonart

D. Edge Treatment: Same as laminate cladding on horizontal surfaces.

E. Core Material: Particleboard.

F. Core Material at Sinks: Particleboard made with exterior glue.

G. Core Thickness: 3/4 inch.

H. Backer Sheet: Provide plastic-laminate backer sheet, NEMA LD 3, Grade BKL, on underside of countertop substrate.

2.3 WOOD MATERIALS

A. Wood Products: Provide materials that comply with requirements of referenced quality standard unless otherwise indicated.

1. Wood Moisture Content: 5 to 10 percent.

B. Composite Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of countertop and quality grade specified unless otherwise indicated.

1. MDF: Medium-density fiberboard, ANSI A208.2, Grade 130.
2. Particleboard: ANSI A208.1, Grade M-2 or Grade M-2-Exterior Glue.
3. Softwood Plywood: DOC PS 1.

2.4 MISCELLANEOUS MATERIALS

A. Adhesive for Bonding Plastic Laminate: Manufacturer's standard.

2.5 FABRICATION

A. Complete fabrication, including assembly, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.

1. Notify Architect seven days in advance of the dates and times countertop fabrication will be complete.
2. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended, and check measurements of assemblies against field measurements before disassembling for shipment.

B. Shop cut openings to maximum extent possible to receive appliances, plumbing fixtures, electrical work, and similar items. Locate openings accurately, and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

1. Seal edges of cutouts by saturating with varnish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition countertops to average prevailing humidity conditions in installation areas.

B. Before installing countertops, examine shop-fabricated work for completion and complete work as required, including removal of packing.

3.2 INSTALLATION

A. Grade: Install countertops to comply with same grade as item to be installed.

B. Assemble countertops and complete fabrication at Project site to the extent that it was not completed in the shop.

1. Provide cutouts for appliances, plumbing fixtures, electrical work, and similar items. Locate openings accurately, and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.
2. Seal edges of cutouts by saturating with varnish.

C. Field Jointing: Where possible, make in the same manner as shop jointing, using dowels, splines, adhesives, and fasteners recommended by manufacturer. Prepare edges to be joined in shop so Project-site processing of top and edge surfaces is not required. Locate field joints where shown on Shop Drawings.

1. Secure field joints in countertops with concealed clamping devices located within 6 inches of front and back edges and at intervals not exceeding 24 inches. Tighten in accordance with manufacturer's written instructions to exert a constant, heavy-clamping pressure at joints.

D. Scribe and cut countertops to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.

E. Countertop Installation: Anchor securely by screwing through corner blocks of base cabinets or other supports into underside of countertop.

1. Install countertops level and true in line. Use concealed shims as required to maintain not more than a 1/8-inch-in-96-inches variation from a straight, level plane.
2. Secure backsplashes to tops with concealed metal brackets at 16 inches o.c. and to walls with adhesive.
3. Seal joints between countertop and backsplash, if any, and joints where countertop and backsplash abut walls with mildew-resistant silicone sealant or another permanently elastic sealing compound recommended by countertop material manufacturer.

3.3 ADJUSTING AND CLEANING

A. Repair damaged and defective countertops, where possible, to eliminate functional and visual defects. Where not possible to repair, replace countertops. Adjust joinery for uniform appearance.

B. Clean countertops on exposed and semiexposed surfaces.

C. Protection: Provide suitable covering over countertop surfaces, taped to underside of countertop at a minimum of 48 inches o.c. Remove protection at Substantial Completion.

END OF SECTION 123623.13

SECTION 123661.19 - QUARTZ AGGLOMERATE COUNTERTOPS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Quartz agglomerate countertops.

1.2 ACTION SUBMITTALS

A. Product Data: For countertop materials.

B. Shop Drawings: For countertops. Show materials, finishes, edge profiles, and methods of joining.

1. Show locations and details of joints.
2. Show direction of directional pattern, if any.

C. Samples: For each type of material exposed to view.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For quartz agglomerate countertops to include in maintenance manuals. Include Product Data for care products used or recommended by Installer and names, addresses, and telephone numbers of local sources for products.

1.5 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom-fabricate countertops similar to that required for this Project, and whose products have a record of successful in-service performance.

B. Installer Qualifications: Fabricator of countertops.

C. Mockups: Build mockups to demonstrate aesthetic effects and to set quality standards for fabrication and execution.

1. Build mockup of typical countertop as shown on Drawings.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.6 FIELD CONDITIONS

A. Field Measurements: Verify dimensions of countertops by field measurements after base cabinets are installed but before countertop fabrication is complete.

1.7 COORDINATION

A. Coordinate locations of utilities that will penetrate countertops or backsplashes.

PART 2 - PRODUCTS

2.1 QUARTZ AGGLOMERATE COUNTERTOP MATERIALS

A. Quartz Agglomerate **(QSS-1)**: Solid sheets consisting of quartz aggregates bound together with a matrix of filled plastic resin and complying with ICPA SS-1, except for composition.

1. Basis of Design: Subject to compliance with requirements, provide basis of design indicated or comparable products by one of the following:

a. E. I. du Pont de Nemours and Company; Corian Quartz (Basis of Design)
b. Caesarstone
c. Cambria.

2. Colors and Patterns: As indicated on Interior Finish Legend.

2.2 ACCESSORIES

A. Countertop Brackets: Heavy duty workstation brackets. Under-counter support frames, legs and miscellaneous metal parts shall be aluminum or steel, welded, degreased, cleaned, treated and powder-coated.

B. Grommets for Cable Passage through Countertops: 2-inch OD, stainless-steel grommets and matching cap with slot for wire passage; finish as selected by Architect.

2.3 COUNTERTOP FABRICATION

A. Fabricate countertops according to quartz agglomerate manufacturer's written instructions and the AWI/AWMAC/WI's "Architectural Woodwork Standards."

1. Grade: Custom.

B. Configuration:

1. Front: Straight, slightly eased at top.

C. Countertops: 3/4-inch- thick, quartz agglomerate.

D. Comply with quartz agglomerate manufacturer's written instructions for adhesives, sealers, fabrication, and finishing.

E. Joints: Fabricate straight countertops eight feet or less in length without joints.

F. Joints: Fabricate countertops in sections for joining in field, with joints at locations as approved by Architect.

1. Splined Joints: Accurately cut kerfs in edges at joints for insertion of metal splines to maintain alignment of surfaces at joints. Make width of cuts slightly more than thickness of splines to provide snug fit. Provide at least three splines in each joint.

2.4 INSTALLATION MATERIALS

A. Adhesive: Product recommended by quartz agglomerate manufacturer.

B. Sealant for Countertops: Comply with applicable requirements in Section 079200 "Joint Sealants."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates to receive quartz agglomerate countertops and conditions under which countertops will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of countertops.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install countertops level to a tolerance of 1/8 inch in 8 feet, 1/4 inch maximum. Do not exceed 1/64-inch difference between planes of adjacent units.

B. Fasten countertops by screwing through corner blocks of base units into underside of countertop. Predrill holes for screws as recommended by manufacturer. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with quartz agglomerate manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

C. Fasten subtops to cabinets by screwing through subtops into cornerblocks of base cabinets. Shim as needed to align subtops in a level plane.

D. Secure countertops to subtops with adhesive according to quartz agglomerate manufacturer's written instructions. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with quartz agglomerate manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

E. Bond joints with adhesive and draw tight as countertops are set. Mask areas of countertops adjacent to joints to prevent adhesive smears.

1. Install metal splines in kerfs in countertop edges at joints. Fill kerfs with adhesive before inserting splines and remove excess immediately after adjoining units are drawn into position.
2. Clamp units to temporary bracing, supports, or each other to ensure that countertops are properly aligned and joints are of specified width.

F. Complete cutouts not finished in shop. Mask areas of countertops adjacent to cutouts to prevent damage while cutting. Make cutouts to accurately fit items to be installed, and at right angles to finished surfaces unless beveling is required for clearance. Ease edges slightly to prevent snipping.

G. Apply sealant to gaps at walls; comply with Section 079200 "Joint Sealants."

END OF SECTION 123661.19

This page intentionally left blank.

SECTION 210517 - SLEEVES AND SLEEVE SEALS FOR FIRE-SUPPRESSION PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Sleeves without waterstop.
2. Sleeves with waterstop.
3. Silicone sealants.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 SLEEVES WITHOUT WATERSTOP

A. Cast-Iron Pipe Sleeves: Cast or fabricated of cast or ductile iron and equivalent to ductile-iron pressure pipe, with plain ends.

B. Steel Pipe Sleeves: ASTM A53/A53M, Type E, Grade B, Schedule 40, hot-dip galvanized, with plain ends.

2.2 SLEEVES WITH WATERSTOP

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Advance Products & Systems, LLC.
2. CALPICO, Inc.
3. GPT; an EnPro Industries company.
4. Metraflex Company (The).

B. Description: Manufactured steel stainless steel galvanized steel, sleeve-type, waterstop assembly made for imbedding in concrete slab or wall.

2.3 SILICONE SEALANTS

A. Silicone, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. GE Construction Sealants; Momentive Performance Materials Inc.
   b. Permathane; ITW Polymer Sealants North America.
   c. Polymeric Systems, Inc.
   d. Sherwin-Williams Company (The).
   e. Sika Corporation.
   f. The Dow Chemical Company.
   g. Tremco Incorporated.

2. Standard: ASTM C920, Type S, Grade NS, Class 25, Use NT.

B. Silicone, S, P, T, NT: Single-component, 100/50, pourable, plus 100 percent and minus 50 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Pecora Corporation.
b. Sika Corporation.
c. The Dow Chemical Company.
d. Tremco Incorporated.

2. Standard: ASTM C920, Type S, Grade P, Class 100/50, Uses T and NT.

C. Silicone Foam: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Smooth-On.

PART 3 - EXECUTION

3.1 INSTALLATION OF SLEEVES - GENERAL

A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.

B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.

1. Sleeves are not required for core-drilled holes.

C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.

1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
2. Cut sleeves to length for mounting flush with both surfaces.

a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.

3. Using silicone sealant, seal space outside of sleeves in slabs and walls without sleeve-seal system.

D. Install sleeves for pipes passing through interior partitions.

1. Cut sleeves to length for mounting flush with both surfaces.
2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint.

E. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke Barrier Penetrations: Maintain indicated fire or smoke rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping and fill materials specified in Section 078413 "Penetration Firestopping."

3.2 INSTALLATION OF SLEEVES WITH WATERSTOP

A. Install sleeve with waterstop as new walls and slabs are constructed.

B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.

C. Secure nailing flanges to concrete forms.

D. Using silicone sealant, seal space around outside of sleeves.

3.3 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Leak Test: After allowing for a full cure, test sleeves and sleeve seals for leaks. Repair leaks and retest until no leaks exist.
2. Sleeves and sleeve seals will be considered defective if they do not pass tests and inspections.

B. Prepare test and inspection reports.

END OF SECTION 210517

This page intentionally left blank.

SECTION 210523 - GENERAL-DUTY VALVES FOR WATER-BASED FIRE-SUPPRESSION PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Two-piece ball valves with indicators.
2. Iron butterfly valves with indicators.
3. Check valves.
4. Trim and drain valves.

1.2 DEFINITIONS

A. NRS: Nonrising stem.

B. OS&Y: Outside screw and yoke.

C. SBR: Styrene-butadiene rubber.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of valve.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, and weld ends.
3. Set valves open to minimize exposure of functional surfaces.

B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher-than-ambient dew point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use operating handles or stems as lifting or rigging points.

D. Protect flanges and specialties from moisture and dirt.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. UL Listed: Valves shall be listed in UL's "Online Certifications Directory" under the headings listed below and shall bear UL mark:

1. Fire Main Equipment: HAMV - Main Level.

a. Indicator Posts, Gate Valve: HCBZ - Level 1.
b. Ball Valves, System Control: HLUG - Level 3.
c. Butterfly Valves: HLXS - Level 3.
d. Check Valves: HMER - Level 3.
e. Gate Valves: HMRZ - Level 3.

2. Sprinkler System and Water Spray System Devices: VDGT - Main Level.

a. Valves, Trim and Drain: VQGU - Level 1.

B. FM Global Approved: Valves shall be listed in its "Approval Guide," under the headings listed below:

1. Automated Sprinkler Systems:

a. Indicator posts.
b. Valves.

1) Gate valves.
2) Check valves
3) Miscellaneous valves.

C. AWWA Compliance: Comply with AWWA C606 for grooved-end connections.

D. NFPA Compliance for valves:

1. Comply with NFPA 13, NFPA 14, NFPA 20, and NFPA 24.

E. Valve Pressure Ratings: Not less than the minimum pressure rating indicated or higher, as required by system pressures.

F. Valve Sizes: Same as upstream piping unless otherwise indicated.

G. Valve Actuator Types:

1. Worm-gear actuator with handwheel for quarter-turn valves, except for trim and drain valves.
2. Handwheel: For other than quarter-turn trim and drain valves.
3. Handlever: For quarter-turn trim and drain valves NPS 2 and smaller.

2.2 TWO-PIECE BALL VALVES WITH INDICATORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Ames Fire & Waterworks; A Watts Water Technologies Company.
2. NIBCO INC.
3. Victaulic Company.

B. Description:

1. UL 1091, except with ball instead of disc and FM Global approved for indicating valves (butterfly or ball type), Class Number 1112.
2. Minimum Pressure Rating: 175 psig.
3. Body Design: Two piece.
4. Body Material: Forged brass or bronze.
5. Port Size: Full or standard.
6. Seats: PTFE.
7. Stem: Bronze or stainless steel.
8. Ball: Chrome-plated brass.
9. Actuator: Worm gear
10. Supervisory Switch: Internal or external.

11. End Connections for Valves NPS 1 through NPS 2: Threaded ends.
12. End Connections for Valves NPS 2-1/2: Grooved ends.

2.3 IRON BUTTERFLY VALVES WITH INDICATORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. ALEUM USA.
2. Anvil International/Smith-Cooper International; Tailwind Capital, LLC.
3. Globe Fire Sprinkler Corporation.
4. Kennedy Valve Company; a division of McWane, Inc.
5. NIBCO INC.
6. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America.
7. Victaulic Company.
8. Zurn Industries, LLC.

B. Description:

1. Standard: UL 1091 and FM Global standard for indicating valves, (butterfly or ball type), Class Number 112.
2. Minimum Pressure Rating: 175 psig.
3. Body Material: Cast or ductile iron.
4. Seat Material: EPDM.
5. Stem: Stainless steel.
6. Disc: Ductile iron, and EPDM or SBR coated.
7. Actuator: Worm gear.
8. Supervisory Switch: Internal or external.
9. Body Design: Grooved-end connections.

2.4 CHECK VALVES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. ALEUM USA.
2. Ames Fire & Waterworks; A Watts Water Technologies Company.
3. Anvil International/Smith-Cooper International; Tailwind Capital, LLC.
4. FEBCO; A WATTS Brand.
5. Fire Protection Products Inc (FPPI); a brand of Anvil International and Smith-Cooper International.
6. Globe Fire Sprinkler Corporation.
7. Matco-Norca.
8. Mueller Co. LLC; Mueller Water Products, Inc.
9. NIBCO INC.
10. Reliable Automatic Sprinkler Co., Inc. (The).
11. Shurjoint; a part of Aalberts Integrated piping Systems.
12. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America.
13. United Brass Works, Inc.
14. Venus Fire Protection Ltd.
15. Victaulic Company.
16. Viking Group Inc.
17. WATTS; A Watts Water Technologies Company.
18. Wilson & Cousins Inc.
19. Zurn Industries, LLC.

B. Description:

1. Standard: UL 312 and FM Global standard for swing check valves, Class Number 1210.

2. Minimum Pressure Rating: 175 psig.
3. Type: Single swing check.
4. Body Material: Cast iron, ductile iron, or bronze.
5. Clapper: Bronze, ductile iron, or stainless steel with elastomeric seal.
6. Clapper Seat: Brass, bronze, or stainless steel.
7. Hinge Shaft: Bronze or stainless steel.
8. Hinge Spring: Stainless steel.
9. End Connections: Flanged, grooved, or threaded.

2.5 TRIM AND DRAIN VALVES

A. Angle Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

   a. Fire Protection Products Inc (FPPI); a brand of Anvil International and Smith-Cooper International.
   b. NIBCO INC.
   c. United Brass Works, Inc.

2. Description:

   a. Pressure Rating: 175 psig 250 psig.
   b. Body Material: Brass or bronze.
   c. Ends: Threaded.
   d. Stem: Bronze.
   e. Disc: Bronze.
   f. Packing: Asbestos free.
   g. Handwheel: Malleable iron, bronze, or aluminum.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.

B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.

C. Examine threads on valve and mating pipe for form and cleanliness.

D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.

E. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION, GENERAL

A. Comply with requirements in the following Sections for specific valve-installation requirements and applications:

1. Section 211313 "Wet-Pipe Sprinkler Systems" for application of valves in wet-pipe, fire-suppression sprinkler systems.

2. Section 331415 "Site Water Distribution Piping" for application of valves in fire-suppression water-service piping.

B. Install listed fire-protection shutoff valves supervised-open, located to control sources of water supply, except from fire-department connections. Install permanent identification signs, indicating portion of system controlled by each valve.

C. Install double-check valve assembly in each fire-protection water-supply connection.

D. Install valves having threaded connections with unions at each piece of equipment arranged to allow easy access, service, maintenance, and equipment removal without system shutdown. Provide separate support where necessary.

E. Install valves in horizontal piping with stem at or above the pipe center.

F. Install valves in position to allow full stem movement.

G. Install valve tags. Comply with requirements in Section 210553 "Identification for Fire-Suppression Piping and Equipment" for valve tags and schedules and signs on surfaces concealing valves; and the NFPA standard applying to the piping system in which valves are installed. Install permanent identification signs indicating the portion of system controlled by each valve.

END OF SECTION 210523

This page intentionally left blank.

SECTION 210529 - HANGERS AND SUPPORTS FOR FIRE-SUPPRESSION PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Metal pipe hangers and supports.
2. Fastener systems.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for structural-steel shapes and plates for trapeze hangers for pipe and equipment supports.
2. Section 210548 "Vibration and Seismic Controls for Fire-Suppression Piping and Equipment" for vibration isolation devices and seismic restraints.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. NFPA Compliance: Comply with NFPA 13.

B. UL Compliance: Comply with UL 203.

2.2 METAL PIPE HANGERS AND SUPPORTS

A. Carbon-Steel Pipe Hangers and Supports:

1. Description: Factory-fabricated components, NFPA approved, UL listed, or FM approved for fire-suppression piping support.
2. Galvanized Metallic Coatings: Pregalvanized or hot-dip galvanized.
3. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.

2.3 FASTENER SYSTEMS

A. Mechanical-Expansion Anchors: NFPA-approved, UL-listed, or FM-approved, insert-wedge-type anchors, for use in hardened portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

1. <u>Manufacturers:</u> Subject to compliance with requirements, provide products by one of the following:

a. Cooper B-line; brand of Eaton, Electrical Sector.

b. Empire Industries, Inc.
c. Hilti, Inc.
d. ITW Ramset/Red Head; Illinois Tool Works, Inc.
e. MKT Fastening, LLC.

2. Indoor Applications: Zinc-coated or Stainless steel.
3. Outdoor Applications: Stainless steel.

2.4 MATERIALS

A. Aluminum: ASTM B221.

B. Carbon Steel: ASTM A1011/A1011M.

C. Structural Steel: ASTM A36/A36M, carbon-steel plates, shapes, and bars; black and galvanized.

D. Stainless Steel: ASTM A240/A240M.

E. Grout: ASTM C1107/C1107M, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout, suitable for interior and exterior applications.

1. Properties: Nonstaining, noncorrosive, and nongaseous.
2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 APPLICATION

A. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping materials and installation, for penetrations through fire-rated walls, ceilings, and assemblies.

B. Strength of Support Assemblies: Where not indicated, select sizes of components, so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 250 lb.

3.2 INSTALLATION OF HANGERS AND SUPPORTS

A. Metal Pipe-Hanger Installation: Comply with installation requirements of approvals and listings. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.

B. Fastener System Installation:

1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches thick in concrete, after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual. Install in accordance with approvals and listings.
2. Install mechanical-expansion anchors in concrete, after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions. Install in accordance with approvals and listings.

C. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.

D. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.

E. Install lateral bracing with pipe hangers and supports to prevent swaying.

F. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms, and install reinforcing bars through openings at top of inserts.

G. Load Distribution: Install hangers and supports, so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.

H. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.

I. Insulated Piping:

1. Attach clamps and spacers to piping.

   a. Piping Operating Above Ambient Air Temperature: Clamp may project through insulation.
   b. Piping Operating Below Ambient Air Temperature: Use thermal hanger-shield insert with clamp sized to match OD of insert.
   c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.

2. Install MSS SP-58, Type 39 protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.

   a. MSS SP-58, Type 39 Option: Thermal hanger-shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

3. Install MSS SP-58, Type 40 protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.

   a. MSS SP-58, Type 40 Option: Thermal hanger-shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

4. Shield Dimensions for Pipe: Not less than the following:

   a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
   b. NPS 4: 12 inches long and 0.06 inch thick.
   c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
   d. NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.
   e. NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.

5. Pipes NPS 8 and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
6. Thermal Hanger Shields: Install with insulation of same thickness as piping insulation.

3.3 ADJUSTING

A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.

B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.4 PAINTING

A. Touchup:

1. Clean field welds and abraded, shop-painted areas. Paint exposed areas immediately after erecting hangers and supports. Use same materials as those used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

   a. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.

B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas, and apply galvanizing-repair paint to comply with ASTM A780/A780M.

3.5 HANGER AND SUPPORT SCHEDULE

A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.

B. Comply with NFPA requirements for pipe-hanger selections and applications that are not specified in piping system Sections.

C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finishes.

D. Use carbon-steel pipe hangers and supports and attachments for general service applications.

E. Horizontal-Piping Hangers and Supports: Comply with NFPA requirements. Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.
2. Steel Pipe Clamps (MSS Type 4): For suspension of NPS 1/2 to NPS 24 if little or no insulation is required.
3. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
4. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 8.
5. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 3.
6. U-Bolts (MSS Type 24): For support of heavy pipes NPS 1/2 to NPS 30.
7. Pipe Saddle Supports (MSS Type 36): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
8. Pipe Stanchion Saddles (MSS Type 37): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate, and with U-bolt to retain pipe.
9. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes NPS 2-1/2 to NPS 36 if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.

F. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.
2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 if longer ends are required for riser clamps.

G. Hanger-Rod Attachments: Comply with NFPA requirements.

H. Building Attachments: Comply with NFPA requirements. Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel or Malleable-Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
2. C-Clamps (MSS Type 23): For structural shapes.
3. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.

I. Saddles and Shields: Comply with NFPA requirements. Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
3. Thermal Hanger-Shield Inserts: For supporting insulated pipe.

J. Comply with NFPA requirements for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.

K. Comply with MFMA-103 for metal framing system selections and applications that are not specified in piping system Sections.

L. Use mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 210529

This page intentionally left blank.

SECTION 210548 - VIBRATION AND SEISMIC CONTROLS FOR FIRE-SUPPRESSION PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Restraints - rigid type.
2. Restraints - cable type.
3. Restraint accessories.
4. Post-installed concrete anchors.
5. Concrete inserts.

B. Related Requirements:

1. Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment" for devices for plumbing equipment and systems.
2. Section 230548 "Vibration and Seismic Controls for HVAC" for devices for HVAC equipment and systems.

1.2 DEFINITIONS

A. Designated Seismic System: A fire-suppression component that requires design in accordance with ASCE/SEI 7, Ch. 13 and for which the Component Importance Factor is greater than 1.0.

B. IBC: International Building Code.

C. OSHPD: Office of Statewide Health Planning and Development (for the State of California).

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include rated load, rated deflection, and overload capacity for each vibration isolation device.
2. Illustrate and indicate style, material, strength, fastening provision, and finish for each type and size of vibration isolation device and seismic-restraint component.
3. Annotate types and sizes of seismic restraints and accessories, complete with listing markings or report numbers and load rating in tension and compression as evaluated by UL product listing.
4. Annotate to indicate application of each product submitted and compliance with requirements.
5. Interlocking Snubbers: Include ratings for horizontal, vertical, and combined loads.

B. Shop Drawings:

1. Detail fabrication and assembly of equipment bases.
2. Vibration Isolation Base Details: Detail fabrication including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.

C. Delegated Design Submittal:

1. For each seismic-restraint device, including seismic-restrained mounting, seismic restraint, seismic-restraint accessory, and concrete anchor and insert that is required by this Section or is indicated on Drawings, submit the following:

   a. Seismic-Restraint Selection: Select seismic restraints complying with performance requirements, design criteria, and analysis data.
   b. Riser Supports: Include riser diagrams and calculations showing anticipated expansion and contraction at each support point, initial and final loads on building structure, and seismic loads. Include certification by professional engineer that riser system was examined for excessive stress and that none exists.
   c. Post-Installed Concrete Anchors and Inserts: Include calculations showing anticipated seismic loads. Include certification that device is approved by an NRTL for seismic reinforcement use.
   d. Seismic Design Calculations: Submit all input data and loading calculations prepared under "Seismic Design Calculations" Paragraph in "Performance Requirements" Article.
   e. Qualified Professional Engineer: All designated-design submittals for seismic calculations are to be signed and sealed by qualified professional engineer responsible for their preparation.

2. Seismic-Restraint Detail Drawing:

   a. Design Analysis: To support selection and arrangement of seismic restraints. Include calculations of combined tensile and shear loads.
   b. Details: Indicate fabrication and arrangement. Detail attachments of restraints to restrained items and to the structure. Show attachment locations, methods, and spacings. Identify components, list their strengths, and indicate directions and values of forces transmitted to the structure during seismic events. Indicate association with vibration isolation devices.
   c. Coordinate seismic restraint details with wind-load restraint details required for equipment mounted outdoors. Comply also with requirements in other Sections for equipment mounted outdoors.

3. Product Listing, Preapproval, and Evaluation Documentation: By UL , showing maximum ratings of restraint items and the basis for approval (tests or calculations).
4. All delegated design submittals for seismic-restraint detail Drawings are to be signed and sealed by qualified professional engineer responsible for their preparation.

1.4 INFORMATIONAL SUBMITTALS

A. Seismic Qualification Data: Provide special certification for designated seismic systems as indicated in ASCE/SEI 7-10, Paragraph 13.2.2, "Special Certification Requirements for Designated Seismic Systems" for all Designated Seismic Systems identified as such on Drawings or in the Specifications.

1. Provide equipment manufacturer's written certification for each designated active fire-suppression system seismic device and system, stating that it will remain operable following the design earthquake. Certification must be based on requirements of ASCE/SEI 7 and AHRI 1270, including shake table testing per ICC-ES AC156 or a similar nationally recognized testing standard procedure acceptable to authorities having jurisdiction or experience data as permitted by ASCE/SEI 7-10.
2. Provide equipment manufacturer's written certification that components with hazardous contents maintain containment following the design earthquake by methods required in ASCE/SEI 7-10.
3. Submit evidence demonstrating compliance with these requirements for approval to authorities having jurisdiction after review and acceptance by a licensed professional engineer.

1.5 QUALITY ASSURANCE

A. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct testing indicated, that is an NRTL as defined by OSHA in 29 CFR 1910.7 and that is acceptable to authorities having jurisdiction.

B. Seismic-Restraint Device Load Ratings: Devices to be tested and rated in accordance with applicable code requirements and authorities having jurisdiction. Devices to be listed by a nationally recognized third party that requires periodic follow-up inspections and has a listing directory available to the public. Provide third-party listing by one or more of the following: UL product listing.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design seismic control system.

1. Seismic Performance: Equipment must be designed and secured to withstand the effects of earthquake motions determined in accordance with NFPA 13 and ASCE/SEI 7-10.

B. Seismic Design Calculations:

1. Perform calculations to obtain force information necessary to properly select seismic-restraint devices, fasteners, and anchorage. Perform calculations using methods acceptable to applicable code authorities and as presented in NFPA 13-2013 and ASCE/SEI 7-10. Where "ASCE/SEI 7" is used throughout this Section, it is to be understood that the edition referred to in this subparagraph is the edition intended as reference throughout the Section Text.

a. Data indicated below to be determined by Delegated Design Contractor must be obtained by Contractor and must be included in individual component submittal packages.

b. Building Design Category: D.
c. Building Occupancy Category: II.
d. Building Risk Category: II.
e. Building Site Classification: D.

C. Consequential Damage: Provide additional seismic restraints for suspended fire-suppression system components or anchorage of floor-, roof-, or wall-mounted fire-suppression system components as indicated in ASCE/SEI 7-10 so that failure of a non-essential or essential fire-suppression system component will not cause the failure of any other essential architectural, mechanical, or electrical building component.

D. Component Supports:

1. Load ratings, features, and applications of all reinforcement components must be based on testing standards of a nationally recognized testing agency.
2. All component support attachments must comply with force and displacement resistance requirements of ASCE/SEI 7-10 Section 13.6.

2.2 RESTRAINTS - RIGID TYPE

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CADDY; brand of nVent Electrical plc.
2. California Dynamics Corporation.

3. Cooper B-line; brand of Eaton, Electrical Sector.
4. Hilti, Inc.
5. Isolation Technology, Inc.
6. TOLCO Incorporated.
7. Unistrut; Atkore International.
8. VMC GROUP.

B. Description: Shop- or field-fabricated bracing assembly made of AISI S110-07-S1 slotted steel channels, ANSI/ASTM A53/A53M steel pipe as per NFPA 13, or other rigid steel brace member. Includes accessories for attachment to braced component at one end and to building structure at the other end and other matching components and with corrosion-resistant coating; rated in tension, compression, and torsion forces.

2.3 RESTRAINTS - CABLE TYPE

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CADDY; brand of nVent Electrical plc.
2. Cooper B-line; brand of Eaton, Electrical Sector.
3. Gripple Inc.
4. Loos & Co. Inc.
5. VMC GROUP.

B. Seismic-Restraint Cables: ASTM A1023/A12023M galvanized or ASTM A603 galvanized-steel cables. End connections made of steel assemblies with thimbles, brackets, swivel, and bolts designed for seismic restraining cable service; with fittings attached by means of poured socket, swaged socket or mechanical (Flemish eye) loop.

C. Restraint cable assembly with cable fittings must comply with ASCE/SEI 19. All cable fittings and complete cable assembly must maintain the minimum cable breaking force. U-shaped cable clips and wedge-type end fittings do not comply and are unacceptable.

2.4 RESTRAINT ACCESSORIES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CADDY; brand of nVent Electrical plc.
2. Cooper B-line; brand of Eaton, Electrical Sector.
3. Hilti, Inc.
4. Loos & Co. Inc.
5. Mason Industries, Inc.
6. TOLCO Incorporated.
7. Unistrut; Atkore International.

B. Hanger-Rod Stiffener: Steel tube or steel slotted-support-system sleeve with internally bolted connections to hanger rod. Non-metallic stiffeners are unacceptable.

C. Hinged and Swivel Brace Attachments: Multifunctional steel connectors for attaching hangers to rigid restraints and restraint cables.

2.5 POST-INSTALLED CONCRETE ANCHORS

A. Mechanical Anchor Bolts:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

   a. Cooper B-line; brand of Eaton, Electrical Sector.
   b. Hilti, Inc.
   c. Mason Industries, Inc.
   d. Powers Fasteners.
   e. Unistrut; Atkore International.

2. Drilled-in and stud-wedge or female-wedge type in zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength for anchor and as tested according to ASTM E488/E488M.

B. Provide post-installed concrete anchors that have been prequalified for use in seismic applications. Post-installed concrete anchors must comply with all requirements of ASCE/SEI 7-10, Ch. 13.

1. Prequalify post-installed anchors in concrete in accordance with ACI 355.2 or other approved qualification testing procedures.
2. Prequalify post-installed anchors in masonry in accordance with approved qualification procedures.

C. Expansion-type anchor bolts are not permitted for equipment in excess of 10 hp that is not vibration isolated.

1. Undercut expansion anchors are permitted.

2.6 CONCRETE INSERTS

A. Manufacturers: Subject to compliance with requirements, provide products by the following:

1. Cooper B-line; brand of Eaton, Electrical Sector.
2. Hilti, Inc.
3. Mason Industries, Inc.
4. Powers Fasteners.
5. Unistrut; Atkore International.

B. Provide preset concrete inserts that are seismically prequalified in accordance with ICC-ES AC466 testing.

C. Comply with ANSI/MSS SP-58.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and equipment to receive vibration isolation and seismic control devices for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in of reinforcement and cast-in-place anchors to verify actual locations before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLICATIONS

A. Multiple Pipe Supports: Secure pipes to trapeze member with clamps approved for application by an evaluation service member of ICC-ES.

B. Hanger-Rod Stiffeners: Install where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods due to seismic forces.

C. Strength of Support and Seismic-Restraint Assemblies: Where not indicated, select sizes of components so strength is adequate to carry calculated static and seismic loads within specified loading limits.

3.3 INSTALLATION OF VIBRATION CONTROL AND SEISMIC-RESTRAINT DEVICES

A. Provide vibration-control devices for systems and equipment where indicated in Equipment Schedules or Fire-Suppression Vibration Isolation, Seismic, and Wind-Load-Restraint Schedule, where indicated on Drawings, or where the Specifications indicate they are to be installed on specific equipment and systems.

B. Provide seismic-restraint devices for systems and equipment where indicated in Equipment Schedules or Vibration Isolation, Seismic, and Wind-Load-Restraint Schedules, where indicated on Drawings, where the Specifications indicate they are to be installed on specific equipment and systems, and where required by applicable codes.

C. Coordinate location of embedded connection hardware with supported equipment attachment and mounting points and with requirements for concrete reinforcement and formwork specified in Section 033000 "Cast-in-Place Concrete."

D. Installation of vibration isolators and seismic restraints must not cause any stresses, misalignment, or change of position of equipment or piping.

E. Comply with installation requirements of NFPA 13 for installation of all seismic-restraint devices.

F. Comply with requirements in Section 077200 "Roof Accessories" for installation of equipment supports and roof penetrations.

G. Equipment Restraints:

1. Install snubbers on fire-suppression equipment mounted on vibration isolators. Locate snubbers as close as possible to vibration isolators and bolt to equipment base and supporting structure.
2. Install resilient bolt isolation washers on equipment anchor bolts where clearance between anchor and adjacent surface exceeds 0.125 inch.
3. Install seismic-restraint devices using methods approved by an evaluation service member of ICC-ES that provides required submittals for component.

H. Piping Restraints:

1. Comply with all requirements in NFPA 13.
2. Design piping sway bracing in accordance with NFPA 13.

   a. Maximum spacing of all sway bracing to be no greater than indicated in NFPA 13.
   b. Design loading of all sway bracing not to exceed values indicated in NFPA 13.

I. Install seismic-restraint devices using methods approved by an evaluation service member of ICC-ES that provides required submittals for component.

J. Install bushing assemblies for anchor bolts for floor-mounted equipment, arranged to provide resilient media between anchor bolt and mounting hole in concrete base.

K. Install bushing assemblies for mounting bolts for wall-mounted equipment, arranged to provide resilient media where equipment or equipment-mounting channels are attached to wall.

L. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.

M. Post-Installed Concrete Anchors:

1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify the structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
3. Mechanical-Type Anchor Bolts: Protect threads from damage during anchor installation. Heavy-duty sleeve anchors to be installed with sleeve fully engaged in the structural element to which anchor is to be fastened.
4. Adhesive-Type Anchor Bolts: Clean holes to remove loose material and drilling dust prior to installation of adhesive. Place adhesive in holes proceeding from the bottom of the hole and progressing toward the surface in such a manner as to avoid introduction of air pockets in the adhesive.
5. Set anchors to manufacturer's recommended torque, using a torque wrench.
6. Install zinc-coated steel anchors for interior and stainless steel anchors for exterior applications.

3.4 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION

A. Install flexible connections in piping where they cross structural seismic joints and other points where differential movement may occur, where adjacent sections or branches are supported by different structural elements, and where the connections terminate with connection to equipment that is anchored to a different structural element from the one supporting the connections as they approach equipment. Comply with requirements in Section 211200 "Fire-Suppression Standpipes," Section 211313 "Wet-Pipe Sprinkler Systems," and Section 211316 "Dry-Pipe Sprinkler Systems" for piping flexible connections.

3.5 ADJUSTING

A. Adjust isolators after system is at operating weight.

B. Adjust limit stops on restrained-spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.

END OF SECTION 210548

This page intentionally left blank.

SECTION 211119 - FIRE-DEPARTMENT CONNECTIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:
   1. Exposed-type fire-department connections.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.
   1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each fire-department connection.

PART 2 - PRODUCTS

2.1 EXPOSED-TYPE FIRE-DEPARTMENT CONNECTION

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   1. American Fire Hose & Cabinet.
   2. Elkhart Brass Mfg. Co., Inc.
   3. Fire Protection Products Inc (FPPI); a brand of Anvil International and Smith-Cooper International.
   4. Fire-End & Croker Corporation.
   5. GMR International Equipment Corporation.
   6. Guardian Fire Equipment, Inc.
   7. Venus Fire Protection Ltd.
   8. Wilson & Cousins Inc.

B. Standard: UL 405.

C. Type: Exposed, projecting, for wall mounting.

D. Pressure Rating: 175 psig minimum.

E. Body Material: Corrosion-resistant metal.

F. Inlets: Brass with threads according to NFPA 1963 and matching local fire-department sizes and threads. Include extension pipe nipples, brass lugged swivel connections, and check devices or clappers.

G. Caps: Brass, lugged type, with gasket and chain.

H. Escutcheon Plate: Round, brass, wall type.

I. Outlet: Back, with pipe threads.

J. Number of Inlets: Two.

K. Escutcheon Plate Marking: Similar to "AUTO-SPKR". "."

L. Finish: Rough brass or bronze.

M. Outlet Size: NPS 4.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of fire-department connections.

B. Examine roughing-in for fire-suppression standpipe system to verify actual locations of piping connections before fire-department connection installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install wall-type fire-department connections.

B. Install two three protective pipe bollards on sides of each fire-department connection. Comply with requirements for bollards in Section 055000 "Metal Fabrications."

C. Install automatic (ball-drip) drain valve at each check valve for fire-department connection.

END OF SECTION 211119

SECTION 211313 - WET-PIPE SPRINKLER SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Steel pipe and fittings.
2. Specialty valves.
3. Air vent.
4. Sprinkler piping specialties.
5. Sprinklers.
6. Alarm devices.
7. Pressure gauges.

B. Related Requirements:

1. Section 211119 "Fire Department Connections" for exposed-, flush-, and yard-type fire department connections.
2. Section 331415 "Site Water Distribution Piping" for fire water-service backflow prevention devices.

1.2 DEFINITIONS

A. Standard-Pressure Sprinkler Piping: Wet-pipe sprinkler system piping designed to operate at working pressure of 175-psig maximum.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

B. Shop Drawings: For wet-pipe sprinkler systems.

1. Include plans, elevations, sections, and attachment details.
2. Include diagrams for power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

A. Design Data: Approved sprinkler piping working plans, prepared according to NFPA 13, including documented approval by authorities having jurisdiction, and including hydraulic calculations if applicable.

B. Field Test Reports:

1. Indicate and interpret test results for compliance with performance requirements and as described in NFPA 13. Include "Contractor's Material and Test Certificate for Aboveground Piping."
2. Fire-hydrant flow test report.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:

1. Installer's responsibilities include designing, fabricating, and installing sprinkler systems and providing professional engineering services needed to assume engineering responsibility. Base calculations on results of fire-hydrant flow test.

a. Engineering Responsibility: Preparation of working plans, calculations, and field test reports by qualified professional engineer. NICET Level III-certified technician, "Water-Based Systems Layout."

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Sprinkler system equipment, specialties, accessories, installation, and testing to comply with NFPA 13.

C. Standard-Pressure Piping System Component: Listed for 175-psig minimum working pressure.

D. Obtain documented approval of sprinkler system design from authorities having jurisdiction.

E. Seismic Performance: Sprinkler piping to withstand the effects of earthquake motions determined according to NFPA 13 and ASCE/SEI 7. See Section 210548 "Vibration and Seismic Controls for Fire-Suppression Piping and Equipment."

2.2 STEEL PIPE AND FITTINGS

A. Standard-Weight Steel Pipe: black-steel pipe, ASTM A53/A53M, Type E , Grade B. Pipe ends may be factory or field formed to match joining method.

B. Schedule 10, Black-Steel Pipe: ASTM A135/A135M or ASTM A795/A795M, Schedule 10 in NPS 5 and smaller; and NFPA 13-specified wall thickness in NPS 6 to NPS 10, plain end.

C. Gray-Iron Threaded Fittings: gray-iron threaded fittings, ASME B16.4, Class 125, standard pattern.

D. Malleable- or Ductile-Iron Unions: UL 860.

E. Steel Welding Fittings: ASTM A234/A234M and ASME B16.9.

1. Welding Filler Metals: Comply with AWS D10.12M/D10.12 for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.

F. Grooved-Joint, Steel-Pipe Appurtenances:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Anvil International/Smith-Cooper International; Tailwind Capital, LLC.
b. CPS Products, Inc.
c. National Fittings, Inc.
d. Shurjoint; a part of Aalberts Integrated piping Systems.
e. Smith-Cooper International.

f. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America.
g. Victaulic Company.

2. Pressure Rating: 175-psig minimum.
3. Grooved-End Fittings for Steel Piping: Painted grooved-end fittings, ASTM A47/A47M, malleable-iron casting or ASTM A536, ductile-iron casting, with dimensions matching steel pipe.
4. Grooved-End-Pipe Couplings for Steel Piping: AWWA C606 and UL 213 rigid pattern, unless otherwise indicated, for steel-pipe dimensions. Include ferrous housing sections, EPDM-rubber gasket, and bolts and nuts.

2.3 COVER SYSTEM FOR SPRINKLER PIPING

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. DecoShield Systems, Inc.

B. Description: System of support brackets and covers made to protect sprinkler piping.

C. Brackets: Glass-reinforced nylon.

D. Covers: Extruded-PVC sections of length, shape, and size required for size and routing of CPVC piping.

2.4 SPECIALTY VALVES

A. Listed in UL's "Fire Protection Equipment Directory"

B. Pressure Rating:

1. Standard-Pressure Piping Specialty Valves: 175-psig minimum.

C. Body Material: Cast or ductile iron.

D. Size: Same as connected piping.

E. End Connections: Flanged or grooved.

F. Automatic (Ball Drip) Drain Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. Reliable Automatic Sprinkler Co., Inc. (The).
b. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America.

2. Standard: UL 1726.
3. Pressure Rating: 175-psig minimum.
4. Type: Automatic draining, ball check.
5. Size: NPS 3/4.
6. End Connections: Threaded.

2.5 AIR VENT

A. Automatic Air Vent Assembly:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. AGF Manufacturing, Inc.

b. Engineered Corrosion Solutions.
c. Potter Electric Signal Company, LLC.
d. South-Tek Systems, LLC.

2. Description: Automatic dual air vent assembly that automatically vents trapped air without human intervention, including Y-strainer and ball valve in a pre-piped assembly.
3. Standard: UL listed approved for use in wet-pipe fire sprinkler system.
4. Vents oxygen continuously from system.
5. Float valve to prevent water discharge.
6. Minimum Water Working Pressure Rating: 175 psig.

2.6 SPRINKLER PIPING SPECIALTIES

A. Flow Detection and Test Assemblies:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. AGF Manufacturing, Inc.
b. Reliable Automatic Sprinkler Co., Inc. (The).
c. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America.
d. Victaulic Company.

2. Standard: UL's "Fire Protection Equipment Directory."
3. Pressure Rating: 175-psig minimum.
4. Body Material: Cast- or ductile-iron housing with orifice, sight glass, and integral test valve.
5. Size: Same as connected piping.
6. Inlet and Outlet: Threaded or grooved.

B. Sprinkler Inspector's Test Fittings:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. AGF Manufacturing, Inc.
b. Triple R Specialty.
c. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America.
d. Victaulic Company.
e. Viking Group Inc.

2. Standard: UL's "Fire Protection Equipment Directory."
3. Pressure Rating: 175-psig minimum.
4. Body Material: Cast- or ductile-iron housing with sight glass.
5. Size: Same as connected piping.
6. Inlet and Outlet: Threaded.

2.7 SPRINKLERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Globe Fire Sprinkler Corporation.
2. Reliable Automatic Sprinkler Co., Inc. (The).
3. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America.
4. Venus Fire Protection Ltd.
5. Victaulic Company.
6. Viking Group Inc.

B. Listed in UL's "Fire Protection Equipment Directory."

C. Pressure Rating for Automatic Sprinklers: 175-psig minimum.

D. Automatic Sprinklers with Heat-Responsive Element:

1. Nonresidential Applications: UL 199.
2. Characteristics: Nominal 1/2-inch orifice with Discharge Coefficient K of 5.6, and for "Ordinary" temperature classification rating unless otherwise indicated or required by application.

E. Sprinkler Finishes: bronze and painted.

2.8 ALARM DEVICES

A. Alarm-device types to match piping and equipment connections.

B. Electrically Operated Notification Appliances:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Fire-Lite Alarms; Honeywell International, Inc.
b. Notifier; Honeywell International, Inc.
c. Potter Electric Signal Company, LLC.

2. Electric Bell:

a. Standard: UL 464.
b. Type: Vibrating, metal alarm bell.
c. Size: 6-inch minimum- diameter.
d. Voltage: 24 V dc.
e. Finish: Red-enamel or polyester powder-coat factory finish, suitable for outdoor use with approved and listed weatherproof backbox.

C. Water-Flow Indicators:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. ADT Security Services, Inc.
b. ITT McDonnell & Miller.
c. Potter Electric Signal Company, LLC.
d. System Sensor.
e. Viking Group Inc.
f. WATTS; A Watts Water Technologies Company.

2. Standard: UL 346.
3. Water-Flow Detector: Electrically supervised.
4. Components: Two single-pole, double-throw circuit switches for isolated alarm and auxiliary contacts, 7 A, 125-V ac and 0.25 A, 24-V dc; complete with factory-set, field-adjustable retard element to prevent false signals and tamperproof cover that sends signal if removed.
5. Type: Paddle operated.
6. Pressure Rating: 250 psig.
7. Design Installation: Horizontal or vertical.

D. Valve Supervisory Switches:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Fire-Lite Alarms; Honeywell International, Inc.
b. Kennedy Valve Company; a division of McWane, Inc.
c. Potter Electric Signal Company, LLC.
d. System Sensor.

2. Standard: UL 346.
3. Type: Electrically supervised.
4. Components: Single-pole, double-throw switch with normally closed contacts.
5. Design: Signals that controlled valve is in other than fully open position.
6. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.9 PRESSURE GAUGES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. AGF Manufacturing, Inc.
2. AMETEK, Inc.
3. Ashcroft Inc.
4. Brecco Corporation.
5. WIKA Instrument Corporation.

B. Standard: UL 393.

C. Dial Size: 3-1/2- to 4-1/2-inch diameter.

D. Pressure Gauge Range: 0- to 250-psig minimum.

E. Label: Include "WATER" label on dial face.

PART 3 - EXECUTION

3.1 PREPARATION

A. Perform fire-hydrant flow test according to NFPA 13 and NFPA 291. Use results for system design calculations required in "Quality Assurance" Article.

B. Report test results promptly and in writing.

3.2 SERVICE-ENTRANCE PIPING

A. Connect sprinkler piping to water-service piping for service entrance to building. Comply with requirements for exterior piping in Section 331415 "Site Water Distribution Piping" for exterior piping.

B. Install shutoff valve, backflow preventer, pressure gauge, drain, and other accessories indicated at connection to water-service piping. Comply with requirements for backflow preventers in Section 331415 "Site Water Distribution Piping."

3.3 INSTALLATION OF PIPING

A. Locations and Arrangements: Drawing plans, schematics, and diagrams indicate general location and arrangement of piping. Install piping as indicated on approved working plans.

1. Deviations from approved working plans for piping require written approval from authorities having jurisdiction. File written approval with Architect before deviating from approved working plans.
2. Coordinate layout and installation of sprinklers with other construction that penetrates ceilings, including light fixtures, HVAC equipment, and partition assemblies.

B. Piping Standard: Comply with NFPA 13 requirements for installation of sprinkler piping.

C. Install seismic restraints on piping. Comply with NFPA 13 requirements for seismic-restraint device materials and installation.

D. Use listed fittings to make changes in direction, branch takeoffs from mains, and reductions in pipe sizes.

E. Install unions adjacent to each valve in pipes NPS 2 and smaller.

F. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 and larger end connections.

G. Install "Inspector's Test Connections" in sprinkler system piping, complete with shutoff valve, and sized and located according to NFPA 13.

H. Install sprinkler piping with drains for complete system drainage.

I. Install sprinkler control valves, test assemblies, and drain risers adjacent to standpipes when sprinkler piping is connected to standpipes.

J. Install automatic (ball drip) drain valve at each check valve for fire-department connection, to drain piping between fire-department connection and check valve. Install drain piping to and spill over floor drain or to outside building.

K. Install alarm devices in piping systems.

L. Install hangers and supports for sprinkler system piping according to NFPA 13. Comply with requirements for hanger materials in NFPA 13. In seismic-rated areas, refer to Section 210548 "Vibration and Seismic Controls for Fire-Suppression Piping and Equipment."

M. Install pressure gauges on riser or feed main, at each sprinkler test connection, and at top of each standpipe. Include pressure gauges with connection not less than NPS 1/4 and with soft-metal seated globe valve, arranged for draining pipe between gauge and valve. Install gauges to permit removal, and install where they are not subject to freezing.

N. Fill sprinkler system piping with water.

O. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 210517 "Sleeves and Sleeve Seals for Fire-Suppression Piping."

P. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 210517 "Sleeves and Sleeve Seals for Fire-Suppression Piping."

Q. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 210518 "Escutcheons for Fire-Suppression Piping."

3.4 JOINT CONSTRUCTION

A. Install couplings, flanges, flanged fittings, unions, nipples, and transition and special fittings that have finish and pressure ratings same as or higher than system's pressure rating for aboveground applications unless otherwise indicated.

B. Install unions adjacent to each valve in pipes NPS 2 and smaller.

C. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 and larger end connections.

D. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.

E. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.

F. Flanged Joints: Select appropriate gasket material in size, type, and thickness suitable for water service. Join flanges with gasket and bolts according to ASME B31.9.

G. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:

1. Apply appropriate tape or thread compound to external pipe threads.
2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.

H. Twist-Locked Joints: Insert plain end of steel pipe into plain-end-pipe fitting. Rotate retainer lugs one-quarter turn or tighten retainer pin.

I. Welded Joints: Construct joints according to AWS D10.12M/D10.12, using qualified processes and welding operators according to "Quality Assurance" Article.

1. Shop weld pipe joints where welded piping is indicated. Do not use welded joints for galvanized-steel pipe.

J. Steel-Piping, Cut-Grooved Joints: Cut square-edge groove in end of pipe according to AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join steel pipe and grooved-end fittings according to AWWA C606 for steel-pipe joints.

K. Steel-Piping, Roll-Grooved Joints: Roll rounded-edge groove in end of pipe according to AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join steel pipe and grooved-end fittings according to AWWA C606 for steel-pipe grooved joints.

3.5 INSTALLATION OF VALVES AND SPECIALTIES

A. Install listed fire-protection valves, trim and drain valves, specialty valves and trim, controls, and specialties according to NFPA 13 and authorities having jurisdiction.

B. Install listed fire-protection shutoff valves supervised open, located to control sources of water supply except from fire-department connections. Install permanent identification signs indicating portion of system controlled by each valve.

C. Install check valve in each water-supply connection. Install backflow preventers instead of check valves in potable-water-supply sources.

D. Specialty Valves:

1. Install valves in vertical position for proper direction of flow, in main supply to system.
2. Install alarm valves with bypass check valve and retarding chamber drain-line connection.
3. Install deluge valves in vertical position, in proper direction of flow, and in main supply to deluge system. Install trim sets for drain, priming level, alarm connections, ball drip valves, pressure gauges, priming chamber attachment, and fill-line attachment.

E. Air Vent:

1. Provide at least one air vent at high point in each wet-pipe sprinkler system in accordance with NFPA 13 requirements. Connect vent into top of fire sprinkler piping.
2. Provide dielectric union for dissimilar metals, ball valve, and strainer upstream of automatic air vent.

3. Pipe from outlet of air vent to drain.

3.6 INSTALLATION OF SPRINKLERS

A. Install sprinklers in suspended ceilings in center of acoustical ceiling panels.

3.7 IDENTIFICATION

A. Install labeling and pipe markers on equipment and piping according to requirements in NFPA 13.

B. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

3.8 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Leak Test: After installation, charge systems and test for leaks. Repair leaks and retest until no leaks exist.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
3. Flush, test, and inspect sprinkler systems according to NFPA 13, "Systems Acceptance" Chapter.
4. Energize circuits to electrical equipment and devices.
5. Coordinate with fire-alarm tests. Operate as required.
6. Verify that equipment hose threads are same as local fire department equipment.

B. Sprinkler piping system will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

3.9 CLEANING

A. Clean dirt and debris from sprinklers.

B. Only sprinklers with their original factory finish are acceptable. Remove and replace any sprinklers that are painted or have any other finish than their original factory finish.

3.10 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain specialty valves.

3.11 PIPING SCHEDULE

A. Piping between Fire Department Connections and Check Valves: Galvanized, standard-weight steel pipe with grooved ends, grooved-end fittings, grooved-end-pipe couplings, and grooved joints.

B. Sprinkler specialty fittings may be used, downstream of control valves, instead of specified fittings.

C. Standard-Pressure, Wet-Pipe Sprinkler System, NPS 2 (DN 50) and Smaller, to Be One of the Following:

1. Standard-weight , black-steel pipe with threaded ends; uncoated, gray-iron threaded fittings; and threaded joints.

D. Standard-Pressure, Wet-Pipe Sprinkler System, NPS 2-1/2 to NPS 4 (DN 65 to DN 100), to Be One of the Following:

1. Schedule 10 black-steel pipe with roll-grooved ends; uncoated, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.

3.12 SPRINKLER SCHEDULE

A. Use sprinkler types in subparagraphs below for the following applications:

1. Rooms without Ceilings: Upright sprinklers.
2. Rooms with Suspended Ceilings: Pendent, recessed, flush, and concealed sprinklers as indicated.

B. Provide sprinkler types in subparagraphs below with finishes indicated.

1. Concealed Sprinklers: Rough brass, with factory-painted white cover plate.
2. Recessed Sprinklers: Bright chrome, with bright chrome escutcheon.
3. Upright, Pendent, and Sidewall Sprinklers: Chrome plated in finished spaces exposed to view; rough bronze in unfinished spaces not exposed to view; wax coated where exposed to acids, chemicals, or other corrosive fumes.

END OF SECTION 211313

SECTION 220513 - COMMON MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes general requirements for single-phase and polyphase, general-purpose, horizontal, small and medium, squirrel-cage induction motors for use on alternating-current power systems up to 600 V and installed at equipment manufacturer's factory or shipped separately by equipment manufacturer for field installation.

1.3 COORDINATION

A. Coordinate features of motors, installed units, and accessory devices to be compatible with the following:

1. Motor controllers.
2. Torque, speed, and horsepower requirements of the load.
3. Ratings and characteristics of supply circuit and required control sequence.
4. Ambient and environmental conditions of installation location.

PART 2 - PRODUCTS

2.1 GENERAL MOTOR REQUIREMENTS

A. Comply with NEMA MG 1 unless otherwise indicated.

2.2 MOTOR CHARACTERISTICS

A. Duty: Continuous duty at ambient temperature of 40 deg C and at altitude of 3300 feet above sea level.

B. Capacity and Torque Characteristics: Sufficient to start, accelerate, and operate connected loads at designated speeds, at installed altitude and environment, with indicated operating sequence, and without exceeding nameplate ratings or considering service factor.

2.3 SINGLE-PHASE MOTORS

A. Motors larger than 1/20 hp shall be one of the following, to suit starting torque and requirements of specific motor application:

1. Permanent-split capacitor.

B. Bearings: Prelubricated, antifriction ball bearings or sleeve bearings suitable for radial and thrust loading.

C. Motors 1/20 HP and Smaller: Shaded-pole type.

D. Thermal Protection: Internal protection to automatically open power supply circuit to motor when winding temperature exceeds a safe value calibrated to temperature rating of motor insulation. Thermal-protection device shall automatically reset when motor temperature returns to normal range.

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 220513

SECTION 220516 - EXPANSION FITTINGS AND LOOPS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Alignment guides and anchors.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Compatibility: Products shall be suitable for piping service fluids, materials, working pressures, and temperatures.

B. Capability: Products to absorb 200 percent of maximum axial movement between anchors.

2.2 ALIGNMENT GUIDES AND ANCHORS

A. Alignment Guides :

1. Description: Steel, factory-fabricated alignment guide, with bolted two-section outer cylinder and base for attaching to structure; with two-section guiding slider for bolting to pipe.

B. Anchor Materials:

1. Steel Shapes and Plates: ASTM A36/A36M.
2. Bolts and Nuts: ASME B18.10 or ASTM A183, steel hex head.
3. Washers: ASTM F844, steel, plain, flat washers.
4. Mechanical Fasteners: Insert-wedge-type stud with expansion plug anchor for use in hardened portland cement concrete, with tension and shear capacities appropriate for application.

   a. Stud: Threaded, zinc-coated carbon steel.
   b. Expansion Plug: Zinc-coated steel.
   c. Washer and Nut: Zinc-coated steel.

PART 3 - EXECUTION

3.1 INSTALLATION OF EXPANSION JOINTS

A. Install expansion joints of sizes matching sizes of piping in which they are installed.

3.2 INSTALLATION OF PIPE LOOP AND SWING CONNECTIONS

A. Install pipe loops cold-sprung in tension or compression as required to partly absorb tension or compression produced during anticipated change in temperature.

B. Connect risers and branch connections to mains with at least five pipe fittings, including tee in main.

C. Connect risers and branch connections to terminal units with at least four pipe fittings, including tee in riser.

D. Connect mains and branch connections to terminal units with at least four pipe fittings, including tee in main.

3.3 INSTALLATION OF ALIGNMENT-GUIDES AND ANCHORS

A. Install alignment guides to guide expansion and to avoid end-loading and torsional stress.

B. Install one guide(s) on each side of pipe expansion fittings and loops. Install guides nearest to expansion joint not more than four pipe diameters from expansion joint.

C. Attach guides to pipe, and secure guides to building structure.

D. Install anchors at locations to prevent stresses from exceeding those permitted by ASME B31.9 and to prevent transfer of loading and stresses to connected equipment.

E. Anchor Attachments:

1. Anchor Attachment to Steel Pipe: Attach by welding. Comply with ASME B31.9 and ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."
2. Anchor Attachment to Copper Tubing: Attach with pipe hangers. Use MSS SP-69, Type 24; U bolts bolted to anchor.

F. Fabricate and install steel anchors by welding steel shapes, plates, and bars. Comply with ASME B31.9 and AWS D1.1/D1.1M.

1. Anchor Attachment to Steel Structural Members: Attach by welding.
2. Anchor Attachment to Concrete Structural Members: Attach by fasteners. Follow fastener manufacturer's written instructions.

G. Use grout to form flat bearing surfaces for guides and anchors attached to concrete.

END OF SECTION 220516

SECTION 220517 - SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Sleeves.
2. Stack-sleeve fittings.
3. Grout.
4. Silicone sealants.

PART 2 - PRODUCTS

2.1 SLEEVES

A. PVC Pipe Sleeves: ASTM D 1785, Schedule 40.

B. Molded-PVC Sleeves: With nailing flange for attaching to wooden forms.

2.2 STACK-SLEEVE FITTINGS

A. Description: Manufactured, Dura-coated or Duco-coated cast-iron sleeve with integral clamping flange for use in waterproof floors and roofs. Include clamping ring, bolts, and nuts for membrane flashing.

1. Underdeck Clamp: Clamping ring with setscrews.

2.3 GROUT

A. Description: Nonshrink, for interior and exterior sealing openings in non-fire-rated walls or floors.

B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.

C. Design Mix: 5000-psi, 28-day compressive strength.

D. Packaging: Premixed and factory packaged.

2.4 SILICONE SEALANTS

A. Silicone, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant, ASTM C 920, Type S, Grade NS, Class 25, Use NT.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.

B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.

C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.

1. Cut sleeves to length for mounting flush with both surfaces.

a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.

2. Using grout or silicone sealant, seal the space outside of sleeves in slabs and walls without sleeve-seal system.

D. Install sleeves for pipes passing through interior partitions.

1. Cut sleeves to length for mounting flush with both surfaces.
2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint.

E. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke Barrier Penetrations: Maintain indicated fire or smoke rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping and fill materials specified in Section 078413 "Penetration Firestopping."

3.2 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Leak Test: After allowing for a full cure, test sleeves and sleeve seals for leaks. Repair leaks and retest until no leaks exist.

B. Sleeves and sleeve seals will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports.

END OF SECTION 220517

SECTION 220518 - ESCUTCHEONS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Escutcheons.

1.3 DEFINITIONS

A. Existing Piping to Remain: Existing piping that is not to be removed and that is not otherwise indicated to be removed and salvaged, or removed and reinstalled.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

A. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.

B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with polished, chrome-plated finish and spring-clip fasteners.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.

B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of insulated piping and with OD that completely covers opening.

1. Escutcheons for New Piping:

a. Chrome-Plated Piping: One-piece cast brass with polished, chrome-plated finish.

END OF SECTION 220518

This page intentionally left blank.

SECTION 220519 - METERS AND GAUGES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermometers, liquid in glass, lead free.
2. Pressure gauges, dial type, lead free.
3. Sight flow indicators, lead free.

B. Related Requirements:

1. Section 221119 "Domestic Water Piping Specialties" for water meters.
2. Section 331415 "Site Water Distribution Piping" for domestic water meters and combined domestic and fire-protection water-service meters outside the building.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Thermometers, liquid in glass, lead free.
2. Pressure gauges, dial type, lead free.
3. Sight flow indicators, lead free.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. All items in this Section in contact with water for human consumption, are to comply with the U.S. Safe Drinking Water Act, with requirements of authorities having jurisdiction, and with NSF 61 and NSF 372, or be certified in compliance with NSF 61 and NSF 372 by an ANSI-accredited third-party certification body, in that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

2.2 THERMOMETERS, LIQUID IN GLASS, LEAD FREE

A. Thermometers, Liquid in Glass, Lead Free - Metal Case, Industrial Style:

1. Source Limitations: Provide liquid-in-glass, lead-free, metal-case, industrial-style thermometers from single manufacturer.
2. Standard: ASME B40.200.
3. Case: Cast aluminum ; 7-inch nominal size unless otherwise indicated.
4. Case Form: Adjustable angle unless otherwise indicated.
5. Tube: Glass with magnifying lens and blue or red organic liquid, mercury free.
6. Tube Background: Nonreflective aluminum with permanent scale markings graduated in deg F.
7. Window: Glass.
8. Stem: Aluminum and of length to suit installation.
   a. Design for Thermowell Installation: Bare stem.
9. Connector: 1-1/4 inches, with ASME B1.1 or ASME B1.20.1 screw threads to fit thermowell.
10. Accuracy: Plus or minus 1 percent of span or one scale division, to a maximum of 1.5 percent of span.

2.3 PRESSURE GAUGES, DIAL TYPE, LEAD FREE

A. Pressure Gauges, Dial Type, Lead Free - Direct Mounted, Metal Case:

1. Source Limitations: Provide dial-type, lead-free, direct-mounted, metal-case pressure gauges from single manufacturer.
2. Standard: ASME B40.100.
3. Case: Liquid-filled type(s); cast aluminum or drawn steel ; 6-inch nominal diameter.
4. Pressure-Element Assembly: Lead-free bourdon tube.
5. Pressure Connection: Lead-free brass, with NPS 1/4 , ASME B1.20.1 pipe threads and bottom-outlet type unless back-outlet type is indicated.
6. Movement: Mechanical, with link to pressure element and connection to pointer.
7. Dial: Nonreflective aluminum with permanent scale markings graduated in psi.
8. Pointer: Dark-colored metal.
9. Window: Glass.
10. Ring: Metal.
11. Accuracy: Grade A, plus or minus 1 percent of middle half of span.

2.4 SIGHT FLOW INDICATORS, LEAD FREE

A. Source Limitations: Provide lead-free sight flow indicators from single manufacturer.

B. Description: Piping inline-installation device for visual verification of flow.

C. Construction: Lead-free bronze or stainless steel body, with sight glass and ball, flapper, or paddle wheel indicator, and threaded or flanged ends.

D. Minimum Pressure Rating: 125 psig.

E. Minimum Temperature Rating: 200 deg F.

F. End Connections: NPS 2 and smaller, threaded.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install direct-mounted thermometers in thermowells and adjust vertical and tilted positions.

B. Install direct-mounted pressure gauges in piping tees with pressure gauge located on pipe at the most readable position.

C. Install valve and snubber in piping for each pressure gauge for fluids.

D. Install thermometers in the following locations:
1. Outlet side of hot-water-balancing valve.
2. Each main hot-water-recirculating line return pipe.

E. Install pressure gauges in the following locations:
1. Building water entry.
2. Recirculation pump outlet.

3.2 CONNECTIONS

A. Install meters and gauges adjacent to machines and equipment to allow service and maintenance of meters, gauges, machines, and equipment.

3.3 ADJUSTING

A. After installation, calibrate meters according to manufacturer's written instructions.

B. Adjust faces of meters and gauges to proper angle for best visibility.

END OF SECTION 220519

This page intentionally left blank.

SECTION 220523.12 - BALL VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Brass ball valves.

1.2 DEFINITIONS

A. CWP: Cold working pressure.

B. RPTFE: Reinforced polytetrafluoroethylene.

C. WOG: Water, oil, gas.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Brass ball valves.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, and soldered ends.
3. Set ball valves open to minimize exposure of functional surfaces.

B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain each type of valve from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Standards:

1. Domestic water valves intended to convey or dispense water for human consumption must comply with the SDWA, requirements of authorities having jurisdiction, and NSF 61 and NSF 372, or must be certified to be in compliance with NSF 61 and NSF 372 (by an ANSI-accredited third-party certification body) that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. ASME Compliance:

1. ASME B1.20.1 for threads for threaded end valves.
2. ASME B16.34 for flanged and threaded end connections

C. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.

D. Valve Sizes: Same as upstream piping unless otherwise indicated.

E. Valve Actuator Type:

1. Hand Lever: For quarter-turn valves smaller than NPS 4.

F. Valves in Insulated Piping:

1. Provide 2-inch extended neck stems.
2. Extended operating handles with nonthermal-conductive covering material and protective sleeves that allow operation of valves without breaking vapor seals or disturbing insulation.
3. Memory stops that are fully adjustable after insulation is applied.

2.3 BRASS BALL VALVES

A. Brass Ball Valves, One Piece, Threaded Ends:

1. Standard: MSS SP-110, MSS SP-145.
2. CWP Rating: 400 psig.
3. Body Design: One piece.
4. Body Material: Forged brass or bronze.
5. Ends: Threaded.
6. Seats: PTFE.
7. Stem: Brass or stainless steel.
8. Ball: Chrome-plated brass or stainless steel.
9. Port: Reduced.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.

B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.

C. Examine threads on valve and mating pipe for form and cleanliness.

D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.

E. Do not attempt to repair defective valves; replace with new valves. Remove defective valves from site.

3.2 INSTALLATION OF VALVES

A. Install valves with unions or flanges at each piece of equipment arranged to allow space for service, maintenance, and equipment removal without system shutdown.

B. Provide support to piping adjacent to valves such that no force is imposed upon valves.

C. Locate valves for easy access.

D. For valves in horizontal piping, install valves with stem at or above center of pipe.

E. Install valves in position to allow full valve actuation movement.

F. Valve Tags: Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.

G. Adhere to manufacturer's written installation instructions. When soldering or brazing valves, do not heat valves above maximum permitted temperature. Do not use solder with melting point temperature above valve manufacturer's recommended maximum.

3.3 ADJUSTING

A. Adjust or replace valve packing after piping systems have been tested and put into service, but before final adjusting and balancing. Replace valves exhibiting leakage.

3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

A. If valves with specified CWP ratings are unavailable, provide the same types of valves with higher CWP ratings.

B. Select valves with the following end connections:

1. For Copper Tubing, NPS 2 (DN 50) and Smaller: Threaded ends except where solder-joint valve-end option or press-end option is indicated in valve schedules below.
2. For Stainless Steel Piping, NPS 2 (DN 50) and Smaller.

3.5 DOMESTIC HOT- AND COLD-WATER VALVE SCHEDULE

A. Pipe NPS 2 (DN 50) and Smaller:

1. Brass ball valve, one piece. Provide with threaded or solder -joint ends.

END OF SECTION 220523.12

This page intentionally left blank.

SECTION 220523.14 - CHECK VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Bronze, swing check valves.
2. Bronze, swing check valves, press ends.

1.2 DEFINITIONS

A. CWP: Cold working pressure.

B. EPDM: Ethylene propylene-diene terpolymer.

C. NBR: Nitrile butadiene rubber (also known as Buna-N).

1.3 ACTION SUBMITTALS

A. Product Data:

1. Bronze, swing check valves.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, grooves, press connections, and weld ends.
3. Set check valves in either closed or open position.

B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use stems or other components as lifting or rigging points unless specifically indicated for this purpose in manufacturer's instructions.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain each type of valve from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Standards:

1. Domestic water piping check valves intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), requirements of authorities having jurisdiction, and NSF 61/NSF 372, or to be certified in compliance with NSF 61/NSF 372 by an American National Standards Institute (ANSI)-accredited third-party certification body that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. ASME Compliance:

1. ASME B1.20.1 for threads for threaded end valves.
2. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
3. ASME B16.18 for cast-copper solder joint.
4. ASME B16.51 for press joint.
5. ASME B31.9 for building services piping valves.

C. Provide bronze valves made with dezincification-resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc are unacceptable.

D. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.

E. Valve Sizes: Same as upstream piping unless otherwise indicated.

F. Valve Bypass and Drain Connections: MSS SP-45.

2.3 BRONZE, SWING CHECK VALVES

A. Bronze, Swing Check Valves with Nonmetallic Disc, Class 150:

1. Standard: MSS SP-80, Type 4.
2. CWP Rating: 300 psig.
3. Body Design: Horizontal flow.
4. Body Material: ASTM B62, bronze.
5. Ends: Threaded or soldered. See valve schedule articles.
6. Disc: PTFE.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.

B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.

C. Examine threads on valve and mating pipe for form and cleanliness.

D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.

E. Examine press fittings to verify they have been properly pressed.

F. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION OF VALVES

A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.

B. Provide support of piping adjacent to valves such that no force is imposed upon valves.

C. Locate valves for easy access and where not blocked by equipment, other piping, or building components.

D. Install valves so that stems are horizontal or slope upward from centerline of pipe.

E. Install valves in position that does not project into aisles or block access to other equipment.

F. Install valves in position to allow full stem and manual operator movement.

G. Verify that joints of each valve have been properly installed and sealed to assure there is no leakage or damage.

H. Check Valves: Install check valves for proper direction of flow.

1. Swing Check Valves: In horizontal position with hinge pin level.
2. Check Valves: Center-guided type and plate type, in horizontal or vertical position, between flanges.
3. Lift Check Valves: With stem upright and plumb.

I. Install valve tags. Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.

J. Adhere to manufacturer's installation instructions. When soldering or brazing valves, do not heat valves above maximum permitted temperature. Do not use solder with melting point temperature above valve manufacturer's recommended maximum.

3.3 ADJUSTING

A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.

3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

A. If valve applications are not indicated, use the following:

1. Pump-Discharge Check Valves:

a. NPS 2 (DN 50) and Smaller: Bronze, swing check valves with nonmetallic disc.

B. If valves with specified CWP ratings are unavailable, the same types of valves with higher CWP ratings may be substituted.

C. End Connections:

1. For Copper Tubing, NPS 2 (DN 50) and Smaller: Threaded, soldered, or press-end connections.

3.5 DOMESTIC HOT- AND COLD-WATER VALVE SCHEDULE

A. Pipe NPS 2 (DN 50) and Smaller:

1. Bronze, swing check valves with nonmetallic disc, Class 150, with soldered or threaded end connections.

END OF SECTION 220523.14

SECTION 220523.15 - GATE VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Bronze gate valves.

1.2 DEFINITIONS

A. CWP: Cold working pressure.

B. EPDM: Ethylene propylene-diene terpolymer.

C. NRS: Nonrising stem.

D. RS: Rising stem.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Bronze gate valves.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, grooves, press connections, and weld ends.
3. Set gate valves closed to prevent rattling.

B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use handwheels, stems, or other components as lifting or rigging points unless specifically indicated for this purpose in manufacturer's instructions.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain each type of valve from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Standards:

1. Domestic water piping check valves intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), requirements of authorities having jurisdiction, and NSF 61/NSF 372, or to be certified in compliance with NSF 61/NSF 372 by an American National Standards Institute (ANSI)-accredited third-party certification body that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. ASME Compliance:

1. ASME B1.20.1 for threads for threaded end valves.
2. ASME B16.1 for flanges on iron valves.
3. ASME B16.5 for flanges on metric standard piping.
4. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
5. ASME B16.18 for cast-copper solder joint.
6. ASME B16.22 for wrought copper solder joint.
7. ASME B16.51 for press joint.
8. ASME B31.9 for building services piping valves.

C. AWWA Compliance: AWWA C606 for groove-end connections.

D. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.

E. Valve Sizes: Same as upstream piping unless otherwise indicated.

F. Valves in Insulated Piping: With 2-inch stem extensions.

G. Valve Bypass and Drain Connections: MSS SP-45.

2.3 BRONZE GATE VALVES

A. Bronze Gate Valves, NRS, Class 150:

1. Description:

a. Standard: MSS SP-80, Type 1.
b. CWP Rating: 300 psig.
c. Body Material: Bronze with integral seat and union-ring bonnet.
d. Ends: Threaded.
e. Stem: Bronze.
f. Disc: Solid wedge; bronze.
g. Packing: Asbestos free.
h. Handwheel: Malleable iron, bronze, or aluminum.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.

B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.

C. Examine threads on valve and mating pipe for form and cleanliness.

D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.

E. Examine press joint surfaces. Verify they are clean and free from dents and burrs, and that o-ring seals are in place and undamaged.

F. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION OF VALVES

A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.

B. Provide support of piping adjacent to valves such that no force is imposed upon valves.

C. Locate valves for easy access and where not blocked by equipment, other piping, or building components.

D. Install valves so that stems are horizontal or slope upward from centerline of pipe.

E. Install valves in position that does not project into aisles or block access to other equipment.

F. Install valves in position to allow full stem and manual operator movement.

G. Verify that joints of each valve have been properly installed and sealed to assure there is no leakage or damage.

H. Install valve tags. Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.

I. Adhere to manufacturer's installation instructions. When soldering or brazing valves, do not heat valves above maximum permitted temperature. Do not use solder with melting point temperature above valve manufacturer's recommended maximum.

3.3 ADJUSTING

A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.

3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

A. Use gate valves for shutoff service only.

B. If valves with specified CWP ratings are unavailable, the same types of valves with higher CWP ratings may be substituted.

C. End Connections:
   1. For Copper Tubing, NPS 2 (DN 50) and Smaller: Threaded, soldered, or press-end connections.

3.5 DOMESTIC HOT- AND COLD-WATER VALVE SCHEDULE

A. Pipe NPS 2 (DN 50) and Smaller:

1. Bronze gate valves, NRS , Class 150 with soldered ends.

END OF SECTION 220523.15

SECTION 220529 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Metal pipe hangers and supports.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for structural-steel shapes and plates for trapeze hangers for pipe and equipment supports.
2. Section 220516 "Expansion Fittings and Loops for Plumbing Piping" for pipe guides and anchors.
3. Section 220548.13 "Vibration Controls for Plumbing Piping and Equipment" for vibration isolation devices.

1.3 QUALITY ASSURANCE

A. Structural-Steel Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M.

B. Pipe Welding Qualifications: Qualify procedures and operators according to 2015 ASME Boiler and Pressure Vessel Code, Section IX.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design trapeze pipe hangers and equipment supports.

B. Structural Performance: Hangers and supports for plumbing piping and equipment shall withstand the effects of gravity loads and stresses within limits and under conditions indicated according to ASCE/SEI 7.

1. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test water.
2. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.
3. Design seismic-restraint hangers and supports for piping and equipment and obtain approval from authorities having jurisdiction.

2.2 METAL PIPE HANGERS AND SUPPORTS

A. Carbon-Steel Pipe Hangers and Supports:

1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.

2. Galvanized Metallic Coatings: Pregalvanized, hot-dip galvanized, or electro-galvanized.
3. Nonmetallic Coatings: Plastic coated or epoxy powder coated.
4. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
5. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.

2.3 MATERIALS

A. Aluminum: ASTM B 221.

B. Carbon Steel: ASTM A 1011/A 1011M.

C. Structural Steel: ASTM A 36/A 36M carbon-steel plates, shapes, and bars; black and galvanized.

D. Stainless Steel: ASTM A 240/A 240M.

E. Grout: ASTM C 1107/C 1107M, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.

1. Properties: Nonstaining, noncorrosive, and nongaseous.
2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 APPLICATION

A. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping materials and installation, for penetrations through fire-rated walls, ceilings, and assemblies.

B. Strength of Support Assemblies: Where not indicated, select sizes of components, so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.

3.2 HANGER AND SUPPORT INSTALLATION

A. Metal Pipe-Hanger Installation: Comply with MSS SP-58. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.

B. Framing System Installation: Arrange for grouping of parallel runs of piping, and support together on field-assembled metal framing systems.

C. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.

D. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.

E. Install lateral bracing with pipe hangers and supports to prevent swaying.

F. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms, and install reinforcing bars through openings at top of inserts.

G. Load Distribution: Install hangers and supports, so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.

H. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.

I. Insulated Piping:

1. Attach clamps and spacers to piping.

   a. Piping Operating Above Ambient Air Temperature: Clamp may project through insulation.
   b. Piping Operating Below Ambient Air Temperature: Use thermal hanger-shield insert with clamp sized to match OD of insert.
   c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.

2. Install MSS SP-58, Type 39 protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.

   a. Option: Thermal hanger-shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

3. Install MSS SP-58, Type 40 protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.

   a. Option: Thermal hanger-shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

4. Shield Dimensions for Pipe: Not less than the following:

   a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
   b. NPS 4: 12 inches long and 0.06 inch thick.
   c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
   d. NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.
   e. NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.

5. Pipes NPS 8 and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
6. Thermal Hanger Shields: Install with insulation of same thickness as piping insulation.

3.3 METAL FABRICATIONS

A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.

B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.

C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. Finish welds at exposed connections, so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.4 ADJUSTING

A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.

B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.5 PAINTING

A. Touchup: Clean field welds and abraded, shop-painted areas. Paint exposed areas immediately after erecting hangers and supports. Use same materials as those used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.

B. Touchup: Cleaning and touchup painting of field welds, bolted connections, and abraded, shop-painted areas on miscellaneous metal are specified in Section 099123 "Interior Painting."

C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas, and apply galvanizing-repair paint to comply with ASTM A 780/A 780M.

3.6 HANGER AND SUPPORT SCHEDULE

A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.

B. Comply with MSS SP-58 for pipe-hanger selections and applications that are not specified in piping system Sections.

C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finishes.

D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.

E. Use carbon-steel pipe hangers and supports and attachments for general service applications.

F. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.

G. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel Turnbuckles (MSS Type 13): For adjustment of up to 6 inches for heavy loads.

H. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joist construction, to attach to top flange of structural shape.
2. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.

I. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

   1. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.

J. Use pipe-positioning systems in pipe spaces behind plumbing fixtures to support supply and waste piping for plumbing fixtures.

END OF SECTION 220529

This page intentionally left blank.

SECTION 220548.13 - VIBRATION CONTROLS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Neoprene Isolation Washers and Grommets
2. Spring hangers.
3. Precompressed Spring Hangers.
4. Manufactured Pipe Isolation Hangers.
5. Field Assembled Pipe Isolation Hangers.
6. Snubbers.
7. Restraint accessories.
8. Flexible Connections.

B. Related Requirements:

1. Section 210548.13 "Vibration Controls for Fire-Suppression Piping and Equipment" for devices for fire-suppression equipment and systems.
2. Section 230548.13 "Vibration Controls for HVAC" for devices for HVAC equipment and systems.

1.3 DEFINITIONS

A. IBC: International Building Code.

B. OSHPD: Office of Statewide Health Planning and Development (for the State of California owned and regulated medical facilities).

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Consequential Damage: Provide additional restraints for suspended fire-suppression system components or anchorage of floor-, roof-, or wall-mounted fire-suppression system components as indicated in ASCE/SEI 7-05 so that failure of a non-essential or essential fire-suppression system component will not cause failure of any other essential architectural, mechanical, or electrical building component.

B. Fire/Smoke Resistance: All components that are not constructed of ferrous metals must have a maximum flame-spread index of 25 and maximum smoke-developed index of 50 when tested by an NRTL in accordance with ASTM E84 or UL 723, and be so labeled.

C. Component Supports:

1. Load ratings, features, and applications of all reinforcement components must be based on testing standards of a nationally recognized testing agency.
2. All component support attachments must comply with force and displacement resistance requirements of ASCE/SEI 7-05 Section 13.6.

2.2 NEOPRENE ISOLATION WASHERS AND GROMMETS

A. Neoprene Isolation Washers and Grommets: IWG.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Kinetics Noise Control, Inc.
   b. Mason Industries, Inc.
   c. Vibration Eliminator Co., Inc.
   d. Vibration Mountings & Controls, Inc.
   e. Vibro-Acoustics.

2. Neoprene isolation washer and grommets shall have a nominal durometer of Shore 50A.

2.3 SPRING HANGERS

A. Combination Coil-Spring and Elastomeric-Insert Hanger with Spring and Insert in Compression: SH.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Kinetics Noise Control, Inc.
   b. Mason Industries, Inc.
   c. Vibration Eliminator Co., Inc.
   d. Vibration Mountings & Controls, Inc.
   e. Vibro-Acoustics.

2. Frame: Steel, fabricated for connection to threaded hanger rods and to allow for a maximum of 30 degrees of angular hanger-rod misalignment without binding or reducing isolation efficiency.
3. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
4. Minimum Additional Travel: 50 percent of the required deflection at rated load.
5. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
6. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
7. Elastomeric Element: Molded, oil-resistant rubber or neoprene. Steel-washer-reinforced cup to support spring and bushing projecting through bottom of frame.
8. Self-centering hanger rod cap to ensure concentricity between hanger rod and support spring coil.

2.4 PRECOMPRESSED SPRING HANGERS

A. Precompressed Combination Coil-Spring and Elastomeric-Insert Hanger with Spring and Insert in Compression: PSH.

1. Shall meet all of the specified requirements of Type SH spring hangers.
2. Shall be provided precompressed by the manufacturer to the rated deflection. Hanger shall have a release mechanical to free the spring after installation is complete.

2.5 MANUFACTURED PIPING ISOLATION HANGER

A. Pipe Hanger Manufactured With Elastomeric Vibration Isolation Layer: PIM.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. HoldRite
   b. Elmdor Stoneman
   c. F&A Products, Inc.
   d. LSP Products.

2. Elastomeric Layer: 30-50 durometer ribbed neoprene, thermoplastics rubber, or crumb rubber.

3. Inside diameter sized for piping outside diameter.

2.6 FIELD ASSEMBLED PIPING ISOLATION HANGER

A. Field Assembled Piping Isolation Hanger Treatment: PIF.

1. 1/2" thick closed cell elastomeric foam insulation layer installed between the pipe and hanger.
2. Minimum 3" wide strip or as required to provide 1" overhang on each side of support pipe.
3. Oversize pipe hangers by a minimum of 3/4" to prevent crushing of foam insulation.
4. Multiple layers of closed cell insulation may be used to reach the required thickness.
5. Closed cell foam insulation to be Armacell AP or Equal.

2.7 SNUBBERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Kinetics Noise Control, Inc.
2. Mason Industries, Inc.
3. Vibration Eliminator Co. Inc.
4. Vibration Mountings & Controls, Inc.
5. Vibro-Acoustics.

2.8 RESTRAINT ACCESSORIES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CADDY; nVent.
2. Gripple Inc.
3. International Seismic Application Technology (ISAT).
4. Kinetics Noise Control, Inc.
5. Mason Industries, Inc.
6. Vibration Eliminator Co., Inc.
7. Vibration Mounts & Controls, Inc.
8. Vibro-Acoustics.

2.9 FLEXIBLE CONNECTORS

A. Flexible Metal Hose Connectors

1. Manufacturer: Subject to compliance with requirements, provide products by one of the following:

   a. Kinetics Noise Control, Inc.
   b. Mason Industries, Inc.
   c. Vibration Eliminator Co., Inc.
   d. Vibration Mountings & Controls, Inc.
   e. Vibro-Acoustics.

2. Stainless steel corrugated type with stainless steel woven braid outer sheath.
3. Minimum Live Lengths:

   a. Pipe diameters up to 2.5" - 12" minimum live length.
   b. Pipe diameters 3" to 4" - 18" minimum live length.
   c. Pipe diameters 5" to 10" - 24" minimum live length.
   d. Pipe diameters 12" or greater - 36" minimum live length.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and equipment to receive vibration isolation devices for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in of reinforcement and cast-in-place anchors to verify actual locations before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLICATIONS

A. Multiple Pipe Supports: Secure pipes to trapeze member with clamps approved for application by an agency acceptable to authorities having jurisdiction.

B. Hanger-Rod Stiffeners: Install where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods due to wind load forces.

C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength is adequate to carry static forces within specified loading limits.

3.3 ACCOMMODATION OF DIFFERENTIAL MOTION

A. Provide flexible connections in piping systems where they cross structural joints and other point where differential movement may occur. Provide adequate flexibility to accommodate differential movement as determined in accordance with ASCE/SEI 7.

3.4 ADJUSTING

A. Adjust isolators after system is at operating weight.

B. Adjust limit stops on restrained-spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.

END OF SECTION 220548.13

SECTION 220553 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Equipment labels.
2. Pipe labels.
3. Valve tags.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product indicated.

B. Samples: For color, letter style, and graphic representation required for each identification material and device.

C. Equipment-Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.

D. Valve-numbering scheme.

E. Valve Schedules: For each piping system. Include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

A. Metal Labels for Equipment:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. Brady Corporation.
   b. Kolbi Pipe Marker Co.
   c. Seton Identification Products; a Brady Corporation company.
2. Material and Thickness: aluminum, 0.032-inch minimum thickness, with predrilled or stamped holes for attachment hardware.
3. Letter and Background Color: As indicated for specific application under Part 3.
4. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
5. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances of up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
6. Fasteners: Stainless steel rivets or self-tapping screws.
7. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

B. Label Content: Include equipment's Drawing designation or unique equipment number, Drawing numbers where equipment is indicated (plans, details, and schedules), and the Specification Section number and title where equipment is specified.

2.2 PIPE LABELS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Brady Corporation.
2. Kolbi Pipe Marker Co.
3. Seton Identification Products; a Brady Corporation company.

B. General Requirements for Manufactured Pipe Labels: Preprinted, color coded, with lettering indicating service and showing flow direction in accordance with ASME A13.1.

C. Letter and Background Color: As indicated for specific application under Part 3.

D. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.

E. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings. Also include:

1. Pipe size.
2. Flow-Direction Arrows: Include flow-direction arrows on distribution piping. Arrows may be either integral with label or applied separately.
3. Lettering Size: Size letters in accordance with ASME A13.1 for piping.

2.3 VALVE TAGS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Brady Corporation.
2. Kolbi Pipe Marker Co.
3. Seton Identification Products; a Brady Corporation company.

B. Description: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.

1. Tag Material: aluminum, 0.031-inch minimum thickness, with predrilled or stamped holes for attachment hardware.
2. Fasteners: Brass beaded chain.

C. Letter and Background Color: As indicated for specific application under Part 3.

D. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.

1. Include valve-tag schedule in operation and maintenance data.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean piping and equipment surfaces of incompatible primers, paints, and encapsulants, as well as dirt, oil, grease, release agents, and other substances that could impair bond of identification devices.

3.2 INSTALLATION, GENERAL REQUIREMENTS

A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.

B. Coordinate installation of identifying devices with locations of access panels and doors.

C. Install identifying devices before installing acoustical ceilings and similar concealment.

D. Locate identifying devices so that they are readily visible from the point of normal approach.

3.3 INSTALLATION OF EQUIPMENT LABELS, WARNING SIGNS, AND LABELS

A. Permanently fasten labels on each item of plumbing equipment.

B. Sign and Label Colors.

1. White letters on an ANSI Z535.1 safety-green background.

C. Locate equipment labels where accessible and visible.

D. Arc-Flash Warning Signs: Provide arc-flash warning signs on electrical disconnects and other equipment where are-flash hazard exists, as indicated on Drawings, and in accordance with requirements of OSHA and NFPA 70E , and other applicable codes and standards.

3.4 INSTALLATION OF PIPE LABELS

A. Piping Color Coding: Painting of piping is specified in Section 099123 "Interior Painting."

B. Install pipe labels showing service and flow direction with permanent adhesive on pipes.

C. Stenciled Pipe Label Option: Stenciled labels showing service and flow direction may be provided instead of manufactured pipe labels, at Installer's option. Install stenciled pipe labels, complying with ASME A13.1, with painted, color-coded bands or rectangles on each piping system.

1. Identification Paint: Use for contrasting background.
2. Stencil Paint: Use for pipe marking.

D. Pipe-Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:

1. Within 3 ft. of each valve and control device.
2. At access doors, manholes, and similar access points that permit view of concealed piping.
3. Within 3 ft. of equipment items and other points of origination and termination.
4. Spaced at maximum intervals of 25 ft. along each run. Reduce intervals to 10 ft. in areas of congested piping and equipment.

E. Do not apply plastic pipe labels or plastic tapes directly to bare pipes conveying fluids at temperatures of 125 deg F or higher. Where these pipes are to remain uninsulated, use a short section of insulation or use stenciled labels.

F. Flow-Direction Flow Arrows: Use arrows, in compliance with ASME A13.1, to indicate direction of flow in pipes, including pipes where flow is allowed in both directions.

G. Pipe-Label Color Schedule:

1. Domestic Cold-Water Piping: White letters on an ANSI Z535.1 safety-green background.
2. Domestic Hot-Water Piping: White letters on an ANSI Z535.1 safety-green background
3. Domestic Hot-Water Return Piping White letters on an ANSI Z535.1 safety-green background.
4. Sanitary Waste and Storm Drainage Piping: White letters on a black background.

3.5 INSTALLATION OF VALVE TAGS

A. Install tags on valves and control devices in piping systems, except check valves, valves within factory-fabricated equipment units, shutoff valves, faucets, convenience and lawn-watering hose connections, and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule in the operating and maintenance manual.

B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in "Valve-Tag Size and Shape" Subparagraph below:

1. Valve-Tag Size and Shape:

   a. Domestic Cold Water: 2 inches , round.
   b. Domestic Hot Water: 2 inches , round.
   c. Domestic Hot-Water Return: 2 inches , round.

2. Valve-Tag Colors:

   a. For each piping system, use the same lettering and background coloring system on valve tags as used in the piping system labels and background.

END OF SECTION 220553

SECTION 220719 - PLUMBING PIPING INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes insulating the following plumbing piping services:

1. Domestic cold-water piping.
2. Domestic hot-water piping.
3. Domestic recirculating hot-water piping.
4. Domestic chilled-water piping for drinking fountains.
5. Roof drains and rainwater leaders.

B. Related Sections:

1. Section 220716 "Plumbing Equipment Insulation" for equipment insulation.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory and field applied if any).

1.3 QUALITY ASSURANCE

A. Comply with the following applicable standards and other requirements specified for miscellaneous components:

1. Supply and Drain Protective Shielding Guards: ICC A117.1.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Packaging: Insulation system materials are to be delivered to the Project site in unopened containers. The packaging is to include name of the manufacturer, fabricator, type, description, and size , as well as ASTM standard designation and maximum use temperature.

1.5 COORDINATION

A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."

B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

C. Coordinate installation and testing of heat tracing.

1.6 SCHEDULING

A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.

1. All Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule," "Outdoor, Aboveground Piping Insulation Schedule," and "Outdoor, Underground Piping Insulation Schedule" articles for where insulating materials are applied.

B. Products do not contain asbestos, lead, mercury, or mercury compounds.

C. Products that come into contact with stainless steel have a leachable chloride content of less than 50 ppm when tested in accordance with ASTM C871.

D. Insulation materials for use on austenitic stainless steel are qualified as acceptable in accordance with ASTM C795.

E. Foam insulation materials do not use CFC or HCFC blowing agents in the manufacturing process.

F. Glass-Fiber, Preformed Pipe: Glass fibers bonded with a thermosetting resin; suitable for maximum use temperature up to 850 deg F in accordance with ASTM C411. Comply with ASTM C547.

1. Manufacturers: Subject to compliance with requirements, undefined:

a. Johns Manville; a Berkshire Hathaway company.
b. Knauf Insulation.
c. Manson Insulation Inc.

2. Preformed Pipe Insulation: Type I, Grade A with factory-applied ASJ+ jacket.
3. Fabricated shapes in accordance with ASTM C450 and ASTM C585.
4. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

2.3 MASTICS AND COATINGS

A. Materials are compatible with insulation materials, jackets, and substrates.

B. Vapor-Retarder Mastic, Water Based: Suitable for indoor use on below-ambient services.

1. Manufacturers: Subject to compliance with requirements, undefined:

a. Childers Brand; H. B. Fuller Construction Products.
b. Foster Brand; H. B. Fuller.
c. Knauf Insulation.

2. Water-Vapor Permeance: Comply with ASTM E96/E96M or ASTM F1249.
3. Service Temperature Range: 0 to plus 180 deg F.
4. Comply with MIL-PRF-19565C, Type II, for permeance requirements.
5. Color: White.

2.4 TAPES

A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C1136.

1. Manufacturers: Subject to compliance with requirements, undefined:

a. 3M Industrial Adhesives and Tapes Division.
b. Ideal Tape Co., Inc., an American Biltrite Company.
c. Knauf Insulation.

2. Width: 3 inches.
3. Thickness: 11.5 mils.
4. Adhesion: 90 ounces force/inch in width.
5. Elongation: 2 percent.
6. Tensile Strength: 40 lbf/inch in width.
7. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.

2.5 PROTECTIVE SHIELDING GUARDS

A. Protective Shielding Pipe Covers, :

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. ProFlo; a Ferguson Enterprises, Inc. brand.
b. Truebro; IPS Corporation.
c. Zurn Industries, LLC.

2. Description: Manufactured plastic wraps for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with Americans with Disabilities Act (ADA) requirements.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.

1. Verify that systems to be insulated have been tested and are free of defects.
2. Verify that surfaces to be insulated are clean and dry.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

B. Clean and prepare surfaces to be insulated. Before insulating, apply a corrosion coating to insulated surfaces as follows:

1. Stainless Steel: Coat 300 series stainless steel with an epoxy primer 5 mils thick and an epoxy finish 5 mils thick if operating in a temperature range of between 140 and 300 deg F. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.

2. Carbon Steel: Coat carbon steel operating at a service temperature of between 32 and 300 deg F with an epoxy coating. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.

C. Coordinate insulation installation with the tradesman installing heat tracing. Comply with requirements for heat tracing that apply to insulation.

D. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless steel surfaces, use demineralized water.

3.3 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping, including fittings, valves, and specialties.

B. Install insulation materials, forms, vapor barriers or retarders, jackets, and of thicknesses required for each item of pipe system, as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.

D. Install insulation with longitudinal seams at top and bottom (12 o'clock and 6 o'clock positions) of horizontal runs.

E. Install multiple layers of insulation with longitudinal and end seams staggered.

F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.

G. Keep insulation materials dry during storage, application, and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with Contract Documents , unless otherwise approved by the engineer-of-record.

H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

I. Install insulation with least number of joints practical.

J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.

1. Install insulation continuously through hangers and around anchor attachments.
2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends attached to structure with vapor-barrier mastic.
3. Install insert materials and insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.

K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.

L. Install insulation with factory-applied jackets as follows:

1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.

2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward-clinching staples along both edges of strip, spaced 4 inches o.c.
3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward-clinching staples along edge at 4 inches o.c.
    a. For below-ambient services, apply vapor-barrier mastic over staples.
4. Cover joints and seams with tape, in accordance with insulation material manufacturer's written instructions, to maintain vapor seal.
5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.

M. Cut insulation in a manner to avoid compressing insulation.

N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches in similar fashion to butt joints.

P. For above-ambient services, do not install insulation to the following:

1. Vibration-control devices.
2. Testing agency labels and stamps.
3. Nameplates and data plates.
4. Cleanouts.

3.4 PENETRATIONS

A. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.

B. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.

1. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping and fire-resistive joint sealers.

3.5 GENERAL PIPE INSULATION INSTALLATION

A. Requirements in this article generally apply to all insulation materials, except where more specific requirements are specified in various pipe insulation material installation articles below.

B. Insulation Installation on Fittings, Valves, Strainers, Flanges, Mechanical Couplings, and Unions:

1. Install insulation over fittings, valves, strainers, flanges, mechanical couplings, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
2. Insulate pipe elbows using preformed fitting insulation made from same material and density as that of adjacent pipe insulation. Each piece is butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
3. Insulate tee fittings with preformed fitting insulation of same material and thickness as that used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
4. Insulate valves using preformed fitting insulation of same material, density, and thickness as that used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of

pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.

5. Insulate strainers using preformed fitting insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers, so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
6. Insulate flanges, mechanical couplings, and unions, using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Stencil or label the outside insulation jacket of each union with the word "union" matching size and color of pipe labels.
7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
8. For services not specified to receive a field-applied jacket, except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing, using PVC tape.

C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.

D. Install removable insulation covers at locations indicated. Installation conforms to the following:

1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as that of adjoining pipe insulation.
2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union at least 2 times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless steel or aluminum bands. Select band material compatible with insulation and jacket.
3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.
4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
5. Unless a PVC jacket is indicated in field-applied jacket schedules, finish exposed surfaces with a metal jacket.

3.6 INSTALLATION OF GLASS-FIBER AND MINERAL WOOL INSULATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of preformed pipe insulation to pipe with wire or bands, and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with jackets on above-ambient surfaces, secure laps with outward-clinched staples at 6 inches o.c.

4. For insulation with jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive, as recommended by insulation material manufacturer, and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Flanges:

1. Install prefabricated pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with glass-fiber or mineral-wool blanket insulation.
4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch, and seal joints with flashing sealant.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install prefabricated sections of same material as that of straight segments of pipe insulation when available.
2. When prefabricated insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install prefabricated sections of same material as that of straight segments of pipe insulation when available.
2. When prefabricated sections are not available, install fabricated sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
4. Install insulation to flanges as specified for flange insulation application.

3.7 FINISHES

A. Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."

1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.

a. Finish Coat Material: Interior, flat, latex-emulsion size.

B. Color: Final color as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.

C. Do not field paint aluminum or stainless steel jackets.

3.8 PIPING INSULATION SCHEDULE, GENERAL

A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.

B. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:

1. Drainage piping located in crawl spaces.

2. Underground piping.
3. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

3.9 INDOOR PIPING INSULATION SCHEDULE

A. Domestic Cold Water:

1. NPS 1 and Smaller: Insulation is the following:

a. Glass-Fiber, Preformed Pipe Insulation, Type I: 1/2 inch 1 inch thick.

2. NPS 1-1/4 and Larger: Insulation is the following:

a. Glass-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.

B. Domestic Hot and Recirculated Hot Water:

1. NPS 1-1/4 and Smaller: Insulation is the following:

a. Glass-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.

C. Domestic Chilled Water (Potable):

1. All Pipe Sizes: Insulation is the following:

a. Glass-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.

D. Roof Drain and Overflow Drain Bodies:

1. All Pipe Sizes: Insulation is one of the following:

a. Glass-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.

3.10 INDOOR, FIELD-APPLIED JACKET SCHEDULE

A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.

B. If more than one material is listed, selection from materials listed is Contractor's option.

C. Piping, Concealed:

1. None.

D. Piping, Exposed:

1. PVC, Color-Coded by System 20 mils thick.

END OF SECTION 220719

SECTION 221116 - DOMESTIC WATER PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Copper tube and fittings.
2. Piping joining materials.
3. Dielectric fittings.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Pipe and tube.
2. Fittings.
3. Joining materials.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Piping layout, or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

A. Potable-water piping and components shall comply with NSF 14, NSF 61, and NSF 372. Include marking "NSF-pw" on piping.

2.2 COPPER TUBE AND FITTINGS

A. Drawn-Temper Copper Tube: ASTM B88, Type L.

B. Cast-Copper, Solder-Joint Fittings: ASME B16.18, pressure fittings.

C. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends.

D. Cast Copper Unions: MSS SP-123, cast-copper-alloy, hexagonal-stock body, with ball-and-socket, metal-to-metal seating surfaces and solder-joint or threaded ends.

2.3 PIPING JOINING MATERIALS

A. Pipe-Flange Gasket Materials:

1. AWWA C110/A21.10, rubber, flat face, 1/8 inch thick or ASME B16.21, nonmetallic and asbestos free unless otherwise indicated.
2. Full-face or ring type unless otherwise indicated.

B. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1, carbon steel unless otherwise indicated.

C. Solder Filler Metals: ASTM B32, lead-free alloys.

D. Flux: ASTM B813, water flushable.

2.4 DIELECTRIC FITTINGS

A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.

B. Dielectric Nipples:

1. Standard: IAPMO PS 66.
2. Electroplated steel nipple complying with ASTM F1545.
3. Pressure Rating and Temperature: 300 psig at 225 deg F.
4. End Connections: Male threaded.
5. Lining: Inert and noncorrosive, propylene.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.

B. Flanges and unions may be used for aboveground piping joints unless otherwise indicated.

C. Aboveground domestic water piping, NPS 2 and smaller , shall be the following:

1. Drawn-temper copper tube, ASTM B88, Type L ; cast- copper, solder-joint fittings; and soldered joints.

3.2 EARTHWORK

A. Comply with requirements in Section 312000 "Earth Moving" for excavating, trenching, and backfilling.

3.3 INSTALLATION OF PIPING

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of domestic water piping. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.

B. Install copper tubing under building slab according to CDA's "Copper Tube Handbook."

C. Install ductile-iron piping under building slab with restrained joints according to AWWA C600 and AWWA M41.

D. Install valves according to the following:

1. Section 220523.12 "Ball Valves for Plumbing Piping."
2. Section 220523.14 "Check Valves for Plumbing Piping."
3. Section 220523.15 "Gate Valves for Plumbing Piping."

E. Install domestic water piping level with 0.25 percent slope downward toward drain and plumb.

F. Comply with requirements for vibration isolation devices specified in Section 220548.13 "Vibration Controls for Plumbing Piping and Equipment."

G. Install piping concealed from view and protected from physical contact by building occupants unless otherwise indicated and except in equipment rooms and service areas.

H. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

I. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal, and coordinate with other services occupying that space.

J. Install piping to permit valve servicing.

K. Install nipples, unions, special fittings, and valves with pressure ratings the same as or higher than the system pressure rating used in applications below unless otherwise indicated.

L. Install piping free of sags and bends.

M. Install fittings for changes in direction and branch connections.

N. Install unions in copper tubing at final connection to each piece of equipment, machine, and specialty.

O. Install pressure gauges on suction and discharge piping for each plumbing pump and packaged booster pump. Comply with requirements for pressure gauges in Section 220519 "Meters and Gages for Plumbing Piping."

P. Install thermostats in hot-water circulation piping. Comply with requirements for thermostats in Section 221123 "Domestic Water Pumps."

Q. Install thermometers on inlet and outlet piping from each water heater. Comply with requirements for thermometers in Section 220519 "Meters and Gages for Plumbing Piping."

R. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

S. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

T. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

3.4 JOINT CONSTRUCTION

A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.

B. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.

C. Soldered Joints for Copper Tubing: Apply ASTM B813, water-flushable flux to end of tube. Join copper tube and fittings according to ASTM B828 or CDA's "Copper Tube Handbook."

D. Flanged Joints: Select appropriate asbestos-free, nonmetallic gasket material in size, type, and thickness suitable for domestic water service. Join flanges with gasket and bolts according to ASME B31.9.

E. Joints for Dissimilar-Material Piping: Make joints using adapters compatible with materials of both piping systems.

3.5 INSTALLATION OF DIELECTRIC FITTINGS

A. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.

B. Dielectric Fittings for NPS 2 and Smaller: Use dielectric nipples.

3.6 INSTALLATION OF HANGERS AND SUPPORTS

A. Comply with requirements for hangers, supports, and anchor devices in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."

B. Install hangers for copper tubing and piping, with maximum horizontal spacing and minimum rod diameters, to comply with MSS-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

C. Support horizontal piping within 12 inches of each fitting.

D. Support vertical runs of copper tubing and piping to comply with MSS-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.7 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. When installing piping adjacent to equipment and machines, allow space for service and maintenance.

C. Connect domestic water piping to exterior water-service piping. Use transition fitting to join dissimilar piping materials.

D. Connect domestic water piping to water-service piping with shutoff valve; extend and connect to the following:

1. Water Heaters: Cold-water inlet and hot-water outlet piping in sizes indicated, but not smaller than sizes of water heater connections.
2. Plumbing Fixtures: Cold- and hot-water-supply piping in sizes indicated, but not smaller than that required by plumbing code.
3. Equipment: Cold- and hot-water-supply piping as indicated, but not smaller than equipment connections. Provide shutoff valve and union for each connection. Use flanges instead of unions for NPS 2-1/2 and larger.

3.8 IDENTIFICATION

A. Identify system components. Comply with requirements for identification materials and installation in Section 220553 "Identification for Plumbing Piping and Equipment."

3.9 ADJUSTING

A. Perform the following adjustments before operation:

1. Close drain valves, hydrants, and hose bibbs.
2. Open shutoff valves to fully open position.
3. Open throttling valves to proper setting.
4. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.
   a. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide hot-water flow in each branch.
   b. Adjust calibrated balancing valves to flows indicated.
5. Remove plugs used during testing of piping and for temporary sealing of piping during installation.
6. Remove and clean strainer screens. Close drain valves and replace drain plugs.
7. Remove filter cartridges from housings and verify that cartridges are as specified for application where used and are clean and ready for use.
8. Check plumbing specialties and verify proper settings, adjustments, and operation.

3.10 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Piping Inspections:
   a. Do not enclose, cover, or put piping into operation until it has been inspected and approved by authorities having jurisdiction.
   b. During installation, notify authorities having jurisdiction at least one day before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction:
      1) Roughing-in Inspection: Arrange for inspection of piping before concealing or closing in after roughing in and before setting fixtures.
      2) Final Inspection: Arrange for authorities having jurisdiction to observe tests specified in "Piping Tests" Subparagraph below and to ensure compliance with requirements.
   c. Reinspection: If authorities having jurisdiction find that piping will not pass tests or inspections, make required corrections and arrange for reinspection.
   d. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
2. Piping Tests:
   a. Fill domestic water piping. Check components to determine that they are not air bound and that piping is full of water.
   b. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit a separate report for each test, complete with diagram of portion of piping tested.
   c. Leave new, altered, extended, or replaced domestic water piping uncovered and unconcealed until it has been tested and approved. Expose work that was covered or concealed before it was tested.
   d. Cap and subject piping to static water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials. Isolate test source and allow it to stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired.

e. Hydrostatic testing and documentation of test results for polypropylene piping to be in accordance with the manufacturer's instructions and submitted to the manufacturer upon successful completion per warranty requirements.
f. Repair leaks and defects with new materials, and retest piping or portion thereof until satisfactory results are obtained.

B. Domestic water piping will be considered defective if it does not pass tests and inspections.

3.11 CLEANING

A. Clean and disinfect potable domestic water piping as follows:

1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
2. Use purging and disinfecting procedures prescribed by authorities having jurisdiction; if methods are not prescribed, use procedures described in either AWWA C651 or AWWA C652 or follow procedures described below:

a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
b. Fill and isolate system according to either of the following:

1) Fill system or part thereof with water/chlorine solution with at least 50 ppm of chlorine. Isolate with valves and allow to stand for 24 hours.
2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for three hours.

c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
d. Repeat procedures if biological examination shows contamination.
e. Submit water samples in sterile bottles to authorities having jurisdiction.

B. Clean non-potable domestic water piping as follows:

1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
2. Use purging procedures prescribed by authorities having jurisdiction or; if methods are not prescribed, follow procedures described below:

a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
b. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedures if biological examination shows contamination.

C. Prepare and submit reports of purging and disinfecting activities. Include copies of water-sample approvals from authorities having jurisdiction.

D. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.

END OF SECTION 221116

SECTION 221119 - DOMESTIC WATER PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Vacuum breakers.
2. Backflow preventers.
3. Balancing valves.
4. Temperature-actuated, water mixing valves.
5. Strainers for domestic water piping.
6. Outlet boxes.
7. Hose bibbs.
8. Wall hydrants.
9. Water-hammer arresters.
10. Flexible connectors.

B. Related Requirements:

1. Section 220519 "Meters and Gauges for Plumbing Piping" for thermometers, pressure gauges, and flow meters in domestic water piping.
2. Section 221116 "Domestic Water Piping" for water meters.
3. Section 223200 "Domestic Water Filtration Equipment" for water filters in domestic water piping.
4. Section 224723 "Remote Water Coolers" for water filters for water coolers.
5. Section 230923.18 "Leak Detection Instruments" for leak detection devices related to HVAC applications.

1.3 DEFINITIONS

A. AMI: Advanced Metering Infrastructure.

B. AMR: Automatic Meter Reading.

C. FKM: A family of fluroelastomer materials defined by ASTM D1418.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For domestic water piping specialties to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR PIPING SPECIALTIES

A. Domestic water piping specialties intended to convey or dispense water for human consumption are to comply with the SDWA, requirements of authorities having jurisdiction, and NSF 61 and NSF 372, or to be certified in compliance with NSF 61 and NSF 372 by an American National Standards Institute (ANSI)-accredited third-party certification body that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

2.2 PERFORMANCE REQUIREMENTS

A. Minimum Working Pressure for Domestic Water Piping Specialties: 125 psig unless otherwise indicated.

2.3 VACUUM BREAKERS

A. Pipe-Applied, Atmospheric-Type Vacuum Breakers:
1. Standard: ASSE 1001.
2. Size: NPS 1/4 to NPS 3, as required to match connected piping.
3. Body: Bronze.
4. Inlet and Outlet Connections: Threaded.
5. Finish: Chrome plated.

2.4 BACKFLOW PREVENTERS

A. Reduced-Pressure-Principle Backflow Preventers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Apollo Valves; a part of Aalberts Integrated Piping Systems.
b. WATTS; A Watts Water Technologies Company.
c. Zurn Industries, LLC.

2. Standard: ASSE 1013.
3. Operation: Continuous-pressure applications.
4. Pressure Loss: 12 psig maximum, through middle third of flow range.
5. Size: 1.5".
6. Design Flow Rate: 35 GPM.
7. Body: Bronze for NPS 2 and smaller; ductile or cast iron with interior lining that complies with AWWA C550 or that is FDA approved for NPS 2-1/2 and larger.
8. End Connections: Threaded for NPS 2 and smaller; for and larger.
9. Configuration: Designed for vertical-inlet, horizontal-center-section, and vertical-outlet flow.
10. Accessories:

a. Valves NPS 2 and Smaller: Ball type with threaded ends on inlet and outlet.
b. Air-Gap Fitting: ASME A112.1.2, matching backflow-preventer connection.

B. Backflow-Preventer Test Kits:

1. Description: Factory calibrated, with gauges, fittings, hoses, and carrying case with test-procedure instructions.

2.5 BALANCING VALVES

A. Automatic Flow Control Balancing Valves :

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Caleffi North America.
   b. IMI Hydronic Engineering Inc.
   c. ThermOmegaTech.

2. Flow Regulation: Plus or minus 5 percent over 95 percent of the working range.
3. Pressure Rating: 200 psig.
4. Size: NPS 2 or smaller.
5. Body: brass.
6. Flow Cartridge: Stainless steel or antiscale polymer.
7. End Connections: Threaded.

2.6 TEMPERATURE-ACTUATED, WATER MIXING VALVES

A. Primary, Thermostatic, Water Mixing Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Caleffi North America.
   b. POWERS; A WATTS Brand.
   c. Symmons Industries, Inc.

2. Standard: ASSE 1017.
3. Pressure Rating: 125 psig minimum unless otherwise indicated.
4. Type: Exposed-mounted , thermostatically controlled, water mixing valve.
5. Material: Bronze body with corrosion-resistant interior components.
6. Connections: Threaded inlets and outlet.
7. Accessories: Manual temperature control, check stops on hot- and cold-water supplies, and adjustable, temperature-control handle.
8. Tempered-Water Setting: 120 F.
9. Tempered-Water Design Flow Rate: 20 GPM
10. Selected Valve Flow Rate at 45-psig Pressure Drop: 214 GPM
11. Pressure Drop at Design Flow Rate: 2 psig
12. Valve Finish: Chrome plated Rough bronze.
13. Piping Finish: Copper.

B. Individual-Fixture, Water Tempering Valves:

1. Standard: ASSE 1016, thermostatically controlled, water tempering valve.
2. Pressure Rating: 125 psig minimum unless otherwise indicated.
3. Material: Bronze body with corrosion-resistant interior components.
4. Temperature Control: Adjustable.
5. Connections: Threaded inlets and outlet.
6. Finish: Chrome plated.
7. Tempered-Water Setting: 109 F.

2.7 STRAINERS FOR DOMESTIC WATER PIPING

A. Y-Pattern Strainers:

1. Pressure Rating: 125 psig minimum unless otherwise indicated.
2. Body: Bronze for NPS 2 and smaller; cast iron with interior lining that complies with AWWA C550 or that is FDA approved, epoxy coated and for NPS 2-1/2 and larger.

3. End Connections: Threaded for NPS 2 and smaller; flanged for NPS 2-1/2 and larger.
4. Screen: Stainless steel with round perforations unless otherwise indicated.
5. Perforation Size:
   a. Strainers NPS 2 and Smaller: 0.020 inch.
6. Drain: Factory-installed, hose-end drain valve.

2.8 OUTLET BOXES

A. Icemaker Outlet Boxes:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. Oatey Co.
   b. Sioux Chief Manufacturing Company, Inc.
   c. Water-Tite, IPS Corporation.
2. Mounting: Recessed.
3. Material and Finish: Enameled-steel, epoxy-painted-steel, or plastic box and faceplate.
4. Faucet: Valved fitting complying with ASME A112.18.1. Include NPS 1/2 or smaller copper tube outlet.
5. Accessory: Water hammer arrestor.
6. Supply Shutoff Fitting: NPS 1/2 gate, globe, or ball valve and NPS 1/2 copper, water tubing.

2.9 HOSE BIBBS

A. Hose Bibbs:

1. Standard: ASME A112.18.1 for sediment faucets.
2. Body Material: Bronze.
3. Seat: Bronze, replaceable.
4. Supply Connections: NPS 1/2 or NPS 3/4 threaded or solder-joint inlet.
5. Outlet Connection: Garden-hose thread complying with ASME B1.20.7.
6. Pressure Rating: 125 psig.
7. Vacuum Breaker: Integral nonremovable, drainable, hose-connection vacuum breaker complying with ASSE 1011.
8. Finish for Equipment Rooms: Rough bronze, or chrome or nickel plated.
9. Finish for Service Areas: Rough bronze.
10. Finish for Finished Rooms: Chrome or nickel plated.
11. Operation for Equipment Rooms: Wheel handle or operating key.
12. Operation for Service Areas: Wheel handle.
13. Include operating key with each operating-key hose bibb.

2.10 WALL HYDRANTS

A. Nonfreeze Wall Hydrants :

1. Standard: ASME A112.21.3M for exposed-outlet, self-draining wall hydrants.
2. Pressure Rating: 125 psig.
3. Operation: Loose key.
4. Casing and Operating Rod: Of length required to match wall thickness. Include wall clamp.
5. Inlet: NPS 3/4 or NPS 1.
6. Outlet, Concealed: With integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
7. Box: Deep, flush mounted with cover.
8. Box and Cover Finish: Rough bronze.

9. Outlet, Exposed: With integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
10. Nozzle and Wall-Plate Finish: Rough bronze.
11. Operating Keys(s): Two with each wall hydrant.

2.11 WATER-HAMMER ARRESTERS

A. Water-Hammer Arresters:

1. Standard: ASSE 1010 or PDI-WH 201.
2. Type: Piston.
3. Size: ASSE 1010, Sizes AA and A through F, or PDI-WH 201, Sizes A through F.

2.12 FLEXIBLE CONNECTORS

A. Flexible connectors as specified in Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment" or 220548.13 "Vibration Controls for Plumbing Piping and Equipment."

PART 3 - EXECUTION

3.1 INSTALLATION OF PIPING SPECIALTIES

A. Backflow Preventers: Install in each water supply to mechanical equipment and systems and to other equipment and water systems that may be sources of contamination. Comply with authorities having jurisdiction.

1. Locate backflow preventers in same room as connected equipment or system.
2. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe-to-floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are unacceptable for this application.
3. Do not install bypass piping around backflow preventers.

B. Balancing Valves: Install in locations where they can easily be adjusted. Set at indicated design flow rates.

C. Y-Pattern Strainers: For water, install on supply side of each pump.

D. Outlet Boxes: Install boxes recessed in wall or surface mounted on wall. Install 1-1/2-by-3-1/2-inch fire-retardant-treated-wood blocking, wall reinforcement between studs. Comply with requirements for fire-retardant-treated-wood blocking in Section 061000 "Rough Carpentry."

E. Hose Stations: Install with check stops or shutoff valves on inlets and with thermometer on outlet.

1. Install cabinet-type units recessed in or surface mounted on wall as specified. Install 1-1/2-by-3-1/2-inch fire-retardant-treated-wood blocking, wall reinforcement between studs. Comply with requirements for fire-retardant-treated-wood blocking in Section 061000 "Rough Carpentry."

F. Water-Hammer Arresters: Install in water piping in accordance with PDI-WH 201.

G. Supply-Type, Trap-Seal Primer Device: Install with outlet piping pitched down toward drain trap a minimum of 1 percent, and connect to floor-drain body, trap, or inlet fitting. Adjust valve for proper flow.

3.2 PIPING CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. When installing piping specialties adjacent to equipment and machines, allow space for service and maintenance.

3.3 IDENTIFICATION

A. Plastic Labels for Equipment: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:

1. Vacuum breakers.
2. Backflow preventers.
3. Water pressure-reducing valves.
4. Automatic water shutoff valve systems.
5. Balancing valves.
6. Temperature-actuated, water mixing valves.
7. Outlet boxes.
8. Wall hydrants.
9. Trap-seal primer device.

B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 ADJUSTING

A. Set field-adjustable pressure set points of water pressure-reducing valves.

B. Set field-adjustable flow set points of balancing valves.

C. Set field-adjustable temperature set points of temperature-actuated, water mixing valves.

D. Adjust each pressure vacuum breaker reduced-pressure-principle backflow preventer and in accordance with manufacturer's written instructions, authorities having jurisdiction and the device's reference standard.

3.5 FIELD QUALITY CONTROL

A. Testing Agency: a qualified testing agency to perform tests and inspections.

B. Perform the following tests and inspections.

1. Test each reduced-pressure-principle backflow preventer and according to authorities having jurisdiction and the device's reference standard.
2. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
3. Operational Test: After electrical circuitry has been energized, start units to confirm unit operation.
4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

C. Domestic water piping specialties will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports.

END OF SECTION 221119

This page intentionally left blank.

SECTION 221123.21 - INLINE, DOMESTIC-WATER PUMPS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. In-line, sealless centrifugal pumps.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product. Include construction materials, rated capacities, certified performance curves with operating points plotted on curves, operating characteristics, electrical characteristics, and furnished specialties and accessories.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For inline, domestic-water pumps to include in operation and maintenance manuals.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Retain shipping flange protective covers and protective coatings during storage.

B. Protect bearings and couplings against damage.

C. Comply with pump manufacturer's written instructions for handling.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. UL Compliance: UL 778 for motor-operated water pumps.

C. Drinking Water System Components - Health Effects and Drinking Water System Components - Lead Content Compliance: NSF 61 and NSF 372.

2.2 IN-LINE, SEALLESS CENTRIFUGAL PUMPS

A. Description: Factory-assembled and -tested, in-line, close-coupled, canned-motor, sealless, overhung-impeller centrifugal pumps.

B. <Click here to find, evaluate, and insert list of manufacturers and products.>

C. Capacities and Characteristics:

1. Capacity: 1 gpm.
2. Total Dynamic Head: 5'.
3. Inlet and Outlet Size: 0.5".
4. Pump Speed: 2650 RPM
5. Pump Control: Timer.
6. Motor Horsepower: 1/12 HP.
7. Electrical Characteristics:

   a. Volts: 115 V.
   b. Phase: Single phase.
   c. Hertz: 60 Hz.
   d. Full-Load Amperes:1.4 A.

D. Pump Construction:

1. Pump and Motor Assembly: Hermetically sealed, replaceable-cartridge type with motor and impeller on common shaft and designed for installation with pump and motor shaft horizontal.
2. Minimum Working Pressure: 125 psig.
3. Maximum Continuous Operating Temperature: 220 deg F.
4. Casing: Bronze, with threaded or companion-flange connections.
5. Impeller: stainless steel.
6. Motor: Single speed.

2.3 MOTORS

A. Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements for motors specified in Section 220513 "Common Motor Requirements for Plumbing Equipment."

1. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.

2.4 CONTROLS

A. Timers: Electric, for control of hot-water circulation pump.

1. Type: Programmable, seven-day clock with manual override on-off switch.
2. Enclosure: NEMA 250, Type 1 , suitable for wall mounting.
3. Operation of Pump: On or off.
4. Transformer: Provide if required.
5. Power Requirement: 120 V ac.
6. Programmable Sequence of Operation: Up to two on-off cycles each day for seven days.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in for domestic-water-piping system to verify actual locations of piping connections before pump installation.

3.2 PUMP INSTALLATION

A. Comply with HI 1.4.

B. Mount pumps in orientation complying with manufacturer's written instructions.

C. Install pressure switches in water-supply piping.

D. Install thermostats in hot-water return piping.

E. Install timers on wall in engineer's office.

F. Install time-delay relays in piping between water heaters and hot-water storage tanks.

3.3 PIPING CONNECTIONS

A. Comply with requirements for piping specified in Section 221116 "Domestic Water Piping." Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to inline, domestic-water pumps, allow space for service and maintenance.

C. Connect domestic-water piping to pumps. Install suction and discharge piping equal to or greater than size of pump nozzles.

D. Install shutoff valve and strainer on suction side of each pump, and check, shutoff, and throttling valves on discharge side of each pump. Install valves same size as connected piping. Comply with requirements for strainers specified in Section 221119 "Domestic Water Piping Specialties." Comply with requirements for valves specified in the following:

1. Section 220523.12 "Ball Valves for Plumbing Piping."
2. Section 220523.13 "Butterfly Valves for Plumbing Piping."
3. Section 220523.14 "Check Valves for Plumbing Piping."
4. Section 220523.15 "Gate Valves for Plumbing Piping."
5. Install pressure gauge and snubber at suction of each pump and pressure gauge and snubber at discharge of each pump. Install at integral pressure-gauge tappings where provided or install pressure-gauge connectors in suction and discharge piping around pumps. Comply with requirements for pressure gauges and snubbers specified in Section 220519 "Meters and Gages for Plumbing Piping."

3.4 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring between temperature controllers and devices.

C. Interlock pump between water heater and hot-water storage tank with water heater burner and time-delay relay.

3.5 IDENTIFICATION

A. Identify system components. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment" for identification of pumps.

3.6 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
2. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
3. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

C. Inline, domestic-water pump will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

3.7 STARTUP SERVICE

A. Perform startup service.

1. Complete installation and startup checks according to manufacturer's written instructions.
2. Check piping connections for tightness.
3. Clean strainers on suction piping.
4. Set timers, for automatic starting and stopping operation of pumps.
5. Perform the following startup checks for each pump before starting:
   a. Verify bearing lubrication.
   b. Verify that pump is free to rotate by hand and that pump for handling hot liquid is free to rotate with pump hot and cold. If pump is bound or drags, do not operate until cause of trouble is determined and corrected.
   c. Verify that pump is rotating in the correct direction.
6. Prime pump by opening suction valves and closing drains, and prepare pump for operation.
7. Start motor.
8. Open discharge valve slowly.
9. Adjust temperature settings on thermostats.
10. Adjust timer settings.

END OF SECTION 221123.21

SECTION 221316 - SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hub-and-spigot, cast-iron soil pipe and fittings.
2. Hubless, cast-iron soil pipe and fittings.

B. Related Requirements:

1. Section 221313 "Facility Sanitary Sewers" for sanitary sewerage piping and structures outside the building.
2. Section 221329 "Sanitary Sewerage Pumps" for effluent and sewage pumps.
3. Section 226600 "Chemical-Waste Systems for Laboratory and Healthcare Facilities" for chemical-waste and vent piping systems.

1.2 ACTION SUBMITTALS

A. Product Data

1. Hub-and-spigot, cast-iron soil pipe and fittings.
2. Hubless, cast-iron soil pipe and fittings.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plans and elevations, or Building Information Model (BIM) drawn to scale, showing items described in this Section and coordinated with all building trades.

1.4 WARRANTY

A. Listed manufacturers to provide labeling and warranty of their respective products.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Components and installation are capable of withstanding the following minimum working pressure unless otherwise indicated:

1. Soil, Waste, and Vent Piping: 10 ft. head of water.

2.2 PIPING MATERIALS

A. Piping materials to bear label, stamp, or other markings of specified testing agency.

B. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.3 HUB-AND-SPIGOT, CAST-IRON SOIL PIPE AND FITTINGS

A. Pipe and Fittings:

1. Marked with CISPI collective trademark.
2. ASTM A74, service cast iron.

B. Gaskets: ASTM C564, rubber.

C. Caulking Materials: ASTM B29, pure lead and oakum or hemp fiber.

2.4 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

A. Pipe and Fittings:

1. Marked with CISPI collective trademark.
2. ASTM A888 or CISPI 301.

B. Heavy-Duty, Hubless-Piping Couplings:

1. Standards: ASTM C1277 and ASTM C1540.
2. Description: Stainless steel shield with stainless steel bands and tightening devices; and ASTM C564, rubber sleeve with integral, center pipe stop.

PART 3 - EXECUTION

3.1 EARTH MOVING

A. Comply with requirements for excavating, trenching, and backfilling specified in Section 312000 "Earth Moving."

3.2 INSTALLATION OF PIPING

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems.

1. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations.
2. Install piping as indicated unless deviations to layout are approved on coordination drawings.

B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.

C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.

E. Install piping to permit valve servicing.

F. Install piping at indicated slopes.

G. Install piping free of sags and bends.

H. Install fittings for changes in direction and branch connections.

I. Install piping to allow application of insulation.

J. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends.

1. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical.
2. Use long-turn, double Y-branch, and 1/8-bend fittings if two fixtures are installed back to back or side by side with common drain pipe.
    a. Straight tees, elbows, and crosses may be used on vent lines.
3. Do not change direction of flow more than 90 degrees.
4. Use proper size of standard increasers and reducers if pipes of different sizes are connected.
    a. Reducing size of waste piping in direction of flow is prohibited.

K. Lay buried building waste piping beginning at low point of each system.

1. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream.
2. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.
3. Maintain swab in piping and pull past each joint as completed.

L. Install soil and waste and vent piping at the following minimum slopes unless otherwise indicated:

1. Building Sanitary Waste: Two percent downward in direction of flow for piping NPS 3 and smaller; 1 percent downward in direction of flow for piping NPS 4 and larger.
2. Horizontal Sanitary Waste Piping: 1 percent downward in direction of flow.
3. Vent Piping: One percent down toward vertical fixture vent or toward vent stack.

M. Install cast-iron soil piping in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."

1. Install encasement on underground piping in accordance with ASTM A674 or AWWA C105/A 21.5.

N. Install engineered soil and waste and vent piping systems as follows:

1. Combination Waste and Vent: Comply with standards of authorities having jurisdiction.
2. Hubless, Single-Stack Drainage System: Comply with ASME B16.45 and hubless, single-stack aerator fitting manufacturer's written installation instructions.
3. Reduced-Size Venting: Comply with standards of authorities having jurisdiction.

O. Install underground, ductile-iron, force-main piping according to AWWA C600.

1. Install buried piping inside building between wall and floor penetrations and connection to sanitary sewer piping outside building with restrained joints.
2. Anchor pipe to wall or floor. Install thrust-block supports at vertical and horizontal offsets.
3. Install encasement on piping in accordance with ASTM A674 or AWWA C105/A 21.5.

P. Install underground, copper, force-main tubing in accordance with CDA's "Copper Tube Handbook."

1. Install encasement on piping in accordance with ASTM A674 or AWWA C105/A 21.5.

Q. Install force mains at elevations indicated.

R. Plumbing Specialties:

1. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers in sanitary waste gravity-flow piping.

   a. Install cleanout fitting with closure plug inside the building in sanitary drainage force-main piping.
   b. Comply with requirements for cleanouts specified in Section 221319 "Sanitary Waste Piping Specialties."

2. Install drains in sanitary waste gravity-flow piping.

   a. Comply with requirements for drains specified in Section 221319 "Sanitary Waste Piping Specialties."

S. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.

T. Install sleeves for piping penetrations of walls, ceilings, and floors.

1. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

U. Install sleeve seals for piping penetrations of concrete walls and slabs.

1. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

V. Install escutcheons for piping penetrations of walls, ceilings, and floors.

1. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

3.3 JOINT CONSTRUCTION

A. Hub-and-Spigot, Cast-Iron Soil Piping Gasketed Joints: Join in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.

B. Hub-and-Spigot, Cast-Iron Soil Piping Caulked Joints: Join in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead-and-oakum caulked joints.

C. Hubless, Cast-Iron Soil Piping Coupled Joints:

1. Join hubless, cast-iron soil piping in accordance with CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-piping coupling joints.

D. Joint Restraints and Sway Bracing:

1. Provide joint restraints and sway bracing for storm drainage piping joints to comply with the following conditions:

   a. Provide axial restraint for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction, branches, and changes in diameter greater than two pipe sizes.
   b. Provide rigid sway bracing for pipe and fittings 4 inches and larger, upstream and downstream of all changes in direction 45 degrees and greater.
   c. Provide rigid sway bracing for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction and branch openings.

3.4 INSTALLATION OF SPECIALTY PIPE FITTINGS

A. Transition Couplings:

1. Install transition couplings at joints of piping with small differences in ODs.
2. In Waste Drainage Piping: [**Unshielded**] [**Shielded**], nonpressure transition couplings.
3. In Aboveground Force Main Piping: Fitting-type transition couplings.
4. In Underground Force Main Piping:

   a. NPS 1-1/2 (DN 40) and Smaller: Fitting-type transition couplings.
   b. NPS 2 (DN 50) and Larger: Pressure transition couplings.

3.5 INSTALLATION OF HANGERS AND SUPPORTS

A. Comply with requirements for pipe hanger and support devices and installation specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment".

1. Install carbon steel pipe hangers for horizontal piping in noncorrosive environments.
2. Install stainless steel pipe hangers for horizontal piping in corrosive environments.
3. Install carbon-steel pipe support clamps for vertical piping in noncorrosive environments.
4. Install stainless steel pipe support clamps for vertical piping in corrosive environments.
5. Vertical Piping: MSS Type 8 or Type 42 clamps.
6. Install individual, straight, horizontal piping runs:

   a. 100 Ft. (30 m) and Less: MSS Type 1, adjustable, steel clevis hangers.
   b. Longer Than 100 Ft. (30 m): MSS Type 43, adjustable roller hangers.
   c. Longer Than 100 Ft. (30 m) if Indicated: MSS Type 49, spring cushion rolls.

7. Multiple, Straight, Horizontal Piping Runs 100 Ft. (30 m) or Longer: MSS Type 44 pipe rolls. Support pipe rolls on trapeze.
8. Base of Vertical Piping: MSS Type 52 spring hangers.

B. Install hangers for cast-iron and soil piping, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

C. Install hangers for piping, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

D. Support horizontal piping and tubing within 12 inches of each fitting, valve, and coupling.

E. Support vertical runs of cast-iron and soil piping to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

F. Support vertical runs of piping to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.6 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.

C. Connect waste and vent piping to the following:

1. Plumbing Fixtures: Connect waste piping in sizes indicated, but not smaller than required by plumbing code.
2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by authorities having jurisdiction.
3. Plumbing Specialties: Connect waste and vent piping in sizes indicated, but not smaller than required by plumbing code.
4. Install test tees (wall cleanouts) in conductors near floor and floor cleanouts with cover flush with floor.
5. Comply with requirements for cleanouts and drains specified in Section 221319 "Sanitary Waste Piping Specialties."
6. Equipment: Connect waste piping as indicated.

    a. Provide shutoff valve if indicated and union for each connection.
    b. Use flanges instead of unions for connections NPS 2-1/2 and larger.

D. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.

E. Make connections in accordance with the following unless otherwise indicated:

1. Install unions, in piping NPS 2 and smaller, adjacent to each valve and at final connection to each piece of equipment.
2. Install flanges, in piping NPS 2-1/2 and larger, adjacent to flanged valves and at final connection to each piece of equipment.

3.7 IDENTIFICATION

A. Identify exposed sanitary waste and vent piping.

B. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.8 FIELD QUALITY CONTROL

A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.

1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.

B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.

C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.

D. Test sanitary waste and vent piping in accordance with procedures of authorities having jurisdiction or, in absence of published procedures, as follows:

1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired.

    a. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.

2. Leave uncovered and unconcealed new, altered, extended, or replaced waste and vent piping until it has been tested and approved.
    a. Expose work that was covered or concealed before it was tested.
3. Roughing-in Plumbing Test Procedure: Test waste and vent piping except outside leaders on completion of roughing-in.
    a. Close openings in piping system and fill with water to point of overflow, but not less than 10 ft. head of water.
    b. From 15 minutes before inspection starts to completion of inspection, water level must not drop.
    c. Inspect joints for leaks.
4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight.
    a. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1 inch wg.
    b. Use U-tube or manometer inserted in trap of water closet to measure this pressure.
    c. Air pressure must remain constant without introducing additional air throughout period of inspection.
    d. Inspect plumbing fixture connections for gas and water leaks.
5. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
6. Prepare reports for tests and required corrective action.

E. Test force-main piping in accordance with procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
1. Leave uncovered and unconcealed new, altered, extended, or replaced force-main piping until it has been tested and approved.
    a. Expose work that was covered or concealed before it was tested.
2. Cap and subject piping to static-water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials.
    a. Isolate test source and allow to stand for four hours.
    b. Leaks and loss in test pressure constitute defects that must be repaired.
3. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
4. Prepare reports for tests and required corrective action.

3.9 PIPING SCHEDULE

A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.

B. Aboveground, soil and waste piping NPS 4 (DN 100) and smaller are to be the following:
1. Hubless, cast-iron soil pipe and fittings and hubless, single-stack aerator fittings; heavy-duty hubless-piping couplings; and coupled joints.
2. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.

C. Aboveground, vent piping NPS 4 (DN 100) is to be the following:
1. Hubless, cast-iron soil pipe and fittings; heavy-duty hubless-piping couplings; and coupled joints.
2. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.

D. Underground, soil, waste, and vent piping NPS 4 (DN 100) and smaller are to be the following:

1. Service cast-iron soil piping; gaskets; and gasketed joints.
2. Hubless, cast-iron soil pipe and fittings; hubless-piping couplings; and coupled joints.
3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.

END OF SECTION 221316

SECTION 221319 - SANITARY WASTE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Cleanouts.
2. Miscellaneous sanitary drainage piping specialties.

B. Related Requirements:

1. Section 076200 "Sheet Metal Flashing and Trim" for metal roof flashing assemblies.
2. Section 077200 "Roof Accessories" for preformed flashings.
3. Section 078413 "Penetration Firestopping" for through-penetration firestop assemblies.
4. Section 221423 "Storm Drainage Piping Specialties" for trench drains for storm water, channel drainage systems for storm water, roof drains, and catch basins.
5. Section 334200 "Stormwater Conveyance" for storm drainage piping and piping specialties outside the building.

1.3 DEFINITIONS

A. PVC: Polyvinyl chloride.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For sanitary waste piping specialties to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTIONS

A. Sanitary waste piping specialties shall bear label, stamp, or other markings of specified testing agency.

B. Comply with NSF 14 for plastic sanitary waste piping specialty components.

2.2 CLEANOUTS

A. Cast-Iron Wall Cleanouts:

1. Standard: ASME A112.36.2M. Include wall access.

2. Size: Same as connected drainage piping.
3. Body: Hubless, cast-iron soil pipe test tee as required to match connected piping.
4. Closure Plug:
   a. Cast iron.
   b. Head.
   c. Drilled and threaded for cover attachment screw.
   d. Size: Same as or not more than one size smaller than cleanout size.
5. Wall Access, Cover Plate: Round, flat, chrome-plated brass or stainless steel cover plate with screw.
6. Wall Access, Frame and Cover: Round , nickel-bronze, copper-alloy, or stainless steel wall-installation frame and cover.

B. Plastic Floor Cleanouts:
1. Size: Same as connected branch.
2. Body: PVC.
3. Closure Plug: PVC.
4. Riser: Drainage pipe fitting and riser to cleanout of same material as drainage piping.

2.3 MISCELLANEOUS SANITARY DRAINAGE PIPING SPECIALTIES

A. Floor-Drain, Trap-Seal Primer Fittings:
1. Description: Cast iron, with threaded inlet and threaded or spigot outlet, and trap-seal primer valve connection.
2. Size: Same as floor drain outlet with NPS 1/2 side inlet.

B. Air-Gap Fittings:
1. Standard: ASME A112.1.2, for fitting designed to ensure fixed, positive air gap between installed inlet and outlet piping.
2. Body: Bronze or cast iron.
3. Inlet: Opening in top of body.
4. Outlet: Larger than inlet.
5. Size: Same as connected waste piping and with inlet large enough for associated indirect waste piping.

C. Sleeve Flashing Device:
1. Description: Manufactured, cast-iron fitting, with clamping device that forms sleeve for pipe floor penetrations of floor membrane. Include galvanized-steel pipe extension in top of fitting that will extend 1 inch above finished floor and galvanized-steel pipe extension in bottom of fitting that will extend through floor slab.
2. Size: As required for close fit to riser or stack piping.

D. Stack Flashing Fittings:
1. Description: Counterflashing-type, cast-iron fitting, with bottom recess for terminating roof membrane, and with threaded or hub top for extending vent pipe.
2. Size: Same as connected stack vent or vent stack.

E. Frost-Resistant Vent Terminals:
1. Description: Manufactured or shop-fabricated assembly constructed of copper, lead-coated copper, or galvanized steel.
2. Design: To provide 1-inch enclosed air space between outside of pipe and inside of flashing collar extension, with counterflashing.

F. Expansion Joints:

1. Standard: ASME A112.6.4.
2. Body: Cast iron with bronze sleeve, packing, and gland.
3. End Connections: Matching connected piping.
4. Size: Same as connected soil, waste, or vent piping.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install cleanouts in aboveground piping and building drain piping according to the following, unless otherwise indicated:

1. Size same as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
2. Locate at each change in direction of piping greater than 45 degrees.
3. Locate at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
4. Locate at base of each vertical soil and waste stack.

B. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.

C. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.

D. Install floor-drain, trap-seal primer fittings on inlet to floor drains that require trap-seal primer connection.

1. Exception: Fitting may be omitted if trap has trap-seal primer connection.
2. Size: Same as floor drain inlet.

E. Install air-gap fittings on draining-type backflow preventers and on indirect-waste piping discharge into sanitary drainage system.

F. Install sleeve and sleeve seals with each riser and stack passing through floors with waterproof membrane.

G. Install frost-resistant vent terminals on each vent pipe passing through roof. Maintain 1-inch clearance between vent pipe and roof substrate.

H. Install expansion joints on vertical stacks and conductors. Position expansion joints for easy access and maintenance.

I. Install wood-blocking reinforcement for wall-mounting-type specialties.

J. Install traps on plumbing specialty drain outlets. Omit traps on indirect wastes unless trap is indicated.

3.2 PIPING CONNECTIONS

A. Comply with requirements in Section 221316 "Sanitary Waste and Vent Piping" for piping installation requirements. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Install piping adjacent to equipment, to allow service and maintenance.

3.3 LABELING AND IDENTIFYING

A. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit.

1. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 PROTECTION

A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.

B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319

SECTION 221319.13 - SANITARY DRAINS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Floor drains.
2. Floor sinks.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 DRAIN ASSEMBLIES

A. Sanitary drains shall bear label, stamp, or other markings of specified testing agency.

B. Comply with NSF 14 for plastic sanitary piping specialty components.

2.2 FLOOR DRAINS

A. Cast-Iron Floor Drains:

1. Standard: ASME A112.6.3.
2. Pattern: Floor drain.
3. Body Material: Cast iron.
4. Seepage Flange: Not required.
5. Anchor Flange: Required.
6. Clamping Device: Required.
7. Outlet: Bottom.
8. Backwater Valve: Not required.
9. Coating on Interior and Exposed Exterior Surfaces: Not required.
10. Sediment Bucket: Not required.
11. Top or Strainer Material: Bronze.
12. Top of Body and Strainer Finish: Chrome Plated.
13. Top Shape: Square.
14. Dimensions of Top or Strainer: 5" square strainer.
15. Top Loading Classification: Light Duty
16. Funnel: Not required.
17. Inlet Fitting: Gray iron, with threaded inlet and threaded or spigot outlet, and trap-seal primer valve connection.
18. Trap Material: Cast iron.
19. Trap Pattern: Standard P-trap Not required.
20. Trap Features: Trap-seal primer valve drain connection.

2.3 FLOOR SINKS

A. Cast-Iron Floor Sinks:

1. <Click here to find, evaluate, and insert list of manufacturers and products.>
2. Standard: ASME A112.6.7.
3. Pattern: Floor drain.
4. Body Material: Cast iron.
5. Anchor Flange: Required.
6. Clamping Device: Not required.
7. Outlet: Bottom, no-hub connection.
8. Coating on Interior Surfaces: Not required.
9. Sediment Bucket: Required.
10. Internal Strainer: Flat.
11. Internal Strainer Material: Aluminum.
12. Top Grate Material: Cast iron, loose.
13. Top of Body and Grate Finish: Nickel bronze.
14. Top Shape: Square.
15. Dimensions of Top Grate: Square 6”.
16. Top Loading Classification: No traffic.
17. Funnel: Not required.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install floor drains at low points of surface areas to be drained. Set grates of drains flush with finished floor, unless otherwise indicated.

1. Position floor drains for easy access and maintenance.
2. Set floor drains below elevation of surrounding finished floor to allow floor drainage.
3. Set with grates depressed according to the following drainage area radii:
   a. Radius, 30 Inches or Less: Equivalent to 1 percent slope, but not less than 1/4-inch total depression.
   b. Radius, 30 to 60 Inches: Equivalent to 1 percent slope.
   c. Radius, 60 Inches or Larger: Equivalent to 1 percent slope, but not greater than 1-inch total depression.
4. Install floor-drain flashing collar or flange, so no leakage occurs between drain and adjoining flooring.
   a. Maintain integrity of waterproof membranes where penetrated.
5. Install individual traps for floor drains connected to sanitary building drain, unless otherwise indicated.

3.2 CONNECTIONS

A. Comply with requirements in Section 221316 "Sanitary Waste and Vent Piping" for piping installation requirements. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Comply with requirements in Section 221319 "Sanitary Waste Piping Specialties" for backwater valves, air admittance devices and miscellaneous sanitary drainage piping specialties.

C. Comply with requirements in Section 221323 "Sanitary Waste Interceptors" for grease interceptors, grease-removal devices, oil interceptors, sand interceptors, and solid interceptors.

D. Install piping adjacent to equipment to allow service and maintenance.

E. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

F. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

3.3 LABELING AND IDENTIFYING

A. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 PROTECTION

A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.

B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319.13

This page intentionally left blank.

SECTION 221414 - STORM DRAINAGE PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hub-and-spigot, cast-iron soil pipe and fittings.
2. Hubless, cast-iron soil pipe and fittings.

B. Related Requirements:

1. Section 334200 "Stormwater Conveyance" for storm drainage piping outside the building.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Hub-and-spigot, cast-iron soil pipe and fittings.
2. Hubless, cast-iron soil pipe and fittings.

B. Shop Drawings: For controlled-flow roof drainage system. Include calculations, plans, sections, elevations, and details.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plans and elevations, or Building Information Model (BIM) drawn to scale, showing items described in this Section and coordinated with all building trades.

B. Field Quality-Control Reports: Inspection reports signed by authorities having jurisdiction.

1.4 QUALITY ASSURANCE

A. Provide materials bearing label, stamp, or other markings of specified testing agency.

1.5 WARRANTY

A. Listed manufacturers to provide labeling and warranty of their respective products

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Components and installation are to be capable of withstanding the following minimum working pressure unless otherwise indicated:

1. Storm Drainage Piping: 10-foot head of water.

2.2 PIPING MATERIALS

A. Piping materials to bear label, stamp, or other markings of specified testing agency.

B. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.3 HUB-AND-SPIGOT, CAST-IRON SOIL PIPE AND FITTINGS

A. Pipe and Fittings:

1. Marked with CISPI collective trademark and NSF certification mark.
2. Standard: ASTM A74.
3. Class: Service weight and cast iron.

B. Gaskets: ASTM C564, rubber.

C. Caulking Materials: ASTM B29, pure lead and oakum or hemp fiber.

2.4 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

A. Pipe and Fittings:

1. Marked with CISPI collective trademark and NSF certification mark.
2. Standards: ASTM A888 and CISPI 301.

B. Heavy-Duty, Hubless-Piping Couplings:

1. Standard: ASTM C1277 or ASTM C1540.
2. Description: Stainless steel shield with stainless steel bands and tightening devices; and ASTM C564, rubber sleeve with integral, center pipe stop.

PART 3 - EXECUTION

3.1 EARTH MOVING

A. Comply with requirements for excavating, trenching, and backfilling specified in Section 312000 "Earth Moving."

3.2 INSTALLATION OF PIPING

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems.

B. Install piping as indicated unless deviations from layout are approved on coordination drawings.

C. Install piping in concealed locations.

1. Piping installed in equipment rooms, service areas, and where indicated may be exposed.

D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated.

E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.

F. Install piping to permit valve servicing.

G. Install piping at indicated slopes.

H. Install piping free of sags and bends.

I. Install fittings for changes in direction and branch connections.

J. Install piping to allow application of insulation.

K. Make changes in direction for piping using appropriate branches, bends, and long-sweep bends.

1. Do not change direction of flow more than 90 degrees.
2. Use proper size of standard increasers and reducers if pipes of different sizes are connected.

a. Reducing size of drainage piping in direction of flow is prohibited.

L. Lay buried building piping beginning at low point of each system.

1. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream.
2. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.
3. Maintain swab in piping and pull past each joint as completed.

M. Install piping at the following minimum slopes unless otherwise indicated.

1. Building Storm Drain: 1/8 in per foot downward in direction of flow for piping NPS 3 and smaller; 1/8 inch per foot downward in direction of flow for piping NPS 4 and larger.
2. Horizontal Storm Drainage Piping: 1/4 inch per foot downward in direction of flow.

N. Install cast-iron soil piping in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Ch IV, "Installation of Cast Iron Soil Pipe and Fittings."

1. Install encasement on underground piping in accordance with ASTM A674 or AWWA C105/A 21.5.

O. Install steel piping in accordance with applicable plumbing code.

P. Install underground and piping in accordance with ASTM D2321.

Q. Install engineered controlled-flow drain specialties and storm drainage piping in locations indicated.

1. Install encasement on piping in accordance with ASTM A674 or AWWA C105/A 21.5.

R. Install force mains at elevations indicated.

S. Plumbing Specialties:

1. Install backwater valves in storm drainage gravity-flow piping.

a. Comply with requirements for backwater valves specified in Section 221423 "Storm Drainage Piping Specialties."

2. Install cleanouts in storm drainage gravity-flow piping in accessible locations.

a. Install cleanout fitting with closure plug inside the building in storm drainage force-main piping.
b. Comply with requirements for cleanouts specified in Section 221423 "Storm Drainage Piping Specialties."

3. Install drains in storm drainage gravity-flow piping.

a. Comply with requirements for drains specified in Section 221423 "Storm Drainage Piping Specialties."

T. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.

U. Install sleeves for piping penetrations of walls, ceilings, and floors.

1. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

V. Install sleeve seals for piping penetrations of concrete walls and slabs.

1. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

W. Install escutcheons for piping penetrations of walls, ceilings, and floors.

1. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

3.3 JOINT CONSTRUCTION

A. Hub-and-Spigot, Cast-Iron Soil Piping Gasketed Joints: Join in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.

B. Hub-and-Spigot, Cast-Iron Soil Piping Caulked Joints: Join in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead-and-oakum caulked joints.

C. Hubless, Cast-Iron Soil Piping Coupled Joints: Join in accordance with CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-piping coupling joints.

D. Threaded Joints: Thread pipe with tapered pipe threads in accordance with ASME B1.20.1.

1. Cut threads full and clean using sharp dies.
2. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:

a. Apply appropriate tape or thread compound to external pipe threads unless dry-seal threading is specified.
b. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
c. Do not use pipe sections that have cracked or open welds.

E. Grooved Joints: Cut groove ends of pipe in accordance with AWWA C606. Lubricate and install gasket over ends of pipes or pipe and fittings. Install coupling housing sections, over gasket, with keys seated in piping grooves. Install and tighten housing bolts.

F. Flanged Joints: Align bolt holes. Select appropriate gasket material, size, type, and thickness. Install gasket concentrically positioned. Use suitable lubricants on bolt threads. Torque bolts in cross pattern.

G. Plastic, Nonpressure-Piping, Solvent-Cemented Joints: Clean and dry joining surfaces. Join pipe and fittings in accordance with the following:

1. Comply with ASTM F402 for safe-handling practice of cleaners, primers, and solvent cements.

H. Joint Restraints and Sway Bracing:

1. Provide joint restraints and sway bracing for storm drainage piping joints to comply with the following conditions:

a. Provide axial restraint for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction, branches, and changes in diameter greater than two pipe sizes.

b. Provide rigid sway bracing for pipe and fittings 4 inches and larger, upstream and downstream of all changes in direction 45 degrees and greater.
c. Provide rigid sway bracing for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction and branch openings.

3.4 INSTALLATION OF HANGERS AND SUPPORTS

A. Comply with requirements for hangers, supports, and anchor devices specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."

1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.
2. Install stainless steel fiberglass pipe hangers for horizontal piping in corrosive environments.
3. Install carbon-steel pipe support clamps for vertical piping in noncorrosive environments.
4. Install stainless steel pipe support clamps for vertical piping in corrosive environments.
5. Vertical Piping: MSS Type 8 or Type 42, clamps.
6. Install individual, straight, horizontal piping runs:

   a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
   b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.
   c. Longer Than 100 Feet if Indicated: MSS Type 49, spring cushion rolls.

7. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
8. Base of Vertical Piping: MSS Type 52, spring hangers.

B. Install hangers for cast-iron and soil tubing and piping, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

C. Install hangers for and piping, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

D. Support horizontal piping and tubing within 12 inches of each fitting, valve, and coupling.

E. Support vertical cast-iron and tubing and piping to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent, but as a minimum at base and at each floor.

F. Support vertical and piping with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.5 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Connect interior storm drainage piping to exterior storm drainage piping. Use transition fitting to join dissimilar piping materials.

C. Connect storm drainage piping to roof drains and storm drainage specialties.

1. Install test tees (wall cleanouts) in conductors near floor and floor cleanouts with cover flush with floor.
2. Comply with requirements for cleanouts and drains specified in Section 221423 "Storm Drainage Piping Specialties."

D. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.

E. Make connections in accordance with the following unless otherwise indicated:

1. Install unions, in piping NPS 2 and smaller, adjacent to each valve and at final connection to each piece of equipment.
2. Install flanges, in piping NPS 2-1/2 and larger, adjacent to flanged valves and at final connection to each piece of equipment.

3.6 IDENTIFICATION

A. Identify exposed storm drainage piping.

B. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.7 FIELD QUALITY CONTROL

A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.

1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in.
2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.

B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.

C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.

D. Test storm drainage piping in accordance with procedures of authorities having jurisdiction or, in absence of published procedures, as follows:

1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired.
   a. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
2. Leave uncovered and unconcealed new, altered, extended, or replaced storm drainage piping until it has been tested and approved.
   a. Expose work that was covered or concealed before it was tested.
3. Test Procedure:
   a. Test storm drainage piping, except outside leaders, on completion of roughing-in.
   b. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water.
   c. From 15 minutes before inspection starts until completion of inspection, water level must not drop.
   d. Inspect joints for leaks.
4. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
5. Prepare reports for tests and required corrective action.

E. Test force-main piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:

1. Leave uncovered and unconcealed new, altered, extended, or replaced force-main piping until it has been tested and approved.

   a. Expose work that was covered or concealed before it was tested.

2. Cap and subject piping to static-water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials.

   a. Isolate test source and allow to stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired.

3. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
4. Prepare reports for tests and required corrective action.

3.8 PROTECTION

A. Protect piping and drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.

B. Place plugs in ends of uncompleted piping at end of day and when work stops.

C. Repair damage to adjacent materials caused by storm drainage piping installation.

3.9 PIPING SCHEDULE

A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.

B. Aboveground storm drainage piping NPS 6 and smaller is to be the following:

1. Hubless, cast-iron soil pipe and fittings; heavy-duty, hubless-piping couplings; and coupled joints.

C. Aboveground, storm drainage piping NPS 8 and larger is to be the following:

1. Hubless, cast-iron soil pipe and fittings; heavy-duty, hubless-piping couplings; and coupled joints.

D. Underground storm drainage piping NPS 6 and smaller shall be any of the following:

1. Service weight, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
2. Hubless, cast-iron soil pipe and fittings; hubless-piping couplings; and coupled joints.

END OF SECTION 221414

This page intentionally left blank.

SECTION 221423 - STORM DRAINAGE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. General-purpose roof drains.
2. Miscellaneous storm drainage piping specialties.
3. Cleanouts.

B. Related Requirements:

1. Section 076200 "Sheet Metal Flashing and Trim" for penetrations of roofs.
2. Section 078413 "Penetration Firestopping" for firestopping roof penetrations.

1.2 ACTION SUBMITTALS

A. Product Data:

1. General-purpose roof drains.
2. Miscellaneous storm drainage piping specialties.
3. Cleanouts.

1.3 QUALITY ASSURANCE

A. Provide drainage piping specialties are to bear label, stamp, or other markings of specified testing agency.

PART 2 - PRODUCTS

2.1 GENERAL-PURPOSE ROOF DRAINS

A. Cast-Iron Roof Drains:

1. Cast-Iron, Large-Sump, General-Purpose Roof Drains:

a. Standard: ASME A112.6.4.
b. Body Material: Cast iron.
c. Dimension of Body: Nominal 14-to 16-inch diameter.
d. Dome Material: Cast iron.
e. Combination flashing ring and gravel stop.
f. Outlet: Bottom.
g. Outlet Type: No-hub.
h. Options:

1) Flow-control weirs.
2) Extension collars.
3) Underdeck clamp.
4) Expansion joint.
5) Sump receiver plate.
6) Perforated Gravel Guard: Stainless steel.
7) Vandal-proof dome.
8) Water Dam: 2 inches high.

2.2 CLEANOUTS

A. Cast-Iron Cleanouts:

1. Cast-Iron Exposed Cleanouts:

   a. Standard: ASME A112.36.2M.
   b. Size: Same as connected branch.
   c. Body Material: No-hub, cast-iron soil pipe test tee as required to match connected piping.
   d. Closure: Countersunk or raised-head , cast-iron plug.
   e. Closure Plug Size: Same as, or not more than, one size smaller than cleanout size.

2. Cast-Iron Wall Cleanouts:
   a. Standard: ASME A112.36.2M. Include wall access.
   b. Size: Same as connected drainage piping.
   c. Body: No-hub, cast-iron soil pipe test tee as required to match connected piping.
   d. Closure Plug:

      1) Material: Cast iron.
      2) Head: Countersunk or raised.
      3) Drilled and threaded for cover attachment screw.
      4) Size: Same as, or not more than, one size smaller than cleanout size.

   e. Wall-Access Cover Plate: Round, flat, chrome-plated brass or stainless steel cover plate with screw.
   f. Wall-Access Frame and Cover: Round , nickel-bronze, copper-alloy, or stainless steel wall-installation frame and cover.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install roof drains in accordance with roof membrane manufacturer's written installation instructions at low points of roof areas.

1. Install flashing collar or flange of roof drain to maintain integrity of waterproof membranes where penetrated.
2. Install expansion joints, if indicated, in roof drain outlets.
3. Position roof drains for easy access and maintenance.

B. Install downspout adapters on outlet of back-outlet parapet roof drains and connect to sheet metal downspouts.

C. Install downspout nozzles at exposed bottom of conductors where they spill onto grade.

D. Install cleanouts in aboveground piping and building drain piping in accordance with the following instructions unless otherwise indicated:

1. Use cleanouts the same size as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
2. Locate cleanouts at each change in direction of piping greater than 45 degrees.
3. Locate cleanouts at minimum intervals of 50 ft. for piping NPS 4 and smaller and 100 ft. for larger piping.
4. Locate cleanouts at base of each vertical storm piping conductor.

E. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.

F. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.

G. Install wall cleanouts in vertical conductors. Install access door in wall if indicated.

H. Install through-penetration firestop assemblies for penetrations of fire- and smoke-rated assemblies.

1. Comply with requirements in Section 078413 "Penetration Firestopping."

3.2 CONNECTIONS

A. Comply with requirements for piping specified in Section 221414 "Storm Drainage Piping." Drawings indicate general arrangement of piping, fittings, and specialties.

3.3 INSTALLATION OF FLASHING

A. Fabricate flashing from single piece of metal unless large pans, sumps, or other drainage shapes are required.

B. Install sheet flashing on pipes, sleeves, and specialties passing through or embedded in floors and roofs with waterproof membrane.

C. Set flashing on floors and roofs in solid coating of bituminous cement.

D. Secure flashing into sleeve and specialty clamping ring or device.

3.4 CLEANING

A. Clean piping specialties during installation and remove dirt and debris as work progresses.

3.5 PROTECTION

A. Protect piping specialties during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic and construction work.

B. Place plugs in ends of uncompleted piping at end of each day and when work stops.

END OF SECTION 221423

This page intentionally left blank.

SECTION 223300 - ELECTRIC, DOMESTIC-WATER HEATERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Commercial, electric, storage, domestic-water heaters.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Commercial, electric, storage, domestic-water heaters.

1.3 INFORMATIONAL SUBMITTALS

A. Domestic-Water Heater Labeling: Certified and labeled by testing agency acceptable to authorities having jurisdiction.

B. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For electric, domestic-water heaters to include emergency, operation, and maintenance manuals.

1.5 COORDINATION

A. Coordinate sizes and locations of concrete bases with actual equipment provided.

1.6 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of electric, domestic-water heaters that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including storage tank and supports.
b. Faulty operation of controls.
c. Deterioration of metals, metal finishes, and other materials beyond normal use.

2. Warranty Periods: From date of Substantial Completion.

a. Commercial, Electric, Storage, Domestic-Water Heaters:

1) Storage Tank: Five years.
2) Controls and Other Components: Five years.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and use.

B. ASME Compliance: Where ASME-code construction is indicated, fabricate and label commercial, domestic-water heater storage tanks to comply with ASME Boiler and Pressure Vessel Code: Section VIII, Division 1.

C. NSF Compliance: Fabricate and label equipment components that will be in contact with potable water to comply with NSF 61 and NSF 372.

2.2 COMMERCIAL, ELECTRIC, DOMESTIC-WATER HEATERS

A. Commercial, Electric, Storage, Domestic-Water Heaters:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. A. O. Smith Corporation.
b. PVI; A WATTS Brand.
c. Rheem Manufacturing Company.

2. Source Limitations: Obtain domestic-water heaters from single source from single manufacturer.
3. Standard: UL 1453.
4. Storage-Tank Construction: Non-ASME-code, stee vertical arrangement.

a. Tappings: Factory fabricated of materials compatible with tank and piping connections. Attach tappings to tank before testing.

1) NPS 2 (DN 50) and Smaller: Threaded ends in accordance with ASME B1.20.1.
2) NPS 2-1/2 (DN 65) and Larger: Flanged ends in accordance with ASME B16.5 for steel and stainless steel flanges, and in accordance with ASME B16.24 for copper and copper-alloy flanges.

b. Pressure Rating: 150 psig.
c. Interior Finish: Comply with NSF 61 and NSF 372 barrier materials for potable-water tank linings, including extending lining material into tappings.

5. Factory-Installed, Storage-Tank Appurtenances:

a. Anode Rod: Replaceable magnesium.
b. Drain Valve: Corrosion-resistant metal with hose-end connection.
c. Insulation: Comply with ASHRAE/IES 90.1.
d. Jacket: Steel with enameled finish or high-impact composite material.
e. Heating Elements: Electric, screw-in or bolt-on immersion type arranged in multiples of three.
f. Temperature Control: Adjustable thermostat.
g. Safety Controls: High-temperature-limit and low-water cutoff devices or systems.
h. Relief Valves: ASME rated and stamped for combination temperature-and-pressure relief valves. Include one or more relief valves with total relieving capacity at least as great as heat input, and include pressure setting less than working-pressure rating of domestic-water heater. Select one relief valve with sensing element that extends into storage tank.

6. Special Requirements: NSF 5 construction.

B. Capacity and Characteristics:

1. Capacity: 37 gal.
2. Recovery: 25 gph at 100 deg F temperature rise.
3. Temperature Setting: 140 deg F.
4. Power Demand: 6 kW.
5. Heating Elements:

   a. Number of Elements: 1.
   b. Kilowatts Each Element: 6 kW.
   c. Number of Stages: One.

6. Electrical Characteristics:

   a. Volts: 208 V.
   b. Phases: Three.
   c. Hertz: 60 Hz.
   d. Full-Load Amperes: A.
   e. Minimum Circuit Ampacity: A.
   f. Maximum Overcurrent Protection: A.

PART 3 - EXECUTION

3.1 DOMESTIC-WATER HEATER INSTALLATION

A. Commercial, Electric, Domestic-Water Heater Mounting: Install commercial, electric, domestic-water heaters on concrete base. Comply with requirements for concrete bases specified in Section 033000 "Cast-in-Place Concrete."

1. Exception: Omit concrete bases for commercial, electric, domestic-water heaters if installation on stand, bracket, suspended platform, or directly on floor is indicated.
2. Maintain manufacturer's recommended clearances.
3. Arrange units so controls and devices that require servicing are accessible.
4. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around the full perimeter of concrete base.
5. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete floor.
6. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
7. Install anchor bolts to elevations required for proper attachment to supported equipment.
8. Anchor domestic-water heaters to substrate.

B. Install electric, domestic-water heaters level and plumb, in accordance with layout drawings, original design, and referenced standards. Maintain manufacturer's recommended clearances. Arrange units so controls and devices needing service are accessible.

1. Install shutoff valves on domestic-water-supply piping to domestic-water heaters and on domestic-hot-water outlet piping. Comply with requirements for shutoff valves specified in Section 220523.12 "Ball Valves for Plumbing Piping," Section 220523.13 "Butterfly Valves for Plumbing Piping," and Section 220523.15 "Gate Valves for Plumbing Piping."

C. Install water-heater drain piping as indirect waste to spill by positive air gap into open drains or over floor drains. Install hose-end drain valves at low points in water piping for electric, domestic-water heaters that do not have tank drains. Comply with requirements for hose-end drain valves specified in Section 221119 "Domestic Water Piping Specialties."

D. Install thermometers on outlet piping of electric, domestic-water heaters. Comply with requirements for thermometers specified in Section 220519 "Meters and Gages for Plumbing Piping."

E. Install thermometers on inlet and outlet piping of residential, solar, electric, domestic-water heaters. Comply with requirements for thermometers specified in Section 220519 "Meters and Gages for Plumbing Piping."

F. Assemble and install inlet and outlet piping manifold kits for multiple electric, domestic-water heaters. Fabricate, modify, or arrange manifolds for balanced water flow through each electric, domestic-water heater. Include shutoff valve and thermometer in each domestic-water heater inlet and outlet, and throttling valve in each electric, domestic-water heater outlet. Comply with requirements for valves specified in Section 220523.12 "Ball Valves for Plumbing Piping," Section 220523.13 "Butterfly Valves for Plumbing Piping," and Section 220523.15 "Gate Valves for Plumbing Piping," and comply with requirements for thermometers specified in Section 220519 "Meters and Gages for Plumbing Piping."

G. Install piping-type heat traps on inlet and outlet piping of electric, domestic-water heater storage tanks without integral or fitting-type heat traps.

H. Fill electric, domestic-water heaters with water.

I. Charge domestic-water expansion tanks with air to required system pressure.

J. Install dielectric fittings in all locations where piping of dissimilar metals is to be joined. The wetted surface of the dielectric fitting contacted by potable water to contain less than 0.25 percent of lead by weight.

3.2 PIPING CONNECTIONS

A. Comply with requirements for piping specified in Section 221116 "Domestic Water Piping." Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to electric, domestic-water heaters, allow space for service and maintenance of water heaters. Arrange piping for easy removal of domestic-water heaters.

3.3 IDENTIFICATION

A. Identify system components. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
2. Operational Test: After electrical circuitry has been energized, start units to confirm proper operation.
3. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

C. Electric, domestic-water heaters will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports.

END OF SECTION 223300

This page intentionally left blank.

SECTION 224213.13 - COMMERCIAL WATER CLOSETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Wall-mounted water closets.
2. Flushometer valves.
3. Toilet seats.
4. Supports.

1.2 DEFINITIONS

A. High-Efficiency Flush Volume: 1.28 gal. or less per flush.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for water closets.
2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Standards:

1. Comply with ASME A112.19.2/CSA B45.1 for water closets.
2. Comply with ASME A112.19.5/CSA B45.15 for flush valves and spuds for water closets and tanks.
3. Comply with ASSE 1037/ASME A112.1037/CSA B125.37 for flush valves.
4. Comply with IAMPO/ANSI Z124.5 for water-closet (toilet) seats.
5. Comply with ASME A112.6.1M for water-closet supports.
6. Comply with ICC A117.1 for ADA-compliant water closets.
7. Comply with ASTM A1045 for flexible PVC gaskets used in connection of vitreous china water closets to sanitary drainage systems.
8. Comply with ASME A112.4.3 for plastic fittings used in connection of vitreous china water closets to sanitary drainage systems.

2.2 FLOOR-MOUNTED, BOTTOM-OUTLET WATER CLOSETS

A. Water Closets - Floor Mounted, Bottom Outlet, Top Spud:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. American Standard.
   b. Kohler Co.
   c. Zurn Industries, LLC.

2. Source Limitations: Obtain water closets from single source from single manufacturer.

3. Bowl:
    a. Material: Vitreous china.
    b. Type: Siphon jet.
    c. Style: Flushometer valve.
    d. Height: ADA compliant.
    e. Rim Contour: Elongated.
    f. Water Consumption: 1.28 gal. per flush.
    g. Spud Size and Location: NPS 1-1/2; top.
    h. Color: White.
4. Flushometer Valve: Piston, Sensor Type, Battery powered
5. Toilet Seat: White, Heavy Duty.

2.3 FLUSHOMETER VALVES

A. Flushometer Valves - Piston, Sensor Operated, Battery Powered:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    a. American Standard.
    b. Kohler Co.
    c. Sloan Valve Company
2. Source Limitations: Obtain flushometer valve from single source from single manufacturer.
3. Minimum Pressure Rating: 125 psig.
4. Features: Include integral check stop and backflow-prevention device.
5. Material: Brass body with corrosion-resistant components.
6. Style: Exposed.
7. Exposed Flushometer-Valve Finish: Chrome-plated.
8. Panel Finish: Chrome-plated or stainless steel.
9. Trip Mechanism: Battery-powered electronic sensor; listed and labeled as defined in NFPA 70, by qualified testing agency, and marked for intended location and application.
10. Consumption: 1.28 gal. per flush.
11. Minimum Inlet: NPS 1.
12. Minimum Outlet: NPS 1-1/4.

2.4 TOILET SEATS

A. Toilet Seats:
1. Source Limitations: Obtain toilet seat from single source from single manufacturer.
2. Material: Plastic.
3. Type: Commercial (Heavy duty).
4. Shape: Elongated rim, open front.
5. Hinge: Self-sustaining, check.
6. Hinge Material: Noncorroding metal.
7. Seat Cover: Not required.
8. Color: White.
9. Surface Treatment: Antimicrobial

2.5 SUPPORTS

A. Water-Closet Carrier:
1. Source Limitations: Obtain water-closet carrier from single source from single manufacturer.
2. Description: Waste-fitting assembly, as required to match drainage piping material and arrangement with faceplates, couplings gaskets, and feet; bolts and hardware matching fixture. Include additional extension coupling, faceplate, and feet for installation in wide pipe space.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in for water-supply piping and sanitary drainage and vent piping systems to verify actual locations of piping connections before water-closet installation.

B. Examine walls and floors for suitable conditions where water closets will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Water-Closet Installation:

1. Install level and plumb.
2. Install floor-mounted water closets on bowl-to-drain connecting fitting attachments to piping or building substrate.
3. Install accessible, wall-mounted water closets at mounting height in accordance with ICC A117.1.

B. Support Installation:

1. Install supports, affixed to building substrate, for floor-mounted, back-outlet water closets.
2. Use carrier supports with waste-fitting assembly and seal.
3. Install floor-mounted, back-outlet water closets attached to building floor substrate, onto waste-fitting seals; and attach to support.
4. Install wall-mounted, back-outlet water-closet supports with waste-fitting assembly and waste-fitting seals; and affix to building substrate.
5. Measure support height installation from finished floor, not structural floor.

C. Flushometer-Valve Installation:

1. Install flushometer-valve, water-supply fitting on each supply to each water closet.
2. Attach supply piping to supports or substrate within pipe spaces behind fixtures.
3. Install lever-handle flushometer valves for accessible water closets with handle mounted on open side of water closet.
4. Install actuators in locations easily reachable for people with disabilities.
5. Install new batteries in battery-powered, electronic-sensor mechanisms.

D. Install toilet seats on water closets.

E. Wall Flange and Escutcheon Installation:

1. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations and within cabinets and millwork.
2. Install deep-pattern escutcheons if required to conceal protruding fittings.
3. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."

F. Joint Sealing:

1. Seal joints between water closets and walls and floors using sanitary-type, one-part, mildew-resistant silicone sealant.
2. Match sealant color to water-closet color.
3. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.3 PIPING CONNECTIONS

A. Connect water closets with water supplies and soil, waste, and vent piping. Use size fittings required to match water closets.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

D. Where installing piping adjacent to water closets, allow space for service and maintenance.

3.4 ELECTRICAL CONNECTIONS

A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.5 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring in accordance with Section 260523 "Control-Voltage Electrical Power Cables."

3.6 ADJUSTING

A. Operate and adjust water closets and controls. Replace damaged and malfunctioning water closets, fittings, and controls.

B. Adjust water pressure at flushometer valves to produce proper flow.

C. Install new batteries in battery-powered, electronic-sensor mechanisms.

3.7 CLEANING AND PROTECTION

A. Clean water closets and fittings with manufacturers' recommended cleaning methods and materials.

B. Install protective covering for installed water closets and fittings.

C. Do not allow use of water closets for temporary facilities unless approved in writing by Owner.

END OF SECTION 224213.13

SECTION 224216.13 - COMMERCIAL LAVATORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Vitreous-china, wall-mounted lavatories.
2. Automatically operated lavatory faucets.
3. Supply fittings.
4. Waste fittings.
5. Lavatory supports.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for lavatories.
2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

PART 2 - PRODUCTS

2.1 VITREOUS-CHINA, WALL-MOUNTED LAVATORIES

A. Lavatory - Rectangular, Vitreous China, Wall Mounted :

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. American Standard
   b. Kohler Co.
   c. Sloan Valve Company
2. Fixture:

   a. Standard: ASME A112.19.2/CSA B45.1.
   b. Type: Slab or wheelchair.
   c. Nominal Size: Rectangular, 27 by 20 inches.
   d. Faucet-Hole Punching: One hole.
   e. Faucet-Hole Location: Top.
   f. Color: White.
   g. Mounting: For concealed-arm carrier.
3. Support: Type II, concealed-arm lavatory carrier.
4. Lavatory Mounting Height: Handicapped/elderly in accordance with ICC A117.1.

2.2 AUTOMATICALLY OPERATED LAVATORY FAUCETS

A. Lavatory faucets intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), requirements of the Authority Having Jurisdiction (AHJ), and with NSF 61/NSF 372, or be certified in compliance with NSF 61/NSF 372 by an American National Standards Institute (ANSI) accredited third-party certification body, that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. Lavatory Faucets - Automatic Type: Battery Powered Electronic Sensor Operated, Mixing , :

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Chicago Faucets; Geberit Group.
   b. Hydrotek International, Inc.
   c. Sloan Valve Company.
   d. T&S Brass and Bronze Works, Inc.

2. Standards: ASME A112.18.1/CSA B125.1 and UL 1951.
3. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
4. General: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and fixture receptor.
5. Body Type: Single hole.
6. Body Material: Commercial, solid-brass, or die-cast housing with brazed copper and brass waterway.
7. Finish: Polished chrome plate.
8. Maximum Flow Rate: 0.5 gpm.
9. Mounting Type: Deck, concealed.
10. Spout: Rigid type.
11. Spout Outlet: Aerator.
12. Drain: Not part of faucet.

2.3 SUPPLY FITTINGS

A. NSF Standard: Comply with NSF 61 and NSF 372 for supply-fitting materials that will be in contact with potable water.

B. Standard: ASME A112.18.1/CSA B125.1.

C. Supply Piping: Chrome-plated-brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated-brass or stainless steel wall flange.

D. Supply Stops: Chrome-plated-brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.

E. Operation: Wheel handle.

F. Risers:

1. NPS 3/8.
2. ASME A112.18.6/CSA B125.6, braided- or corrugated-stainless steel, flexible hose riser.

2.4 WASTE FITTINGS

A. Standard: ASME A112.18.2/CSA B125.2.

B. Drain: Grid type with NPS 1-1/4 offset and straight tailpiece.

C. Trap:

1. Size: NPS 1-1/4.
2. Material:

   a. Chrome-plated, two-piece, cast-brass trap and ground-joint swivel elbow with 0.032-inch-thick brass tube to wall ; and chrome-plated, brass or steel wall flange.

2.5 LAVATORY SUPPORTS

A. Lavatory Carrier:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Jay R. Smith Mfg Co; a division of Morris Group International.
b. Wade; a subsidiary of McWane Inc.
c. Zurn Industries, LLC.

2. Standard: ASME A112.6.1M.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before lavatory installation.

B. Examine counters and walls for suitable conditions where lavatories will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install lavatories level and plumb in accordance with roughing-in drawings.

B. Install supports, affixed to building substrate, for wall-mounted lavatories.

C. Install accessible wall-mounted lavatories at handicapped/elderly mounting height for people with disabilities or the elderly, in accordance with ICC A117.1.

D. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."

E. Seal joints between lavatories, counters, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

F. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible lavatories. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

3.3 PIPING CONNECTIONS

A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ELECTRICAL CONNECTIONS

A. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.5 ADJUSTING

A. Operate and adjust lavatories and controls. Replace damaged and malfunctioning lavatories, fittings, and controls.

B. Install new batteries in battery-powered, electronic-sensor mechanisms.

3.6 CLEANING AND PROTECTION

A. After completing installation of lavatories, inspect and repair damaged finishes.

B. Clean lavatories, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.

C. Provide protective covering for installed lavatories and fittings.

D. Do not allow use of lavatories for temporary facilities unless approved in writing by Owner.

END OF SECTION 224216.13

SECTION 224216.16 - COMMERCIAL SINKS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Service sinks.
2. Kitchen/utility sinks.
3. Manually operated sink faucets.
4. Supply fittings.
5. Waste fittings.
6. Grout.

B. Related Requirements:

1. Section 114000 "Foodservice Equipment" for NSF-compliant foodservice and handwash sinks.
2. Section 224100 "Residential Plumbing Fixtures" for residential sinks.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for sinks.
2. Include rated capacities, operating characteristics and furnished specialties and accessories.

PART 2 - PRODUCTS

2.1 SERVICE SINKS

A. Service Sinks - Terrazzo, Floor Mounted:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Fiat Products.
   b. Florestone Products Co., Inc.
   c. Stern-Williams Co., Inc.

2. Source Limitations: Obtain sinks from single source from single manufacturer.
3. Fixture:

   a. Material: Marble chips cast in portland cement to produce a compressive strength of not less than 3000 psi, seven days after casting.
   b. Shape: Square.
   c. Nominal Size: 36 by 36 inches.
   d. Height: 12 inches with dropped front.
   e. Tiling Flange: Not required.
   f. Rim Guard: On front top surfaces.

g. Color: Not applicable.
h. Drain: Grid with NPS 3 outlet.

4. Mounting: On floor and flush to wall.

2.2 KITCHEN/UTILITY SINKS

A. Kitchen/Utility Sinks - Stainless Steel, Counter Mounted:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Eagle Group.
b. Elkay.
c. Just Manufacturing.

2. Source Limitations: Obtain sinks from single source from single manufacturer.
3. Fixture:

a. Standard: ASME A112.19.3/CSA B45.4.
b. Type: Stainless steel, self-rimming, sound-deadened unit less ledge back.
c. Number of Compartments: One.
d. Material: 18 gauge, Type 304 stainless steel.
e. Compartment:

1) Drain: Grid with NPS 1-1/2 tailpiece and twist drain.
2) Drain Location: Centered in compartment.
3) Depth: Wheelchair accessible.

4. Supply Fittings:

a. Standard: ASME A112.18.1/CSA B125.1.
b. Supplies: Chrome-plated brass compression stop with inlet connection matching water-supply piping type and size.

1) Operation: Wheel handle.
2) Risers: NPS 1/2, ASME A112.18.6/CSA B125.6, braided or corrugated stainless steel flexible hose.

5. Waste Fittings:

a. Standard: ASME A112.18.2/CSA B125.2.
b. Trap(s):

1) Size: NPS 1-1/2.
2) Material:

a) Chrome-plated, two-piece, cast-brass trap and swivel elbow with 17-gauge brass tube to wall ; and chrome-plated brass or steel wall flange.

6. Mounting: On counter with sealant.

2.3 MANUALLY OPERATED SINK FAUCETS

A. Sink faucets intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), with requirements of the Authority Having Jurisdiction (AHJ), and with NSF 61 and NSF 372, or be certified in compliance with NSF 61 and NSF 372 by an ANSI-accredited third-party certification body, in that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. Commercial Sink Faucets - Manual Type: Two-handle mixing ,.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. American Standard.
   b. Chicago Faucets; Geberit Group.
   c. Elkay.

2. Source Limitations: Obtain sink faucets from single source from single manufacturer.
3. Standard: ASME A112.18.1/CSA B125.1.
4. General: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and sink receptor.
5. Body Type: Centerset.
6. Body Material: Commercial, solid brass, or die-cast housing with brazed copper and brass waterway.
7. Finish: Chrome plated.
8. Maximum Flow Rate: 1.5 gpm.
9. Mounting Type: Deck, concealed Deck, exposed.
10. Valve Handle(s): Lever 6-inch wrist blade.
11. Spout Type: Rigid gooseneck Swivel gooseneck.
12. Vacuum Breaker: Not required for hose outlet.
13. Spout Outlet: Aerator.

C. Commercial Service Sink Faucets - Manual Type:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. American Standard.
   b. Chicago Faucets; Geberit Group.
   c. T&S Brass and Bronze Works, Inc.

2. Source Limitations: Obtain sink faucets from single source from single manufacturer.
3. Description: Wall/back mounted, brass body, with integral service stops, checks, spout with bucket/pail hook, 3/4-inch hose thread end, integral vacuum breaker, inlets 8 inches o.c., and two-handle mixing.
4. Faucet:

   a. Standards:

      1) ASME A112.18.1/CSA B125.1.
      2) NSF 61 and NSF 372.
      3) ICC A117.1.
      4) ASSE 1001 (VB).

   b. Finish: Polished chrome plated.
   c. Handles: 4 arms.
   d. Cartridges: Ceramic.
   e. Brace: Adjustable top brace.

2.4 SUPPLY FITTINGS

A. NSF Standard: Comply with NSF 61 and NSF 372 for supply-fitting materials that will be in contact with potable water.

B. Standard: ASME A112.18.1/CSA B125.1.

C. Supply Piping: Chrome-plated brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated brass or stainless steel wall flange.

D. Supply Stops: Chrome-plated brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.

E. Operation: Wheel handle.

F. Risers:

1. NPS 1/2.
2. ASME A112.18.6/CSA B125.6, braided or corrugated stainless steel flexible hose.

2.5 WASTE FITTINGS

A. Standard: ASME A112.18.2/CSA B125.2.

B. Drain: Grid type with NPS 1-1/2 offset and straight tailpiece.

C. Trap:

1. Size: NPS 1-1/2.
2. Material:
   a. Chrome-plated, two-piece, cast-brass trap and swivel elbow with 17-gauge brass tube to wall; and chrome-plated brass or steel wall flange.

2.6 GROUT

A. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.

B. Characteristics: Nonshrink; recommended for interior and exterior applications.

C. Design Mix: 5000 psi, 28-day compressive strength.

D. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in for water-supply piping and sanitary drainage and vent piping systems to verify actual locations of piping connections before sink installation.

B. Examine walls, floors, and counters for suitable conditions where sinks will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install sinks level and plumb in accordance with rough-in drawings.

B. Install supports, affixed to building substrate, for wall-hung sinks.

C. Install wall-mounted sinks at accessible mounting height in accordance with ICC A117.1.

D. Set floor-mounted sinks in leveling bed of cement grout.

E. Install water-supply piping with stop on each supply to each sink faucet.

1. Exception: Use ball or gate valves if supply stops are not specified with sink. Comply with valve requirements specified in Section 220523.12 "Ball Valves for Plumbing Piping" and Section 220523.15 "Gate Valves for Plumbing Piping."
2. Install stops in locations where they can be easily reached for operation.

F. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."

G. Seal joints between sinks and counters, floors, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

H. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible sinks. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

3.3 PIPING CONNECTIONS

A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ADJUSTING

A. Operate and adjust sinks and controls. Replace damaged and malfunctioning sinks, fittings, and controls.

B. Install new batteries in battery-powered, electronic-sensor mechanisms.

3.5 CLEANING AND PROTECTION

A. After completing installation of sinks, inspect and repair damaged finishes.

B. Clean sinks, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.

C. Provide protective covering for installed sinks and fittings.

D. Do not allow use of sinks for temporary facilities unless approved in writing by Owner.

END OF SECTION 224216.16

This page intentionally left blank.

SECTION 224713 - DRINKING FOUNTAINS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Drinking fountains.
2. Supports.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of drinking fountain and bottle filling station.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Include operating characteristics, and furnished specialties and accessories.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Standards:

1. Drinking fountains and bottle filling stations intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), requirements of the Authority Having Jurisdiction (AHJ), and with NSF 61 or NSF 372, or be certified in compliance with NSF 61 or NSF 372 by an ANSI-accredited third-party certification body, that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.
2. Comply with NSF 42 and NSF 53 for water filters for drinking fountains and bottle filling stations.
3. Comply with ICC A117.1 for accessible drinking fountains and bottle filling stations.

2.2 DRINKING FOUNTAINS

A. Drinking Fountains - Surface Wall-Mounted, Powder-Coated Metal:

1. <u>Products:</u> Subject to compliance with requirements, provide the following:

   a. Oasis International; Versacooler II w/ Electronic Bottle Filler.

2. Source Limitations: Obtain surface wall-mounted, powder-coated-metal drinking fountains -from single source from single manufacturer.
3. Type: Vandal resistant.
4. Receptor(s):

   a. Type: Slab On horizontal support.
   b. Shape: Rectangular.
   c. Back Panel: Stainless steel wall plate behind drinking fountain.
   d. Bubblers: One for each receptor, with adjustable stream regulator, located on deck.

e. Drain: Grid type with NPS 1-1/4 tailpiece.

5. Maximum Water Flow: 0.15 gpm.
6. Control: Push button.
7. Supply: NPS 3/8 with shutoff valve.
8. Waste Fitting: ASME A112.18.2/CSA B125.2, NPS 1-1/4 chrome-plated brass P-trap and waste.
9. Filter: One or more water filters with capacity sized for unit peak flow rate.
10. Electrical Characteristics:

    a. Volts: 120 V ac.
    b. Phase: Single.
    c. Hertz: 60 Hz.

11. Support: Provide manufacturer's mounting plate and drinking fountain carrier.
12. Drinking Fountain Mounting Height: Accessible in accordance with ICC A117.1 High/low - standard/accessible in accordance with ICC A117.1.

2.3 SUPPORTS

A. Drinking Fountain Carrier:

1. Products: Subject to compliance with requirements, provide one of the following:

    a. Wade; a subsidiary of McWane Inc.
    b. WATTS; A Watts Water Technologies Company.
    c. Zurn Industries, LLC.

2. Standard: ASME A112.6.1M.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in for water-supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before fixture installation.

B. Examine walls and floors for suitable conditions where fixtures will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install fixtures level and plumb according to roughing-in drawings. For fixtures indicated for children, install at height required by authorities having jurisdiction.

B. Set pedestal drinking fountains and bottle filling stations on flat surface in accordance with manufacturer's written installation instructions.

C. Install recessed, drinking fountains and bottle filling stations secured to wood blocking in wall construction.

D. Install off-the-floor carrier supports, affixed to building substrate, for wall-mounted fixtures.

E. Install water-supply piping with shutoff valve on supply to each fixture to be connected to domestic-water distribution piping. Use ball valve. Install valves in locations where they can be easily reached for operation. Valves are specified in Section 220523.12 "Ball Valves for Plumbing Piping"

F. Install trap and waste piping on drain outlet of each fixture to be connected to sanitary drainage system.

G. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons where required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."

H. Seal joints between fixtures and walls using sanitary-type, one-part, mildew-resistant, silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.3 PIPING CONNECTIONS

A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Install ball shutoff valve on water supply to each fixture. Install valve upstream from filter for drinking fountain. Comply with valve requirements specified in Section 220523.12 "Ball Valves for Plumbing Piping"

D. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ELECTRICAL CONNECTIONS

A. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

B. Install electrical devices furnished by manufacturer, but not factory mounted, according to NFPA 70 and NECA 1.

C. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplates to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplates to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.5 ADJUSTING

A. Adjust fixture flow regulators for proper flow and stream height.

3.6 CLEANING

A. After installing fixtures, inspect unit. Remove paint splatters and other spots, dirt, and debris. Repair damaged finish to match original finish.

B. Clean fixtures, on completion of installation, according to manufacturer's written instructions.

C. Provide protective covering for installed fixtures.

D. Do not allow use of fixtures for temporary facilities unless approved in writing by Owner.

END OF SECTION 224713

SECTION 230513 - COMMON MOTOR REQUIREMENTS FOR HVAC EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes general requirements for single-phase and polyphase, general-purpose, horizontal, small and medium, squirrel-cage induction motors for use on alternating-current power systems up to 600 V and installed at equipment manufacturer's factory or shipped separately by equipment manufacturer for field installation.

1.3 COORDINATION

A. Coordinate features of motors, installed units, and accessory devices to be compatible with the following:

1. Motor controllers.
2. Torque, speed, and horsepower requirements of the load.
3. Ratings and characteristics of supply circuit and required control sequence.
4. Ambient and environmental conditions of installation location.

PART 2 - PRODUCTS

2.1 GENERAL MOTOR REQUIREMENTS

A. Comply with NEMA MG 1 unless otherwise indicated.

B. Comply with IEEE 841 for severe-duty motors.

2.2 MOTOR CHARACTERISTICS

A. Duty: Continuous duty at ambient temperature of 40 deg C and at altitude of 3300 feet above sea level.

B. Capacity and Torque Characteristics: Sufficient to start, accelerate, and operate connected loads at designated speeds, at installed altitude and environment, with indicated operating sequence, and without exceeding nameplate ratings or considering service factor.

2.3 POLYPHASE MOTORS

A. Description: NEMA MG 1, Design B, medium induction motor.

B. Efficiency: Premium efficient, as defined in NEMA MG 1.

C. Service Factor: 1.15.

D. Multispeed Motors: Variable torque.

1. For motors with 2:1 speed ratio, consequent pole, single winding.

2. For motors with other than 2:1 speed ratio, separate winding for each speed.

E. Rotor: Random-wound, squirrel cage.

F. Bearings: Regreasable, shielded, antifriction ball bearings suitable for radial and thrust loading.

G. Temperature Rise: Match insulation rating.

H. Insulation: Class F.

I. Code Letter Designation:

1. Motors 15 HP and Larger: NEMA starting Code F or Code G.
2. Motors Smaller Than 15 HP: Manufacturer's standard starting characteristic.

J. Enclosure Material: Cast iron for motor frame sizes 324T and larger; rolled steel for motor frame sizes smaller than 324T.

2.4 ADDITIONAL REQUIREMENTS FOR POLYPHASE MOTORS

A. Motors Used with Reduced-Voltage and Multispeed Controllers: Match wiring connection requirements for controller with required motor leads. Provide terminals in motor terminal box, suited to control method.

2.5 SINGLE-PHASE MOTORS

A. Motors larger than 1/20 hp shall be one of the following, to suit starting torque and requirements of specific motor application:

1. Permanent-split capacitor.

B. Multispeed Motors: Variable-torque, permanent-split-capacitor type.

C. Bearings: Prelubricated, antifriction ball bearings or sleeve bearings suitable for radial and thrust loading.

D. Motors 1/20 HP and Smaller: Shaded-pole type.

E. Thermal Protection: Internal protection to automatically open power supply circuit to motor when winding temperature exceeds a safe value calibrated to temperature rating of motor insulation. Thermal-protection device shall automatically reset when motor temperature returns to normal range.

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 230513

SECTION 230517 - SLEEVES AND SLEEVE SEALS FOR HVAC PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Sleeves.
2. Stack-sleeve fittings.
3. Sleeve-seal systems.
4. Sleeve-seal fittings.
5. Grout.
6. Silicone sealants.

B. Related Requirements:

1. Section 078413 "Penetration Firestopping" for penetration firestopping installed in fire-resistance-rated walls, horizontal assemblies, and smoke barriers, with and without penetrating items.

PART 2 - PRODUCTS

2.1 SLEEVES

A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, anti-corrosion coated or zinc coated, with plain ends and integral welded waterstop collar.

2.2 SLEEVE-SEAL SYSTEMS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CALPICO, Inc.
2. GPT; an EnPro Industries company.
3. Metraflex Company (The).

B. Description:

1. Modular sealing-element unit, designed for field assembly, for filling annular space between piping and sleeve.
2. Designed to form a hydrostatic seal of 20-psig.
3. Sealing Elements: EPDM-rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size.
4. Pressure Plates: Carbon steel.
5. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, ASTM B 633 of length required to secure pressure plates to sealing elements.

2.3 SLEEVE-SEAL FITTINGS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CALPICO, Inc.
2. GPT; an EnPro Industries company.
3. Metraflex Company (The).

B. Description:

1. Manufactured plastic, sleeve-type, waterstop assembly, made for imbedding in concrete slab or wall.
2. Plastic or rubber waterstop collar with center opening to match piping OD.

2.4 GROUT

A. Description: Nonshrink, recommended for interior and exterior sealing openings in nonfire-rated walls or floors.

B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.

C. Design Mix: 5000-psi, 28-day compressive strength.

D. Packaging: Premixed and factory packaged.

2.5 SILICONE SEALANTS

A. Silicone, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant, ASTM C 920, Type S, Grade NS, Class 25, use NT.

1. Verify sealant has a VOC content of 250 g/L or less.
2. Verify sealant complies with the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

B. Silicone, S, P, 25, T, NT: Single-component, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade P, Class 25, Uses T and NT. Grade P Pourable (self-leveling) formulation is for opening in floors and other horizontal surfaces that are not fire rated.

1. Verify sealant has a VOC content of 250 g/L or less.
2. Verify sealant complies with the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

C. Silicone Foam: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

1. Verify sealant has a VOC content of 250 g/L or less.
2. Verify sealant complies with the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.

B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.

1. Sleeves are not required for core-drilled holes.

C. Install sleeves in concrete walls as new slabs and walls are constructed.

1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
2. Cut sleeves to length for mounting flush with both surfaces.

a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.

3. Using grout or silicone sealant, seal space outside of sleeves in slabs and walls without sleeve-seal system.

D. Install sleeves for pipes passing through interior partitions.

1. Cut sleeves to length for mounting flush with both surfaces.
2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
3. Seal annular space between sleeve and piping or piping insulation; use sealants appropriate for size, depth, and location of joint.

E. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke-Barrier Penetrations: Maintain indicated fire or smoke rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping and fill materials specified in Section 078413 "Penetration Firestopping."

3.2 SLEEVE-SEAL-SYSTEM INSTALLATION

A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at service piping entries into building.

B. Select type, size, and number of sealing elements required for piping material and size and for sleeve ID or hole size. Position piping in center of sleeve. Center piping in penetration, assemble sleeve-seal-system components, and install in annular space between piping and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make a watertight seal.

3.3 SLEEVE-SEAL-FITTING INSTALLATION

A. Install sleeve-seal fittings as new walls and slabs are constructed.

B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.

C. Secure nailing flanges to concrete forms.

D. Using grout or silicone sealant, seal space around outside of sleeve-seal fittings.

3.4 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Leak Test: After allowing for a full cure, test sleeves and sleeve seals for leaks. Repair leaks and retest until no leaks exist.

B. Sleeves and sleeve seals will be considered defective if they do not pass tests and inspections.

3.5 SLEEVE AND SLEEVE-SEAL SCHEDULE

A. Use sleeves and sleeve seals for the following piping-penetration applications:

1. Exterior Concrete Walls Above Grade:

   a. Piping Smaller Than NPS 6 : Steel pipe sleeves.
   b. Piping and Larger.

2. Interior Partitions:

   a. Piping Smaller Than NPS 6 : Steel pipe sleeves.
   b. Piping and Larger.

END OF SECTION 230517

SECTION 230518 - ESCUTCHEONS FOR HVAC PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Escutcheons.

1.3 DEFINITIONS

A. Existing Piping to Remain: Existing piping that is not to be removed and that is not otherwise indicated to be removed, removed and salvaged, or removed and reinstalled.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

A. One-Piece, Steel Type: With polished, chrome-plated finish and setscrew fastener.

B. One-Piece, Stainless-Steel Type: With polished stainless-steel finish.

C. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.

D. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with polished, chrome-plated finish and spring-clip fasteners.

E. One-Piece, Stamped-Steel Type: With polished, chrome-plated finish and spring-clip fasteners.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.

B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.

1. Escutcheons for New Piping:

a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep pattern.
b. Insulated Piping: One-piece steel with polished, chrome-plated finish.

c. Insulated Piping: One-piece stainless steel with polished stainless-steel finish.
d. Insulated Piping: One-piece cast brass with polished, chrome-plated finish.
e. Insulated Piping: One-piece stamped steel with polished, chrome-plated finish.
f. Bare Piping in Unfinished Service Spaces: One-piece steel with polished, chrome-plated finish.
g. Bare Piping in Unfinished Service Spaces: One-piece cast brass with polished, chrome-plated finish.
h. Bare Piping in Equipment Rooms: One-piece steel with polished, chrome-plated finish.
i. Bare Piping in Equipment Rooms: One-piece cast brass with polished, chrome-plated finish.

END OF SECTION 230518

SECTION 230529 - HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Metal pipe hangers and supports.
2. Trapeze pipe hangers.
3. Thermal-hanger shield inserts.
4. Fastener systems.
5. Equipment supports.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for structural-steel shapes and plates for trapeze hangers for pipe and equipment supports.
2. Section 230516 "Expansion Fittings and Loops for HVAC Piping" for pipe guides and anchors.
3. for vibration isolation devices.
4. Section 233113 "Metal Ducts" for duct hangers and supports.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show fabrication and installation details and include calculations for the following; include Product Data for components:

1. Trapeze pipe hangers.

PART 2 - PRODUCTS

2.1 METAL PIPE HANGERS AND SUPPORTS

A. Carbon-Steel Pipe Hangers and Supports:

1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
2. Galvanized Metallic Coatings: Pregalvanized, hot-dip galvanized, or electro-galvanized.
3. Nonmetallic Coatings: Plastic coated, or epoxy powder-coated.
4. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
5. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.

2.2 TRAPEZE PIPE HANGERS

A. Description: MSS SP-58, Type 59, shop- or field-fabricated pipe-support assembly made from structural carbon-steel shapes with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U-bolts.

2.3 THERMAL-HANGER SHIELD INSERTS

A. Insulation-Insert Material for Cold Piping: ASTM C591, Type VI, Grade 1 polyisocyanurate with 125-psi minimum compressive strength and vapor barrier.

B. Insulation-Insert Material for Hot Piping: ASTM C591, Type VI, Grade 1 polyisocyanurate with 125-psi minimum compressive strength.

C. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.

D. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.

E. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

2.4 FASTENER SYSTEMS

A. Mechanical-Expansion Anchors: Insert-wedge-type anchors for use in hardened portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. Hilti, Inc.
   b. ITW Ramset/Red Head; Illinois Tool Works, Inc.
   c. MKT Fastening, LLC.
2. Indoor Applications: Zinc-coated or stainless steel.
3. Outdoor Applications: Stainless steel.

2.5 OUTDOOR EQUIPMENT STANDS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. MIRO Industries.
2. RectorSeal HVAC; a CSW Industrials Company.
3. Description: Individual foot supports with elevated adjustable channel cross bars and clamps/fasteners/bolts for ground or roof supported outdoor equipment components, without roof membrane penetration, in a pre-fabricated system that can be modularly-assembled on site.
4. Foot Material: Rubber or polypropylene.
5. Rails Material: Hot dip galvanized carbon steel.
6. Wind/Sliding Load Resistance: Up to 113 mph minimum.

2.6 MATERIALS

A. Aluminum: ASTM B221.

B. Carbon Steel: ASTM A1011/A1011M.

C. Threaded Rods: Continuously threaded. Zinc-plated or galvanized steel for indoor applications and stainless steel for outdoor applications. Mating nuts and washers of similar materials as rods.

PART 3 - EXECUTION

3.1 APPLICATION

A. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping materials and installation for penetrations through fire-rated walls, ceilings, and assemblies.

B. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.

3.2 HANGER AND SUPPORT INSTALLATION

A. Metal Pipe-Hanger Installation: Comply with MSS SP-58. Install hangers, supports, clamps, and attachments as required to properly support piping from the building structure.

B. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-58. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.

1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified for individual pipe hangers.
2. Field fabricate from ASTM A36/A36M, carbon-steel shapes selected for loads being supported. Weld steel according to AWS D1.1/D1.1M.

C. Framing System Installation: Arrange for grouping of parallel runs of piping, and support together on field-assembled strut systems.

D. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.

E. Fastener System Installation:

1. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.

F. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.

G. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.

H. Install lateral bracing with pipe hangers and supports to prevent swaying.

I. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.

J. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.

K. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.

L. Insulated Piping:

1. Attach clamps and spacers to piping.

   a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
   b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
   c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.

2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.

   a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.

   a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

4. Shield Dimensions for Pipe: Not less than the following:

   a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
   b. NPS 4: 12 inches long and 0.06 inch thick.
   c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
   d. NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.
   e. NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.

5. Pipes NPS 8 and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
6. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

3.3 METAL FABRICATIONS

A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.

B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.

C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.4 ADJUSTING

A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.

B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.5 PAINTING

A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.

B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A780/A780M.

3.6 HANGER AND SUPPORT SCHEDULE

A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.

B. Comply with MSS SP-58 for pipe-hanger selections and applications that are not specified in piping system Sections.

C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.

D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.

E. Use carbon-steel pipe hangers and supports metal trapeze pipe hangers and attachments for general service applications.

F. Use stainless steel attachments for hostile environment applications.

G. Use padded hangers for piping that is subject to scratching.

H. Use thermal-hanger shield inserts for insulated piping and tubing.

I. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.
2. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.

J. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.

K. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
2. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.

L. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.

M. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Thermal-Hanger Shield Inserts: For supporting insulated pipe.

N. Comply with MSS SP-58 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.

O. Comply with MFMA-103 for metal framing system selections and applications that are not specified in piping system Sections.

P. Use mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 230529

SECTION 230553 - IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Equipment labels.
2. Pipe labels.
3. Duct labels.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

A. Metal Labels for Equipment:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. Brady Corporation.
   b. Pipemarker.com; Brimar Industries, Inc.
   c. Seton Identification Products; a Brady Corporation company.
2. Material and Thickness: Brass, 0.032-inch minimum thickness, with predrilled or stamped holes for attachment hardware.
3. Letter and Background Color: As indicated for specific application under Part 3.
4. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
5. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances of up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
6. Fasteners: Stainless steel rivets or self-tapping screws.
7. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

B. Label Content: Include equipment's Drawing designation or unique equipment number, Drawing numbers where equipment is indicated (plans, details, and schedules), and the Specification Section number and title where equipment is specified.

2.2 PIPE LABELS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Brady Corporation.
2. Pipemarker.com; Brimar Industries, Inc.
3. Seton Identification Products; a Brady Corporation company.

B. General Requirements for Manufactured Pipe Labels: Preprinted, color coded, with lettering indicating service and showing flow direction in accordance with ASME A13.1.

C. Letter and Background Color: As indicated for specific application under Part 3.

D. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to circumference of pipe and to attach to pipe without fasteners or adhesive.

E. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.

F. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings. Also include:

1. Pipe size.
2. Flow-Direction Arrows: Include flow-direction arrows on main distribution piping. Arrows may be either integral with label or applied separately.
3. Lettering Size: Size letters in accordance with ASME A13.1 for piping.

2.3 DUCT LABELS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Brady Corporation.
2. Pipemarker.com; Brimar Industries, Inc.
3. Seton Identification Products; a Brady Corporation company.

B. Letter and Background Color: As indicated for specific application under Part 3.

C. Maximum Temperature: Able to withstand temperatures up to 160 deg F.

D. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.

E. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances of up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.

F. Fasteners: Stainless steel rivets or self-tapping screws.

G. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

H. Duct Label Contents: Include identification of duct service using same designations or abbreviations as used on Drawings. Also include the following:

1. Duct size.
2. Flow-Direction Arrows: Include flow-direction arrows on main distribution ducts. Arrows may be either integral with label or may be applied separately.
3. Lettering Size: At least 1/2 inch for viewing distances of up to 72 inches and proportionately larger lettering for greater viewing distances.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean piping and equipment surfaces of incompatible primers, paints, and encapsulants, as well as dirt, oil, grease, release agents, and other substances that could impair bond of identification devices.

3.2 INSTALLATION, GENERAL REQUIREMENTS

A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.

B. Coordinate installation of identifying devices with locations of access panels and doors.

C. Install identifying devices before installing acoustical ceilings and similar concealment.

D. Locate identifying devices so that they are readily visible from the point of normal approach.

3.3 INSTALLATION OF EQUIPMENT LABELS, WARNING SIGNS, AND LABELS

A. Permanently fasten labels on each item of mechanical equipment.

B. Sign and Label Colors:

1. White letters on an ANSI Z535.1 safety-blue background.

C. Locate equipment labels where accessible and visible.

D. Arc-Flash Warning Signs: Provide arc-flash warning signs on electrical disconnects and other equipment where arc-flash hazard exists, as indicated on Drawings, and in accordance with requirements of OSHA and NFPA 70E , and other applicable codes and standards.

3.4 INSTALLATION OF PIPE LABELS

A. Install pipe labels showing service and flow direction with permanent adhesive on pipes.

B. Stenciled Pipe Label Option: Stenciled labels showing service and flow direction may be provided instead of manufactured pipe labels, at Installer's option. Install stenciled pipe labels, complying with ASME A13.1, with painted, color-coded bands or rectangles on each piping system.

1. Identification Paint: Use for contrasting background.
2. Stencil Paint: Use for pipe marking.

C. Pipe-Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:

1. Within 3 ft. of each valve and control device.
2. At access doors, manholes, and similar access points that permit view of concealed piping.
3. Within 3 ft. of equipment items and other points of origination and termination.
4. Spaced at maximum intervals of 25 ft. along each run. Reduce intervals to 10 ft. in areas of congested piping, ductwork, and equipment.

D. Do not apply plastic pipe labels or plastic tapes directly to bare pipes conveying fluids at temperatures of 125 deg F or higher. Where these pipes are to remain uninsulated, use a short section of insulation or use stenciled labels.

E. Flow-Direction Arrows: Use arrows to indicate direction of flow in pipes, including pipes where flow is allowed in both directions.

F. Pipe-Label Color Schedule:

1. Refrigerant Piping: White letters on an ANSI Z535.1 safety-blue background.

3.5 INSTALLATION OF DUCT LABELS

A. Install self-adhesive duct labels showing service and flow direction with permanent adhesive on air ducts.

1. Provide labels in the following color codes:

a. For air supply ducts: White letters on blue background.
b. For air return ducts: White letters on blue background.
c. For exhaust-, outside-, relief-, return-, and mixed-air ducts: White letters on blue background.

B. Stenciled Duct-Label Option: Stenciled labels showing service and flow direction may be provided instead of plastic-laminated duct labels, at Installer's option.

1. For all air ducts: Black letters on white background.

C. Locate label near each point where ducts enter into and exit from concealed spaces and at maximum intervals of 20 ft. where exposed or are concealed by removable ceiling system.

D. Stenciled Access Panels and Door Labels, Equipment Labels, and Similar Operational Instructions:

1. Black letters on White background.

END OF SECTION 230553

SECTION 230593 - TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Testing, Adjusting, and Balancing of Air Systems:

   a. Variable-air-volume systems.

2. Testing, adjusting, and balancing of equipment.
3. Duct leakage tests verification.
4. Pipe leakage tests verification.
5. HVAC-control system verification.

1.3 DEFINITIONS

A. AABC: Associated Air Balance Council.

B. NEBB: National Environmental Balancing Bureau.

C. TAB: Testing, adjusting, and balancing.

D. TABB: Testing, Adjusting, and Balancing Bureau.

E. TAB Specialist: An independent entity meeting qualifications to perform TAB work.

F. TDH: Total dynamic head.

G. UFAD: Underfloor air distribution.

1.4 PREINSTALLATION MEETINGS

A. TAB Conference: Conduct a TAB conference at Project site (other) after approval of the TAB strategies and procedures plan, to develop a mutual understanding of the details. Provide a minimum of 14 (other) days' advance notice of scheduled meeting time and location.

1. Minimum Agenda Items:

   a. The Contract Documents examination report.
   b. The TAB plan.
   c. Needs for coordination and cooperation of trades and subcontractors.
   d. Proposed procedures for documentation and communication flow.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: Within 30 days of Contractor's Notice to Proceed, submit documentation that the TAB specialist and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.

B. Contract Documents Examination Report: Within 60 days of Contractor's Notice to Proceed, submit the Contract Documents review report, as specified in Part 3.

C. Examination Report: Submit a summary report of the examination review required in "Examination" Article.

D. Certified TAB reports.

1.6 QUALITY ASSURANCE

A. TAB Specialists Qualifications, Certified by AABC:

1. TAB Field Supervisor: Employee of the TAB specialist and certified by AABC.
2. TAB Technician: Employee of the TAB specialist and certified by AABC.

B. TAB Specialists Qualifications, Certified by NEBB :

1. TAB Field Supervisor: Employee of the TAB specialist and certified by NEBB.
2. TAB Technician: Employee of the TAB specialist and certified by NEBB.

C. Instrumentation Type, Quantity, Accuracy, and Calibration: Comply with requirements in ASHRAE 111, Section 4, "Instrumentation."

1. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 7.2.2 - "Air Balancing."

D. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.7.2.3 - "System Balancing."

E. Code and AHJ Compliance: TAB is required to comply with governing codes and requirements of authorities having jurisdiction.

1.7 FIELD CONDITIONS

A. Full Owner Occupancy: Owner will occupy the site and existing building during entire TAB period. Cooperate with Owner during TAB operations to minimize conflicts with Owner's operations.

B. Partial Owner Occupancy: Owner may occupy completed areas of building before Substantial Completion. Cooperate with Owner during TAB operations to minimize conflicts with Owner's operations.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 TAB SPECIALISTS

A. Subject to compliance with requirements:

1. At least one AABC or NEBB certified balance specialist with a minimum of 2 years' experience shall be at the site to perform daily TAB activities.

3.2 EXAMINATION

A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems designs that may preclude proper TAB of systems and equipment.

B. Examine installed systems for balancing devices, such as test ports, gauge cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers. Verify that locations of these balancing devices are applicable for intended purpose and are accessible.

C. Examine the approved submittals for HVAC systems and equipment.

D. Examine design data, including HVAC system descriptions, statements of design assumptions for environmental conditions and systems output, and statements of philosophies and assumptions about HVAC system and equipment controls.

E. Examine ceiling plenums used for HVAC to verify that they are properly separated from adjacent areas and sealed.

F. Examine equipment performance data, including fan and pump curves.

1. Relate performance data to Project conditions and requirements, including system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
2. Calculate system-effect factors to reduce performance ratings of HVAC equipment when installed under conditions different from the conditions used to rate equipment performance. To calculate system effects for air systems, use tables and charts found in AMCA 201, "Fans and Systems," or in SMACNA's "HVAC Systems - Duct Design." Compare results with the design data and installed conditions.

G. Examine system and equipment installations and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.

H. Examine test reports specified in individual system and equipment Sections.

I. Examine HVAC equipment and verify that bearings are greased, belts are aligned and tight, filters are clean, and equipment with functioning controls is ready for operation.

J. Examine terminal units, such as variable-air-volume boxes, and verify that they are accessible and their controls are connected and functioning.

K. Examine control valves for proper installation for their intended function of isolating, throttling, diverting, or mixing fluid flows.

L. Examine operating safety interlocks and controls on HVAC equipment.

M. Examine control dampers for proper installation for their intended function of isolating, throttling, diverting, or mixing air flows.

N. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.3 PREPARATION

A. Prepare a TAB plan that includes the following:

1. Equipment and systems to be tested.
2. Strategies and step-by-step procedures for balancing the systems. Include proposed locations for duct traverses.
3. Instrumentation to be used.
4. Sample forms with specific identification for all equipment.

B. Perform system-readiness checks of HVAC systems and equipment to verify system readiness for TAB work. Include, at a minimum, the following:

1. Airside:

a. Verify that leakage and pressure tests on air distribution systems have been satisfactorily completed.
b. Duct systems are complete with terminals installed.
c. Volume, smoke, and fire dampers are open and functional.
d. Clean filters are installed.
e. Fans are operating, free of vibration, and rotating in correct direction.
f. Variable-frequency controllers' startup is complete and safeties are verified.
g. Automatic temperature-control systems are operational.
h. Ceilings are installed.
i. Windows and doors are installed.
j. Suitable access to balancing devices and equipment is provided.

3.4 GENERAL PROCEDURES FOR TESTING AND BALANCING

A. Perform testing and balancing procedures on each system in accordance with the procedures contained in AABC's "National Standards for Total System Balance" or NEBB's "Procedural Standards for Testing, Adjusting, and Balancing of Environmental Systems" and in this Section.

B. Cut insulation, ducts, pipes, and equipment casings for installation of test probes to the minimum extent necessary for TAB procedures.

1. After testing and balancing, patch probe holes in ducts with same material and thickness as used to construct ducts.
2. After testing and balancing, install test ports and duct access doors that comply with requirements in Section 233300 "Air Duct Accessories."
3. Where holes for probes are required in piping or hydronic equipment, install pressure and temperature test plugs to seal systems.
4. Install and join new insulation that matches removed materials. Restore insulation, coverings, vapor barrier, and finish in accordance with Section 230713 "Duct Insulation," Section 230716 "HVAC Equipment Insulation," and Section 230719 "HVAC Piping Insulation."

C. Mark equipment and balancing devices, including damper-control positions, valve position indicators, fan-speed-control levers, and similar controls and devices, with paint or other suitable, permanent identification material to show final settings.

D. Take and report testing and balancing measurements in inch-pound (IP) units.

3.5 TESTING, ADJUSTING, AND BALANCING OF HVAC EQUIPMENT

A. Test, adjust, and balance HVAC equipment indicated on Drawings, including, but not limited to, the following:

1. Terminal units.
2. Unit heaters.
3. Heating and ventilating units.
4. Rooftop air-conditioning units.
5. Packaged air conditioners.
6. Split-system air conditioners.

3.6 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

A. Prepare test reports for both fans and outlets. Obtain manufacturer's outlet factors and recommended testing procedures. Crosscheck the summation of required outlet volumes with required fan volumes.

B. Prepare schematic diagrams of systems' Record drawings duct layouts.

C. For variable-air-volume systems, develop a plan to simulate diversity.

D. Determine the best locations in main and branch ducts for accurate duct-airflow measurements.

E. Check airflow patterns from the outdoor-air louvers and dampers and the return- and exhaust-air dampers through the supply-fan discharge and mixing dampers.

F. Locate start-stop and disconnect switches, electrical interlocks, and motor starters.

G. Verify that motor starters are equipped with properly sized thermal protection.

H. Check dampers for proper position to achieve desired airflow path.

I. Check for airflow blockages.

J. Check condensate drains for proper connections and functioning.

K. Check for proper sealing of air-handling-unit components.

3.7 PROCEDURES FOR VARIABLE-AIR-VOLUME SYSTEMS

A. Adjust the variable-air-volume systems as follows:

1. Verify that the system static pressure sensor is located two-thirds of the distance down the duct from the fan discharge.
2. Verify that the system is under static pressure control.
3. Select the terminal unit that is most critical to the supply-fan airflow. Measure inlet static pressure, and adjust system static pressure control set point so the entering static pressure for the critical terminal unit is not less than the sum of the terminal-unit manufacturer's recommended minimum inlet static pressure plus the static pressure needed to overcome terminal-unit discharge system losses.
4. Calibrate and balance each terminal unit for maximum and minimum design airflow as follows:

   a. Adjust controls so that terminal is calling for maximum airflow. Some controllers require starting with minimum airflow. Verify calibration procedure for specific project.
   b. Measure airflow and adjust calibration factor as required for design maximum airflow. Record calibration factor.

c. When maximum airflow is correct, balance the air outlets downstream from terminal units.
d. Adjust controls so that terminal is calling for minimum airflow.
e. Measure airflow and adjust calibration factor as required for design minimum airflow. Record calibration factor. If no minimum calibration is available, note any deviation from design airflow.

5. After terminals have been calibrated and balanced, test and adjust system for total airflow. Adjust fans to deliver total design airflows within the maximum allowable fan speed listed by fan manufacturer.

a. Set outside-air, return-air, and relief-air dampers for proper position that simulates minimum outdoor-air conditions.
b. Set terminals for maximum airflow. If system design includes diversity, adjust terminals for maximum and minimum airflow, so that connected total matches fan selection and simulates actual load in the building.
c. Where duct conditions allow, measure airflow by main Pitot-tube traverse. If necessary, perform multiple Pitot-tube traverses close to the fan and prior to any outlets, to obtain total airflow.
d. Where duct conditions are unsuitable for Pitot-tube traverse measurements, a coil traverse may be acceptable.

6. Measure fan static pressures as follows:

a. Measure static pressure directly at the fan outlet.
b. Measure static pressure directly at the fan inlet.
c. Measure static pressure across each component that makes up the air-handling system.
d. Report any artificial loading of filters at the time static pressures are measured.

7. Set final return and outside airflow to the fan while operating at maximum return airflow and minimum outdoor airflow.

a. Balance the return-air ducts and inlets.
b. Verify that terminal units are meeting design airflow under system maximum flow.

8. Re-measure the inlet static pressure at the most critical terminal unit, and adjust the system static pressure set point to the most energy-efficient set point to maintain the optimum system static pressure. Record set point and give to controls Contractor.
9. Verify final system conditions as follows:

a. Re-measure and confirm that minimum outdoor, return, and relief airflows are within design. Readjust to match design if necessary.
b. Re-measure and confirm that total airflow is within design.
c. Re-measure final fan operating data, speed, volts, amps, and static profile.
d. Mark final settings.
e. Test system in economizer mode. Verify proper operation and adjust if necessary. Measure and record all operating data.
f. Verify tracking between supply and return fans.

3.8 PROCEDURES FOR MOTORS

A. Motors 1/2 HP and Larger: Test at final balanced conditions and record the following data:

1. Manufacturer's name, model number, and serial number.
2. Motor horsepower rating.
3. Motor rpm.
4. Phase and hertz.
5. Nameplate and measured voltage, each phase.
6. Nameplate and measured amperage, each phase.
7. Starter size and thermal-protection-element rating.
8. Service factor and frame size.

B. Motors Driven by Variable-Frequency Controllers: Test manual bypass of controller to prove proper operation.

3.9 DUCT LEAKAGE TESTS

A. Witness the duct leakage testing performed by Installer.

B. Verify that proper test methods are used and that leakage rates are within specified limits.

C. Report deficiencies observed.

3.10 HVAC CONTROLS VERIFICATION

A. In conjunction with system balancing, perform the following:

1. Verify HVAC control system is operating within the design limitations.
2. Confirm that the sequences of operation are in compliance with Contract Documents.
3. Verify that controllers are calibrated and function as intended.
4. Verify that controller set points are as indicated.
5. Verify the operation of lockout or interlock systems.
6. Verify the operation of valve and damper actuators.
7. Verify that controlled devices are properly installed and connected to correct controller.
8. Verify that controlled devices travel freely and are in position indicated by controller: open, closed, or modulating.
9. Verify location and installation of sensors to ensure that they sense only intended temperature, humidity, or pressure.

B. Reporting: Include a summary of verifications performed, remaining deficiencies, and variations from indicated conditions.

3.11 TOLERANCES

A. Set HVAC system's airflow rates and water flow rates within the following tolerances:

1. Supply, Return, and Exhaust Fans and Equipment with Fans: Plus or minus 10 percent. If design value is less than 100 cfm, within 10 cfm.
2. Air Outlets and Inlets: Plus or minus 10 percent. If design value is less than 100 cfm, within 10 cfm.
3. Heating-Water Flow Rate: Plus or minus 10 percent. If design value is less than 10 gpm, within 10 percent.
4. Chilled-Water Flow Rate: Plus or minus 10 percent. If design value is less than 10 gpm, within 10 percent.
5. Condenser-Water Flow Rate: Plus or minus 10 percent.

B. Maintaining pressure relationships as designed shall have priority over the tolerances specified above.

3.12 PROGRESS REPORTING

A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for system-balancing devices. Recommend changes and additions to system-balancing devices, to facilitate proper performance measuring and balancing. Recommend changes and additions to HVAC systems and general construction to allow access for performance-measuring and -balancing devices.

B. Status Reports: Prepare biweekly progress reports to describe completed procedures, procedures in progress, and scheduled procedures. Include a list of deficiencies and problems found in systems being tested and balanced. Prepare a separate report for each system and each building floor for systems serving multiple floors.

3.13 FINAL REPORT

A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.

1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing engineer.
2. Include a list of instruments used for procedures, along with proof of calibration.
3. Certify validity and accuracy of field data.

B. Final Report Contents: In addition to certified field-report data, include the following:

1. Pump curves.
2. Fan curves.
3. Manufacturers' test data.
4. Field test reports prepared by system and equipment installers.
5. Other information relative to equipment performance; do not include Shop Drawings and Product Data.

C. General Report Data: In addition to form titles and entries, include the following data:

1. Title page.
2. Name and address of the TAB specialist.
3. Project name.
4. Project location.
5. Architect's name and address.
6. Engineer's name and address.
7. Contractor's name and address.
8. Report date.
9. Signature of TAB supervisor who certifies the report.
10. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
11. Summary of contents, including the following:

    a. Indicated versus final performance.
    b. Notable characteristics of systems.
    c. Description of system operation sequence if it varies from the Contract Documents.

12. Nomenclature sheets for each item of equipment.
13. Data for terminal units, including manufacturer's name, type, size, and fittings.
14. Notes to explain why certain final data in the body of reports vary from indicated values.
15. Test conditions for fans performance forms, including the following:

    a. Settings for outdoor-, return-, and exhaust-air dampers.
    b. Conditions of filters.
    c. Cooling coil, wet- and dry-bulb conditions.
    d. Heating coil, dry-bulb conditions.
    e. Face and bypass damper settings at coils.
    f. Fan drive settings, including settings and percentage of maximum pitch diameter.
    g. Variable-frequency controller Inlet vane settings for variable-air-volume systems.
    h. Settings for pressure controller(s).
    i. Other system operating conditions that affect performance.

16. Test conditions for pump performance forms, including the following:
    a. Variable-frequency controller settings for variable-flow hydronic systems.
    b. Settings for pressure controller(s).
    c. Other system operating conditions that affect performance.

D. System Diagrams: Include schematic layouts of air and hydronic distribution systems. Present each system with single-line diagram and include the following:
    1. Quantities of outdoor, supply, return, and exhaust airflows.
    2. Water and steam flow rates.
    3. Duct, outlet, and inlet sizes.
    4. Pipe and valve sizes and locations.
    5. Terminal units.
    6. Balancing stations.
    7. Position of balancing devices.

E. Air-Handling-Unit Test Reports: For air-handling units, include the following:
    1. Unit Data:
        a. Unit identification.
        b. Location.
        c. Make and type.
        d. Model number and unit size.
        e. Manufacturer's serial number.
        f. Unit arrangement and class.
        g. Discharge arrangement.
        h. Sheave make, size in inches, and bore.
        i. Center-to-center dimensions of sheave and amount of adjustments in inches.
        j. Number, make, and size of belts.
        k. Number, type, and size of filters.
    2. Motor Data:
        a. Motor make, and frame type and size.
        b. Horsepower and speed.
        c. Volts, phase, and hertz.
        d. Full-load amperage and service factor.
        e. Sheave make, size in inches, and bore.
        f. Center-to-center dimensions of sheave and amount of adjustments in inches.
    3. Test Data (Indicated and Actual Values):
        a. Total airflow rate in cfm.
        b. Total system static pressure in inches wg.
        c. Fan speed.
        d. Inlet and discharge static pressure in inches wg.
        e. For each filter bank, filter static-pressure differential in inches wg.
        f. Preheat-coil static-pressure differential in inches wg.
        g. Cooling-coil static-pressure differential in inches wg.
        h. Heating-coil static-pressure differential in inches wg.
        i. List for each internal component with pressure-drop, static-pressure differential in inches wg.
        j. Outdoor airflow in cfm.
        k. Return airflow in cfm.
        l. Outdoor-air damper position.
        m. Return-air damper position.
        n. Vortex damper position.

F. Electric-Coil Test Reports: For terminal unit, and electric coils installed in central-station air-handling units, include the following:

1. Unit Data:

   a. System identification.
   b. Location.
   c. Coil identification.
   d. Capacity in Btu/h.
   e. Number of stages.
   f. Connected volts, phase, and hertz.
   g. Rated amperage.
   h. Airflow rate in cfm.
   i. Face area in sq. ft.
   j. Minimum face velocity in fpm.

2. Test Data (Indicated and Actual Values):

   a. Heat output in Btu/h.
   b. Airflow rate in cfm.
   c. Air velocity in fpm.
   d. Entering-air temperature in deg F.
   e. Leaving-air temperature in deg F.
   f. Voltage at each connection.
   g. Amperage for each phase.

G. Fan Test Reports: For supply, return, and exhaust fans, include the following:

1. Fan Data:

   a. System identification.
   b. Location.
   c. Make and type.
   d. Model number and size.
   e. Manufacturer's serial number.
   f. Arrangement and class.
   g. Sheave make, size in inches, and bore.
   h. Center-to-center dimensions of sheave and amount of adjustments in inches.

2. Motor Data:

   a. Motor make, and frame type and size.
   b. Horsepower and speed.
   c. Volts, phase, and hertz.
   d. Full-load amperage and service factor.
   e. Sheave make, size in inches, and bore.
   f. Center-to-center dimensions of sheave and amount of adjustments in inches.
   g. Number, make, and size of belts.

3. Test Data (Indicated and Actual Values):

   a. Total airflow rate in cfm.
   b. Total system static pressure in inches wg.
   c. Fan speed.
   d. Discharge static pressure in inches wg.
   e. Suction static pressure in inches wg.

H. Round, and Rectangular Duct Traverse Reports: Include a diagram with a grid representing the duct cross-section and record the following:

1. Report Data:

a. System fan and air-handling-unit number.
b. Location and zone.
c. Traverse air temperature in deg F.
d. Duct static pressure in inches wg.
e. Duct size in inches.
f. Duct area in sq. ft.
g. Indicated airflow rate in cfm.
h. Indicated velocity in fpm.
i. Actual airflow rate in cfm.
j. Actual average velocity in fpm.
k. Barometric pressure in psig.

I. Air-Terminal-Device Reports:

1. Unit Data:

a. System and air-handling unit identification.
b. Location and zone.
c. Apparatus used for test.
d. Area served.
e. Make.
f. Number from system diagram.
g. Type and model number.
h. Size.
i. Effective area in sq. ft.

2. Test Data (Indicated and Actual Values):

a. Airflow rate in cfm.
b. Air velocity in fpm.
c. Preliminary airflow rate as needed in cfm.
d. Preliminary velocity as needed in fpm.
e. Final airflow rate in cfm.
f. Final velocity in fpm.
g. Space temperature in deg F.

J. System-Coil Reports: For reheat coils and water coils of terminal units, include the following:

1. Unit Data:

a. System and air-handling-unit identification.
b. Location and zone.
c. Room or riser served.
d. Coil make and size.

2. Test Data (Indicated and Actual Values):

a. Airflow rate in cfm.

K. Instrument Calibration Reports:

1. Report Data:

a. Instrument type and make.
b. Serial number.
c. Application.

d. Dates of use.
e. Dates of calibration.

3.14 VERIFICATION OF TAB REPORT

A. The TAB specialist's test and balance engineer shall conduct the inspection in the presence of Construction Manager.

B. Owner Construction Manager Commissioning Authority shall randomly select measurements, documented in the final report, to be rechecked. Rechecking shall be limited to the lesser of either 10 percent of the total measurements recorded or the extent of measurements that can be accomplished in a normal 8-hour business day.

C. If rechecks yield measurements that differ from the measurements documented in the final report by more than the tolerances allowed, the measurements shall be noted as "FAILED."

D. If the number of "FAILED" measurements is greater than 10 percent of the total measurements checked during the final inspection, the TAB shall be considered incomplete and shall be rejected.

E. If recheck measurements find the number of failed measurements noncompliant with requirements indicated, proceed as follows:

1. TAB specialists shall recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes; resubmit the final report and request a second final inspection. All changes shall be tracked to show changes made to previous report.
2. If the second final inspection also fails, Owner may pursue others Contract options to complete TAB work.

F. Prepare test and inspection reports.

3.15 ADDITIONAL TESTS

A. Within 90 days of completing TAB, perform additional TAB to verify that balanced conditions are being maintained throughout and to correct unusual conditions.

B. Seasonal Periods: If initial TAB procedures were not performed during near-peak summer and winter conditions, perform additional TAB during near-peak summer and winter conditions.

END OF SECTION 230593

SECTION 230713 - DUCT INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes insulating the following duct services:

1. Indoor, concealed supply and outdoor air.
2. Outdoor, exposed supply and return.

B. Related Requirements:

1. Section 230716 "HVAC Equipment Insulation."
2. Section 230719 "HVAC Piping Insulation."
3. Section 233113 "Metal Ducts" for duct liners.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory- and field-applied if any).

1.3 DELIVERY, STORAGE, AND HANDLING

A. Packaging: Insulation material containers are to be marked with the manufacturer's name, appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.4 COORDINATION

A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."

B. Coordinate clearance requirements with duct Installer for duct insulation application. Before preparing ductwork Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

C. Coordinate installation and testing of heat tracing.

1.5 SCHEDULING

A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.

1. All Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
2. All Insulation Installed Indoors; Outdoors-Installed Insulation in Contact with Airstream: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
3. All Insulation Installed Indoors and Outdoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

A. Comply with requirements in "Duct Insulation Schedule, General," "Indoor Duct and Plenum Insulation Schedule," and "Aboveground, Outdoor Duct and Plenum Insulation Schedule" articles for where insulating materials are to be applied.

B. Products do not contain asbestos, lead, mercury, or mercury compounds.

C. Products that come in contact with stainless steel have a leachable chloride content of less than 50 ppm when tested in accordance with ASTM C871.

D. Insulation materials for use on austenitic stainless steel are qualified as acceptable in accordance with ASTM C795.

E. Foam insulation materials do not use CFC or HCFC blowing agents in the manufacturing process.

F. Glass-Fiber Blanket: Glass fibers bonded with a thermosetting resin; suitable for maximum use temperature up to 450 deg F in accordance with ASTM C411. Comply with ASTM C553, Type II, and ASTM C1290, Type III with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Certainteed; SAINT-GOBAIN.
b. Johns Manville; a Berkshire Hathaway company.
c. Knauf Insulation.
d. Manson Insulation Inc.
e. Owens Corning.

G. Glass-Fiber Board Insulation: Glass fibers bonded with a thermosetting resin; suitable for maximum use temperature between 35 deg F and 250 deg F for jacketed and between 35 deg F and 450 deg F for unfaced in accordance with ASTM C411. Comply with ASTM C612, Type IA or Type IB. For duct and plenum applications, provide insulation with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Certainteed; SAINT-GOBAIN.
b. Johns Manville; a Berkshire Hathaway company.
c. Knauf Insulation.
d. Manson Insulation Inc.

e. Owens Corning.

2.3 ADHESIVES

A. Materials are compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.

B. Glass-Fiber and Mineral Wool Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Childers Brand; H. B. Fuller Construction Products.
b. Foster Brand; H. B. Fuller Construction Products.

2.4 MASTICS AND COATINGS

A. Materials are compatible with insulation materials, jackets, and substrates.

B. Vapor-Retarder Mastic, Water Based, Interior Use: Suitable for indoor use on below ambient services.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Childers Brand; H. B. Fuller Construction Products.
b. Foster Brand; H. B. Fuller Construction Products.
c. Knauf Insulation.
d. Vimasco Corporation.

2. Water-Vapor Permeance: Comply with ASTM C755, Section 7.2.2, Table 2, for insulation type and service conditions.
3. Service Temperature Range: Minus 20 to plus 180 deg F.
4. Comply with MIL-PRF-19565C, Type II, for permeance requirements.
5. Color: White.

C. Vapor-Retarder Mastic, Solvent Based, Exterior Use: Suitable for outdoor use on below ambient services.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Childers Brand; H. B. Fuller Construction Products.
b. Eagle Bridges - Marathon Industries.
c. Foster Brand; H. B. Fuller.

2. Water-Vapor Permeance: Comply with ASTM C755, Section 7.2.2, Table 2, for insulation type and service conditions.
3. Service Temperature Range: Minus 50 to plus 220 deg F.
4. Color: White.

D. Breather Mastic: Water based; suitable for indoor and outdoor use on above ambient services.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Childers Brand; H. B. Fuller Construction Products.
b. Foster Brand; H. B. Fuller Construction Products.
c. Knauf Insulation.
d. Vimasco Corporation.

2. Water-Vapor Permeance: ASTM E96/E96M, greater than 1.0 perm at manufacturer's recommended dry film thickness.
3. Service Temperature Range: Minus 20 to plus 180 deg F.
4. Color: White.

2.5 SEALANTS

A. FSK and Metal Jacket Flashing Sealants:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Childers Brand; H. B. Fuller Construction Products.
b. Foster Brand; H. B. Fuller Construction Products.

2. Materials are compatible with insulation materials, jackets, and substrates.
3. Fire- and water-resistant, flexible, elastomeric sealant.
4. Service Temperature Range: Minus 40 to plus 250 deg F.
5. Color: Aluminum.

2.6 FIELD-APPLIED JACKETS

A. Field-applied jackets comply with ASTM C921, Type I, unless otherwise indicated.

B. Self-Adhesive Outdoor Jacket (Asphaltic): 60-mil- thick, laminated vapor barrier and waterproofing membrane for installation over insulation located aboveground outdoors; consisting of a rubberized bituminous resin on a crosslaminated polyethylene film covered with stucco-embossed aluminum-foil facing.

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. Polyguard Products, Inc.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.

1. Verify that systems to be insulated have been tested and are free of defects.
2. Verify that surfaces to be insulated are clean and dry.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.3 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of ducts and fittings.

B. Install insulation materials, vapor barriers or retarders, jackets, and thicknesses required for each item of duct system as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.

D. Install insulation with longitudinal seams at top and bottom of horizontal runs.

E. Install multiple layers of insulation with longitudinal and end seams staggered.

F. Keep insulation materials dry during application and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with Contract Documents.

G. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

H. Install insulation with least number of joints practical.

I. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.

1. Install insulation continuously through hangers and around anchor attachments.
2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.

J. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.

K. Install insulation with factory-applied jackets as follows:

1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.
2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
3. Overlap jacket longitudinal seams at least 1-1/2 inches. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 4 inches o.c.

   a. For below ambient services, apply vapor-barrier mastic over staples.

4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to duct flanges and fittings.

L. Cut insulation in a manner to avoid compressing insulation.

M. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

N. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.

3.4 PENETRATIONS

A. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.

1. Seal penetrations with flashing sealant.

2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
4. Seal jacket to wall flashing with flashing sealant.

3.5 INSTALLATION OF GLASS-FIBER AND MINERAL-WOOL INSULATION

A. Blanket Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.

B. Comply with manufacturer's written installation instructions.

1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 50 percent coverage of duct and plenum surfaces.
2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:

    a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
    b. On duct sides with dimensions larger than 18 inches, place pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
    c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
    d. Do not overcompress insulation during installation.
    e. Impale insulation over pins and attach speed washers.
    f. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.

4. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.

    a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
    b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.

5. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. At end joints, secure with steel bands spaced a maximum of 18 inches o.c.
6. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
7. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

C. Board Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.

1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for 50 percent coverage of duct and plenum surfaces.
2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.

3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:
    a. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
    b. On duct sides with dimensions larger than 18 inches, space pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
    c. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
    d. Do not overcompress insulation during installation.
    e. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.
4. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.
    a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
    b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.
5. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Groove and score insulation to fit as closely as possible to outside and inside radius of elbows. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
6. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

3.6 FIELD-APPLIED JACKET INSTALLATION

A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.
    1. Draw jacket smooth and tight to surface with 2-inch overlap at seams and joints.
    2. Embed glass cloth between two 0.062-inch- thick coats of lagging adhesive.
    3. Completely encapsulate insulation with coating, leaving no exposed insulation.

B. Where FSK jackets are indicated, install as follows:
    1. Draw jacket material smooth and tight.
    2. Install lap or joint strips with same material as jacket.
    3. Secure jacket to insulation with manufacturer's recommended adhesive.
    4. Install jacket with 1-1/2-inch laps at longitudinal seams and 3-inch- wide joint strips at end joints.
    5. Seal openings, punctures, and breaks in vapor-retarder jackets and exposed insulation with vapor-barrier mastic.

C. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints; for horizontal applications, install with longitudinal seams along top and bottom of tanks and vessels. Seal with manufacturer's recommended adhesive.
    1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

D. Where metal jackets are indicated, install with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof sealant recommended by insulation manufacturer. Secure jacket with stainless steel bands 12 inches o.c. and at end joints.

3.7 FINISHES

A. Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."

1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.

a. Finish Coat Material: Interior, flat, latex-emulsion size.

B. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.

C. Color: Final color as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.

D. Do not field paint aluminum or stainless steel jackets.

3.8 DUCT INSULATION SCHEDULE, GENERAL

A. Plenums and Ducts Requiring Insulation:

1. Indoor, concealed supply and outdoor air.
2. Outdoor, exposed supply and return.

3.9 INDOOR DUCT AND PLENUM INSULATION SCHEDULE

A. Concealed, round and flat-oval, supply-air duct insulation is the following:

1. Glass-Fiber Blanket: 2 inches thick and 3 lb/cu. ft. nominal density.

B. Concealed, rectangular, supply-air duct insulation is the following:

1. Glass-Fiber Blanket: 2 inches thick and 3 lb/cu. ft. nominal density.

3.10 ABOVEGROUND, OUTDOOR DUCT AND PLENUM INSULATION SCHEDULE

A. Insulation materials and thicknesses are identified below. If more than one material is listed for a duct system, selection from materials listed is Contractor's option.

B. Exposed, rectangular, supply-air duct insulation is one of the following:

1. Glass-Fiber Board: 2 inches thick and 6 lb/cu. ft. nominal density.

C. Exposed, rectangular, return-air duct insulation is one of the following:

1. Glass-Fiber Board: 2 inches thick and 6 lb/cu. ft. nominal density.

3.11 OUTDOOR, FIELD-APPLIED JACKET SCHEDULE

A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.

B. If more than one material is listed, selection from materials listed is Contractor's option.

C. Ducts and Plenums, Concealed:

1. Aluminum, Smooth Stucco Embossed: 0.024 inch thick.

D. Ducts and Plenums, Exposed, up to 48 Inches in Diameter or with Flat Surfaces up to 72 Inches:

1. Aluminum, Smooth Stucco Embossed: 0.024 inch thick.

END OF SECTION 230713

This page intentionally left blank.

SECTION 230719 - HVAC PIPING INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes insulation for HVAC piping systems.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory and field applied, if any).

1.3 DELIVERY, STORAGE, AND HANDLING

A. Packaging: Insulation system materials are to be delivered to the Project site in unopened containers. The packaging is to include name of manufacturer, fabricator, type, description, and size , as well as ASTM standard designation, and maximum use temperature.

1.4 COORDINATION

A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."

B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

1.5 SCHEDULING

A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84 by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.

1. All Insulation Installed Indoors and Outdoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 MASTICS AND COATINGS

A. Materials are compatible with insulation materials, jackets, and substrates.

B. Vapor-Retarder Mastic, Water Based: Suitable for indoor use on below-ambient services.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Childers Brand; H. B. Fuller Construction Products.
b. Foster Brand; H. B. Fuller Construction Products.
c. Knauf Insulation.
d. Vimasco Corporation.

2. Water-Vapor Permeance: Comply with ASTM E96/E96M or ASTM F1249.
3. Service Temperature Range: Minus 20 to plus 180 deg F.
4. Comply with MIL-PRF-19565C, Type II, for permeance requirements.
5. Color: White.

C. Vapor-Retarder Mastic, Solvent Based, Outdoor Use: Suitable for outdoor use on below-ambient services.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Childers Brand; H. B. Fuller Construction Products.
b. Foster Brand; H. B. Fuller Construction Products.

2. Water-Vapor Permeance: Comply with ASTM E96/E96M or ASTM F1249.
3. Service Temperature Range: Minus 50 to plus 220 deg F.
4. Color: White.

2.3 FIELD-APPLIED JACKETS

A. Field-applied jackets comply with ASTM C1136, Type I, unless otherwise indicated.

B. Metal Jacket:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. Johns Manville; a Berkshire Hathaway company.

C. Self-Adhesive Outdoor Jacket (Asphaltic): 60-mil- thick, laminated vapor barrier and waterproofing membrane for installation over insulation located aboveground outdoors; consisting of a rubberized bituminous resin on a cross-laminated polyethylene film covered with stucco-embossed aluminum-foil facing.

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. Polyguard Products, Inc.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.

1. Verify that systems to be insulated have been tested and are free of defects.
2. Verify that surfaces to be insulated are clean and dry.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

B. Clean and prepare surfaces to be insulated. Before insulating, apply a corrosion coating to insulated surfaces as follows:

1. Stainless Steel: Coat 300 series stainless steel with an epoxy primer 5 mils thick and an epoxy finish 5 mils thick if operating in a temperature range between 140 and 300 deg F. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.
2. Carbon Steel: Coat carbon steel operating at a service temperature of between 32 and 300 deg F with an epoxy coating. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.

C. Coordinate insulation installation with the tradesman installing heat tracing. Comply with requirements for heat tracing that apply to insulation.

D. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless steel surfaces, use demineralized water.

3.3 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping, including fittings, valves, and specialties.

B. Install insulation materials, forms, vapor barriers or retarders, jackets, and of thicknesses required for each item of pipe system, as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.

D. Install insulation with longitudinal seams at top and bottom (12 o'clock and 6 o'clock positions) of horizontal runs.

E. Install multiple layers of insulation with longitudinal and end seams staggered.

F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.

G. Keep insulation materials dry during storage, application, and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with the Contract Documents.

H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

I. Install insulation with least number of joints practical.

J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.

1. Install insulation continuously through hangers and around anchor attachments.
2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends attached to structure with vapor-barrier mastic.

3. Install insert materials and insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.

K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.

L. Install insulation with factory-applied jackets as follows:

1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.
2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward-clinching staples along both edges of strip, spaced 4 inches o.c.
3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward-clinching staples along edge at 4 inches o.c.
4. For below-ambient services, apply vapor-barrier mastic over staples.
5. Cover joints and seams with tape, in accordance with insulation material manufacturer's written instructions, to maintain vapor seal.
6. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.

M. Cut insulation in a manner to avoid compressing insulation.

N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches in similar fashion to butt joints.

P. For above-ambient services, do not install insulation to the following:

1. Vibration-control devices.
2. Testing agency labels and stamps.
3. Nameplates and data plates.

3.4 GENERAL PIPE INSULATION INSTALLATION

A. Requirements in this article generally apply to all insulation materials, except where more specific requirements are specified in various pipe insulation material installation articles below.

B. Insulation Installation on Fittings, Valves, Strainers, Flanges, Mechanical Couplings, and Unions:

1. Install insulation over fittings, valves, strainers, flanges, mechanical couplings, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
2. Insulate pipe elbows using prefabricated fitting insulation made from same material and density as that of adjacent pipe insulation. Each piece is butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
3. Insulate tee fittings with prefabricated fitting insulation of same material and thickness as that used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
4. Insulate valves using prefabricated fitting insulation of same material, density, and thickness as that used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including

the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.

5. Insulate strainers using prefabricated fitting insulation of same material, density, and thickness as that used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers, so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
6. Insulate flanges, mechanical couplings, and unions using a section of oversized preformed pipe insulation to fit. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Stencil or label the outside insulation jacket of each union with the word "union" matching size and color of pipe labels.
7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
8. For services not specified to receive a field-applied jacket, except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing, using PVC tape.

C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.

D. Install removable insulation covers at locations indicated. Installation conforms to the following:

1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as that of adjoining pipe insulation.
2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union at least 2 times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless steel or aluminum bands. Select band material compatible with insulation and jacket.
3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.
4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
5. Unless a PVC jacket is indicated in field-applied jacket schedules, finish exposed surfaces with a metal jacket.

3.5 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

A. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

B. Insulation Installation on Pipe Flanges:

1. Install pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.

3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of sheet insulation of same thickness as that of pipe insulation.
4. Secure insulation to flanges and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install sections of pipe insulation and miter if required in accordance with manufacturer's written instructions.
2. Secure insulation materials and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install prefabricated valve covers manufactured of same material as that of pipe insulation when available.
2. When prefabricated valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.
4. Secure insulation to valves and specialties, and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.6 INSTALLATION OF GLASS-FIBER AND MINERAL WOOL INSULATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of preformed pipe insulation to pipe with wire or bands, and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with jackets on above-ambient surfaces, secure laps with outward-clinched staples at 6 inches o.c.
4. For insulation with jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive, as recommended by insulation material manufacturer, and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Flanges:

1. Install prefabricated pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with glass-fiber or mineral-wool blanket insulation.
4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch, and seal joints with flashing sealant.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install prefabricated sections of same material as that of straight segments of pipe insulation when available.
2. When preformed insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install prefabricated sections of same material as that of straight segments of pipe insulation when available.
2. When prefabricated sections are not available, install fabricated sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
4. Install insulation to flanges as specified for flange insulation application.

3.7 INSTALLATION OF FIELD-APPLIED JACKETS

A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.

1. Draw jacket smooth and tight to surface with 2-inch overlap at seams and joints.
2. Embed glass cloth between two 0.062-inch- thick coats of lagging adhesive.
3. Completely encapsulate insulation with coating, leaving no exposed insulation.

B. Where flexible elastomeric piping insulation is installed outdoors, install metal jackets with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof sealant recommended by insulation manufacturer. Secure jacket with stainless steel bands 12 inches o.c. and at end joints.

C. Where PVDC jackets are indicated, install as follows:

1. Apply three separate wraps of filament tape per insulation section to secure pipe insulation to pipe prior to installation of PVDC jacket.
2. Wrap presized jackets around individual pipe insulation sections, with one end overlapping the previously installed sheet. Install presized jacket with an approximate overlap at butt joint of 2 inches over the previous section. Adhere lap seal using adhesive or SSL, and then apply 1-1/4 circumferences of appropriate PVDC tape around overlapped butt joint.
3. Continuous jacket can be spiral-wrapped around a length of pipe insulation. Apply adhesive or PVDC tape at overlapped spiral edge. When electing to use adhesives, refer to manufacturer's written instructions for application of adhesives along this spiral edge to maintain a permanent bond.
4. Jacket can be wrapped in cigarette fashion along length of roll for insulation systems with an outer circumference of 33-1/2 inches or less. The 33-1/2-inch- circumference limit allows for 2-inch-overlap seal. Using the length of roll allows for longer sections of jacket to be installed at one time. Use adhesive on the lap seal. Visually inspect lap seal for "fishmouthing," and use PVDC tape along lap seal to secure joint.
5. Repair holes or tears in PVDC jacket by placing PVDC tape over the hole or tear and wrapping a minimum of 1-1/4 circumferences to avoid damage to tape edges.

3.8 FINISHES

A. Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."

1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.

   a. Finish Coat Material: Interior, flat, latex-emulsion size.

B. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.

C. Color: Final color as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.

D. Do not field paint aluminum or stainless steel jackets.

3.9 PIPING INSULATION SCHEDULE, GENERAL

A. Refer to Drawings for piping insulation schedule.

B. Insulation conductivity and thickness per pipe size comply with schedules in this Section or with requirements of authorities having jurisdiction, whichever is more stringent.

C. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.

D. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:

1. Underground piping.
2. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

END OF SECTION 230719

SECTION 230923 - DIRECT DIGITAL CONTROL (DDC) SYSTEM FOR HVAC

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. DDC system for monitoring and controlling of HVAC systems.
2. Delivery of selected control devices to equipment and systems manufacturers for factory installation and to HVAC systems installers for field installation.

B. Related Requirements:

C. Section 230923.13 "Energy Meters" for thermal and electric power energy meters that connect to DDC systems.

1. Section 230923.17 "Level Instruments" for liquid-level switches, sensors, and transmitters that connect to DDC systems.
2. Section 230923.22 "Position Instruments" for limit switches that connect to DDC systems.
3. Section 230923.33 "Vibration Instruments" for vibration instruments that connect to DDC systems.
4. Section 230923.43 "Weather Stations" for weather stations that connect to DDC systems.
5. Section 230993.11 "Sequence of Operations for HVAC DDC" for control sequences in DDC systems.
6. Communications Cabling:

   a. Section 260523 "Control-Voltage Electrical Power Cables" for balanced twisted pair communications cable.
   b. Section 271513 "Communications Copper Horizontal Cabling" for balanced twisted pair communications cable.
   c. Section 271523 "Communications Optical Fiber Horizontal Cabling" for optical fiber communications cable.

7. Raceways:

   a. Section 260533 "Raceways and Boxes for Electrical Systems" for raceways for low-voltage control cable.
   b. Section 270528 "Pathways for Communications Systems" for raceways for balanced twisted pair cabling and optical fiber cable.

8. Section 260553 "Identification for Electrical Systems" for identification requirements for electrical components.
9. Section 270553 "Identification for Communications Systems" for identification requirements for communications components.

1.3 DEFINITIONS

A. Algorithm: A logical procedure for solving a recurrent mathematical problem. A prescribed set of well-defined rules or processes for solving a problem in a finite number of steps.

B. Analog: A continuously varying signal value, such as current, flow, pressure, or temperature.

C. BACnet Specific Definitions:

1. BACnet: Building Automation Control Network Protocol, ASHRAE 135. A communications protocol allowing devices to communicate data over and services over a network.
2. BACnet Interoperability Building Blocks (BIBBs): BIBB defines a small portion of BACnet functionality that is needed to perform a particular task. BIBBs are combined to build the BACnet functional requirements for a device.
3. BACnet/IP: Defines and allows using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP subnetworks that share the same BACnet network number.
4. BACnet Testing Laboratories (BTL): Organization responsible for testing products for compliance with ASHRAE 135, operated under direction of BACnet International.
5. PICS (Protocol Implementation Conformance Statement): Written document that identifies the particular options specified by BACnet that are implemented in a device.

D. Binary: Two-state signal where a high signal level represents ON" or "OPEN" condition and a low signal level represents "OFF" or "CLOSED" condition. "Digital" is sometimes used interchangeably with "Binary" to indicate a two-state signal.

E. Controller: Generic term for any standalone, microprocessor-based, digital controller residing on a network, used for local or global control. Three types of controllers are indicated: Network Controller, Programmable Application Controller, and Application-Specific Controller.

F. Control System Integrator: An entity that assists in expansion of existing enterprise system and support of additional operator interfaces to I/O being added to existing enterprise system.

G. COV: Changes of value.

H. DDC System Provider: Authorized representative of, and trained by, DDC system manufacturer and responsible for execution of DDC system Work indicated.

I. Distributed Control: Processing of system data is decentralized and control decisions are made at subsystem level. System operational programs and information are provided to remote subsystems and status is reported back. On loss of communication, subsystems shall be capable of operating in a standalone mode using the last best available data.

J. DOCSIS: Data-Over Cable Service Interface Specifications.

K. E/P: Voltage to pneumatic.

L. Gateway: Bidirectional protocol translator that connects control systems that use different communication protocols.

M. HLC: Heavy load conditions.

N. I/O: System through which information is received and transmitted. I/O refers to analog input (AI), binary input (BI), analog output (AO) and binary output (BO). Analog signals are continuous and represent control influences such as flow, level, moisture, pressure, and temperature. Binary signals convert electronic signals to digital pulses (values) and generally represent two-position operating and alarm status. "Digital," (DI and (DO), is sometimes used interchangeably with "Binary," (BI) and (BO), respectively.

O. I/P: Current to pneumatic.

P. LAN: Local area network.

Q. LNS: LonWorks Network Services.

R. LON Specific Definitions:

1. FTT-10: Echelon Transmitter-Free Topology Transceiver.
2. LonMark: Association comprising suppliers and installers of LonTalk products. Association provides guidelines for implementing LonTalk protocol to ensure interoperability through a standard or consistent implementation.
3. LonTalk: An open standard protocol developed by the Echelon Corporation that uses a "Neuron Chip" for communication. LonTalk is a register trademark of Echelon.
4. LonWorks: Network technology developed by Echelon.
5. Node: Device that communicates using CEA-709.1-C protocol and that is connected to a CEA-709.1-C network.
6. Node Address: The logical address of a node on the network, consisting of a Domain number, Subnet number, and Node number. "Node number" portion of an address is a number assigned to device during installation, is unique within a subnet, and is not a factory-set unique Node ID.
7. Node ID: A unique 48-bit identifier assigned at factory to each CEA-709.1-C device. Sometimes called a "Neuron ID."
8. Program ID: An identifier (number) stored in a device (usually EEPROM) that identifies node manufacturer, functionality of device (application and sequence), transceiver used, and intended device usage.
9. Standard Configuration Property Type (SCPT): Pronounced "skip-it." A standard format type maintained by LonMark International for configuration properties.
10. Standard Network Variable Type (SNVT): Pronounced "snivet." A standard format type maintained by LonMark used to define data information transmitted and received by individual nodes. "SNVT" is used in two ways. It is an acronym for "Standard Network Variable Type" and is often used to indicate a network variable itself (i.e., it can mean "a network variable of a standard network variable type").
11. Subnet: Consists of a logical grouping of up to 127 nodes, where logical grouping is defined by node addressing. Each subnet is assigned a number, which is unique within a Domain. See "Node Address."
12. TP/FT-10: Free Topology Twisted Pair network defined by CEA-709.3 and is most common media type for a CEA-709.1-C control network.
13. TP/XF-1250: High-speed, 1.25-Mbps, twisted-pair, doubly terminated bus network defined by "LonMark Interoperability Guidelines" typically used only to connect multiple TP/FT-10 networks.
14. User-Defined Configuration Property Type (UCPT): Pronounced "U-Keep-It." A Configuration Property format type that is defined by device manufacturer.
15. User-Defined Network Variable Type (UNVT): Network variable format defined by device manufacturer. UNVTs create non-standard communications that other vendors' devices may not correctly interpret and may negatively impact system operation. UNVTs are not allowed.

S. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control, signaling power-limited circuits.

T. Mobile Device: A data-enabled phone or tablet computer capable of connecting to a cellular data network and running a native control application or accessing a web interface.

U. Modbus TCP/IP: An open protocol for exchange of process data.

V. MS/TP: Master-slave/token-passing, IEE 8802-3. Datalink protocol LAN option that uses twisted-pair wire for low-speed communication.

W. MTBF: Mean time between failures.

X. Network Controller: Digital controller, which supports a family of programmable application controllers and application-specific controllers, that communicates on peer-to-peer network for transmission of global data.

Y. Network Repeater: Device that receives data packet from one network and rebroadcasts it to another network. No routing information is added to protocol.

Z. Peer to Peer: Networking architecture that treats all network stations as equal partners.

AA. POT: Portable operator's terminal.

BB. PUE: Performance usage effectiveness.

CC. RAM: Random access memory.

DD. RF: Radio frequency.

EE. Router: Device connecting two or more networks at network layer.

FF. Server: Computer used to maintain system configuration, historical and programming database.

GG. TCP/IP: Transport control protocol/Internet protocol.

HH. UPS: Uninterruptible power supply.

II. USB: Universal Serial Bus.

JJ. User Datagram Protocol (UDP): This protocol assumes that the IP is used as the underlying protocol.

KK. VAV: Variable air volume.

LL. WLED: White light emitting diode.

1.4 ACTION SUBMITTALS

A. Multiple Submissions:

1. If multiple submissions are required to execute work within schedule, first submit a coordinated schedule clearly defining intent of multiple submissions. Include a proposed date of each submission with a detailed description of submittal content to be included in each submission.
2. Clearly identify each submittal requirement indicated and in which submission the information will be provided.
3. Include an updated schedule in each subsequent submission with changes highlighted to easily track the changes made to previous submitted schedule.

B. Product Data: For each type of product include the following:

1. Construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Operating characteristics, electrical characteristics, and furnished accessories indicating process operating range, accuracy over range, control signal over range, default control signal with loss of power, calibration data specific to each unique application, electrical power requirements, and limitations of ambient operating environment, including temperature and humidity.
3. Product description with complete technical data, performance curves, and product specification sheets.
4. Installation, operation and maintenance instructions including factors effecting performance.
5. Bill of materials of indicating quantity, manufacturer, and extended model number for each unique product.

    a. Workstations.

b. Servers.
c. Printers.
d. Gateways.
e. Routers.
f. Protocol analyzers.
g. DDC controllers.
h. Enclosures.
i. Electrical power devices.
j. UPS units.
k. Accessories.
l. Instruments.
m. Control dampers and actuators.
n. Control valves and actuators.

6. When manufacturer's product datasheets apply to a product series rather than a specific product model, clearly indicate and highlight only applicable information.
7. Each submitted piece of product literature shall clearly cross reference specification and drawings that submittal is to cover.

C. Software Submittal:

1. Cross-referenced listing of software to be loaded on each operator workstation, server, gateway, and DDC controller.
2. Description and technical data of all software provided, and cross-referenced to products in which software will be installed.
3. Operating system software, operator interface and programming software, color graphic software, DDC controller software, maintenance management software, and third-party software.
4. Include a flow diagram and an outline of each subroutine that indicates each program variable name and units of measure.
5. Listing and description of each engineering equation used with reference source.
6. Listing and description of each constant used in engineering equations and a reference source to prove origin of each constant.
7. Description of operator interface to alphanumeric and graphic programming.
8. Description of each network communication protocol.
9. Description of system database, including all data included in database, database capacity and limitations to expand database.
10. Description of each application program and device drivers to be generated, including specific information on data acquisition and control strategies showing their relationship to system timing, speed, processing burden and system throughout.
11. Controlled Systems: Instrumentation list with element name, type of device, manufacturer, model number, and product data. Include written description of sequence of operation including schematic diagram.

D. Shop Drawings:

1. General Requirements:

a. Include cover drawing with Project name, location, Owner, Architect, Contractor and issue date with each Shop Drawings submission.
b. Include a drawing index sheet listing each drawing number and title that matches information in each title block.

2. Include plans, elevations, sections, and mounting details where applicable.
3. Include details of product assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
4. Detail means of vibration isolation and show attachments to rotating equipment.

5. Plan Drawings indicating the following:
    a. Screened backgrounds of walls, structural grid lines, HVAC equipment, ductwork, and piping.
    b. Room names and numbers with coordinated placement to avoid interference with control products indicated.
    c. Each desktop workstation, server, gateway, router, DDC controller, control panel instrument connecting to DDC controller, and damper and valve connecting to DDC controller, if included in Project.
    d. Exact placement of products in rooms, ducts, and piping to reflect proposed installed condition.
    e. Network communication cable and raceway routing.
    f. Proposed routing of wiring, cabling, conduit, and tubing, coordinated with building services for review before installation.
6. Schematic drawings for each controlled HVAC system indicating the following:
    a. I/O points labeled with point names shown. Indicate instrument range, normal operating set points, and alarm set points. Indicate fail position of each damper and valve, if included in Project.
    b. I/O listed in table format showing point name, type of device, manufacturer, model number, and cross-reference to product data sheet number.
    c. A graphic showing location of control I/O in proper relationship to HVAC system.
    d. Wiring diagram with each I/O point having a unique identification and indicating labels for all wiring terminals.
    e. Unique identification of each I/O that shall be consistently used between different drawings showing same point.
    f. Elementary wiring diagrams of controls for HVAC equipment motor circuits including interlocks, switches, relays, and interface to DDC controllers.
    g. Narrative sequence of operation.
    h. Graphic sequence of operation, showing all inputs and output logical blocks.
7. Control panel drawings indicating the following:
    a. Panel dimensions, materials, size, and location of field cable, raceways, and tubing connections.
    b. Interior subpanel layout, drawn to scale and showing all internal components, cabling and wiring raceways, nameplates, and allocated spare space.
    c. Front, rear, and side elevations and nameplate legend.
    d. Unique drawing for each panel.
8. DDC system network riser diagram indicating the following:
    a. Each device connected to network with unique identification for each.
    b. Interconnection of each different network in DDC system.
    c. For each network, indicate communication protocol, speed and physical means of interconnecting network devices, such as copper cable type, or optical fiber cable type. Indicate raceway type and size for each.
    d. Each network port for connection of an operator workstation or other type of operator interface with unique identification for each.
9. DDC system electrical power riser diagram indicating the following:
    a. Each point of connection to field power with requirements (volts/phase//hertz/ amperes/connection type) listed for each.
    b. Each control power supply including, as applicable, transformers, power-line conditioners, transient voltage suppression and high filter noise units, DC power supplies, and UPS units with unique identification for each.
    c. Each product requiring power with requirements (volts/phase//hertz/amperes/connection type) listed for each.

d. Power wiring type and size, race type, and size for each.

10. Monitoring and control signal diagrams indicating the following:

a. Control signal cable and wiring between controllers and I/O.
b. Point-to-point schematic wiring diagrams for each product.
c. Control signal tubing to sensors, switches, and transmitters.
d. Process signal tubing to sensors, switches, and transmitters.

11. Color graphics indicating the following:

a. Itemized list of color graphic displays to be provided.
b. For each display screen to be provided, a true color copy showing layout of pictures, graphics, and data displayed.
c. Intended operator access between related hierarchical display screens.

E. System Description:

1. Full description of DDC system architecture, network configuration, operator interfaces and peripherals, servers, controller types and applications, gateways, routers and other network devices, and power supplies.
2. Complete listing and description of each report, log and trend for format and timing, and events which initiate generation.
3. System and product operation under each potential failure condition including, but not limited to, the following:

a. Loss of power.
b. Loss of network communication signal.
c. Loss of controller signals to inputs and outpoints.
d. Operator workstation failure.
e. Server failure.
f. Gateway failure.
g. Network failure
h. Controller failure.
i. Instrument failure.
j. Control damper and valve actuator failure.

4. Complete bibliography of documentation and media to be delivered to Owner.
5. Description of testing plans and procedures.
6. Description of Owner training.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data:

1. Systems Provider Qualification Data:

a. Resume of project manager assigned to Project.
b. Resumes of application engineering staff assigned to Project.
c. Resumes of installation and programming technicians assigned to Project.
d. Resumes of service technicians assigned to Project.
e. Brief description of past project including physical address, floor area, number of floors, building system cooling and heating capacity, and building's primary function.
f. Description of past project DDC system, noting similarities to Project scope and complexity indicated.
g. Names of staff assigned to past project that will also be assigned to execute work of this Project.
h. Owner contact information for past project including name, phone number, and e-mail address.

i. Contractor contact information for past project including name, phone number, and e-mail address.

2. Manufacturer's qualification data.

B. Product Certificates:

1. Data Communications Protocol Certificates: Certifying that each proposed DDC system component complies with ASHRAE 135.
2. Data Communications Protocol Certificates: Certifying that each proposed DDC system component complies with LonWorks.

C. Sample Warranty: For manufacturer's warranty.

1.6 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For DDC system to include in emergency, operation, and maintenance manuals.

1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:

a. Project Record Drawings of as-built versions of submittal Shop Drawings provided in electronic PDF format.
b. Testing and commissioning reports and checklists of completed final versions of reports, checklists, and trend logs.
c. As-built versions of submittal Product Data.
d. Names, addresses, e-mail addresses, and 24-hour telephone numbers of Installer and service representatives for DDC system and products.
e. Operator's manual with procedures for operating control systems including logging on and off, handling alarms, producing point reports, trending data, overriding computer control, and changing set points and variables.
f. Programming manuals with description of programming language and syntax, of statements for algorithms and calculations used, of point database creation and modification, of program creation and modification, and of editor use.
g. Engineering, installation, and maintenance manuals that explain how to:

1) Design and install new points, panels, and other hardware.
2) Perform preventive maintenance and calibration.
3) Debug hardware problems.
4) Repair or replace hardware.

h. Documentation of all programs created using custom programming language including set points, tuning parameters, and object database.
i. Backup copy of graphic files, programs, and database on electronic media such as DVDs.
j. List of recommended spare parts with part numbers and suppliers.
k. Complete original-issue documentation, installation, and maintenance information for furnished third-party hardware including computer equipment and sensors.
l. Complete original-issue copies of furnished software, including operating systems, custom programming language, operator workstation software, and graphics software.
m. Licenses, guarantees, and warranty documents.
n. Recommended preventive maintenance procedures for system components, including schedule of tasks such as inspection, cleaning, and calibration; time between tasks; and task descriptions.
o. Owner training materials.

1.7 QUALITY ASSURANCE

A. DDC System Manufacturer Qualifications:

1. Nationally recognized manufacturer of DDC systems and products.
2. DDC systems with similar requirements to those indicated for a continuous period of 10 years within time of bid.
3. DDC systems and products that have been successfully tested and in use on at least five past projects.
4. Having complete published catalog literature, installation, operation, and maintenance manuals for all products intended for use.
5. Having full-time in-house employees for the following:

    a. Product research and development.
    b. Product and application engineering.
    c. Product manufacturing, testing, and quality control.
    d. Technical support for DDC system installation training, commissioning, and troubleshooting of installations.
    e. Owner operator training.

B. DDC System Provider Qualifications:

1. Authorized representative of, and trained by, DDC system manufacturer.
2. In-place facility located within 50 Miles of Project.
3. Demonstrated past experience with installation of DDC system products being installed for period within five consecutive years before time of bid.
4. Demonstrated past experience on five projects of similar complexity, scope, and value.
5. Each person assigned to Project shall have demonstrated past experience.
6. Staffing resources of competent and experienced full-time employees that are assigned to execute work according to schedule.
7. Service and maintenance staff assigned to support Project during warranty period.
8. Product parts inventory to support on-going DDC system operation for a period of not less than 5 years after Substantial Completion.
9. DDC system manufacturer's backing to take over execution of Work if necessary to comply with requirements indicated. Include Project-specific written letter, signed by manufacturer's corporate officer, if requested.

C. Testing Agency Qualifications: Member company of NETA.

1. Testing Agency's Field Supervisor: Certified by NETA to supervise on-site testing.

D. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and products and for fabrication and installation.

1. Build mockups of completed installation for areas indicated on Drawings.
2. Approval of mockups does not constitute approval of deviations from Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.

1.8 WARRANTY

A. Manufacturer's Warranty: Manufacturer and Installer agree to repair or replace products that fail in materials or workmanship within specified warranty period.

1. Failures shall be adjusted, repaired, or replaced at no additional cost or reduction in service to Owner.
2. Include updates or upgrades to software and firmware if necessary to resolve deficiencies.

    a. Install updates only after receiving Owner's written authorization.

3. Warranty service shall occur during normal business hours and commence within 24 hours of Owner's warranty service request.
4. Warranty Period: Two year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 DDC SYSTEM MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, undefined:

1. Distech Controls.

2.2 DDC SYSTEM DESCRIPTION

A. Microprocessor-based monitoring and control including analog/digital conversion and program logic. A control loop or subsystem in which digital and analog information is received and processed by a microprocessor, and digital control signals are generated based on control algorithms and transmitted to field devices to achieve a set of predefined conditions.

1. DDC system shall consist of a high-speed, peer-to-peer network of distributed DDC controllers, other network devices, operator interfaces, and software.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.3 WEB ACCESS

A. DDC system shall be web based.

1. Web-Based Access to DDC System:

a. DDC system software shall be based on server thin-client architecture, designed around open standards of web technology. DDC system server shall be accessed using a web browser over DDC system network, using Owner's LAN, and remotely over Internet.
b. Intent of thin-client architecture is to provide operators complete access to DDC system via a web browser. No special software other than a web browser shall be required to access graphics, point displays, and trends; to configure trends, points, and controllers; and to edit programming.
c. Web access shall be password protected.

2.4 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: Products installed in ducts, equipment, and return-air paths shall comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 25 or less.
2. Smoke-Developed Index: 50 or less.

B. DDC System Speed:

1. Response Time of Connected I/O:

a. AI point values connected to DDC system shall be updated at least every five seconds for use by DDC controllers. Points used globally shall also comply with this requirement.

b. BI point values connected to DDC system shall be updated at least every five seconds for use by DDC controllers. Points used globally shall also comply with this requirement.
c. AO points connected to DDC system shall begin to respond to controller output commands within two second(s). Global commands shall also comply with this requirement.
d. BO point values connected to DDC system shall respond to controller output commands within two second(s). Global commands shall also comply with this requirement.

2. Display of Connected I/O:

a. Analog point COV connected to DDC system shall be updated and displayed at least every 10 seconds for use by operator.
b. Binary point COV connected to DDC system shall be updated and displayed at least every 10 seconds for use by operator.
c. Alarms of analog and digital points connected to DDC system shall be displayed within 30 seconds of activation or change of state.
d. Graphic display refresh shall update within eight seconds.
e. Point change of values and alarms displayed from workstation to workstation when multiple operators are viewing from multiple workstations shall not exceed graphic refresh rate indicated.

C. Network Bandwidth: Design each network of DDC system to include at least 30 percent available spare bandwidth with DDC system operating under normal and heavy load conditions indicated. Calculate bandwidth usage, and apply a safety factor to ensure that requirement is satisfied when subjected to testing under worst case conditions.

D. DDC System Data Storage:

1. Include capability to archive not less than 60 consecutive months of historical data for all I/O points connected to system, including alarms, event histories, transaction logs, trends and other information indicated.
2. Local Storage:

a. Provide server with data storage indicated. Server(s) shall use IT industry standard database platforms and be capable of functions described in "DDC Data Access" Paragraph.

3. Cloud Storage:

a. Provide application-based and web browser interfaces to configure, upload, download, and manage data, and service plan with storage adequate to store all data for term indicated. Cloud storage shall use IT industry standard database platforms and be capable of functions described in "DDC Data Access" Paragraph.

E. DDC Data Access:

1. When logged into the system, operator shall be able to also interact with any DDC controller connected to DDC system as required for functional operation of DDC system.
2. System(s) shall be used for application configuration; for archiving, reporting and trending of data; for operator transaction archiving and reporting; for network information management; for alarm annunciation; and for operator interface tasks and controls application management.

F. Future Expandability:

1. DDC system size shall be expandable to an ultimate capacity of at least two times total I/O points indicated.
2. Additional DDC controllers, I/O and associated wiring shall be all that is needed to achieve ultimate capacity. Initial network infrastructure shall be designed and installed to support ultimate capacity.
3. Operator interfaces installed initially shall not require hardware and software additions and revisions for ultimate capacity.

G. Input Point Displayed Accuracy: Input point displayed values shall meet following end-to-end overall system accuracy, including errors associated with meter, sensor, transmitter, lead wire or cable, and analog to digital conversion.

1. Energy:
   a. Thermal: Within 1 percent of reading.
   b. Electric Power: Within 1 percent of reading.
   c. Requirements indicated on Drawings for meters not supplied by utility.
2. Flow:
   a. Air: Within 5 percent of design flow rate.
   b. Air (Terminal Units): Within 10 percent of design flow rate.
   c. Water: Within 2 percent of design flow rate.
   d. Steam: Within 5 percent of design flow rate.
3. Gas:
   a. Carbon Dioxide: Within 50 ppm.
   b. Carbon Monoxide: Within 5 percent of reading.
   c. Oxygen: Within 5 percent of reading.
   d. Refrigerant: Within 50 ppm.
4. Moisture (Relative Humidity):
   a. Air: Within 2 percent RH.
   b. Space: Within 2 percent RH.
   c. Outdoor: Within 2 percent RH.
5. Level: Within 2 percent of reading.
6. Pressure:
   a. Air, Ducts and Equipment: 0.5 percent of instrument span.
   b. Space: Within 0.25 percent of instrument span.
   c. Water: Within 0.5 percent of instrument span.
   d. Steam: Within 0.5 percent of instrument span.
7. Speed: Within 5 percent of reading.
8. Temperature, Dew Point:
   a. Air: Within 0.5 deg F.
   b. Space: Within 0.5 deg F.
   c. Outdoor: Within 2 deg F.
9. Temperature, Dry Bulb:
   a. Air: Within 0.5 deg F.
   b. Space: Within 0.5 deg F.
   c. Outdoor: Within 1 deg F.
   d. Chilled Water: Within 0.5 deg F.
   e. Condenser Water: Within 0.5 deg F.
   f. Heating Hot Water: Within 0.5 deg F.
   g. Energy Recovery Runaround Liquid: Within 0.5 deg F.
   h. Steam: Within 1 deg F.
   i. Temperature Difference: Within 0.25 deg F.
   j. Other Temperatures Not Indicated: Within 0.5 deg F.
10. Temperature, Wet Bulb:
   a. Air: Within 0.5 deg F.
   b. Space: Within 0.5 deg F.
   c. Outdoor: Within 1 deg F.

11. Vibration: Within 5 percent of reading.

H. Precision of I/O Reported Values: Values reported in database and displayed shall have following precision:

1. Current:

   a. Milliamperes: Nearest 1/100th of a milliampere.
   b. Amperes: Nearest 1/10th of an ampere up to 100 A; nearest ampere for 100 A and more.

2. Energy:

   a. Electric Power:

      1) Rate (Watts): Nearest 1/10th of a watt through 1000 W.
      2) Rate (Kilowatts): Nearest 1/10th of a kilowatt through 1000 kW; nearest kilowatt above 1000 kW.
      3) Usage (Kilowatt-Hours): Nearest kilowatt through 10,000 kW; nearest 10 kW between 10,000 and 100,000 kW; nearest 100 kW for above 100,000 kW.

   b. Thermal, Rate:

      1) Heating: For Btu/h, nearest Btu/h up to 1000 Btu/h; nearest 10 Btu/h between 1000 and 10,000 Btu/h; nearest 100 Btu/h for above 10,000 Btu/h. For Mbh, round to nearest Mbh up to 1000 Mbh; nearest 10 Mbh between 1000 and 10,000 Mbh; nearest 100 Mbh above 10,000 Mbh.
      2) Cooling: For tons, nearest ton up to 1000 tons; nearest 10 tons between 1000 and 10,000 tons; nearest 100 tons above 10,000 tons.

   c. Thermal, Usage:

      1) Heating: For Btu, nearest Btu up to 1000 Btu; nearest 10 Btu between 1000 and 10,000 Btu; nearest 100 Btu for above 10,000 Btu. For Mbtu, round to nearest Mbtu up to 1000 Mbtu; nearest 10 Mbtu between 1000 and 10,000 Mbtu; nearest 100 Mbtu above 10,000 Mbtu.
      2) Cooling: For ton-hours, nearest ton-hours up to 1000 ton-hours; nearest 10 ton-hours between 1000 and 10,000 ton-hours; nearest 100 tons above 10,000 tons.

3. Flow:

   a. Air: Nearest 1/10th of a cfm through 100 cfm; nearest cfm between 100 and 1000 cfm; nearest 10 cfm between 1000 and 10,000 cfm; nearest 100 cfm above 10,000 cfm.
   b. Water: Nearest 1/10th gpm through 100 gpm; nearest gpm between 100 and 1000 gpm; nearest 10 gpm between 1000 and 10,000 gpm; nearest 100 gpm above 10,000 gpm.
   c. Steam: Nearest 1/10th lb/hr through 100 lbs/hr; nearest lbs/hr between 100 and 1000 lbs/hr; nearest 10 lbs/hr above 1000 lbs/hr.

4. Gas:

   a. Carbon Dioxide (ppm): Nearest ppm.
   b. Carbon Monoxide (ppm): Nearest ppm.
   c. Oxygen (Percentage): Nearest 1/10th of 1 percent.
   d. Refrigerant (ppm): Nearest ppm.

5. Moisture (Relative Humidity):

   a. Relative Humidity (Percentage): Nearest 1 percent.

6. Level: Nearest 1/100th of an inch through 10 inches; nearest 1/10 of an inch between 10 and 100 inches; nearest inch above 100 inches.
7. Speed:

   a. Rotation (rpm): Nearest 1 rpm.
   b. Velocity: Nearest 1/10th fpm through 100 fpm; nearest fpm between 100 and 1000 fpm; nearest 10 fpm above 1000 fpm.

8. Position, Dampers and Valves (Percentage Open): Nearest 1 percent.
9. Pressure:
    a. Air, Ducts and Equipment: Nearest 1/10th in. w.c.
    b. Space: Nearest 1/100th in. w.c.
    c. Steam: Nearest 1/10th psig through 100 psig; nearest psig above 100 psig.
    d. Water: Nearest 1/10 psig through 100 psig; nearest psig above 100 psig.
10. Temperature:
    a. Air, Ducts and Equipment: Nearest 1/10th of a degree.
    b. Outdoor: Nearest degree.
    c. Space: Nearest 1/10th of a degree.
    d. Chilled Water: Nearest 1/10th of a degree.
    e. Condenser Water: Nearest 1/10th of a degree.
    f. Heating Hot Water: Nearest degree.
    g. Heat Recovery Runaround: Nearest 1/10th of a degree.
    h. Steam: Nearest degree.
11. Vibration: Nearest 1/10th in/s.
12. Voltage: Nearest 1/10 volt up to 100 V; nearest volt above 100 V.

I. Control Stability: Control variables indicated within the following limits:

1. Flow:
    a. Air, Ducts and Equipment, except Terminal Units: Within 2 percent of design flow rate.
    b. Air, Terminal Units: Within 10 percent of design flow rate.
    c. Water: Within 2 percent of design flow rate.
    d. Steam: Within 5 percent of design flow rate.
2. Gas:
    a. Carbon Dioxide: Within 50 ppm.
    b. Carbon Monoxide: Within 5 percent of reading.
    c. Oxygen: Within 5 percent of reading.
3. Moisture (Relative Humidity):
    a. Air: Within 2 percent RH.
    b. Space: Within 2 percent RH.
    c. Outdoor: Within 2 percent RH.
4. Level: Within 5 percent of reading.
5. Pressure:
    a. Air, Ducts and Equipment: 0.5 percent of instrument span.
    b. Space: Within 0.25 percent of instrument span.
    c. Water: Within 0.5 percent of instrument span.
    d. Steam: Within 0.5 percent of instrument span.
6. Temperature, Dew Point:
    a. Air: Within 0.5 deg F.
    b. Space: Within 0.5 deg F.
7. Temperature, Dry Bulb:
    a. Air: Within 0.5 deg F.
    b. Space: Within 0.5 deg F.
    c. Chilled Water: Within 0.5 deg F.
    d. Condenser Water: Within 0.5 deg F.
    e. Heating Hot Water: Within 0.5 deg F.

f. Energy Recovery Runaround Liquid: Within 0.5 deg F.

8. Temperature, Wet Bulb:

a. Air: Within 0.5 deg F.
b. Space: Within 0.5 deg F.

J. Environmental Conditions for Controllers, Gateways, and Routers:

1. Products shall operate without performance degradation under ambient environmental temperature, pressure and humidity conditions encountered for installed location.

a. If product alone cannot comply with requirement, install product in a protective enclosure that is isolated and protected from conditions impacting performance. Enclosure shall be internally insulated, electrically heated, cooled and ventilated as required by product and application.

2. Products shall be protected with enclosures satisfying the following minimum requirements unless more stringent requirements are indicated. Products not available with integral enclosures complying with requirements indicated shall be housed in protective secondary enclosures. Installed location shall dictate the following NEMA 250 enclosure requirements:

a. Outdoors, Unprotected: Type 4X.
b. Indoors, Heated and Air Conditioned: Type 1.

K. Environmental Conditions for Instruments and Actuators:

1. Instruments and actuators shall operate without performance degradation under the ambient environmental temperature, pressure, humidity, and vibration conditions specified and encountered for installed location.

a. If instruments and actuators alone cannot comply with requirement, install instruments and actuators in protective enclosures that are isolated and protected from conditions impacting performance. Enclosure shall be internally insulated, electrically heated and ventilated as required by instrument and application.

2. Instruments, actuators and accessories shall be protected with enclosures satisfying the following minimum requirements unless more stringent requirements are indicated. Instruments and actuators not available with integral enclosures complying with requirements indicated shall be housed in protective secondary enclosures. Installed location shall dictate the following NEMA 250 enclosure requirements:

a. Outdoors, Unprotected: Type 4X.
b. Indoors, Heated with Non-Filtered Ventilation: Type 2.
c. Indoors, Heated and Air-conditioned: Type 1.
d. Within Duct Systems and Air-Moving Equipment Not Exposed to Possible Condensation: Type 2.

L. DDC System Reliability:

1. Design, install and configure DDC controllers, gateways, routers, to yield a MTBF of at least 40,000 hours, based on a confidence level of at least 90 percent. MTBF value shall include any failure for any reason to any part of products indicated.
2. If required to comply with MTBF indicated, include DDC system and product redundancy to maintain DCC system, and associated systems and equipment that are being controlled, operational and under automatic control.
3. Critical systems and equipment that require a higher degree of DDC system redundancy than MTBF indicated shall be indicated on Drawings.

M. Electric Power Quality:

1. Power-Line Surges:

a. Protect susceptible DDC system products connected to ac power circuits from power-line surges to comply with requirements of IEEE C62.41.
b. Do not use fuses for surge protection.
c. Test protection in the normal mode and in the common mode, using the following two waveforms:

1) 10-by-1000-mic.sec. waveform with a peak voltage of 1500 V and a peak current of 60 A.
2) 8-by-20-mic.sec. waveform with a peak voltage of 1000 V and a peak current of 500 A.

2. Power Conditioning:

a. Protect susceptible DDC system products connected to ac power circuits from irregularities and noise rejection. Characteristics of power-line conditioner shall be as follows:

1) At 85 percent load, output voltage shall not deviate by more than plus or minus 1 percent of nominal when input voltage fluctuates between minus 20 percent to plus 10 percent of nominal.
2) During load changes from zero to full load, output voltage shall not deviate by more than plus or minus 3 percent of nominal.
3) Accomplish full correction of load switching disturbances within five cycles, and 95 percent correction within two cycles of onset of disturbance.
4) Total harmonic distortion shall not exceed 3-1/2 percent at full load.

3. Ground Fault: Protect products from ground fault by providing suitable grounding. Products shall not fail due to ground fault condition.

N. Backup Power Source:

1. HVAC systems and equipment served by a backup power source shall have associated DDC system products that control such systems and equipment also served from a backup power source.

O. UPS:

1. DDC system products powered by UPS units shall include the following:

a. Desktop workstations.
b. Printers.
c. Servers.
d. Gateways.
e. DDC controllers , except application-specific controllers.

P. Continuity of Operation after Electric Power Interruption:

1. Equipment and associated factory-installed controls, field-installed controls, electrical equipment, and power supply connected to building normal and backup power systems shall automatically return equipment and associated controls to operating state occurring immediately before loss of normal power, without need for manual intervention by operator when power is restored either through backup power source or through normal power if restored before backup power is brought online.

2.5 SYSTEM ARCHITECTURE

A. System architecture shall consist of no more than three levels of LANs.

1. Level one LAN shall connect network controllers and operator workstations.

2. Level one or Level two LAN shall connect programmable application controllers to other programmable application controllers, and to network controllers.
3. Level two or Level three LAN shall connect application-specific controllers to programmable application controllers and network controllers.
4. Level two or Level three LAN shall connect application-specific controllers to application-specific controllers.

B. Minimum Data Transfer and Communication Speed:

1. LAN Connecting Operator Workstations and Network Controllers: 100 Mbps.
2. LAN Connecting Programmable Application Controllers: 100 kbps.
3. LAN Connecting Application-Specific Controllers: 38,400 bps.

C. DDC system shall consist of dedicated and separated LANs that are not shared with other building systems and tenant data and communication networks.

D. System architecture shall be modular and have inherent ability to expand to not less than three times system size indicated with no impact to performance indicated.

E. System architecture shall perform modifications without having to remove and replace existing network equipment.

F. Number of LANs and associated communication shall be transparent to operator. All I/O points residing on any LAN shall be capable of global sharing between all system LANs.

G. System design shall eliminate dependence on any single device for system alarm reporting and control execution. Each controller shall operate independently by performing its' own control, alarm management and historical data collection.

H. Special Network Architecture Requirements:

1. Air-Handling Systems: For control applications of an air-handling system that consists of air-handling unit(s) and VAV terminal units, include a dedicated LAN of application-specific controllers serving VAV terminal units connected directly to controller that is controlling air-handling system air-handling unit(s). Basically, create a DDC system LAN that aligns with air-handling system being controlled.

2.6 DDC SYSTEM OPERATOR INTERFACES

A. Operator Means of System Access: Operator shall be able to access entire DDC system through any of multiple means, including, but not limited to, the following:

1. Desktop and portable workstation with hardwired connection through LAN port.
2. Portable operator workstation with wireless connection through LAN router.
3. Mobile device and application with secured wireless connection through LAN router or cellular data service.
4. Remote connection through web access.

B. Access to system, regardless of operator means used, shall be transparent to operator.

C. Network Ports: For hardwired connection of desktop or portable workstation. Network port shall be easily accessible, properly protected, clearly labeled, and installed at the following locations:

1. Each different roof level with roof-mounted air-handling units or rooftop units.
2. Security system command center.
3. Fire-alarm system command center.

D. Desktop Workstations:

1. Connect to DDC system Level one LAN through a communications port directly on LAN or through a communications port on a DDC controller.
2. Able to communicate with any device located on any DDC system LAN.

E. Portable Workstations:

1. Connect to DDC system Level one LAN through a communications port directly on LAN or through a communications port on a DDC controller.
2. Able to communicate with any device located on any DDC system LAN.
3. Connect to DDC system Level two or Level three LAN through a communications port on an application-specific controller, or a room temperature sensor connected to an application-specific controller.
4. Connect to system through a wireless router connected to Level one LAN.
5. Connect to system through a cellular data service.
6. Portable workstation shall be able to communicate with any device connected to any system LAN regardless of point of physical connection to system.
7. Monitor, program, schedule, adjust set points, and report capabilities of I/O connected anywhere in system.
8. Have dynamic graphic displays that are identical to desktop workstations.

F. POT:

1. Connect DDC controller through a communications port local to controller.
2. Able to communicate with any DDC system controller that is directly connected or with LAN or connected to DDC system.

G. Mobile Device:

1. Connect to system through a wireless router connected to LAN and cellular data service.
2. Able to communicate with any DDC controller connected to DDC system using a dedicated application and secure web access.

H. Telephone Communications:

1. Through use of a standard modem, operator shall be able to communicate with any device connected to any system LAN.
2. Have auto-dial and auto-answer communications to allow desktop and portable workstations and DDC controllers to communicate with remote workstations and remote DDC controllers via telephone lines.

   a. Desktop and Portable Workstations:

      1) Operators shall be able to perform all control functions, report functions, and database generation and modification functions as if directly connected to system LAN.
      2) Have routines to automatically answer calls, and either file or display information sent remotely.
      3) Communications taking place over telephone lines shall be completely transparent to operator.
      4) Dial-up program shall maintain a user-definable cross-reference and associated telephone numbers so it is not required to remember or manually dial telephone numbers.

   b. DDC Controllers:

      1) Not have modems unless specifically indicated for a unique controller.
      2) Controllers with modems shall automatically place calls to report critical alarms, or to upload trend and historical information for archiving.
      3) Analyze and prioritize alarms to minimize initiation of calls.

4) Buffer noncritical alarms in memory and report them as a group of alarms, or until an operator manually requests an upload.
5) Make provisions for handling busy signals, no-answers, and incomplete data transfers.
6) Call default devices when communications cannot be established with primary devices.

I. Critical Alarm Reporting:

1. Operator-selected critical alarms shall be sent by DDC system to notify operator of critical alarms that require immediate attention.
2. DDC system shall send alarm notification to multiple recipients that are assigned for each alarm.
3. DDC system shall notify recipients by any or all means, including e-mail, text message and prerecorded phone message to mobile and landline phone numbers.

J. Simultaneous Operator Use: Capable of accommodating up to 20 simultaneous operators that are accessing DDC system through any one of operator interfaces indicated.

2.7 NETWORKS

A. Acceptable networks for connecting workstations, mobile devices, and network controllers include the following:

1. IP.
2. IEEE 8802-3, Ethernet.

B. Acceptable networks for connecting programmable application controllers include the following:

1. IP.

C. Acceptable networks for connecting application-specific controllers include the following:

1. EIA-485A.
2. IP.

2.8 NETWORK COMMUNICATION PROTOCOL

A. Network communication protocol(s) used throughout entire DDC system shall be open to Owner and available to other companies for use in making future modifications to DDC system.

B. ASHRAE 135 Protocol:

1. ASHRAE 135 communication protocol shall be sole and native protocol used throughout entire DDC system.
2. DDC system shall not require use of gateways except to integrate HVAC equipment and other building systems and equipment, not required to use ASHRAE 135 communication protocol.
3. If used, gateways shall connect to DDC system using ASHRAE 135 communication protocol and Project object properties and read/write services indicated by interoperability schedule.
4. Operator workstations, controllers and other network devices shall be tested and listed by BACnet Testing Laboratories.

C. CEA-709.1-C Protocol:

1. DDC system shall be an open implementation of LonWorks technology using CEA 709.1-C communication protocol and using LonMark SNVTs as defined in LonMark SNVT list exclusively for communication throughout DDC system.

2. LNS shall be used for all network management including addressing and binding of network variables.

   a. Final LNS database shall be submitted with Project closeout submittals.
   b. All devices shall be online and commissioned into LNS database.

3. All devices connected to DDC system network(s) shall use CEA-709.1-C protocol and be installed so SCPT output from any node on network can be bound to any other node in the domain.

D. Industry Standard Protocols:

1. DDC system shall use any one or a combination of the following industry standard protocols for network communication while complying with other DDC system requirements indicated:

   a. ASHRAE 135.
   b. CEA-709.1-C.

2. Operator workstations and network controllers shall communicate through ASHRAE 135 or CEA-709.1-C protocol.
3. Portions of DDC system networks using ASHRAE 135 communication protocol shall be an open implementation of network devices complying with ASHRAE 135. Network devices shall be tested and listed by BACnet Testing Laboratories.
4. Portions of DDC system networks using CEA-709.1-C communication protocol shall be an open implementation of LonWorks technology using CEA-709.1-C communication protocol and using LonMark SNVTs as defined in LonMark SNVT list exclusively for DDC system.
5. Portions of DDC system networks using Modbus Application Protocol Specification V1.1b communication protocol shall be an open implementation of network devices and technology complying with Modbus Application Protocol Specification V1.1b.
6. Gateways shall be used to connect networks and network devices using different protocols.

2.9 DDC SYSTEM WIRELESS NETWORKS

A. Use Zigbee or an open industry standard and technology used by multiple DDC system manufacturers technology to create a wireless mesh network to provide wireless connectivity for network devices at multiple system levels including communications from programmable application controllers and application-specific controllers to temperature sensors and from network controllers to programmable application controllers and application-specific controllers.

B. Installer shall design wireless networks to comply with DDC system performance requirements indicated. Wireless network devices shall co-exist on same network with hardwired devices.

C. Hardwired controllers shall be capable of retrofit to wireless devices with no special software.

D. A wireless coordinator shall provide a wireless interface between programmable application controllers, application-specific controllers, and network controllers.

E. Wireless Temperature Sensors:

1. Wireless temperature sensors shall sense and transmit room temperatures, temperature set point, room occupancy notification and low battery condition to an associated router.
2. Use direct sequence spread spectrum RF technology.
3. Operate on the 2.4-GHz ISM Band.
4. Comply with IEEE 802.15.4 for low-power, low duty-cycle RF transmitting systems.
5. FCC compliant to CFR 15, Subpart B, Class A.
6. Include set point adjustment between 55 to 85 deg F.
7. Multiple sensors shall be able to report to a router connected to a DDC controller for averaging or high and low selection.

2.10 DESKTOP WORKSTATIONS

A. Description: A tower or all-in-one computer designed for normal use at a single, semipermanent location.

B. <Click here to find, evaluate, and insert list of manufacturers and products.>

C. Performance Requirements:

1. Performance requirements may dictate equipment exceeding minimum requirements indicated.
2. Energy Star compliant.

D. Personal Computer:

1. Minimum Processor Speed: 3.50 gigahertz.
2. RAM:
   a. Capacity: 8 GB.
   b. Speed and Type: 1333 MHz.
3. Hard Drive:
   a. Media: Solid state.
   b. Number of Hard Drives: One.
   c. Capacity: 500 GB.
4. At least four expansion slots of 64 bit.
5. Video Card:
   a. Resolution: 1920 by 1200 pixels.
   b. RAM: 16 GB.
6. Sound Card:
   a. At least 128 voice wavetable synthesis.
   b. Capable of delivering three-dimensional sound effects.
   c. High-resolution 16-bit stereo digital audio recording and playback with user-selectable sample rates up to 48,000 Hz.
7. Network Interface Card: Include card with connection, as applicable.
   a. 10-100-1000 base TX Ethernet with RJ45 connector port.
   b. 100 base FX Ethernet with SC or ST port.

E. Wireless Ethernet, 802.11 a/b/g/n.

1. Optical Modem: Full duplex link for connection to optical fiber cable provided.
2. I/O Ports:
   a. Two USB 3.0 ports on front panel, six on back panel, and three internal on motherboard.
   b. One serial port.
   c. One parallel port.
   d. Two PS/2 ports.
   e. One RJ-45.
   f. One stereo line-in and headphone/line-out on back panel.
   g. One microphone and headphone connector on front panel.
   h. One IEEE 1394 on front and back panel with PCI-e card.
   i. One ESATA port on back panel.
3. Battery: Life of at least three years to maintain system clock/calendar and ROM, as a minimum.

F. Keyboard:

1. 101 enhanced keyboard.

2. Full upper- and lowercase ASCII keyset, numeric keypad, dedicated cursor control keypad, and 12 programmable function keys.
3. Wireless operation within up to 72 inches in front of workstation.

G. Pointing Device:

1. Either a two- or three-button mouse.
2. Wireless operation within up to 72 inches in front of workstation.

H. Flat Panel Display Monitor:

1. Display:

a. Color display with 27 inches diagonal viewable area.
b. Analog input signal.
c. Aspect Ratio: 16 to 9.
d. Antiglare display.
e. Energy Star compliant.
f. Resolution: 1920 by 1080 pixels at 60 Hz with pixel size of 0.277 mm or smaller.
g. Number of Displays: One.

I. Speakers:

1. Two, with individual controls for volume, bass and treble.
2. Signal to Noise Ratio: At least 65 dB.
3. Power: At least 4 W per speaker/channel.
4. Magnetic shielding to prevent distortion on the video monitor.

J. I/O Cabling: Include applicable cabling to connect I/O devices.

2.11 SERVERS

A. Description: x86-based permanently installed computer used for client-server computing.

B. Manufacturers: Subject to compliance with requirements, undefined:

C. Mounting: Rack.

D. Power: Dual power supply, minimum 300 W.

E. Performance Requirements:

1. Performance requirements may dictate equipment exceeding minimum requirements indicated.
2. Energy Star compliant.
3. Minimum Processor Speed.
4. RAM:

a. Capacity.
b. Speed and Type: MGz.
c. Expandable Capacity.

5. Redundant Array of Independent Disks: Two configuration.
6. Drive Bays: Eight at 2.5 inches or eight at 3.5 inches.
7. Hard-Drive Storage: Two drives each with 500 GB storage and nominal rotational speed of 7200 rpm.
8. Network Interface: Optical fiber.
9. DVD +RW Drive.
10. Color, flat-screen display with 27 diagonal viewable area.

11. Keyboard and mouse.
12. Next-day on-site warranty for two -year period following Substantial Completion.

F. Servers shall include the following:

1. Full-feature backup server (server and backup minimum requirement).
2. Software licenses.
3. Cable installation between server(s) and network.

G. Web Server:

1. If required to be separate, include web server hardware and software to match, except backup server is not required.
2. Firewalls between server web and networks.
3. Password protection for access to server from web server.
4. Cable installation between the server(s) and building Ethernet network.

H. Power each server through a dedicated UPS unit.

2.12 PRINTERS

A. Color Laser Printer:

1. Manufacturers: Subject to compliance with requirements, undefined:

   a. Hewlett-Packard Company.

2. 1200 by 1200 dots per inch resolution black and white, 1200 by 1200 dots per inch resolution black and white and color.
3. First sheet printed within 10 seconds.
4. Print buffer with at least 512 MB of RAM, expandable to at least one GB.
5. Complies with Energy Star requirements.
6. Capable of handling letter- and legal-size paper and overhead transparencies.
7. Two paper trays; one tray with 250 sheet capacity, and one tray with 500 sheet capacity.
8. Two-sided printing.

2.13 SYSTEM SOFTWARE

A. System Software Minimum Requirements:

1. Real-time multitasking and multiuser 64-bit operating system that allows concurrent multiple operator workstations operating and concurrent execution of multiple real-time programs and custom program development.
2. Operating system shall be capable of operating DOS and Microsoft Windows applications.
3. Database management software shall manage all data on an integrated and non-redundant basis. Additions and deletions to database shall be without detriment to existing data. Include cross linkages so no data required by a program can be deleted by an operator until that data have been deleted from respective programs.
4. Network communications software shall manage and control multiple network communications to provide exchange of global information and execution of global programs.
5. Operator interface software shall include day-to-day operator transaction processing, alarm and report handling, operator privilege level and data segregation control, custom programming, and online data modification capability.
6. Scheduling software shall schedule centrally based time and event, temporary, and exception day programs.

B. Operator Interface Software:

1. Minimize operator training through use of English language prorating and English language point identification.
2. Minimize use of a typewriter-style keyboard through use of a pointing device similar to a mouse.
3. Operator sign-off shall be a manual operation or, if no keyboard or mouse activity takes place, an automatic sign-off.
4. Automatic sign-off period shall be programmable from one to 60 minutes in one-minute increments on a per operator basis.
5. Operator sign-on and sign-off activity shall be recorded and sent to printer.
6. Security Access:

    a. Operator access to DDC system shall be under password control.
    b. An alphanumeric password shall be field assignable to each operator.
    c. Operators shall be able to access DDC system by entry of proper password.
    d. Operator password shall be same regardless of which computer or other interface means is used.
    e. Additions or changes made to passwords shall be updated automatically.
    f. Each operator shall be assigned an access level to restrict access to data and functions the operator is cable of performing.
    g. Software shall have at least five access levels.
    h. Each menu item shall be assigned an access level so that a one-for-one correspondence between operator assigned access level(s) and menu item access level(s) is required to gain access to menu item.
    i. Display menu items to operator with those capable of access highlighted. Menu and operator access level assignments shall be online programmable and under password control.

7. Data Segregation:

    a. Include data segregation for control of specific data routed to a workstation, to an operator or to a specific output device, such as a printer.
    b. Include at least 32 segregation groups.
    c. Segregation groups shall be selectable such as "fire points," "fire points on second floor," "space temperature points," "HVAC points," and so on.
    d. Points shall be assignable to multiple segregation groups. Display and output of data to printer or monitor shall occur where there is a match of operator or peripheral segregation group assignment and point segregations.
    e. Alarms shall be displayed and printed at each peripheral to which segregation allows, but only those operators assigned to peripheral and having proper authorization level will be allowed to acknowledge alarms.
    f. Operators and peripherals shall be assignable to multiple segregation groups and all assignments are to be online programmable and under password control.

8. Operators shall be able to perform commands including, but not limited to, the following:

    a. Start or stop selected equipment.
    b. Adjust set points.
    c. Add, modify, and delete time programming.
    d. Enable and disable process execution.
    e. Lock and unlock alarm reporting for each point.
    f. Enable and disable totalization for each point.
    g. Enable and disable trending for each point.
    h. Override control loop set points.
    i. Enter temporary override schedules.
    j. Define holiday schedules.
    k. Change time and date.
    l. Enter and modify analog alarm limits.
    m. Enter and modify analog warning limits.
    n. View limits.

o. Enable and disable demand limiting.
p. Enable and disable duty cycle.
q. Display logic programming for each control sequence.

9. Reporting:

a. Generated automatically and manually.
b. Sent to displays, printers and disk files.
c. Types of Reporting:

1) General listing of points.
2) List points currently in alarm.
3) List of off-line points.
4) List points currently in override status.
5) List of disabled points.
6) List points currently locked out.
7) List of items defined in a "Follow-Up" file.
8) List weekly schedules.
9) List holiday programming.
10) List of limits and deadbands.

10. Summaries: For specific points, for a logical point group, for an operator selected group(s), or for entire system without restriction due to hardware configuration.

C. Graphic Interface Software:

1. Include a full interactive graphical selection means of accessing and displaying system data to operator. Include at least five levels with the penetration path operator assignable (for example, site, building, floor, air-handling unit, and supply temperature loop). Native language descriptors assigned to menu items are to be operator defined and modifiable under password control.
2. Include a hierarchical-linked dynamic graphic operator interface for accessing and displaying system data and commanding and modifying equipment operation. Interface shall use a pointing device with pull-down or penetrating menus, color and animation to facilitate operator understanding of system.
3. Include at least 10 levels of graphic penetration with the hierarchy operator assignable.
4. Descriptors for graphics, points, alarms and such shall be modified through operator's workstation under password control.
5. Graphic displays shall be online user definable and modifiable using the hardware and software provided.
6. Data to be displayed within a graphic shall be assignable regardless of physical hardware address, communication or point type.
7. Graphics are to be online programmable and under password control.
8. Points may be assignable to multiple graphics where necessary to facilitate operator understanding of system operation.
9. Graphics shall also contain software points.
10. Penetration within a graphic hierarchy shall display each graphic name as graphics are selected to facilitate operator understanding.
11. Back-trace feature shall permit operator to move upward in the hierarchy using a pointing device. Back trace shall show all previous penetration levels. Include operator with option of showing each graphic full screen size with back trace as horizontal header or by showing a "stack" of graphics, each with a back trace.
12. Display operator accessed data on the monitor.
13. Operator shall select further penetration using pointing device to click on a site, building, floor, area, equipment, and so on. Defined and linked graphic below that selection shall then be displayed.
14. Include operator with means to directly access graphics without going through penetration path.
15. Dynamic data shall be assignable to graphics.
16. Display points (physical and software) with dynamic data provided by DDC system with appropriate text descriptors, status or value, and engineering unit.

17. Use color, rotation, or other highly visible means, to denote status and alarm states. Color shall be variable for each class of points, as chosen by operator.
18. Points shall be dynamic with operator adjustable update rates on a per point basis from one second to over a minute.
19. For operators with appropriate privilege, points shall be commanded directly from display using pointing device.
    a. For an analog command point such as set point, current conditions and limits shall be displayed and operator can position new set point using pointing device.
    b. For a digital command point such as valve position, valve shall show its current state such as open or closed and operator could select alternative position using pointing device.
    c. Keyboard equivalent shall be available for those operators with that preference.
20. Operator shall be able to split or resize viewing screen into quadrants to show one graphic on one quadrant of screen and other graphics or spreadsheet, bar chart, word processing, curve plot and other information on other quadrants on screen. This feature shall allow real-time monitoring of one part of system while displaying other parts of system or data to better facilitate overall system operation.
21. Help Features:
    a. On-line context-sensitive help utility to facilitate operator training and understanding.
    b. Bridge to further explanation of selected keywords. Document shall contain text and graphics to clarify system operation.
        1) If help feature does not have ability to bridge on keywords for more information, a complete set of user manuals shall be provided in an indexed word-processing program, which shall run concurrently with operating system software.
    c. Available for Every Menu Item:
        1) Index items for each system menu item.
22. Graphic generation software shall allow operator to add, modify, or delete system graphic displays.
    a. Include libraries of symbols depicting HVAC symbols such as fans, coils, filters, dampers, valves pumps, and electrical symbols similar to those indicated.
    b. Graphic development package shall use a pointing device in conjunction with a drawing program to allow operator to perform the following:
        1) Define background screens.
        2) Define connecting lines and curves.
        3) Locate, orient and size descriptive text.
        4) Define and display colors for all elements.
        5) Establish correlation between symbols or text and associated system points or other displays.

D. Project-Specific Graphics: Graphics documentation including, but not limited to, the following:
1. Site plan showing each building, and additional site elements, which are being controlled or monitored by DDC system.
2. Plan for each building floor, including interstitial floors, and each roof level of each building, showing the following:
    a. Room layouts with room identification and name.
    b. Locations and identification of all monitored and controlled HVAC equipment and other equipment being monitored and controlled by DDC system.
    c. Location and identification of each hardware point being controlled or monitored by DDC system.

3. Control schematic for each of following, including a graphic system schematic representation, similar to that indicated on Drawings, with point identification, set point and dynamic value indication , sequence of operation and control logic diagram.
4. Graphic display for each piece of equipment connected to DDC system through a data communications link. Include dynamic indication of all points associated with equipment.
5. DDC system network riser diagram that shows schematic layout for entire system including all networks and all controllers, gateways operator workstations and other network devices.

E. Customizing Software:

1. Software to modify and tailor DDC system to specific and unique requirements of equipment installed, to programs implemented and to staffing and operational practices planned.
2. Online modification of DDC system configuration, program parameters, and database using menu selection and keyboard entry of data into preformatted display templates.
3. As a minimum, include the following modification capability:

   a. Operator assignment shall include designation of operator passwords, access levels, point segregation and auto sign-off.
   b. Peripheral assignment capability shall include assignment of segregation groups and operators to consoles and printers, designation of backup workstations and printers, designation of workstation header points and enabling and disabling of print-out of operator changes.
   c. System configuration and diagnostic capability shall include communications and peripheral port assignments, DDC controller assignments to network, DDC controller enable and disable, assignment of command trace to points and application programs and initiation of diagnostics.
   d. System text addition and change capability shall include English or native language descriptors for points, segregation groups and access levels and action messages for alarms, run time and trouble condition.
   e. Time and schedule change capability shall include time and date set, time and occupancy schedules, exception and holiday schedules and daylight savings time schedules.
   f. Point related change capability shall include the following:

      1) System and point enable and disable.
      2) Run-time enable and disable.
      3) Assignment of points to segregation groups, calibration tables, lockout, and run time and to a fixed I/O value.
      4) Assignment of alarm and warning limits.

   g. Application program change capability shall include the following:

      1) Enable and disable of software programs.
      2) Programming changes.
      3) Assignment of comfort limits, global points, time and event initiators, time and event schedules and enable and disable time and event programs.

4. Software shall allow operator to add points, or groups of points, to DDC system and to link them to energy optimization and management programs. Additions and modifications shall be online programmable using operator workstation, downloaded to other network devices and entered into their databases. After verification of point additions and associated program operation, database shall be uploaded and recorded on hard drive and disk for archived record.
5. Include high-level language programming software capability for implementation of custom DDC programs. Software shall include a compiler, linker, and up- and down-load capability.
6. Include a library of DDC algorithms, intrinsic control operators, arithmetic, logic and relational operators for implementation of control sequences. Also include, as a minimum, the following:

   a. Proportional control (P).
   b. Proportional plus integral (PI).
   c. Proportional plus integral plus derivative (PID).

d. Adaptive and intelligent self-learning control.

1) Algorithm shall monitor loop response to output corrections and adjust loop response characteristics according to time constant changes imposed.
2) Algorithm shall operate in a continuous self-learning manner and shall retain in memory a stored record of system dynamics so that on system shut down and restart, learning process starts from where it left off.

7. Fully implemented intrinsic control operators including sequence, reversing, ratio, time delay, time of day, highest select AO, lowest select AO, analog controlled digital output, analog control AO, and digitally controlled AO.
8. Logic operators such as "And," "Or," "Not," and others that are part of a standard set available with a high-level language.
9. Arithmetic operators such as "Add," "Subtract," "Multiply," "Divide," and others that are part of a standard set available with a high-level language.
10. Relational operators such as "Equal To," "Not Equal To," "Less Than," "Greater Than," and others that are part of a standard set available with a high-level language.

F. Alarm Handling Software:

1. Include alarm handling software to report all alarm conditions monitored and transmitted through DDC controllers , gateways and other network devices.
2. Include first in, first out handling of alarms according to alarm priority ranking, with most critical alarms first, and with buffer storage in case of simultaneous and multiple alarms.
3. Alarm handling shall be active at all times to ensure that alarms are processed even if an operator is not currently signed on to DDC system.
4. Alarms display shall include the following:

a. Indication of alarm condition such as "Abnormal Off," "Hi Alarm," and "Low Alarm."
b. "Analog Value" or "Status" group and point identification with native language point descriptor such as "Space Temperature, Building 110, 2nd Floor, Room 212."
c. Discrete per point alarm action message, such as "Call Maintenance Dept. Ext-5561."
d. Include extended message capability to allow assignment and printing of extended action messages. Capability shall be operator programmable and assignable on a per point basis.

5. Alarms shall be directed to appropriate operator workstations, printers, and individual operators by privilege level and segregation assignments.
6. Send e-mail alarm messages to designated operators.
7. Send e-mail, page, text and voice messages to designated operators for critical alarms.
8. Alarms shall be categorized and processed by class.

a. Class 1:

1) Associated with fire, security and other extremely critical equipment monitoring functions; have alarm, trouble, return to normal, and acknowledge conditions printed and displayed.
2) Unacknowledged alarms to be placed in unacknowledged alarm buffer.
3) All conditions shall cause an audible sound and shall require individual acknowledgment to silence audible sound.

b. Class 2:

1) Critical, but not life-safety related, and processed same as Class 1 alarms, except do not require individual acknowledgment.
2) Acknowledgement may be through a multiple alarm acknowledgment.

c. Class 3:

1) General alarms; printed, displayed and placed in unacknowledged alarm buffer queues.

2) Each new alarm received shall cause an audible sound. Audible sound shall be silenced by "acknowledging" alarm or by pressing a "silence" key.
3) Acknowledgement of queued alarms shall be either on an individual basis or through a multiple alarm acknowledgement.
4) Alarms returning to normal condition shall be printed and not cause an audible sound or require acknowledgment.

d. Class 4:

1) Routine maintenance or other types of warning alarms.
2) Alarms to be printed only, with no display, no audible sound and no acknowledgment required.

9. Include an unacknowledged alarm indicator on display to alert operator that there are unacknowledged alarms in system. Operator shall be able to acknowledge alarms on an individual basis or through a multiple alarm acknowledge key, depending on alarm class.
10. To ensure that no alarm records are lost, it shall be possible to assign a backup printer to accept alarms in case of failure of primary printer.

G. Reports and Logs:

1. Include reporting software package that allows operator to select, modify, or create reports using DDC system I/O point data available.
2. Each report shall be definable as to data content, format, interval and date.
3. Report data shall be sampled and stored on DDC controller, within storage limits of DDC controller, and then uploaded to archive on server for historical reporting.
4. Operator shall be able to obtain real-time logs of all I/O points by type or status, such as alarm, point lockout, or normal.
5. Reports and logs shall be stored on server hard drives in a format that is readily accessible by other standard software applications, including spreadsheets and word processing.
6. Reports and logs shall be readily printed and set to be printed either on operator command or at a specific time each day.

H. Standard Reports: Standard DDC system reports shall be provided and operator shall be able to customize reports later.

1. All I/O: With current status and values.
2. Alarm: All current alarms, except those in alarm lockout.
3. Disabled I/O: All I/O points that are disabled.
4. Alarm Lockout I/O: All I/O points in alarm lockout, whether manual or automatic.
5. Alarm Lockout I/O in Alarm: All I/O in alarm lockout that are currently in alarm.
6. Logs:

a. Alarm history.
b. System messages.
c. System events.
d. Trends.

I. Tenant Override Reports: Prepare Project-specific reports.

1. Weekly report showing daily total time in hours that each tenant has requested after-hours HVAC.
2. Monthly report showing daily total time in hours that each tenant has requested after-hours HVAC.
3. Annual summary report that shows after-hours HVAC usage on a monthly basis.

J. HVAC Equipment Reports: Prepare Project-specific reports.

1. Chiller Report: Daily report showing operating conditions of each chiller according to ASHRAE 147, including, but not limited to, the following:

a. Chilled-water entering temperature.

b. Chilled-water leaving temperature.
c. Chilled-water flow rate.
d. Chilled-water inlet and outlet pressures.
e. Evaporator refrigerant pressure and temperature.
f. Condenser refrigerant pressure and liquid temperature.
g. Condenser-water entering temperature.
h. Condenser-water leaving temperature.
i. Condenser-water flow rate.
j. Refrigerant levels.
k. Oil pressure and temperature.
l. Oil level.
m. Compressor refrigerant discharge temperature.
n. Compressor refrigerant suction temperature.
o. Addition of refrigerant.
p. Addition of oil.
q. Vibration levels or observation that vibration is not excessive.
r. Motor amperes per phase.
s. Motor volts per phase.
t. Refrigerant monitor level (PPM).
u. Purge exhaust time or discharge count.
v. Ambient temperature (dry bulb and wet bulb).
w. Date and time logged.

K. Utility Reports: Prepare Project-specific reports.

1. Electric Report:

a. Include weekly report showing daily electrical consumption and peak electrical demand with time and date stamp for each meter.
b. Include monthly report showing the daily electrical consumption and peak electrical demand with time and date stamp for each meter.
c. Include annual report showing the monthly electrical consumption and peak electrical demand with time and date stamp for each meter.
d. For each weekly, monthly and annual report, include sum total of submeters combined by load type, such as lighting, receptacles and HVAC equipment showing daily electrical consumption and peak electrical demand.
e. For each weekly, monthly and annual report, include sum total of all submeters in building showing electrical consumption and peak electrical demand.

2. Natural Gas Report:

a. Include weekly report showing daily natural gas consumption and peak natural gas demand with time and date stamp for each meter.
b. Include monthly report showing the daily natural gas consumption and peak natural gas demand with time and date stamp for each meter.
c. Include annual report showing the monthly natural gas consumption and peak natural gas demand with time and date stamp for each meter.
d. For each weekly, monthly and annual report, include sum total of submeters combined by load type, such as boilers and service water heaters showing daily natural gas consumption and peak natural gas demand.
e. For each weekly, monthly and annual report, include sum total of all submeters in building showing natural gas consumption and peak natural gas demand.

3. Service Water Report:

a. Include weekly report showing daily service water consumption and peak service water demand with time and date stamp for each meter.
b. Include monthly report showing the daily service water consumption and peak service water demand with time and date stamp for each meter.

c. Include annual report showing the monthly service water consumption and peak service water demand with time and date stamp for each meter.
d. For each weekly, monthly and annual report, include sum total of submeters combined by load type, such as cooling tower makeup and irrigation showing daily service water consumption and peak service water demand.
e. For each weekly, monthly and annual report, include sum total of all submeters in building showing service water consumption and peak service water demand.

L. Energy Reports: Prepare Project-specific daily, weekly, monthly , annual and since-installed energy reports.

1. Prepare report for each purchased energy utility, indicating the following:

a. Time period being reported with beginning and end date, and time indicated.
b. Consumption in units of measure commonly used to report specific utility consumption over time.
c. Gross area served by utility.
d. Consumption per unit area served using utility-specific unit of measure.
e. Cost per utility unit.
f. Utility cost per unit area.
g. Convert all utilities to a common energy consumption unit of measure and report for each utility.
h. Consumption per unit area using common unit of measure.

2. Prepare report for each renewable energy source, indicating the following:

a. Time period being reported with beginning and end date, and time indicated.
b. Harvested energy in units of measure commonly used to report specific harvested energy consumption over time.
c. Gross area served by renewable energy source.
d. Harvested energy per unit area served using specific unit of measure.
e. Cost per purchased utility unit displaced by renewable energy.
f. Cost savings attributed to harvested energy source.
g. Cost savings per unit area attributed to harvested energy.
h. Convert all renewable energy sources to a common energy consumption unit of measure and report for each.
i. Harvested energy per unit area using common unit of measure.

3. Prepare purchased energy utility report for each submetered area that indicates the following:

a. Time period being reported with beginning and end date, and time indicated.
b. Gross area served.
c. Energy consumption by energy utility type.
d. Energy consumption per unit area by energy utility type.
e. Total energy consumption of all utilities in common units of measure.
f. Total energy consumption of all utilities in common units of measure per unit area.
g. Unit energy cost by energy utility type.
h. Energy cost by energy utility type.
i. Energy cost per unit area by energy utility type.
j. Total cost of all energy utilities.
k. Total cost of all energy utilities per unit area.

4. Prepare Project total purchased energy utility report that combines all purchased energy utilities and all areas served. Project total energy report shall indicate the following:

a. Time period being reported with beginning and end date, and time indicated.
b. Gross area served.
c. Energy consumption by energy utility type.
d. Energy consumption per unit area by energy utility type.
e. Total energy consumption of all utilities in common units of measure.

f. Total energy consumption of all utilities in common units of measure per unit area.
g. Unit energy cost by energy utility type.
h. Energy cost by energy utility type.
i. Energy cost per unit area by energy utility type.
j. Total cost of all energy utilities.
k. Total cost of all energy utilities per unit area.

M. HVAC System Efficiency Reports: Prepare Project-specific daily weekly monthly , annual and since-installed HVAC system efficiency reports.

1. Prepare report for each chilled-water system, indicating the following:

a. Time period being reported with beginning and end date, and time indicated.
b. Cooling energy supplied during time period.
c. Power energy consumed during time period by cooling equipment used to produce cooling energy supplied. List power consumed for each individual piece of equipment in system and summed total of all equipment in system.
d. Energy efficiency coefficient of performance determined by dividing power energy consumed into cooling energy supplied.
e. Energy efficiency determined by dividing cooling energy supplied into power energy consumed.
f. Units of measure used in report shall be consistent with units indicated for system.

2. Prepare report for each hot-water system, indicating the following:

a. Time period being reported with beginning and end date, and time indicated.
b. Cooling energy supplied during time period.
c. Fuel consumed during time period by boilers used to produce heating energy supplied. List fuel consumed for each individual piece of equipment in system and summed total of all equipment in system.
d. Energy efficiency determined by dividing heating energy supplied into fuel energy consumed.
e. Units of measure used in report shall be consistent with units indicated for system.

3. Prepare report for each steam system, indicating the following:

a. Time period being reported with beginning and end date, and time indicated.
b. Cooling energy supplied during time period.
c. Fuel consumed during time period by boilers used to produce heating energy supplied. List fuel consumed for each individual piece of equipment in system and summed total of all equipment in system.
d. Energy efficiency determined by dividing heating energy supplied into fuel energy consumed.
e. Units of measure used in report shall be consistent with units indicated for system.

N. PUE Reports: Prepare Project-specific daily weekly monthly , annual and since-installed PUE reports.

1. Prepare separate report for each tenant.
2. Prepare Project PUE report that combines PUE and all tenants served.
3. Calculate PUE following guidelines in The Green Grid, White Paper No. 22.

O. Weather Reports:
1. Include daily report showing the following:

a. Daily minimum, maximum, and average outdoor dry-bulb temperature.
b. Daily minimum, maximum, and average outdoor wet-bulb temperature.
c. Daily minimum, maximum, and average outdoor dew point temperature.
d. Number of heating degree-days for each day calculated from a base temperature of 55 deg F.
e. Number of cooling degree-days for each day calculated from a base temperature of 65 deg F.
f. Daily minimum, maximum, and average outdoor carbon dioxide level.

g. Daily minimum, maximum, and average relative humidity.
h. Daily minimum, maximum, and average barometric pressure.
i. Daily minimum, maximum, and average wind speed and direction.

2. Include weekly report showing the following:

a. Daily minimum, maximum, and average outdoor dry-bulb temperature.
b. Daily minimum, maximum, and average outdoor wet-bulb temperature.
c. Daily minimum, maximum, and average outdoor dew point temperature.
d. Number of heating degree-days for each day calculated from a base temperature of 55 deg F.
e. Number of cooling degree-days for each day calculated from a base temperature of 65 deg F.
f. Weekly minimum, maximum, and average outdoor carbon dioxide level.
g. Daily minimum, maximum, and average relative humidity.
h. Daily minimum, maximum, and average barometric pressure.
i. Daily minimum, maximum, and average wind speed and direction.

3. Include monthly report showing the following:

a. Daily minimum, maximum, and average outdoor dry-bulb temperature.
b. Daily minimum, maximum, and average outdoor wet-bulb temperature.
c. Daily minimum, maximum, and average outdoor dew point temperature.
d. Number of heating degree-days for each day calculated from a base temperature of 55 deg F.
e. Number of cooling degree-days for each day calculated from a base temperature of 65 deg F.
f. Monthly minimum, maximum, and average outdoor carbon dioxide level.
g. Daily minimum, maximum, and average relative humidity.
h. Daily minimum, maximum, and average barometric pressure.
i. Daily minimum, maximum, and average wind speed and direction.

4. Include annual (12-month) report showing the following:

a. Monthly minimum, maximum, and average outdoor dry-bulb temperature.
b. Monthly minimum, maximum, and average outdoor wet-bulb temperature.
c. Monthly minimum, maximum, and average outdoor dew point temperature.
d. Number of heating degree-days for each month calculated from a base temperature of 55 deg F.
e. Number of cooling degree-days for each month calculated from a base temperature of 65 deg F.
f. Annual minimum, maximum, and average outdoor carbon dioxide level.
g. Monthly minimum, maximum, and average relative humidity.
h. Daily minimum, maximum, and average barometric pressure.
i. Daily minimum, maximum, and average wind speed and direction.

P. Standard Trends:

1. Trend all I/O point present values, set points, and other parameters indicated for trending.
2. Trends shall be associated into groups, and a trend report shall be set up for each group.
3. Trends shall be stored within DDC controller and uploaded to hard drives automatically on reaching 75 of DDC controller buffer limit, or by operator request, or by archiving time schedule.
4. Preset trend intervals for each I/O point after review with Owner.
5. Trend intervals shall be operator selectable from 10 seconds up to 60 minutes. Minimum number of consecutive trend values stored at one time shall be 100 per variable.
6. When drive storage memory is full, most recent data shall overwrite oldest data.
7. Archived and real-time trend data shall be available for viewing numerically and graphically by operators.

Q. Custom Trends: Operator shall be able to define a custom trend log for any I/O point in DDC system.

1. Each trend shall include interval, start time, and stop time.
2. Data shall be sampled and stored on DDC controller, within storage limits of DDC controller, and then uploaded to archive on server hard drives.

3. Data shall be retrievable for use in spreadsheets and standard database programs.

R. Programming Software:

1. Include programming software to execute sequences of operation indicated.
2. Include programming routines in simple and easy to follow logic with detailed text comments describing what the logic does and how it corresponds to sequence of operation.
3. Programming software shall be as follows :

   a. Graphic Based: Programming shall use a library of function blocks made from preprogrammed code designed for DDC control systems.

      1) Function blocks shall be assembled with interconnection lines that represent to control sequence in a flowchart.
      2) Programming tools shall be viewable in real time to show present values and logical results of each function block.

   b. Menu Based: Programming shall be done by entering parameters, definitions, conditions, requirements and constraints.
   c. Line by Line and Text Based: Programming shall declare variable types such as local, global, real, integer, and so on, at the beginning of the program. Use descriptive comments frequently to describe programming code.

4. Include means for detecting programming errors and testing software control strategies with a simulation tool before implementing in actual control. Simulation tool may be inherent with programming software or as a separate product.

S. Database Management Software:

1. Where a separate SQL database is used for information storage, DDC system shall include database management software that separates database monitoring and managing functions by supporting multiple separate windows.
2. Database secure access shall be accomplished using standard SQL authentication including ability to access data for use outside of DDC system applications.
3. Database management function shall include summarized information on trend, alarm, event, and audit for the following database management actions:

   a. Backup.
   b. Purge.
   c. Restore.

4. Database management software shall support the following:

   a. Statistics: Display database server information and trend, alarm, event, and audit information on database.
   b. Maintenance: Include method of purging records from trend, alarm, event and audit databases by supporting separate screens for creating a backup before purging, selecting database, and allowing for retention of a selected number of day's data.
   c. Backup: Include means to create a database backup file and select a storage location.
   d. Restore: Include a restricted means of restoring a database by requiring operator to have proper security level.

5. Database management software shall include information of current database activity, including the following:

   a. Ready.
   b. Purging record from a database.
   c. Action failed.
   d. Refreshing statistics.
   e. Restoring database.
   f. Shrinking a database.

g. Backing up a database.
h. Resetting Internet information services.
i. Starting network device manager.
j. Shutting down the network device manager.
k. Action successful.

6. Database management software monitoring functions shall continuously read database information once operator has logged on.
7. Include operator notification through on-screen pop-up display and e-mail message when database value has exceeded a warning or alarm limit.
8. Monitoring settings window shall have the following sections:
   a. Allow operator to set and review scan intervals and start times.
   b. E-mail: Allow operator to create and review e-mail and phone text messages to be delivered when a warning or an alarm is generated.
   c. Warning: Allow operator to define warning limit parameters, set reminder frequency and link e-mail message.
   d. Alarm: Allow operator to define alarm limit parameters, set reminder frequency and link e-mail message.
   e. Database Login: Protect system from unauthorized database manipulation by creating a read access and a write access for each of trend, alarm, event and audit databases as well as operator proper security access to restore a database.
9. Monitoring settings taskbar shall include the following informational icons:
   a. Normal: Indicates by color and size, or other easily identifiable means that all databases are within their limits.
   b. Warning: Indicates by color and size, or other easily identifiable means that one or more databases have exceeded their warning limit.
   c. Alarm: Indicates by color and size, or other easily identifiable means that one or more databases have exceeded their alarm limit.

2.14 OFFICE APPLICATION SOFTWARE

A. Manufacturers: Subject to compliance with requirements, undefined:
   1. Microsoft Corporation.

B. Include current version of office application software at time of Substantial Completion.

C. Office application software package shall include multiple separate applications and use a common platform for all applications, similar to Microsoft's "Office Professional."
   1. Database.
   2. E-mail.
   3. Presentation.
   4. Publisher.
   5. Spreadsheet.
   6. Word processing.

2.15 ASHRAE 135 GATEWAYS

A. Include BACnet communication ports, whenever available as an equipment OEM standard option, for integration via a single communication cable. BACnet-controlled plant equipment includes, but is not limited to, boilers, chillers, and variable-speed drives.

B. Include gateways to connect BACnet to legacy systems, existing non-BACnet devices, and existing non-BACnet DDC-controlled equipment, only when specifically requested and approved by Owner.

C. Include with each gateway an interoperability schedule showing each point or event on legacy side that BACnet "client" will read, and each parameter that BACnet network will write to. Describe this interoperability of BACnet services, or BIBBs, defined in ASHRAE 135, Annex K.

D. Gateway Minimum Requirements:

1. Read and view all readable object properties on non-BACnet network to BACnet network and vice versa where applicable.
2. Write to all writeable object properties on non-BACnet network from BACnet network and vice versa where applicable.
3. Include single-pass (only one protocol to BACnet without intermediary protocols) translation from non-BACnet protocol to BACnet and vice versa.
4. Comply with requirements of Data Sharing Read Property, Data Sharing Write Property, Device Management Dynamic Device Binding-B, and Device Management Communication Control BIBBs according to ASHRAE 135.
5. Hardware, software, software licenses, and configuration tools for operator-to-gateway communications.
6. Backup programming and parameters on CD media and the ability to modify, download, backup, and restore gateway configuration.

2.16 ASHRAE 135 PROTOCOL ANALYZER

A. Analyzer and required cables and fittings for connection to ASHRAE 135 network.

B. Analyzer shall include the following minimum capabilities:

1. Capture and store to a file data traffic on all network levels.
2. Measure bandwidth usage.
3. Filtering options with ability to ignore select traffic.

2.17 WIRELESS ROUTERS FOR OPERATOR INTERFACE

A. Single-Band Wireless Routers:

1. Manufacturers: Subject to compliance with requirements, undefined:
2. Description: High-speed router with integral Ethernet ports.
3. Technology: IEEE 802.11n; 2.4 -GHz speed band.
4. Speed: Up to 300 Mbps.
5. Compatibility: IEEE 802.11n/g/b/a wireless devices.
6. Ethernet Ports: Four, gigabit (1000 Mbps).
7. Wireless Security: Wi-Fi Protected Access (WPA) and WPA2 according to IEEE 802.11i.

B. Dual-Band Wireless Routers:

1. Manufacturers: Subject to compliance with requirements, undefined:
   a. D-Link Corporation/D-Link Systems, Inc.
   b. NETGEAR Inc.
2. Description: High-speed, dual-band router with integral Ethernet ports and USB port.
3. Technology: IEEE 802.11n; 2.4- and 5-GHz speed bands.
4. Speed: Up to 300 Mbps on 2.4-GHz band and up to 450 Mbps on 5-GHz band.
5. Compatibility: IEEE 802.11n/g/b/a wireless devices.
6. Ethernet Ports: Four, gigabit (1000 Mbps).

7. USB Port: One, USB 2.0 or 3.0.
8. Wireless Security: Wi-Fi Protected Access (WPA) and WPA2 according to IEEE 802.11i.

2.18 DDC CONTROLLERS

A. DDC system shall consist of a combination of network controllers, programmable application controllers and application-specific controllers to satisfy performance requirements indicated.

B. DDC controllers shall perform monitoring, control, energy optimization and other requirements indicated.

C. DDC controllers shall use a multitasking, multiuser, real-time digital control microprocessor with a distributed network database and intelligence.

D. Each DDC controller shall be capable of full and complete operation as a completely independent unit and as a part of a DDC system wide distributed network.

E. Environment Requirements:

1. Controller hardware shall be suitable for the anticipated ambient conditions.
2. Controllers located in conditioned space shall be rated for operation at 32 to 120 deg F.
3. Controllers located outdoors shall be rated for operation at 40 to 150 deg F.

F. Power and Noise Immunity:

1. Controller shall operate at 90 to 110 percent of nominal voltage rating and shall perform an orderly shutdown below 80 percent of nominal voltage.
2. Operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios with up to 5 W of power located within 36 inches of enclosure.

G. DDC Controller Spare Processing Capacity:

1. Include spare processing memory for each controller. RAM, PROM, or EEPROM will implement requirements indicated with the following spare memory:

   a. Network Controllers: 50 percent.
   b. Programmable Application Controllers: Not less than 60 percent.
   c. Application-Specific Controllers: Not less than 70 percent.

2. Memory shall support DDC controller's operating system and database and shall include the following:

   a. Monitoring and control.
   b. Energy management, operation and optimization applications.
   c. Alarm management.
   d. Historical trend data of all connected I/O points.
   e. Maintenance applications.
   f. Operator interfaces.
   g. Monitoring of manual overrides.

H. DDC Controller Spare I/O Point Capacity: Include spare I/O point capacity for each controller as follows:

1. Network Controllers:

   a. 20 percent of each AI, AO, BI, and BO point connected to controller.
   b. Minimum Spare I/O Points per Controller:

      1) AIs: Three.
      2) AOs: Three.
      3) BIs: Three.

4) BOs: Three.

2. Programmable Application Controllers:

a. 20 percent of each AI, AO, BI, and BO point connected to controller.
b. Minimum Spare I/O Points per Controller:

1) AIs: Three.
2) AOs: Three.
3) BIs: Three.
4) BOs: Three.

3. Application-Specific Controllers:

a. 10 percent of each AI, AO, BI, and BO point connected to controller.
b. Minimum Spare I/O Points per Controller:

1) AIs: Two.
2) AOs: Two.
3) BIs: One.
4) BOs: One.

I. Maintenance and Support: Include the following features to facilitate maintenance and support:

1. Mount microprocessor components on circuit cards for ease of removal and replacement.
2. Means to quickly and easily disconnect controller from network.
3. Means to quickly and easily access connect to field test equipment.
4. Visual indication that controller electric power is on, of communication fault or trouble, and that controller is receiving and sending signals to network.

J. General Requirements for CEA-709.1-C DDC Controllers:

1. Controllers shall be LonMark certified.
2. Distinguishable and accessible switch, button, or pin, when pressed shall broadcast its 48-bit Node ID and Program ID over network.
3. TP/FT-10 transceiver according to CEA-709.3 and connections for TP/FT-10 control network wiring.
4. TP/XF-1250 transceiver according to CEA-709.3 and connections for TP/XF-1250 control network wiring.
5. Communicate using CEA-709.1-C protocol.
6. Controllers configured into subnets, as required, to comply with performance requirements indicated.
7. Network communication through LNS network management and database standard for CEA-709.1-C network devices.
8. Locally powered, not powered through network connection.
9. Functionality required to support applications indicated, including, but not limited to, the following:

a. Input and outputs indicated and as required to support sequence of operation and application in which it is used. SNVTs shall have meaningful names identifying the value represented by an SNVT. Unless an SNVT of an appropriate engineering type is unavailable, all network variables shall be of an SNVT with engineering units appropriate to value the variable represents.
b. Configurable through SCPTs defined in LonMark SCPT List, operator-defined UCPTs, network configuration inputs (NCIs) of an SNVT type defined in LonMark SNVT List, NCIs of an operator-defined network variable type, or hardware settings on controller itself for all settings and parameters used by application in which it is used.

10. Programmable controllers shall conform to LonMark Interoperability Guidelines and have LonMark certification.

K. Input and Output Point Interface:

1. Hardwired input and output points shall connect to network, programmable application and application-specific controllers.
2. Input and output points shall be protected so shorting of point to itself, to another point, or to ground will not damage controller.
3. Input and output points shall be protected from voltage up to 24 V of any duration so that contact will not damage controller.
4. AIs:
   a. AIs shall include monitoring of low-voltage (zero- to 10-V dc), current (4 to 20 mA) and resistance signals from thermistor and RTD sensors.
   b. AIs shall be compatible with, and field configurable to, sensor and transmitters installed.
   c. Controller AIs shall perform analog-to-digital (A-to-D) conversion with a minimum resolution of 16 bits or better to comply with accuracy requirements indicated.
   d. Signal conditioning including transient rejection shall be provided for each AI.
   e. Capable of being individually calibrated for zero and span.
   f. Incorporate common-mode noise rejection of at least 50 dB from zero to 100 Hz for differential inputs, and normal-mode noise rejection of at least 20 dB at 60 Hz from a source impedance of 10000 ohms.
5. AOs:
   a. Controller AOs shall perform analog-to-digital (A-to-D) conversion with a minimum resolution of 16 bits or better to comply with accuracy requirements indicated.
   b. Output signals shall have a range of 4 to 20 mA dc or zero- to 10-V dc as required to include proper control of output device.
   c. Capable of being individually calibrated for zero and span.
   d. AOs shall not exhibit a drift of greater than 0.4 percent of range per year.
6. BIs:
   a. Controller BIs shall accept contact closures and shall ignore transients of less than 5-ms duration.
   b. Isolation and protection against an applied steady-state voltage of up to 180-V ac peak.
   c. BIs shall include a wetting current of at least 12 mA to be compatible with commonly available control devices and shall be protected against effects of contact bounce and noise.
   d. BIs shall sense "dry contact" closure without external power (other than that provided by the controller) being applied.
   e. Pulse accumulation input points shall comply with all requirements of BIs and accept up to 10 pulses per second for pulse accumulation. Buffer shall be provided to totalize pulses. Pulse accumulator shall accept rates of at least 20 pulses per second. The totalized value shall be reset to zero on operator's command.
7. BOs:
   a. Controller BOs shall include relay contact closures or triac outputs for momentary and maintained operation of output devices.
      1) Relay contact closures shall have a minimum duration of 0.1 second. Relays shall include at least 180 V of isolation. Electromagnetic interference suppression shall be provided on all output lines to limit transients to non-damaging levels. Minimum contact rating shall be 1 A at 24-V ac.
      2) Triac outputs shall include at least 180 V of isolation. Minimum contact rating shall be 1 A at 24-V ac.
   b. BOs shall include for two-state operation or a pulsed low-voltage signal for pulse-width modulation control.
   c. BOs shall be selectable for either normally open or normally closed operation.
   d. Include tristate outputs (two coordinated BOs) for control of three-point floating-type electronic actuators without feedback.

e. Limit use of three-point floating devices to VAV terminal unit control applications. Control algorithms shall operate actuator to one end of its stroke once every 24 hours for verification of operator tracking.

2.19 NETWORK CONTROLLERS

A. General Network Controller Requirements:

1. Include adequate number of controllers to achieve performance indicated.
2. System shall consist of one or more independent, standalone, microprocessor-based network controllers to manage global strategies indicated.
3. Controller shall have enough memory to support its operating system, database, and programming requirements.
4. Data shall be shared between networked controllers and other network devices.
5. Operating system of controller shall manage input and output communication signals to allow distributed controllers to share real and virtual object information and allow for central monitoring and alarms.
6. Controllers that perform scheduling shall have a real-time clock.
7. Controller shall continually check status of its processor and memory circuits. If an abnormal operation is detected, controller shall assume a predetermined failure mode and generate an alarm notification.
8. Controllers shall be fully programmable.

B. Communication:

1. Network controllers shall communicate with other devices on DDC system Level one network.
2. Network controller also shall perform routing if connected to a network of programmable application and application-specific controllers.

C. Operator Interface:

1. Controller shall be equipped with a service communications port for connection to a portable operator's workstation or mobile device.
2. Local Keypad and Display:

   a. Equip controller with local keypad and digital display for interrogating and editing data.
   b. Use of keypad and display shall require security password.

D. Serviceability:

1. Controller shall be equipped with diagnostic LEDs or other form of local visual indication of power, communication, and processor.
2. Wiring and cable connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
3. Controller shall maintain BIOS and programming information in event of a power loss for at least 96 hours.

2.20 PROGRAMMABLE APPLICATION CONTROLLERS

A. General Programmable Application Controller Requirements:

1. Include adequate number of controllers to achieve performance indicated.
2. Controller shall have enough memory to support its operating system, database, and programming requirements.
3. Data shall be shared between networked controllers and other network devices.

4. Operating system of controller shall manage input and output communication signals to allow distributed controllers to share real and virtual object information and allow for central monitoring and alarms.
5. Controllers that perform scheduling shall have a real-time clock.
6. Controller shall continually check status of its processor and memory circuits. If an abnormal operation is detected, controller shall assume a predetermined failure mode and generate an alarm notification.
7. Controllers shall be fully programmable.

B. Communication:

1. Programmable application controllers shall communicate with other devices on network.

C. Operator Interface:

1. Controller shall be equipped with a service communications port for connection to a portable operator's workstation or mobile device.
2. Local Keypad and Display:

   a. Equip controller with local keypad and digital display for interrogating and editing data.
   b. Use of keypad and display shall require security password.

D. Serviceability:

1. Controller shall be equipped with diagnostic LEDs or other form of local visual indication of power, communication, and processor.
2. Wiring and cable connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
3. Controller shall maintain BIOS and programming information in event of a power loss for at least 72 hours.

2.21 APPLICATION-SPECIFIC CONTROLLERS

A. Description: Microprocessor-based controllers, which through hardware or firmware design are dedicated to control a specific piece of equipment. Controllers are not fully user-programmable but are configurable and customizable for operation of equipment they are designed to control.

1. Capable of standalone operation and shall continue to include control functions without being connected to network.
2. Data shall be shared between networked controllers and other network devices.

B. Communication: Application-specific controllers shall communicate with other application-specific controller and devices on network, and to programmable application and network controllers.

C. Operator Interface: Controller shall be equipped with a service communications port for connection to a portable operator's workstation. Connection shall extend to port on space temperature sensor that is connected to controller.

D. Serviceability:

1. Controller shall be equipped with diagnostic LEDs or other form of local visual indication of power, communication, and processor.
2. Wiring and cable connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
3. Controller shall use nonvolatile memory and maintain all BIOS and programming information in event of power loss.

2.22 CONTROLLER SOFTWARE

A. General Controller Software Requirements:

1. Software applications shall reside and operate in controllers. Editing of applications shall occur at operator workstations.
2. I/O points shall be identified by up to 30 -character point name and up to 16 -character point descriptor. Same names shall be used at operator workstations.
3. Control functions shall be executed within controllers using DDC algorithms.
4. Controllers shall be configured to use stored default values to ensure fail-safe operation. Default values shall be used when there is a failure of a connected input instrument or loss of communication of a global point value.

B. Security:

1. Operator access shall be secured using individual security passwords and usernames.
2. Passwords shall restrict operator to points, applications, and system functions as assigned by system manager.
3. Operator log-on and log-off attempts shall be recorded.
4. System shall protect itself from unauthorized use by automatically logging off after last keystroke. The delay time shall be operator-definable.

C. Scheduling: Include capability to schedule each point or group of points in system. Each schedule shall consist of the following:

1. Weekly Schedule:
   a. Include separate schedules for each day of week.
   b. Each schedule should include the capability for start, stop, optimal start, optimal stop, and night economizer.
   c. Each schedule may consist of up to 10 events.
   d. When a group of objects are scheduled together, include capability to adjust start and stop times for each member.
2. Exception Schedules:
   a. Include ability for operator to designate any day of the year as an exception schedule.
   b. Exception schedules may be defined up to a year in advance. Once an exception schedule is executed, it will be discarded and replaced by regular schedule for that day of week.
3. Holiday Schedules:
   a. Include capability for operator to define up to 99 special or holiday schedules.
   b. Schedules may be placed on scheduling calendar and will be repeated each year.
   c. Operator shall be able to define length of each holiday period.

D. System Coordination:

1. Include standard application for proper coordination of equipment.
2. Application shall include operator with a method of grouping together equipment based on function and location.
3. Group may then be used for scheduling and other applications.

E. Binary Alarms:

1. Each binary point shall be set to alarm based on operator-specified state.
2. Include capability to automatically and manually disable alarming.

F. Analog Alarms:

1. Each analog object shall have both high and low alarm limits.

2. Alarming shall be able to be automatically and manually disabled.

G. Alarm Reporting:

1. Operator shall be able to determine action to be taken in event of an alarm.
2. Alarms shall be routed to appropriate operator workstations based on time and other conditions.
3. Alarm shall be able to start programs, print, be logged in event log, generate custom messages, and display graphics.

H. Remote Communication:

1. System shall have ability to dial out in the event of an alarm.

I. Electric Power Demand Limiting:

1. Demand-limiting program shall monitor building or other operator-defined electric power consumption from signals connected to electric power meter or from a watt transducer or current transformer.
2. Demand-limiting program shall predict probable power demand such that action can be taken to prevent exceeding demand limit. When demand prediction exceeds demand limit, action will be taken to reduce loads in a predetermined manner. When demand prediction indicates demand limit will not be exceeded, action will be taken to restore loads in a predetermined manner.
3. Demand reduction shall be accomplished by the following means:
   a. Reset air-handling unit supply temperature set points.
   b. Reset space temperature set points.
   c. De-energize equipment based on priority.
4. Demand-limiting parameters, frequency of calculations, time intervals, and other relevant variables shall be based on the means by which electric power service provider computes demand charges.
5. Include demand-limiting prediction and control for any individual meter monitored by system or for total of any combination of meters.
6. Include means operator to make the following changes online:
   a. Addition and deletion of loads controlled.
   b. Changes in demand intervals.
   c. Changes in demand limit for meter(s).
   d. Maximum shutoff time for equipment.
   e. Minimum shutoff time for equipment.
   f. Select rotational or sequential shedding and restoring.
   g. Shed and restore priority.
7. Include the following information and reports, to be available on an hourly, daily, weekly, monthly and annual basis:
   a. Total electric consumption.
   b. Peak demand.
   c. Date and time of peak demand.
   d. Daily peak demand.

J. Maintenance Management: System shall monitor equipment status and generate maintenance messages based on operator-designated run-time, starts, and calendar date limits.

K. Sequencing: Include application software based on sequences of operation indicated to properly sequence chillers, boilers, and other applicable HVAC equipment.

L. Control Loops:

1. Support any of the following control loops, as applicable to control required:

a. Two-position (on/off, open/close, slow/fast) control.
b. Proportional control.
c. Proportional plus integral (PI) control.
d. Proportional plus integral plus derivative (PID) control.

1) Include PID algorithms with direct or reverse action and anti-windup.
2) Algorithm shall calculate a time-varying analog value used to position an output or stage a series of outputs.
3) Controlled variable, set point, and PID gains shall be operator-selectable.

e. Adaptive (automatic tuning).

M. Staggered Start: Application shall prevent all controlled equipment from simultaneously restarting after a power outage. Order which equipment (or groups of equipment) is started, along with the time delay between starts, shall be operator-selectable.

N. Energy Calculations:

1. Include software to allow instantaneous power or flow rates to be accumulated and converted to energy usage data.
2. Include an algorithm that calculates a sliding-window average (rolling average). Algorithm shall be flexible to allow window intervals to be operator specified (such as 15, 30, or 60 minutes).
3. Include an algorithm that calculates a fixed-window average. A digital input signal shall define start of window period (such as signal from utility meter) to synchronize fixed-window average with that used by utility.

O. Anti-Short Cycling:

1. BO points shall be protected from short cycling.
2. Feature shall allow minimum on-time and off-time to be selected.

P. On and Off Control with Differential:

1. Include an algorithm that allows a BO to be cycled based on a controlled variable and set point.
2. Algorithm shall be direct- or reverse-acting and incorporate an adjustable differential.

Q. Run-Time Totalization:

1. Include software to totalize run-times for all BI and BO points.
2. A high run-time alarm shall be assigned, if required, by operator.

2.23 ENCLOSURES

A. General Enclosure Requirements:

1. House each controller and associated control accessories in a single enclosure. Enclosure shall serve as central tie-in point for control devices such as switches, transmitters, transducers, power supplies and transformers.
2. Do not house more than one controller in a single enclosure.
3. Include enclosure door with key locking mechanism. Key locks alike for all enclosures and include one pair of keys per enclosure.
4. Equip doors of enclosures housing controllers and components with analog or digital displays with windows to allow visual observation of displays without opening enclosure door.
5. Individual wall-mounted single-door enclosures shall not exceed 36 inches wide and 48 inches high.

6. Individual wall-mounted double-door enclosures shall not exceed 60 inches wide and 36 inches high.
7. Freestanding enclosures shall not exceed 48 inches wide and 72 inches high.
8. Include wall-mounted enclosures with brackets suitable for mounting enclosures to wall or freestanding support stand as indicated.
9. Supply each enclosure with a complete set of as-built schematics, tubing, and wiring diagrams and product literature located in a pocket on inside of door. For enclosures with windows, include pocket on bottom of enclosure.

B. Internal Arrangement:

1. Internal layout of enclosure shall group and protect pneumatic, electric, and electronic components associated with a controller, but not an integral part of controller.
2. Arrange layout to group similar products together.
3. Include a barrier between line-voltage and low-voltage electrical and electronic products.
4. Factory or shop install products, tubing, cabling and wiring complying with requirements and standards indicated.
5. Terminate field cable and wire using heavy-duty terminal blocks.
6. Include spare terminals, equal to not less than 10 percent of used terminals.
7. Include spade lugs for stranded cable and wire.
8. Install a maximum of two wires on each side of a terminal.
9. Include enclosure field power supply with a toggle-type switch located at entrance inside enclosure to disconnect power.
10. Include enclosure with a line-voltage nominal 20-A GFCI duplex receptacle for service and testing tools. Wire receptacle on hot side of enclosure disconnect switch and include with a 5-A circuit breaker.
11. Mount products within enclosure on removable internal panel(s).
12. Include products mounted in enclosures with engraved, laminated phenolic nameplates (black letters on a white background). The nameplates shall have at least 1/4-inch- high lettering.
13. Route tubing cable and wire located inside enclosure within a raceway with a continuous removable cover.
14. Label each end of cable, wire and tubing in enclosure following an approved identification system that extends from field I/O connection and all intermediate connections throughout length to controller connection.
15. Size enclosure internal panel to include at least 25 percent spare area on face of panel.

C. Environmental Requirements:

1. Evaluate temperature and humidity requirements of each product to be installed within each enclosure.
2. Calculate enclosure internal operating temperature considering heat dissipation of all products installed within enclosure and ambient effects (solar, conduction and wind) on enclosure.
3. Where required by application, include temperature-controlled electrical heat to maintain inside of enclosure above minimum operating temperature of product with most stringent requirement.
4. Where required by application, include temperature-controlled ventilation fans with filtered louver(s) to maintain inside of enclosure below maximum operating temperature of product with most stringent requirement.
5. Include temperature-controlled cooling within the enclosure for applications where ventilation fans cannot maintain inside temperature of enclosure below maximum operating temperature of product with most stringent requirement.
6. Where required by application, include humidity-controlled electric dehumidifier or cooling to maintain inside of enclosure below maximum relative humidity of product with most stringent requirement and to prevent surface condensation within enclosure.

D. Wall-Mounted, NEMA 250, Type 1:

1. <Click here to find, evaluate, and insert list of manufacturers and products.>

2. Enclosure shall be NRTL listed according to UL 50 or UL 50E.
3. Construct enclosure of steel, not less than:
    a. Enclosure size less than 24 in.: 0.053 in. or 0.067 in. thick.
    b. Enclosure size 24 in. and larger: 0.067 in. or 0.093 in. thick.
4. Finish enclosure inside and out with polyester powder coating that is electrostatically applied and then baked to bond to substrate.
    a. Exterior color shall be manufacturer's standard.
    b. Interior color shall be manufacturer's standard.
5. Hinged door full size of front face of enclosure and supported using:
    a. Enclosures sizes less than 36 in. tall: Multiple butt hinges.
    b. Enclosures sizes 36 in. tall and larger: Continuous piano hinges.
6. Removable internal panel with a white polyester powder coating that is electrostatically applied and then baked to bond to substrate.
    a. Size less than 24 in.: Solid or Perforated steel, 0.053 in. thick.
    b. Size 24 in. and larger: Solid aluminum, 0.10 in. or steel, 0.093 in. thick.
7. Internal panel mounting hardware, grounding hardware and sealing washers.
8. Grounding stud on enclosure body.
9. Thermoplastic pocket on inside of door for record Drawings and Product Data.

E. Accessories:

1. Framed Fixed Window Kit for NEMA 250, Types 4, 4X, and 12 Enclosures:
    a. 0.25-inch- thick, scratch-resistant acrylic or polycarbonate window mounted in a metal frame matching adjacent door material.
    b. Enclosure types, except NEMA 250 Type 1, shall have a continuous gasket material around perimeter of window and frame to provide watertight seal.
    c. Window kit shall be factory or shop installed before shipment to Project.
2. Frameless Fixed Window Kit for NEMA 250, Type 1 Enclosures:
    a. 0.125-inch- thick, polycarbonate window mounted in enclosure door material.
    b. Window attached to door with screw fasteners and continuous strip of high-strength double-sided tape around window perimeter.
    c. Window kit shall be factory or shop installed before shipment to Project.
3. Frame Fixed or Hinged Window Kit for NEMA 250, Types 1 and 12 Enclosures:
    a. 0.25-inch- thick, scratch-resistant acrylic or polycarbonate window mounted in a metal frame matching adjacent door material.
    b. Enclosure types, except NEMA 250 Type 1, shall have a continuous gasket material around perimeter of window and frame to provide watertight seal.
    c. Window kit shall be factory or shop installed before shipment to Project.
4. Bar handle with keyed cylinder lock set.

2.24 RELAYS

A. General-Purpose Relays:

1. Manufacturers: Subject to compliance with requirements, undefined:
    a. Functional Devices. Inc.
    b. IDEC.
2. Relays shall be heavy duty and rated for at least 10 A at 250-V ac and 60 Hz.

3. Relays shall be either double pole double throw (DPDT) or three-pole double throw, depending on the control application.
4. Use a plug-in-style relay with an eight-pin octal plug for DPDT relays and an 11-pin octal plug for three-pole double-throw relays.
5. Construct the contacts of either silver cadmium oxide or gold.
6. Enclose the relay in a clear transparent polycarbonate dust-tight cover.
7. Relays shall have LED indication and a manual reset and push-to-test button.
8. Performance:
    a. Mechanical Life: At least 10 million cycles.
    b. Electrical Life: At least 100,000 cycles at rated load.
    c. Pickup Time: 15 ms or less.
    d. Dropout Time: 10 ms or less.
    e. Pull-in Voltage: 85 percent of rated voltage.
    f. Dropout Voltage: 50 percent of nominal rated voltage.
    g. Power Consumption: 2 VA.
    h. Ambient Operating Temperatures: Minus 40 to 115 deg F.
9. Equip relays with coil transient suppression to limit transients to non-damaging levels.
10. Plug each relay into an industry-standard, 35-mm DIN rail socket. Plug all relays located in control panels into sockets that are mounted on a DIN rail.
11. Relay socket shall have screw terminals. Mold into the socket the coincident screw terminal numbers and associated octal pin numbers.

B. Multifunction Time-Delay Relays:

1. Manufacturers: Subject to compliance with requirements, undefined:
    a. Functional Devices. Inc.
    b. IDEC.
2. Relays shall be continuous duty and rated for at least 10 A at 240-V ac and 60 Hz.
3. Relays shall be DPDT relay with up to eight programmable functions to provide on/off delay, interval and recycle timing functions.
4. Use a plug-in-style relay with either an 8- or 11-pin octal plug.
5. Construct the contacts of either silver cadmium oxide or gold.
6. Enclose the relay in a dust-tight cover.
7. Include knob and dial scale for setting delay time.
8. Performance:
    a. Mechanical Life: At least 10 million cycles.
    b. Electrical Life: At least 100,000 cycles at rated load.
    c. Timing Ranges: Multiple ranges from 0.1 seconds to 100 minutes.
    d. Repeatability: Within 2 percent.
    e. Recycle Time: 45 ms.
    f. Minimum Pulse Width Control: 50 ms.
    g. Power Consumption: 5 VA or less at 120-V ac.
    h. Ambient Operating Temperatures: Minus 40 to 115 deg F.
9. Equip relays with coil transient suppression to limit transients to non-damaging levels.
10. Plug each relay into an industry-standard, 35-mm DIN rail socket. Plug all relays located in control panels into sockets that are mounted on a DIN rail.
11. Relay socket shall have screw terminals. Mold into the socket the coincident screw terminal numbers and associated octal pin numbers.

C. Latching Relays:

1. Manufacturers: Subject to compliance with requirements, undefined:
    a. Functional Devices. Inc.

b. IDEC.

2. Relays shall be continuous duty and rated for at least 10 A at 250-V ac and 60 Hz.
3. Relays shall be either DPDT or three-pole double throw, depending on the control application.
4. Use a plug-in-style relay with a multibladed plug.
5. Construct the contacts of either silver cadmium oxide or gold.
6. Enclose the relay in a clear transparent polycarbonate dust-tight cover.
7. Performance:

   a. Mechanical Life: At least 10 million cycles.
   b. Electrical Life: At least 100,000 cycles at rated load.
   c. Pickup Time: 15 ms or less.
   d. Dropout Time: 10 ms or less.
   e. Pull-in Voltage: 85 percent of rated voltage.
   f. Dropout Voltage: 50 percent of nominal rated voltage.
   g. Power Consumption: 2 VA.
   h. Ambient Operating Temperatures: Minus 40 to 115 deg F.

8. Equip relays with coil transient suppression to limit transients to non-damaging levels.
9. Plug each relay into an industry-standard, 35-mm DIN rail socket. Plug all relays located in control panels into sockets that are mounted on a DIN rail.
10. Relay socket shall have screw terminals. Mold into the socket the coincident screw terminal numbers and associated octal pin numbers.

D. Current Sensing Relay:

1. Manufacturers: Subject to compliance with requirements, undefined:

   a. Functional Devices. Inc.
   b. Veris Industries.

2. Monitors ac current.
3. Independent adjustable controls for pickup and dropout current.
4. Energized when supply voltage is present and current is above pickup setting.
5. De-energizes when monitored current is below dropout current.
6. Dropout current is adjustable from 50 to 95 percent of pickup current.
7. Include a current transformer, if required for application.
8. House current sensing relay and current transformer in its own enclosure. Use NEMA 250, Type 12 enclosure for indoors and NEMA 250, Type 4 for outdoors.

E. Combination On-Off Status Sensor and On-Off Relay:

1. Manufacturers: Subject to compliance with requirements, undefined:

   a. Functional Devices Inc.
   b. Veris Industries.

2. Description:

   a. On-off control and status indication in a single device.
   b. LED status indication of activated relay and current trigger.
   c. Closed-Open-Auto override switch located on the load side of the relay.

3. Performance:

   a. Ambient Temperature: Minus 30 to 140 deg F.
   b. Voltage Rating: Single-phase loads rated for 300-V ac. Three-phase loads rated for 600-V ac.

4. Status Indication:

   a. Current Sensor: Integral sensing for single-phase loads up to 20 A and external solid or split sensing ring for three-phase loads up to 150 A.

b. Current Sensor Range: As required by application.
c. Current Set Point: Adjustable.
d. Current Sensor Output:

1) Solid-state, single-pole double-throw contact rated for 30-V ac and dc and for 0.4 A.
2) Solid-state, single-pole double-throw contact rated for 120-V ac and 1.0 A.
3) Analog, zero- to 5- or 10-V dc.
4) Analog, 4 to 20 mA, loop powered.

5. Relay: Single-pole double-throw, continuous-duty coil; rated for 10-million mechanical cycles.
6. Enclosure: NEMA 250, Type 1 enclosure.

2.25 ELECTRICAL POWER DEVICES

A. Transformers:

1. Transformer shall be sized for the total connected load, plus an additional 25 percent of connected load.
2. Transformer shall be at least 100 VA.
3. Transformer shall have both primary and secondary fuses.

B. Power-Line Conditioner:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. SOLA HD.

2. General Power-Line Conditioner Requirements:

a. Design to ensure maximum reliability, serviceability and performance.
b. Overall function of the power-line conditioner is to receive raw, polluted electrical power and purify it for use by electronic equipment. The power-line conditioner shall provide isolated, regulated, transient, and noise-free sinusoidal power to loads served.

3. Standards: NRTL listed per UL 1012.
4. Performance:

a. Single phase, continuous, 100 percent duty rated KVA/KW capacity. Design to supply power for linear or nonlinear, high crest factor, resistive and reactive loads.
b. Automatically regulate output voltage to within 2 percent or better with input voltage fluctuations of plus 10 to minus 20 percent of nominal when system is loaded 100 percent. Use Variable Range Regulation to obtain improved line voltage regulation when operating under less than full load conditions.

1) At 75 Percent Load: Output voltage automatically regulated to within 3 percent with input voltage fluctuations of plus 10 to minus 35 percent of nominal.
2) At 50 Percent Load: Output voltage automatically regulated to within 3 percent with input voltage fluctuations of plus 10 to minus 40 percent of nominal.
3) At 25 Percent Load: Output voltage automatically regulated to within 3 percent with input voltage fluctuations of plus 10 to minus 45 percent of nominal.

c. With input voltage distortion of up to 40 percent, limit the output voltage sine wave to a maximum harmonic content of 5 percent.
d. Automatically regulate output voltage to within 2.5 percent when load (resistive) changes from zero percent to 100 percent to zero percent.
e. Output voltage returns to 95 percent of nominal level within two cycles and to 100 percent within three cycles when the output is taken from no load to full resistive load or vice-versa. Recovery from partial resistive load changes is corrected in a shorter period of time.
f. K Factor: 30, designed to operate with nonlinear, non-sinusoidal, high crest factor loads without overheating.

g. Input power factor within 0.95 approaching unity with load power factor as poor as 0.6.
h. Attenuate load-generated odd current harmonics 23 dB at the input.
i. Electrically isolate the primary from the secondary. Meet isolation criteria as defined in NFPA 70, Article 250-5D.
j. Lighting and Surge Protection: Compares to UL 1449 rating of 330 V when subjected to Category B3 (6000 V/3000 A) combination waveform as established by IEEE C62.41.
k. Common-mode noise attenuation of 140 dB.
l. Transverse-mode noise attenuation of 120 dB.
m. With loss of input power for up to 16.6 ms, the output sine wave remains at usable ac voltage levels.
n. Reliability of 200,000 hours' MTBF.
o. At full load, when measured at 1-m distance, audible noise is not to exceed 54 dB.
p. Approximately 92 percent efficient at full load.

5. Transformer Construction:

a. Ferroresonant, dry type, convection cooled, 600V class. Transformer windings of Class H (220 deg C) insulated copper.
b. Use a Class H installation system throughout with operating temperatures not to exceed 150 deg C over a 40-deg C ambient temperature.
c. Configure transformer primary for multi-input voltage. Include input terminals for source conductors and ground.
d. Manufacture transformer core using M-6 grade, grain-oriented, stress-relieved transformer steel.
e. Configure transformer secondary in a 240/120-V split with a 208-V tap or straight 120 V, depending on power output size.
f. Electrically isolate the transformer secondary windings from the primary windings. Bond neutral conductor to cabinet enclosure and output neutral terminal.
g. Include interface terminals for output power hot, neutral and ground conductors.
h. Label leads, wires and terminals to correspond with circuit wiring diagram.
i. Vacuum impregnate transformer with epoxy resin.

6. Cabinet Construction:

a. Design for panel or floor mounting.
b. NEMA 250, Type 1, general-purpose, indoor enclosure.
c. Manufacture the cabinet from heavy gauge steel complying with UL 50.
d. Include a textured baked-on paint finish.

C. Transient Voltage Suppression and High-Frequency Noise Filter Unit:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. Current Technology Inc.

2. The maximum continuous operating voltage shall be at least 125 percent.
3. The operating frequency range shall be 47 to 63 Hz.
4. Protection modes according to NEMA LS-1.
5. The rated single-pulse surge current capacity, for each mode of protection, shall be no less than the following:

a. Line to Neutral: 45,000 A.
b. Neutral to Ground: 45,000 A.
c. Line to Ground: 45,000 A.
d. Per Phase: 90,000 A.

6. Clamping voltages shall be in compliance with test and evaluation procedures defined in NEMA LS-1. Maximum clamping voltage shall be as follows:

a. Line to Neutral: 360 V.
b. Line to Ground: 360 V.

c. Neutral to Ground: 360 V.

7. Electromagnetic interference and RF interference noise rejection or attenuation values shall comply with test and evaluation procedures defined in NEMA LS-1.

a. Line to Neutral:

1) 100 kHz: 42 dB.
2) 1 MHz: 25 dB.
3) 10 MHz: 21 dB.
4) 100 MHz: 36 dB.

b. Line to Ground:

1) 100 kHz: 16 dB.
2) 1 MHz: 55 dB.
3) 10 MHz: 81 dB.
4) 100 MHz: 80 dB.

8. Unit shall have LED status indicator that extinguishes to indicate a failure.
9. Unit shall be listed by an NRTL as a transient voltage surge suppressor per UL 1449, and as an electromagnetic interference filter per UL 1283.
10. Unit shall not generate any appreciable magnetic field.
11. Unit shall not generate an audible noise.

D. DC Power Supply:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Functional Devices, Inc.
b. IDEC.

2. Plug-in style suitable for mating with a standard eight-pin octal socket. Include the power supply with a mating mounting socket.
3. Enclose circuitry in a housing.
4. Include both line and load regulation to ensure a stable output. To protect both the power supply and the load, power supply shall have an automatic current limiting circuit.
5. Performance:

a. Output voltage nominally 25-V dc within 5 percent.
b. Output current up to 100 mA.
c. Input voltage nominally 120-V ac, 60 Hz.
d. Load regulation within 0.5 percent from zero- to 100-mA load.
e. Line regulation within 0.5 percent at a 100-mA load for a 10 percent line change.
f. Stability within 0.1 percent of rated volts for 24 hours after a 20-minute warmup.

2.26 UNINTERRUPTABLE POWER SUPPLY (UPS) UNITS FOR WORKSTATIONS

A. 250 through 1000 VA:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. APC.
b. Cyberpower.

2. UPS units shall provide continuous, regulated output power without using their batteries during brown-out, surge, and spike conditions.
3. Load served shall not exceed 75 percent of UPS rated capacity, including power factor of connected loads.

a. Larger-capacity units shall be provided for systems with larger connected loads.
b. UPS shall provide 30 minutes of battery power.

4. Performance:

   a. Input Voltage: Single phase, 120- or 230-V ac, compatible with field power source.
   b. Load Power Factor Range (Crest Factor): 0.65 to 1.0.
   c. Output Voltage: 101- to 132-V ac, while input voltage varies between 89 and 152-V ac.
   d. On Battery Output Voltage: Sine wave.
   e. Inverter overload capacity shall be minimum 150 percent for 30 seconds.
   f. Recharge time shall be a maximum of six hours to 90 percent capacity after full discharge to cutoff.
   g. Transfer Time: 6 ms.
   h. Surge Voltage Withstand Capacity: IEEE C62.41, Categories A and B; 6 kV/200 and 500 A; 100-kHz ringwave.

5. UPS shall be automatic during fault or overload conditions.
6. Unit with integral line-interactive, power condition topology to eliminate all power contaminants.
7. Include front panel with power switch and visual indication of power, battery, fault and temperature.
8. Unit shall include an audible alarm of faults and front panel silence feature.
9. Unit with four NEMA WD 1, NEMA WD 6 Configuration 5-15R receptacles.
10. UPS shall include dry contacts (digital output points) for low battery condition and battery-on (primary utility power failure) and connect the points to the DDC system.
11. Batteries shall be sealed lead-acid type and be maintenance free. Battery replacement shall be front accessible by user without dropping load.
12. Include tower models installed in ventilated cabinets to the particular installation location.

B. 1000 through 3000 VA:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. APC.
   b. Cyberpower.

2. UPS units shall provide continuous, regulated output power without using their batteries during brown-out, surge, and spike conditions.
3. Load served shall not exceed 75 percent of UPS rated capacity, including power factor of connected loads.

   a. Larger-capacity units, or multiple units, shall be provided for systems with larger connected loads.
   b. UPS shall provide 30 minutes of battery power.

4. Performance:

   a. Input Voltage: Single phase, 120-V ac, plus 20 to minus 30 percent.
   b. Power Factor: Minimum 0.97 at full load.
   c. Output Voltage: Single phase, 120-V ac, within 3 percent, steady state with rated output current of 10.0 A, 30.0-A peak.
   d. Inverter overload capacity shall be minimum 150 percent for 30 seconds.
   e. Recharge time shall be a maximum of eight hours to 90 percent capacity.

5. UPS bypass shall be automatic during fault or overload conditions.
6. UPS shall include dry contacts (digital output points) for low battery condition and battery-on (primary utility power failure) and connect the points to the DDC system.
7. Batteries shall be sealed lead-acid type and be maintenance free.
8. Include tower models installed in ventilated cabinets or rack models installed on matching racks, as applicable to the particular installation location and space availability/configuration.

2.27 PROCESS TUBING

A. Products in this article are intended for signals to instruments connected to liquid and steam systems.

B. Copper Tubing:

1. Seamless phosphor deoxidized copper, soft annealed or drawn tempered with chemical and physical properties according to ASTM B75.
2. Performance, dimensions, weight and tolerance according to ASTM B280.
3. Diameter, as required by application, of not less than nominal 0.25 inch.
4. Wall thickness, as required by application, but not less than 0.030 inch.
5. Copper Tubing Connectors and Fittings (for Process Tubing) - Brass, Compression Type:

   a. <Click here to find, evaluate, and insert list of manufacturers and products.>

6. Copper Tubing Connectors and Fittings (for Process Tubing) - Brass, Solder-Joint Type:

   a. <Click here to find, evaluate, and insert list of manufacturers and products.>

C. Stainless Steel Tubing Connectors and Fittings (for Process Tubing):

1. <Click here to find, evaluate, and insert list of manufacturers and products.>
2. Connectors and fittings shall be stainless steel, with stainless steel collets, flareless type.
3. Connect instruments to tubing with connectors having compression connector on one end and IPS or NPT thread on other end.

2.28 CONTROL WIRE AND CABLE

A. Wire: Single conductor control wiring above 24 V.

1. Wire size shall be at least No. 16 AWG.
2. Conductor shall be 7/24 soft annealed copper strand with 2- to 2.5-inch lay.
3. Conductor insulation shall be 600 V, Type THWN or Type THHN, and 90 deg C according to UL 83.
4. Conductor colors shall be black (hot), white (neutral), and green (ground).
5. Furnish wire on spools.

B. Single Twisted Shielded Instrumentation Cable above 24 V:

1. Wire size shall be a minimum No. 18 AWG.
2. Conductors shall be a twisted, 7/24 soft annealed copper strand with a 2- to 2.5-inch lay.
3. Conductor insulation shall have a Type THHN/THWN or Type TFN rating.
4. Shielding shall be 100 percent type, 0.35/0.5-mil aluminum/Mylar tape, helically applied with 25 percent overlap, and aluminum side in with tinned copper drain wire.
5. Outer jacket insulation shall have a 600-V, 90-deg C rating and shall be Type TC cable.
6. For twisted pair, conductor colors shall be black and white. For twisted triad, conductor colors shall be black, red and white.
7. Furnish wire on spools.

C. Single Twisted Shielded Instrumentation Cable 24 V and Less:

1. Wire size shall be a minimum No. 18 AWG.
2. Conductors shall be a twisted, 7/24 soft annealed copper stranding with a 2- to 2.5-inch lay.
3. Conductor insulation shall have a nominal 15-mil thickness, constructed from flame-retardant PVC.
4. Shielding shall be 100 percent type, 1.35-mil aluminum/polymer tape, helically applied with 25 percent overlap, and aluminum side in with tinned copper drain wire.
5. Outer jacket insulation shall have a 300-V, 105-deg C rating and shall be Type PLTC cable.
6. For twisted pair, conductor colors shall be black and white. For twisted triad, conductor colors shall be black, red and white.
7. Furnish wire on spools.

D. LAN and Communication Cable: Comply with DDC system manufacturer requirements for network being installed.

1. Cable shall be balanced twisted pair.
2. Comply with the following requirements and for balanced twisted pair cable described in Section 260523 "Control-Voltage Electrical Power Cables." Section 271513 "Communications Copper Horizontal Cabling."

a. Cable shall be plenum rated.
b. Cable shall have a unique color that is different from other cables used on Project.

2.29 RACEWAYS

A. Comply with requirements in Section 260533 "Raceways and Boxes for Electrical Systems" for electrical power raceways and boxes.

B. Comply with requirements in Section 270528 "Pathways for Communications Systems" for raceways for balanced twisted pair cables and optical fiber cables.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

1. Verify compatibility with and suitability of substrates.

B. Examine roughing-in for products to verify actual locations of connections before installation.

1. Examine roughing-in for instruments installed in piping to verify actual locations of connections before installation.
2. Examine roughing-in for instruments installed in duct systems to verify actual locations of connections before installation.

C. Examine walls, floors, roofs, and ceilings for suitable conditions where product will be installed.

D. Prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.

E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 DDC SYSTEM INTERFACE WITH OTHER SYSTEMS AND EQUIPMENT

A. Communication Interface to Equipment with Integral Controls:

1. DDC system shall have communication interface with equipment having integral controls and having a communication interface for remote monitoring or control.
2. Equipment to Be Connected:

a. Domestic water booster pumps specified in Section 221123.13 "Domestic-Water Packaged Booster Pumps."
b. Air-terminal units specified in Section 233600 "Air Terminal Units."
c. Chillers specified in Section 236423.16 "Water-Cooled, Scroll Water Chillers."
d. Cooling towers specified in Section 236513.13 "Open-Circuit, Forced-Draft Cooling Towers."

e. Cooling towers specified in Section 236513.16 "Closed-Circuit, Forced-Draft Cooling Towers."
f. Cooling towers specified in Section 236514.13 "Open-Circuit, Induced-Draft, Counterflow Cooling Towers."
g. Cooling towers specified in Section 236514.14 "Open-Circuit, Induced-Draft, Crossflow Cooling Towers."
h. Cooling towers specified in Section 236514.16 "Closed-Circuit, Induced-Draft, Counterflow Cooling Towers."
i. Cooling towers specified in Section 236514.17 "Closed-Circuit, Induced-Draft, Combined-Flow Cooling Towers."
j. Heat wheels and heat exchangers specified in Section 237223 "Air-to-Air Energy Recovery Equipment."
k. Roof-top units specified in Section 237413 "Packaged, Outdoor, Central-Station Air-Handling Units."
l. Switchboards specified in Section 262300 "Low-Voltage Switchgear."
m. Motor-control centers specified in Section 262419 "Motor-Control Centers."
n. UPS specified in Section 263353 "Static Uninterruptible Power Supply."

B. Communication Interface to Other Building Systems:

1. DDC system shall have a communication interface with systems having a communication interface.
2. Systems to Be Connected:

3.3 DDC SYSTEM INTERFACE WITH EXISTING SYSTEMS

A. Interface with Existing Systems:

1. DDC systems shall interface existing systems to achieve integration.
2. Monitoring and Control of DDC System by Existing Control System:

a. DDC system performance requirements shall be satisfied when monitoring and controlling DDC system by existing control system.
b. Operator of existing system shall be able to upload, download, monitor, trend, control and program every input and output point in DDC system from existing control system using existing control system software and operator workstations.
c. Remote monitoring and control from existing control system shall not require operators of existing control system to learn new software.
d. Interface of DDC system into existing control system shall be transparent to operators of existing control system and allow operators to program, monitor, and control DDC system from any operator workstation connected to existing control system.

3. Integration of Existing Control System into DDC System:

a. Existing control system performance requirements shall be satisfied when monitoring and controlling existing control system through DDC system.
b. Operator shall be able to upload, download, monitor, alarm, report, trend, control and program every input and output point in existing system from DDC system using operator workstations and software provided. The combined systems shall share one database.
c. Interface of existing control system I/O points into DDC system shall be transparent to operators. All operational capabilities shall be identical regardless of whether I/O already exists or I/O is being installed.

B. Integration with Existing Enterprise System:

1. DDC system shall interface with an existing enterprise system to adhere to Owner standards already in-place and to achieve integration.

2. Owner's control system integrator will provide the following services:
   a. Enterprise system expansion and development of graphics, logs, reports, trends and other operational capabilities of enterprise system for I/O being added to DDC control system for use by enterprise system operators.
   b. Limited assistance during commissioning to extent of DDC system integration with existing enterprise system.
   c. Prepare on-site demonstration mockup of integration of DDC system to be installed with existing system before installing DDC system.
3. Engage Owner's control system integrator to provide the following services:
   a. Enterprise system expansion and development of graphics, logs, reports, trends and other operational capabilities of enterprise system for I/O being added to DDC control system for use by enterprise system operators.
   b. Limited assistance during commissioning to extent of DDC system integration with existing enterprise system.
   c. Prepare on-site demonstration mockup of integration of DDC system to be installed with existing system before installing DDC system.
4. Control System Integrator Contact Information:
   a. Company: <**Insert name**>.
   b. Company Street Address: <**Insert address**>.
   c. Company Contact: <**Insert name**>.
   d. Phone Number: <**Insert phone number**>.
   e. E-mail Address: <**Insert e-mail address**>.
5. Attend meetings with control system integrator to integrate DDC system.

3.4 CONTROL DEVICES FOR INSTALLATION BY INSTALLERS

A. Deliver selected control devices, specified in indicated HVAC instrumentation and control device Sections, to identified equipment and systems manufacturers for factory installation and to identified installers for field installation.

B. Deliver the following to duct fabricator and Installer for installation in ductwork. Include installation instructions to Installer and supervise installation for compliance with requirements.
   1. DDC control dampers, which are specified in Section 230923.12 "Control Dampers."
   2. Airflow sensors and switches, which are specified in Section 230923.14 "Flow Instruments."
   3. Pressure sensors, which are specified in Section 230923.23 "Pressure Instruments."

C. Deliver the following to plumbing and HVAC piping installers for installation in piping. Include installation instructions to Installer and supervise installation for compliance with requirements.
   1. DDC control valves, which are specified in Section 230923.11 "Control Valves."
   2. Pipe-mounted flow meters, which are specified in Section 230923.14 "Flow Instruments."
   3. Pipe-mounted sensors, switches, and transmitters. Flow meters are specified in Section 230923.14 "Flow Instruments."
   4. Tank-mounted sensors, switches, and transmitters. Pressure sensors, switches, and transmitters are specified in Section 230923.23 "Pressure Instruments."
   5. Liquid and steam temperature sensors, switches, and transmitters are specified in Section 230923.27 "Temperature Instruments."
   6. Pipe- and tank-mounted thermowells. Liquid and steam thermowells are specified in Section 230923.27 "Temperature Instruments."

3.5 CONTROL DEVICES FOR EQUIPMENT MANUFACTURER FACTORY INSTALLATION

A. Deliver the following to air-handling unit manufacturer for factory installation. Include installation instructions to air-handling unit manufacturer and supervise installation for compliance with requirements.

1. Programmable application or application-specific controller.
2. Unit-mounted DDC control dampers and actuators, which are specified in Section 230923.12 "Control Dampers."
3. Unit-mounted airflow sensors, switches, and transmitters, which are specified in Section 230923.14 "Flow Instruments."
4. Unit-mounted gas sensors, and transmitters, which are specified in Section 230923.16 "Gas Instruments."
5. Unit-mounted leak-detection switches, which are specified in Section 230923.18 "Leak Detection Instruments."
6. Unit-mounted pressure sensors, switches, and transmitters, which are specified in Section 230923.23 "Pressure Instruments."
7. Unit-mounted speed sensors, switches, and transmitters, which are specified in Section 230923.24 "Speed Instruments."
8. Unit-mounted temperature sensors, switches, and transmitters. Air-temperature sensors, switches, and transmitters are specified in Section 230923.27 "Temperature Instruments."
9. Relays.

B. Deliver the following to terminal unit manufacturer for factory installation. Include installation instructions to terminal unit manufacturer.

1. Programmable application or application-specific controller.
2. Electric damper actuator. Damper actuators are specified in Section 230923.12 "Control Dampers."
3. Unit-mounted flow and pressure sensors, transmitters, and transducers. Flow sensors, transmitters, and transducers are specified in Section 230923.14 "Flow Instruments." Pressure sensors, switches, and transmitters are specified in Section 230923.23 "Pressure Instruments."
4. Unit-mounted temperature sensors. Air-temperature sensors, switches, and transmitters are specified in Section 230923.27 "Temperature Instruments."
5. Relays.

C. Deliver the following to fan-coil unit manufacturer for factory installation. Include installation instructions to fan-coil unit manufacturer.

1. Programmable application or application-specific controller.
2. Unit-mounted temperature sensors. Air-temperature sensors, switches, and transmitters are specified in Section 230923.27 "Temperature Instruments."
3. Flow and pressure switches. Air and liquid flow sensors, transmitters, and transducers are specified in Section 230923.14 "Flow Instruments." Pressure sensors, switches, and transmitters are specified in Section 230923.23 "Pressure Instruments."
4. Leak-detection switches, which are specified in Section 230923.18 "Leak Detection Instruments."
5. Relays.

3.6 GENERAL INSTALLATION REQUIREMENTS

A. Install products to satisfy more stringent of all requirements indicated.

B. Install products level, plumb, parallel, and perpendicular with building construction.

C. Support products, tubing, piping wiring and raceways. Brace products to prevent lateral movement and sway or a break in attachment when subjected to a force.

D. If codes and referenced standards are more stringent than requirements indicated, comply with requirements in codes and referenced standards.

E. Fabricate openings and install sleeves in ceilings, floors, roof, and walls required by installation of products. Before proceeding with drilling, punching, and cutting, check for concealed work to avoid damage. Patch, flash, grout, seal, and refinish openings to match adjacent condition.

F. Firestop Penetrations Made in Fire-Rated Assemblies: Comply with requirements in Section 078413 "Penetration Firestopping."

G. Seal penetrations made in acoustically rated assemblies. Comply with requirements in Section 079200 "Joint Sealants."

H. Welding Requirements:

1. Restrict welding and burning to supports and bracing.
2. No equipment shall be cut or welded without approval. Welding or cutting will not be approved if there is risk of damage to adjacent Work.
3. Welding, where approved, shall be by inert-gas electric arc process and shall be performed by qualified welders according to applicable welding codes.
4. If requested on-site, show satisfactory evidence of welder certificates indicating ability to perform welding work intended.

I. Fastening Hardware:

1. Stillson wrenches, pliers, and other tools that damage surfaces of rods, nuts, and other parts are prohibited for work of assembling and tightening fasteners.
2. Tighten bolts and nuts firmly and uniformly. Do not overstress threads by excessive force or by oversized wrenches.
3. Lubricate threads of bolts, nuts and screws with graphite and oil before assembly.

J. If product locations are not indicated, install products in locations that are accessible and that will permit service and maintenance from floor, equipment platforms, or catwalks without removal of permanently installed furniture and equipment.

K. Corrosive Environments:

1. Avoid or limit use of materials in corrosive airstreams and environments, including, but not limited to, the following:

   a. Laboratory exhaust-air streams.
   b. Process exhaust-air streams.

2. When conduit is in contact with a corrosive airstream and environment, use Type 316 stainless steel conduit and fittings or conduit and fittings that are coated with a corrosive-resistant coating that is suitable for environment. Comply with requirements for installation of raceways and boxes specified in Section 260533 "Raceways and Boxes for Electrical Systems."
3. Where instruments are located in a corrosive airstream and are not corrosive resistant from manufacturer, field install products in NEMA 250, Type 4X enclosure constructed of Type 316L stainless steel.

3.7 WORKSTATION INSTALLATION

A. Desktop Workstations Installation:

1. Install workstation(s) at location(s) directed by Owner.
2. Install multiple-receptacle power strip with cord for use in connecting multiple workstation components to a single duplex electrical power receptacle.

3. Install software on workstation(s) and verify software functions properly.
4. Develop Project-specific graphics, trends, reports, logs and historical database.
5. Power each workstation through a dedicated UPS unit. Locate UPS adjacent to workstation.

B. Portable Workstations Installation:

1. Turn over portable workstations to Owner at Substantial Completion.
2. Install software on workstation(s) and verify software functions properly.

C. Color Graphics Application:

1. Use system schematics indicated as starting point to create graphics.
2. Develop Project-specific library of symbols for representing system equipment and products.
3. Incorporate digital images of Project-completed installation into graphics where beneficial to enhance effect.
4. Submit sketch of graphic layout with description of all text for each graphic for Owner's review before creating graphic using graphics software.
5. Seek Owner input in graphics development once using graphics software.
6. Final editing shall be done on-site with Owner's review and feedback.
7. Refine graphics as necessary for Owner acceptance.
8. On receiving Owner acceptance, print a hard copy for inclusion in operation and maintenance manual. Prepare a scanned copy PDF file of each graphic and include with softcopy of DDC system operation and maintenance manual.

D. Wall-Mounted Portable Operator's Workstation Cabinet Installation:

1. Install wall-mounted portable operator's workstation cabinet(s) at location(s) indicated on Drawings.
2. Install wall-mounted portable operator's workstation cabinet(s) at following location(s) and at locations directed by Owner:

   a. Each mechanical room.
   b. Chiller room.
   c. Boiler room.

3. Connect each cabinet to 120-V, single-phase, 60Hz field power source, and install single gang electrical box with NEMA WD 6, Type 20R duplex receptacle and metal cover plate in cabinet. Comply with requirements in Section 262726 "Wiring Devices."
4. Connect each cabinet to Ethernet network and install an Ethernet network port for connection to portable operator workstation Ethernet cable. Comply with requirements in Section 271513 "Communications Copper Horizontal Cabling."

3.8 POT INSTALLATION

A. Install one portable operator terminal(s).

B. Turn over POTs to Owner at Substantial Completion.

C. Install software on each POT and verify that software functions properly.

3.9 SERVER INSTALLATION

A. Install one server at location(s) directed by Owner.

B. Install number of servers required to suit requirements indicated. Review Project requirements and indicate layout of proposed location in Shop Drawings.

C. Install software indicated on server(s) and verify that software functions properly.

D. Develop Project-specific graphics, trends, reports, logs, and historical database.

E. Power servers through dedicated UPS unit. Locate UPS adjacent to server.

3.10 PRINTER INSTALLATION

A. Provide the following printer(s) at location(s) directed by Owner:

1. Black and White Laser: Quantity, one.
2. Color Laser: Quantity, one.

B. Install printer software on workstations and verify that software functions properly.

3.11 CONTROLLER INSTALLATION

A. Install controllers in enclosures to comply with indicated requirements.

B. Connect controllers to field power supply.

C. Install controller with latest version of applicable software and configure to execute requirements indicated.

D. Test and adjust controllers to verify operation of connected I/O to achieve performance indicated requirements while executing sequences of operation.

E. Installation of Network Controllers:

1. Quantity and location of network controllers shall be determined by DDC system manufacturer to satisfy requirements indicated.
2. Install controllers in a protected location that is easily accessible by operators.
3. Top of controller shall be within 72 inches of finished floor.

F. Installation of Programmable Application Controllers:

1. Quantity and location of programmable application controllers shall be determined by DDC system manufacturer to satisfy requirements indicated.
2. Install controllers in a protected location that is easily accessible by operators.
3. Top of controller shall be within 72 inches of finished floor.

G. Application-Specific Controllers:

1. Quantity and location of application-specific controllers shall be determined by DDC system manufacturer to satisfy requirements indicated.
2. For controllers not mounted directly on equipment being controlled, install controllers in a protected location that is easily accessible by operators.

3.12 INSTALLATION OF WIRELESS ROUTERS FOR OPERATOR INTERFACE

A. Install wireless routers to achieve optimum performance and best possible coverage.

B. Mount wireless routers in a protected location that is within 60 inches of floor and easily accessible by operators.

C. Connect wireless routers to field power supply and to UPS units if network controllers are powered through UPS units.

D. Install wireless router with latest version of applicable software and configure wireless router with WPA2 security and password protection. Create access password with not less than 12 characters consisting of letters and numbers and at least one special character. Document password in operations and maintenance manuals for reference by operators.

E. Test and adjust wireless routers for proper operation with portable workstation and other wireless devices intended for use by operators.

3.13 ENCLOSURES INSTALLATION

A. Install the following items in enclosures, to comply with indicated requirements:

1. Gateways.
2. Routers.
3. Controllers.
4. Electrical power devices.
5. UPS units.
6. Relays.
7. Accessories.
8. Instruments.
9. Actuators

B. Attach wall-mounted enclosures to wall using the following types of steel struts:

1. For NEMA 250, Type 1 Enclosures: Use painted steel strut and hardware.
2. For NEMA 250, Type 4X Enclosures and Enclosures Located Outdoors: Use stainless steel strut and hardware.
3. Install plastic caps on exposed cut edges of strut.

C. Align top of adjacent enclosures.

D. Install floor-mounted enclosures located in mechanical equipment rooms on concrete housekeeping pads. Attach enclosure legs using stainlesssteel anchors.

E. Install continuous and fully accessible wireways to connect conduit, wire, and cable to multiple adjacent enclosures. Wireway used for application shall have protection equal to NEMA 250 rating of connected enclosures.

3.14 ELECTRIC POWER CONNECTIONS

A. Connect electrical power to DDC system products requiring electrical power connections.

B. Design of electrical power to products not indicated with electric power is delegated to DDC system provider and installing trade. Work shall comply with NFPA 70 and other requirements indicated.

C. Comply with requirements in Section 262816 "Enclosed Switches and Circuit Breakers" for electrical power circuit breakers.

D. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for electrical power conductors and cables.

E. Comply with requirements in Section 260533 "Raceways and Boxes for Electrical Systems" for electrical power raceways and boxes.

3.15 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Comply with requirements in Section 260553 "Identification for Electrical Systems" for identification products and installation.

B. Install laminated acrylic or melamine plastic signs with unique identification on face for each of the following:

1. Operator workstation.
2. Server.
3. Printer.
4. Router.
5. Protocol analyzer.
6. DDC controller.
7. Enclosure.
8. Electrical power device.
9. UPS unit.
10. Accessory.

C. Install unique instrument identification on face of each instrument connected to a DDC controller.

D. Install unique identification on face of each control damper and valve actuator connected to a DDC controller.

E. Where product is installed above accessible tile ceiling, also install matching identification on face of ceiling grid located directly below.

F. Where product is installed above an inaccessible ceiling, also install identification on face of access door directly below.

G. Warning Labels and Signs:

1. Shall be permanently attached to equipment that can be automatically started by DDC control system.
2. Shall be located in highly visible location near power service entry points.

3.16 NETWORK INSTALLATION

A. Install optical fiber cable when connecting between the following network devices and when located in different buildings on campus, or when distance between devices exceeds 330 Feet :

1. Operator workstations.
2. Operator workstations and network controllers.
3. Network controllers.

B. Install balanced twisted pair or optical fiber cable when connecting between the following network devices located in same building:

1. Operator workstations.
2. Operator workstations and network controllers.
3. Network controllers.

C. Install balanced twisted pair or copper cable (as required by equipment) when connecting between the following:

1. Gateways.
2. Gateways and network controllers or programmable application controllers.

3. Routers.
4. Routers and network controllers or programmable application controllers.
5. Network controllers and programmable application controllers.
6. Programmable application controllers.
7. Programmable application controllers and application-specific controllers.
8. Application-specific controllers.

D. Install cable in continuous raceway.

1. Where indicated on Drawings, cable trays may be used for copper cable in lieu of conduit.

3.17 NETWORK NAMING AND NUMBERING

A. Coordinate with Owner and provide unique naming and addressing for networks and devices.

B. ASHRAE 135 Networks:

1. MAC Address:

a. Every network device shall have an assigned and documented MAC address unique to its network.
b. Ethernet Networks: Document MAC address assigned at its creation.
c. ARCNET or MS/TP networks: Assign from 00 to 64.

2. Network Numbering:

a. Assign unique numbers to each new network.
b. Provide ability for changing network number through device switches or operator interface.
c. DDC system, with all possible connected LANs, can contain up to 65,534 unique networks.

3. Device Object Identifier Property Number:

a. Assign unique device object identifier property numbers or device instances for each device network.
b. Provide for future modification of device instance number by device switches or operator interface.
c. LAN shall support up to 4,194,302 unique devices.

4. Device Object Name Property Text:

a. Device object name property field shall support 32 minimum printable characters.
b. Assign unique device "Object Name" property names with plain-English descriptive names for each device.

1) Example 1: Device object name for device controlling boiler plant at Building 1000 would be "HW System B1000."
2) Example 2: Device object name for a VAV terminal unit controller could be "VAV unit 102".

5. Object Name Property Text for Other Than Device Objects:

a. Object name property field shall support 32 minimum printable characters.
b. Assign object name properties with plain-English names descriptive of application.

1) Example 1: "Zone 1 Temperature."
2) Example 2 "Fan Start and Stop."

6. Object Identifier Property Number for Other Than Device Objects:

a. Assign object identifier property numbers according to Drawings or tables indicated.

b. If not indicated, object identifier property numbers may be assigned at Installer's discretion but must be approved by Owner in advance, be documented and be unique for like object types within device.

3.18 INSTALLATION OF PNEUMATIC AND AIR SIGNAL PIPING AND TUBING

A. Above-Grade Pneumatic and Air Signal Piping and Tubing Installation:

1. Material Application:

a. Install copper tubing, except as follows:

1) Tubing Exposed to View: Polyethylene tubing installed in raceways may be used in lieu of copper tubing.
2) Concealed Tubing: Polyethylene tubing may be used in lieu of copper tubing when concealed behind accessible ceilings and concealed in walls and connecting wall-mounted instruments with recessed connections.

b. Install copper tubing for sizes up through NPS 1 and install galvanized-steel pipe for larger sizes, except as follows:

1) Tubing Exposed to View: Polyethylene tubing installed in raceways may be used in lieu of copper tubing where exposed to view.
2) Concealed Tubing: Polyethylene tubing may be used in lieu of copper tubing when concealed behind accessible ceilings and concealed in walls and connecting wall-mounted instruments with recessed connections.

c. Install copper tubing , unless other accessible materials are indicated, for air signals to instruments including, but not limited to, the following:

1) Sensors.
2) Switches.
3) Transmitters.

d. Install drawn-temper copper tubing, except within 36 inches of device terminations tubing shall be annealed-tempered copper tubing.
e. Install compression fittings to connect copper tubing to instruments, control devices, and accessories.
f. Install compression fittings to connect polyethylene tubing to instruments, control devices, and accessories.

2. Routing:

a. Do not expose tubing in finished spaces, such as spaces with ceilings; occupied spaces, offices, and conference rooms, unless expressly approved in writing by Architect. Tubing may be exposed in areas without ceilings.
b. Where tubing is installed in finished occupied spaces, install the tubing in surface metal raceway with appropriate fittings only where not feasible to conceal in wall, above ceiling or behind architectural enclosures or covers.
c. Install piping and tubing plumb and parallel to and at right angles with building construction.
d. Install multiple runs of tubing or piping in equally spaced parallel lines.
e. Piping and tubing shall not interfere with access to valves, equipment, duct and equipment access doors, or obstruct personnel access and passageways of any kind.
f. Coordinate with other trades before installation to prevent proposed piping and tubing from interfering with pipe, duct, terminal equipment, light fixtures, conduit and cable tray space. If changes to Shop Drawings are necessary due to field coordination, document changes on record Drawings.
g. Install vibration loops in copper tubing when connecting to instrument and actuators that vibrate.

3. Support:
    a. According to MSS SP-69, Table 3, except support spacing shall not exceed 60 inches.
    b. Support copper tubing with copper hangers, clips, and tube trays.
    c. Do not use tape for support or dielectric isolation.
    d. Install supports at each change in direction and at each branch take off.
    e. Attached supports to building structure independent of work of other trades. Support from ducts, pipes, cable trays, and conduits is prohibited.
    f. Attached support from building structure with threaded rods, structural shapes, or channel strut.
    g. Install and brace supports to carry static load plus a safety margin, which will allow tubing to be serviced.
    h. Brace supports to prevent lateral movement.
    i. Paint steel support members that are not galvanized or zinc coated.
    j. Support polyethylene tubing same as copper tubing.
4. Do not attach piping and tubing to equipment that may be removed frequently for maintenance or that may impart vibration and expansion from temperature change.
5. Protect exposed tubing in mechanical equipment rooms from mechanical damage within 96 inches above floor. Use aluminum channel reversed and secured over tubing to protect tubing from damage.
6. Joining and Makeup:
    a. Where joining and mating dissimilar metals where galvanic action could occur, install dielectric isolation.
    b. Install a dirt leg with an isolation valve and threaded plug at each main air, connection to a panel, pneumatic pilot positioner and PRV station.
    c. Make threaded joints for connecting to instrument equipment with connectors with a compression tubing connector on one end and threaded connection on other end.
    d. Make tubing bends with a tube-bending tool. Hard bends, wrinkled or flattened bends are unacceptable.
    e. Install tube fittings according to manufacturer's written instructions.
    f. Do not make tubing connections to a fitting before completing makeup of the connection.
    g. Align tubing with the fitting. Avoid springing tube into position, as this may result in excessive stress on both tubing and fitting with possible resulting leaks.
    h. Do not install fittings close to a bend. A length of straight tubing, not deformed by bending, is required for a proper connection.
    i. Check tubing for correct diameter and wall thickness.
    j. Tube ends shall be cut square and deburred. Exercise care during cutting to keep tubing round.
    k. Thread pipe on a threading machine. Ream inner edges of pipe ends, file and grind to remove burrs.
    l. Wrap pipe threads of fittings on pneumatic lines with a single wrap of PTFE tape.
    m. Protect piping and tubing from entrance of foreign matter.
7. Conduit in which nonmetallic tubing is installed shall not exceed 50 percent fill. Support conduit according to NFPA 70 unless otherwise indicated.

B. Below-Grade Pneumatic and Air Signal Piping and Tubing Installation:
1. Install tubing below grade in a continuous 4-inch, Schedule 80, PVC conduit.
2. Install at a depth of at least 24 inches below finished grade.
3. Install tubing in raceways dedicated to tubing. Do not combine electrical conductors and tubing in raceways.

C. Identify piping and tubing as follows:
1. Every 50 feet of straight run.
2. At least once for each branch within 36 inches of main tee.

3. At each change in direction.
4. Within 36 inches of each ceiling, floor, roof and wall penetration.
5. Where exposed to and where concealed from view, including above ceiling plenums, shafts, and chases.
6. At each valve.
7. Mark each instrument tube connection with a number-coded identification. Each unique tube shall have same unique number at instrument connection and termination at opposite end of tube.

D. Pneumatic and Air Signal Piping Isolation Valves Installation:

1. Install valves full size of piping and tubing.
2. Install at the following locations:

a. At each branch.
b. Before and after each PRV.
c. Before and after each air dryer.
d. At each control device.

3. Valves shall be located to be readily accessible from floor.

3.19 INSTALLATION OF PROCESS TUBING

A. Install process tubing for signal to instruments in liquid and steam systems. Instruments include, but are not limited to, the following:

1. Meters.
2. Sensors.
3. Switches.
4. Transmitters.

B. Support tubing according to MSS SP-69, Table 3, but at intervals no less than 60 inches.

C. Install NPS 1/2 process tubing for industrial-grade sensors, transmitters, and switches. Install stainless steel bushings where required.

D. Make tubing bends with a bending tool. Flattened or wrinkled bends are unacceptable.

E. Support tubing independent of other trades.

F. Route tubing parallel to and at right angles to building construction.

G. Install tubing concealed in areas with ceilings.

H. Install a dirt leg with an isolation valve and threaded plug in drain valve at each connection to a transmitter and switch.

I. Insulate process piping connected to hot water and steam systems for personnel protection if the surface temperature exceeds 120 deg F. Only insulate piping within maintenance personnel reach from floor, platform, or catwalk.

J. Wrap pipe threads of fitting in process tubing with service temperatures below 350 deg F with a single wrap of PTFE tape.

K. Coat pipe threads of fittings on process tubing in services with temperatures exceeding 350 deg F with pipe compound before being made up to reduce the possibility of galling.

L. Do not make tubing connections to a fitting before completing makeup of the connection.

M. Check tubing for correct diameter and wall thickness. Cut the tube ends square and deburred. Exercise care during cutting to keep tubing round.

N. Do not install fittings close to a bend. A length of straight tubing, not deformed by bending, is required for a proper connection.

O. Align tubing with fitting when installed. Avoid springing tube into position.

P. Install tubing with extreme care exercised to keep foreign matter out of system. Open tubing ends shall be kept plugged to keep out dust, dirt and moisture.

Q. Do not attach tubing to equipment that may be removed frequently for maintenance or may impart vibration and expansion from temperature change.

R. Protect exposed tubing in mechanical equipment rooms from inadvertent mechanical damage within 96 inches above floor. Use aluminum channel reversed and secured over tubing to protect tubing from damage.

S. Process Tubing Isolation Valves Installation:

1. Install valves full size of piping and tubing.
2. Install isolation valves at the following locations:
   a. Process connection.
   b. Inlet to each instrument including, sensors, transmitters, switches, gauges, and other control devices.
3. Locate valves to be readily accessible from floor.

3.20 CONTROL WIRE, CABLE AND RACEWAYS INSTALLATION

A. Comply with NECA 1.

B. Wire and Cable Installation:

1. Comply with installation requirements in Section 260523 "Control-Voltage Electrical Power Cables."
2. Comply with installation requirements in Section 271313 "Communications Copper Backbone Cabling."
3. Comply with installation requirements in Section 271513 "Communications Copper Horizontal Cabling."
4. Install cables with protective sheathing that is waterproof and capable of withstanding continuous temperatures of 90 deg C with no measurable effect on physical and electrical properties of cable.
   a. Provide shielding to prevent interference and distortion from adjacent cables and equipment.
5. Terminate wiring in a junction box.
   a. Clamp cable over jacket in junction box.
   b. Individual conductors in the stripped section of the cable shall be slack between the clamping point and terminal block.
6. Terminate field wiring and cable not directly connected to instruments and control devices having integral wiring terminals using terminal blocks.
7. Install signal transmission components according to IEEE C2, REA Form 511a, NFPA 70, and as indicated.
8. Use shielded cable to transmitters.
9. Use shielded cable to temperature sensors.
10. Perform continuity and meager testing on wire and cable after installation.

C. Conduit Installation:

1. Comply with Section 260533 "Raceways and Boxes for Electrical Systems" for control-voltage conductors.
2. Comply with Section 270528 "Pathways for Communications Systems" for balanced twisted pair cabling and optical fiber installation.

3.21 OPTICAL FIBER CABLE SYSTEM INSTALLATION

A. Comply with installation requirements in Section 271323 "Communications Optical Fiber Backbone Cabling."

B. Comply with installation requirements in Section 271523 "Communications Optical Fiber Horizontal Cabling."

3.22 DDC SYSTEM I/O CHECKOUT PROCEDURES

A. Check installed products before continuity tests, leak tests and calibration.

B. Check instruments for proper location and accessibility.

C. Check instruments for proper installation on direction of flow, elevation, orientation, insertion depth, or other applicable considerations that will impact performance.

D. Check instrument tubing for proper isolation, fittings, slope, dirt legs, drains, material and support.

E. For pneumatic products, verify that air supply for each product is properly installed.

F. Control Damper Checkout:

1. For pneumatic dampers, verify that pressure gauges are provided in each air line to damper actuator and positioner.
2. Verify that control dampers are installed correctly for flow direction.
3. Verify that proper blade alignment, either parallel or opposed, has been provided.
4. Verify that damper frame attachment is properly secured and sealed.
5. Verify that damper actuator and linkage attachment is secure.
6. Verify that actuator wiring is complete, enclosed and connected to correct power source.
7. Verify that damper blade travel is unobstructed.

G. Control Valve Checkout:

1. For pneumatic valves, verify that pressure gauges are provided in each air line to valve actuator and positioner.
2. Verify that control valves are installed correctly for flow direction.
3. Verify that valve body attachment is properly secured and sealed.
4. Verify that valve actuator and linkage attachment is secure.
5. Verify that actuator wiring is complete, enclosed and connected to correct power source.
6. Verify that valve ball, disc or plug travel is unobstructed.
7. After piping systems have been tested and put into service, but before insulating and balancing, inspect each valve for leaks. Adjust or replace packing to stop leaks. Replace the valve if leaks persist.

H. Instrument Checkout:

1. Verify that instrument is correctly installed for location, orientation, direction and operating clearances.

2. Verify that attachment is properly secured and sealed.
3. Verify that conduit connections are properly secured and sealed.
4. Verify that wiring is properly labeled with unique identification, correct type and size and is securely attached to proper terminals.
5. Inspect instrument tag against approved submittal.
6. For instruments with tubing connections, verify that tubing attachment is secure and isolation valves have been provided.
7. For flow instruments, verify that recommended upstream and downstream distances have been maintained.
8. For temperature instruments:
    a. Verify sensing element type and proper material.
    b. Verify length and insertion.

3.23 DDC SYSTEM I/O ADJUSTMENT, CALIBRATION AND TESTING:

A. Calibrate each instrument installed that is not factory calibrated and provided with calibration documentation.

B. Provide a written description of proposed field procedures and equipment for calibrating each type of instrument. Submit procedures before calibration and adjustment.

C. For each analog instrument, make a three-point test of calibration for both linearity and accuracy.

D. Equipment and procedures used for calibration shall comply with instrument manufacturer's written instructions.

E. Provide diagnostic and test equipment for calibration and adjustment.

F. Field instruments and equipment used to test and calibrate installed instruments shall have accuracy at least twice the instrument accuracy being calibrated. An installed instrument with an accuracy of 1 percent shall be checked by an instrument with an accuracy of 0.5 percent.

G. Calibrate each instrument according to instrument instruction manual supplied by manufacturer.

H. If after calibration indicated performance cannot be achieved, replace out-of-tolerance instruments.

I. Comply with field testing requirements and procedures indicated by ASHRAE's Guideline 11, "Field Testing of HVAC Control Components," in the absence of specific requirements, and to supplement requirements indicated.

J. Analog Signals:
    1. Check analog voltage signals using a precision voltage meter at zero, 50, and 100 percent.
    2. Check analog current signals using a precision current meter at zero, 50, and 100 percent.
    3. Check resistance signals for temperature sensors at zero, 50, and 100 percent of operating span using a precision-resistant source.

K. Digital Signals:
    1. Check digital signals using a jumper wire.
    2. Check digital signals using an ohmmeter to test for contact making or breaking.

L. Control Dampers:
    1. Stroke and adjust control dampers following manufacturer's recommended procedure, from 100 percent open to 100 percent closed and back to 100 percent open.

2. Stroke control dampers with pilot positioners. Adjust damper and positioner following manufacturer's recommended procedure, so damper is 100 percent closed, 50 percent closed and 100 percent open at proper air pressure.
3. Check and document open and close cycle times for applications with a cycle time less than 30 seconds.
4. For control dampers equipped with positive position indication, check feedback signal at multiple positions to confirm proper position indication.

M. Control Valves:

1. Stroke and adjust control valves following manufacturer's recommended procedure, from 100 percent open to 100 percent closed and back to 100 percent open.
2. Stroke control valves with pilot positioners. Adjust valve and positioner following manufacturer's recommended procedure, so valve is 100 percent closed, 50 percent closed and 100 percent open at proper air pressures.
3. Check and document open and close cycle times for applications with a cycle time less than 30 seconds.
4. For control valves equipped with positive position indication, check feedback signal at multiple positions to confirm proper position indication.

N. Meters: Check sensors at zero, 50, and 100 percent of Project design values.

O. Sensors: Check sensors at zero, 50, and 100 percent of Project design values.

P. Switches: Calibrate switches to make or break contact at set points indicated.

Q. Transmitters:

1. Check and calibrate transmitters at zero, 50, and 100 percent of Project design values.
2. Calibrate resistance temperature transmitters at zero, 50, and 100 percent of span using a precision-resistant source.

3.24 DDC SYSTEM CONTROLLER CHECKOUT

A. Verify power supply.

1. Verify voltage, phase and hertz.
2. Verify that protection from power surges is installed and functioning.
3. Verify that ground fault protection is installed.
4. If applicable, verify if connected to UPS unit.
5. If applicable, verify if connected to a backup power source.
6. If applicable, verify that power conditioning units, transient voltage suppression and high-frequency noise filter units are installed.

B. Verify that wire and cabling is properly secured to terminals and labeled with unique identification.

C. Verify that spare I/O capacity is provided.

3.25 DDC CONTROLLER I/O CONTROL LOOP TESTS

A. Testing:

1. Test every I/O point connected to DDC controller to verify that safety and operating control set points are as indicated and as required to operate controlled system safely and at optimum performance.
2. Test every I/O point throughout its full operating range.

3. Test every control loop to verify operation is stable and accurate.
4. Adjust control loop proportional, integral and derivative settings to achieve optimum performance while complying with performance requirements indicated. Document testing of each control loop's precision and stability via trend logs.
5. Test and adjust every control loop for proper operation according to sequence of operation.
6. Test software and hardware interlocks for proper operation. Correct deficiencies.
7. Operate each analog point at the following:
    a. Upper quarter of range.
    b. Lower quarter of range.
    c. At midpoint of range.
8. Exercise each binary point.
9. For every I/O point in DDC system, read and record each value at operator workstation, at DDC controller and at field instrument simultaneously. Value displayed at operator workstation, at DDC controller and at field instrument shall match.
10. Prepare and submit a report documenting results for each I/O point in DDC system and include in each I/O point a description of corrective measures and adjustments made to achieve desire results.

3.26 DDC SYSTEM VALIDATION TESTS

A. Perform validation tests before requesting final review of system. Before beginning testing, first submit Pretest Checklist and Test Plan.

B. After approval of Test Plan, execute all tests and procedures indicated in plan.

C. After testing is complete, submit completed test checklist.

D. Pretest Checklist: Submit the following list with items checked off once verified:

1. Detailed explanation for any items that are not completed or verified.
2. Required mechanical installation work is successfully completed and HVAC equipment is working correctly.
3. HVAC equipment motors operate below full-load amperage ratings.
4. Required DDC system components, wiring, and accessories are installed.
5. Installed DDC system architecture matches approved Drawings.
6. Control electric power circuits operate at proper voltage and are free from faults.
7. Required surge protection is installed.
8. DDC system network communications function properly, including uploading and downloading programming changes.
9. Using BACnet protocol analyzer, verify that communications are error free.
10. Each controller's programming is backed up.
11. Equipment, products, tubing, wiring cable, and conduits are properly labeled.
12. All I/O points are programmed into controllers.
13. Testing, adjusting, and balancing work affecting controls is complete.
14. Dampers and actuators zero and span adjustments are set properly.
15. Each control damper and actuator goes to failed position on loss of power.
16. Valves and actuators zero and span adjustments are set properly.
17. Each control valve and actuator goes to failed position on loss of power.
18. Meter, sensor and transmitter readings are accurate and calibrated.
19. Control loops are tuned for smooth and stable operation.
20. View trend data where applicable.
21. Each controller works properly in standalone mode.
22. Safety controls and devices function properly.
23. Interfaces with fire-alarm system function properly.
24. Electrical interlocks function properly.

25. Operator workstations and other interfaces are delivered, all system and database software is installed, and graphic are created.
26. Record Drawings are completed.

E. Test Plan:

1. Prepare and submit a validation test plan including test procedures for performance validation tests.
2. Test plan shall address all specified functions of DDC system and sequences of operation.
3. Explain detailed actions and expected results to demonstrate compliance with requirements indicated.
4. Explain method for simulating necessary conditions of operation used to demonstrate performance.
5. Include a test checklist to be used to check and initial that each test has been successfully completed.
6. Submit test plan documentation 20 business days before start of tests.

F. Validation Test:

1. Verify operating performance of each I/O point in DDC system.
   a. Verify analog I/O points at operating value.
   b. Make adjustments to out-of-tolerance I/O points.
      1) Identify I/O points for future reference.
      2) Simulate abnormal conditions to demonstrate proper function of safety devices.
      3) Replace instruments and controllers that cannot maintain performance indicated after adjustments.
2. Simulate conditions to demonstrate proper sequence of control.
3. Readjust settings to design values and observe ability of DDC system to establish desired conditions.
4. After 24 Hours following Initial Validation Test:
   a. Re-check I/O points that required corrections during initial test.
   b. Identify I/O points that still require additional correction and make corrections necessary to achieve desired results.
5. After 24 Hours of Second Validation Test:
   a. Re-check I/O points that required corrections during second test.
   b. Continue validation testing until I/O point is normal on two consecutive tests.
6. Completely check out, calibrate, and test all connected hardware and software to ensure that DDC system performs according to requirements indicated.
7. After validation testing is complete, prepare and submit a report indicating all I/O points that required correction and how many validation re-tests it took to pass. Identify adjustments made for each test and indicate instruments that were replaced.

G. DDC System Response Time Test:

1. Simulate HLC.
   a. Heavy load shall be an occurrence of 50 percent of total connected binary COV, one-half of which represent an "alarm" condition, and 50 percent of total connected analog COV, one-half of which represent an "alarm" condition, that are initiated simultaneously on a one-time basis.
2. Initiate 10 successive occurrences of HLC and measure response time to typical alarms and status changes.
3. Measure with a timer having at least 0.1-second resolution and 0.01 percent accuracy.
4. Purpose of test is to demonstrate DDC system, as follows:
   a. Reaction to COV and alarm conditions during HLC.
   b. Ability to update DDC system database during HLC.

5. Passing test is contingent on the following:
   a. Alarm reporting at printer beginning no more than two seconds after the initiation (time zero) of HLC.
   b. All alarms, both binary and analog, are reported and printed; none are lost.
   c. Compliance with response times specified.
6. Prepare and submit a report documenting HLC tested and results of test including time stamp and print out of all alarms.

H. DDC System Network Bandwidth Test:
1. Test network bandwidth usage on all DDC system networks to demonstrate bandwidth usage under DDC system normal operating conditions and under simulated HLC.
2. To pass, none of DDC system networks shall use more than 70 percent of available bandwidth under normal and HLC operation.

3.27 DDC SYSTEM WIRELESS NETWORK VERIFICATION

A. DDC system Installer shall design wireless DDC system networks to comply with performance requirements indicated.

B. Installer shall verify wireless network performance through field testing and shall document results in a field test report.

C. Testing and verification of all wireless devices shall include, but not be limited to, the following:
1. Speed.
2. Online status.
3. Signal strength.

3.28 FINAL REVIEW

A. Submit written request to Architect and Construction Manager when DDC system is ready for final review. Written request shall state the following:
1. DDC system has been thoroughly inspected for compliance with contract documents and found to be in full compliance.
2. DDC system has been calibrated, adjusted and tested and found to comply with requirements of operational stability, accuracy, speed and other performance requirements indicated.
3. DDC system monitoring and control of HVAC systems results in operation according to sequences of operation indicated.
4. DDC system is complete and ready for final review.

B. Review by Construction Manager shall be made after receipt of written request. A field report shall be issued to document observations and deficiencies.

C. Take prompt action to remedy deficiencies indicated in field report and submit a second written request when all deficiencies have been corrected. Repeat process until no deficiencies are reported.

D. Should more than two reviews be required, DDC system manufacturer and Installer shall compensate entity performing review for total costs, labor and expenses, associated with third and subsequent reviews. Estimated cost of each review shall be submitted and approved by DDC system manufacturer and Installer before making the review.

E. Prepare and submit closeout submittals and begin procedures indicated in "Extended Operation Test" Article when no deficiencies are reported.

F. A part of DDC system final review shall include a demonstration to parties participating in final review.

1. Provide staff familiar with DDC system installed to demonstrate operation of DDC system during final review.
2. Provide testing equipment to demonstrate accuracy and other performance requirements of DDC system that is requested by reviewers during final review.
3. Demonstration shall include, but not be limited to, the following:

a. Accuracy and calibration of 20 I/O points randomly selected by reviewers. If review finds that some I/O points are not properly calibrated and not satisfying performance requirements indicated, additional I/O points may be selected by reviewers until total I/O points being reviewed that satisfy requirements equals quantity indicated.
b. HVAC equipment and system hardwired and software safeties and life-safety functions are operating according to sequence of operation. Up to 20 I/O points shall be randomly selected by reviewers. Additional I/O points may be selected by reviewers to discover problems with operation.
c. Correct sequence of operation after electrical power interruption and resumption after electrical power is restored for randomly selected HVAC systems.
d. Operation of randomly selected dampers and valves in normal-on, normal-off and failed positions.
e. Reporting of alarm conditions for randomly selected alarms, including different classes of alarms, to ensure that alarms are properly received by operators and operator workstations.
f. Trends, summaries, logs and reports set-up for Project.
g. For up to three HVAC systems randomly selected by reviewers, use graph trends to show that sequence of operation is executed in correct manner and that HVAC systems operate properly through complete sequence of operation including different modes of operations indicated. Show that control loops are stable and operating at set points and respond to changes in set point of 20 percent or more.
h. Software's ability to communicate with controllers, operator workstations, uploading and downloading of control programs.
i. Software's ability to edit control programs off-line.
j. Data entry to show Project-specific customizing capability including parameter changes.
k. Step through penetration tree, display all graphics, demonstrate dynamic update, and direct access to graphics.
l. Execution of digital and analog commands in graphic mode.
m. Spreadsheet and curve plot software and its integration with database.
n. Online user guide and help functions.
o. Multitasking by showing different operations occurring simultaneously on four quadrants of split screen.
p. System speed of response compared to requirements indicated.
q. For Each Network and Programmable Application Controller:

1) Memory: Programmed data, parameters, trend and alarm history collected during normal operation is not lost during power failure.
2) Operator Interface: Ability to connect directly to each type of digital controller with a portable workstation and mobile device. Show that maintenance personnel interface tools perform as indicated in manufacturer's technical literature.
3) Standalone Ability: Demonstrate that controllers provide stable and reliable standalone operation using default values or other method for values normally read over network.
4) Electric Power: Ability to disconnect any controller safely from its power source.
5) Wiring Labels: Match control drawings.
6) Network Communication: Ability to locate a controller's location on network and communication architecture matches Shop Drawings.
7) Nameplates and Tags: Accurate and permanently attached to control panel doors, instrument, actuators, and devices.

r. For Each Operator Workstation:

1) I/O points lists agree with naming conventions.
2) Graphics are complete.
3) UPS unit, if applicable, operates.

s. Communications and Interoperability: Demonstrate proper interoperability of data sharing, alarm and event management, trending, scheduling, and device and network management. Requirements must be met even if only one manufacturer's equipment is installed.

1) Data Presentation: On each operator workstation, demonstrate graphic display capabilities.
2) Reading of Any Property: Demonstrate ability to read and display any used readable object property of any device on network.
3) Set Point and Parameter Modifications: Show ability to modify set points and tuning parameters indicated. Modifications are made with messages and write services initiated by an operator using workstation graphics, or by completing a field in a menu with instructional text.
4) Peer-to-Peer Data Exchange: Network devices are installed and configured to perform without need for operator intervention to implement Project sequence of operation and to share global data.
5) Alarm and Event Management: Alarms and events are installed and prioritized according to Owner. Demonstrate that time delays and other logic are set up to avoid nuisance tripping. Show that operators with sufficient privileges are permitted.
6) Schedule Lists: Schedules are configured for start and stop, mode change, occupant overrides, and night setback as defined in sequence of operations.
7) Schedule Display and Modification: Ability to display any schedule with start and stop times for calendar year. Show that all calendar entries and schedules are modifiable from any connected operator workstation by an operator with sufficient privilege.
8) Archival Storage of Data: Data archiving is handled by operator workstation and server and local trend archiving and display is accomplished.
9) Modification of Trend Log Object Parameters: Operator with sufficient privilege can change logged data points, sampling rate, and trend duration.
10) Device and Network Management:

a) Display of network device status.
b) Display of BACnet Object Information.
c) Silencing devices transmitting erroneous data.
d) Time synchronization.
e) Remote device re-initialization.
f) Backup and restore network device programming and master database(s).
g) Configuration management of routers.

3.29 EXTENDED OPERATION TEST

A. Extended operation test is intended to simulate normal operation of DDC system by Owner.

B. Operate DDC system for an operating period of 14 consecutive calendar days following Substantial Completion. Coordinate exact start date of testing with Owner.

C. Provide an operator familiar with DDC system installed to man an operator workstation while on-site during eight hours of each normal business day occurring during operating period.

D. During operating period, DDC system shall demonstrate correct operation and accuracy of monitored and controlled points as well as operation capabilities of sequences, logs, trends, reports, specialized control algorithms, diagnostics, and other software indicated.

1. Correct defects of hardware and software when it occurs.

E. Definition of Failures and Downtime during Operating Period:

1. Failed I/O point constituting downtime is an I/O point failing to perform its intended function consistently and a point physically failed due to hardware and software.
2. Downtime is when any I/O point in DDC system is unable to fulfill its' required function.
3. Downtime shall be calculated as elapsed time between a detected point failure as confirmed by an operator and time point is restored to service.
4. Maximum time interval allowed between DDC system detection of failure occurrence and operator confirmation shall be 0.5 hours.
5. Downtime shall be logged in hours to nearest 0.1 hour.
6. Power outages shall not count as downtime, but shall suspend test hours unless systems are provided with UPS and served through a backup power source.
7. Hardware or software failures caused by power outages shall count as downtime.

F. During operating period, log downtime and operational problems are encountered.

1. Identify source of problem.
2. Provide written description of corrective action taken.
3. Record duration of downtime.
4. Maintain log showing the following:

   a. Time of occurrence.
   b. Description of each occurrence and pertinent written comments for reviewer to understand scope and extent of occurrence.
   c. Downtime for each failed I/O point.
   d. Running total of downtime and total time of I/O point after each problem has been restored.

5. Log shall be available to Owner for review at any time.

G. For DDC system to pass extended operation test, total downtime shall not exceed 2 percent of total point-hours during operating period.

1. Failure to comply with minimum requirements of passing at end of operating period indicated shall require that operating period be extended one consecutive day at a time until DDC system passes requirement.

H. Evaluation of DDC system passing test shall be based on the following calculation:

1. Downtime shall be counted on a point-hour basis where total number of DDC system point-hours is equal to total number of I/O points in DDC system multiplied by total number of hours during operating period.
2. One point-hour of downtime is one I/O point down for one hour. Three points down for five hours is a total of 15 point-hours of downtime. Four points down for one-half hour is 2 point-hours of downtime.
3. Example Calculation: Maximum allowable downtime for 30-day test when DDC system has 1000 total I/O points (combined analog and binary) and has passing score of 1 percent downtime is computed by 30 days x 24 h/day x 1000 points x 1 percent equals 7200 point-hours of maximum allowable downtime.

I. Prepare test and inspection reports.

3.30 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.31 MAINTENANCE SERVICE

A. Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by DDC system manufacturer's authorized service representative. Include monthly preventive maintenance, repair or replacement of worn or defective components, cleaning, calibration and adjusting as required for proper operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.

3.32 SOFTWARE SERVICE AGREEMENT

A. Technical Support: Beginning at Substantial Completion, service agreement shall include software support for two year(s).

B. Upgrade Service: At Substantial Completion, update software to latest version. Install and program software upgrades that become available within two year(s) from date of Substantial Completion. Upgrading software shall include operating system and new or revised licenses for using software.

1. Upgrade Notice: At least 30 days to allow Owner to schedule and access system and to upgrade computer equipment if necessary.

3.33 DEMONSTRATION

A. Engage a factory-authorized service representative with complete knowledge of Project-specific system installed to train Owner's maintenance personnel to adjust, operate, and maintain DDC system.

B. Extent of Training:

1. Base extent of training on scope and complexity of DDC system indicated and training requirements indicated. Provide extent of training required to satisfy requirements indicated even if more than minimum training requirements are indicated.
2. Inform Owner of anticipated training requirements if more than minimum training requirements are indicated.
3. Minimum Training Requirements:

a. Provide not less than 10 days of training total.
b. Stagger training over multiple training classes to accommodate Owner's requirements. All training shall occur before end of warranty period.
c. Total days of training shall be broken into not more than three separate training classes.
d. Each training class shall be not less than two consecutive day(s).

C. Training Schedule:

1. Schedule training with Owner 20 business days before expected Substantial Completion.
2. Schedule training to provide Owner with at least 15 business days of notice in advance of training.
3. Training shall occur within normal business hours at a mutually agreed on time. Unless otherwise agreed to, training shall occur Monday through Friday, except on U.S. Federal holidays, with two morning sessions and two afternoon sessions. Each morning session and afternoon session shall be split in half with 15 -minute break between sessions. Morning and afternoon sessions shall be separated by 60 -minute lunch period. Training, including breaks and excluding lunch period, shall not exceed eight hours per day.

4. Provide staggered training schedule as requested by Owner.

D. Training Attendee List and Sign-in Sheet:

1. Request from Owner in advance of training a proposed attendee list with name, phone number and e-mail address.
2. Provide a preprinted sign-in sheet for each training session with proposed attendees listed and no fewer than six blank spaces to add additional attendees.
3. Preprinted sign-in sheet shall include training session number, date and time, instructor name, phone number and e-mail address, and brief description of content to be covered during session. List attendees with columns for name, phone number, e-mail address and a column for attendee signature or initials.
4. Circulate sign-in sheet at beginning of each session and solicit attendees to sign or initial in applicable location.
5. At end of each training day, send Owner an e-mail with an attachment of scanned copy (PDF) of circulated sign-in sheet for each session.

E. Training Attendee Headcount:

1. Plan in advance of training for five attendees.
2. Make allowance for Owner to add up to two attendee(s) at time of training.
3. Headcount may vary depending on training content covered in session. Attendee access may be restricted to some training content for purposes of maintaining system security.

F. Training Attendee Prior Knowledge: For guidance in planning required training and instruction, assume attendees have the following:

1. High school education and degree.
2. Basic user knowledge of computers and office applications.
3. Basic knowledge of HVAC systems.
4. Basic knowledge of DDC systems.
5. Basic knowledge of DDC system and products installed.

G. Attendee Training Manuals:

1. Provide each attendee with a color hard copy of all training materials and visual presentations.
2. Hard-copy materials shall be organized in a three-ring binder with table of contents and individual divider tabs marked for each logical grouping of subject matter. Organize material to provide space for attendees to take handwritten notes within training manuals.
3. In addition to hard-copy materials included in training manual, provide each binder with a sleeve or pocket that includes a DVD or flash drive with PDF copy of all hard-copy materials.

H. Instructor Requirements:

1. One or multiple qualified instructors, as required, to provide training.
2. Instructors shall have not less than five years of providing instructional training on not less than five past projects with similar DDC system scope and complexity to DDC system installed.

I. Organization of Training Sessions:

1. Organize training sessions into logical groupings of technical content and to reflect different levels of operators having access to system. Plan training sessions to accommodate the following three levels of operators:

   a. Daily operators.
   b. Advanced operators.
   c. System managers and administrators.

2. Plan and organize training sessions to group training content to protect DDC system security. Some attendees may be restricted to some training sessions that cover restricted content for purposes of maintaining DDC system security.

J. Training Outline:

1. Submit training outline for Owner review at least 10 business day before scheduling training.
2. Outline shall include a detailed agenda for each training day that is broken down into each of four training sessions that day, training objectives for each training session and synopses for each lesson planned.

K. On-Site Training:

1. Owner will provide conditioned classroom or workspace with ample desks or tables, chairs, power and data connectivity for instructor and each attendee.
2. Instructor shall provide training materials, projector and other audiovisual equipment used in training.
3. Provide as much of training located on-site as deemed feasible and practical by Owner.
4. On-site training shall include regular walk-through tours, as required, to observe each unique product type installed with hands-on review of operation, calibration and service requirements.
5. Operator workstation provided with DDC system shall be used in training. If operator workstation is not indicated, provide a temporary workstation to convey training content.

L. Off-Site Training:

1. Provide conditioned training rooms and workspace with ample tables desks or tables, chairs, power and data connectivity for each attendee.
2. Provide capability to remotely access to Project DDC system for use in training.
3. Provide a workstation for use by each attendee.

M. Training Content for Daily Operators:

1. Basic operation of system.
2. Understanding DDC system architecture and configuration.
3. Understanding each unique product type installed including performance and service requirements for each.
4. Understanding operation of each system and equipment controlled by DDC system including sequences of operation, each unique control algorithm and each unique optimization routine.
5. Operating operator workstations, printers and other peripherals.
6. Logging on and off system.
7. Accessing graphics, reports and alarms.
8. Adjusting and changing set points and time schedules.
9. Recognizing DDC system malfunctions.
10. Understanding content of operation and maintenance manuals including control drawings.
11. Understanding physical location and placement of DDC controllers and I/O hardware.
12. Accessing data from DDC controllers.
13. Operating portable operator workstations.
14. Review of DDC testing results to establish basic understanding of DDC system operating performance and HVAC system limitations as of Substantial Completion.
15. Running each specified report and log.
16. Displaying and demonstrating each data entry to show Project-specific customizing capability. Demonstrating parameter changes.
17. Stepping through graphics penetration tree, displaying all graphics, demonstrating dynamic updating, and direct access to graphics.
18. Executing digital and analog commands in graphic mode.
19. Demonstrating control loop precision and stability via trend logs of I/O for not less than 10 percent of I/O installed.
20. Demonstrating DDC system performance through trend logs and command tracing.

21. Demonstrating scan, update, and alarm responsiveness.
22. Demonstrating spreadsheet and curve plot software, and its integration with database.
23. Demonstrating on-line user guide, and help function and mail facility.
24. Demonstrating multitasking by showing dynamic curve plot, and graphic construction operating simultaneously via split screen.
25. Demonstrating the following for HVAC systems and equipment controlled by DDC system:

    a. Operation of HVAC equipment in normal-off, -on and failed conditions while observing individual equipment, dampers and valves for correct position under each condition.
    b. For HVAC equipment with factory-installed software, show that integration into DDC system is able to communicate with DDC controllers or gateways, as applicable.
    c. Using graphed trends, show that sequence of operation is executed in correct manner, and HVAC systems operate properly through complete sequence of operation including seasonal change, occupied and unoccupied modes, warm-up and cool-down cycles and other modes of operation indicated.
    d. Hardware interlocks and safeties function properly and DDC system performs correct sequence of operation after electrical power interruption and resumption after power is restored.
    e. Reporting of alarm conditions for each alarm, and confirm that alarms are received at assigned locations, including operator workstations.
    f. Each control loop responds to set point adjustment and stabilizes within time period indicated.
    g. Sharing of previously graphed trends of all control loops to demonstrate that each control loop is stable and set points are being maintained.

N. Training Content for Advanced Operators:

1. Making and changing workstation graphics.
2. Creating, deleting and modifying alarms including annunciation and routing.
3. Creating, deleting and modifying point trend logs including graphing and printing on an ad-hoc basis and operator-defined time intervals.
4. Creating, deleting and modifying reports.
5. Creating, deleting and modifying points.
6. Creating, deleting and modifying programming including ability to edit control programs off-line.
7. Creating, deleting and modifying system graphics and other types of displays.
8. Adding DDC controllers and other network communication devices such as gateways and routers.
9. Adding operator workstations.
10. Performing DDC system checkout and diagnostic procedures.
11. Performing DDC controllers operation and maintenance procedures.
12. Performing operator workstation operation and maintenance procedures.
13. Configuring DDC system hardware including controllers, workstations, communication devices and I/O points.
14. Maintaining, calibrating, troubleshooting, diagnosing and repairing hardware.
15. Adjusting, calibrating and replacing DDC system components.

O. Training Content for System Managers and Administrators:

1. DDC system software maintenance and backups.
2. Uploading, downloading and off-line archiving of all DDC system software and databases.
3. Interface with Project-specific, third-party operator software.
4. Understanding password and security procedures.
5. Adding new operators and making modifications to existing operators.
6. Operator password assignments and modification.
7. Operator authority assignment and modification.
8. Workstation data segregation and modification.

P. Video of Training Sessions:

1. Provide a digital video and audio recording of each training session. Create a separate recording file for each session.
2. Stamp each recording file with training session number, session name and date.
3. Provide Owner with two copies of digital files on DVDs or flash drives for later reference and for use in future training.
4. Owner retains right to make additional copies for intended training purposes without having to pay royalties.

END OF SECTION 230923

This page intentionally left blank.

SECTION 230923.17 - LEVEL INSTRUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes liquid-level switches, sensors, and transmitters.

B. Related Requirements:

1. Section 230923 "Direct-Digital Control System for HVAC" for control equipment and software, relays, electrical power devices, uninterruptible power supply units, wire, and cable.
2. Section 230993 "Sequence of Operations for HVAC Controls" for requirements that relate to Section 230923.17.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include operating characteristics; electrical characteristics; and furnished accessories indicating process operating range, accuracy over range, control signal over range, default control signal with loss of power, calibration data specific to each unique application, electrical power requirements, and limitations of ambient operating environment, including temperature and humidity.
2. Include product description with complete technical data, performance curves, and product specification sheets.

B. Shop Drawings:

1. Include details of product assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
2. Include diagrams for power, signal, and control wiring.
3. Include number-coded identification system for unique identification of wiring, cable, and tubing ends.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For level instruments, to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Environmental Conditions:

1. Instruments shall operate without performance degradation under the ambient environmental temperature, pressure, humidity, and vibration conditions specified and encountered for installed location.

2.2 LEVEL SWITCHES

A. Liquid-Level Switch (Magnetic Type with Float):

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

   a. W. E. Anderson; Dwyer Instruments, Inc.

2. Description:

   a. Mounting Suitable for Application: Horizontal or vertical switch mounting.
   b. Float arm with hinge design limits vertical movement to prevent sticking.
   c. Replaceable float with threaded connection.
   d. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for hazardous environments (Class I, Groups C and D; Class II, Groups E, F, and G).

3. Performance:

   a. Level Actuation and De-Actuation: 0.75-inch deadband.
   b. Body Pressure Limit: 1000 psig for brass body; 2000 psig for Type 316 stainless-steel body.
   c. Float Pressure Limit: 150 psig.
   d. Temperature Range: Minus 4 to 275 deg F.
   e. Electrical Rating: 10 A at 125/250-V ac.
   f. Switch Type: DPDT snap switch.

4. Wetted Parts Construction:

   a. Float and Rod: Type 316 stainless steel.
   b. Body: Type 316 stainless steel.
   c. Magnetic Keeper: Type 316 stainless steel.
   d. Process Connection: NPS 1-1/2 NPT.
   e. Enclosure:

      1) Die-cast aluminum alloy.
      2) Threaded cover.
      3) NEMA 250, Type 4.
      4) Electrical Connection: Terminal block.
      5) Conduit Connection: NPS 3/4 NPT.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for instruments to verify actual locations of connections before installation.

C. Prepare written report, endorsed by Installer, listing conditions detrimental to performance.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install products level, plumb, parallel, and perpendicular with building construction.

B. Fastening Hardware:

1. Stillson wrenches, pliers, and other tools that cause injury to or mar surfaces of rods, nuts, and other parts are prohibited for work of assembling and tightening nuts.
2. Tighten bolts and nuts firmly and uniformly. Do not overstress threads by using excessive force or oversized wrenches.
3. Lubricate threads of bolts, nuts, and screws with graphite and oil before assembly.

C. Install products in locations that are accessible and that permit calibration and maintenance from floor, equipment platforms, or catwalks. Where ladders are required for Owner's access, confirm unrestricted ladder placement is possible under occupied condition.

D. Mount switches and transmitters not subject to code, state, and federal accessibility requirements within a range of 42 to 72 inches above the adjacent floor, grade or service catwalk, or platform.

1. Make every effort to mount at 60 inches.

3.3 ELECTRICAL POWER

A. Furnish and install electrical power to products requiring electrical connections.

B. Furnish and install circuit breakers. Comply with requirements in Section 262816 "Enclosed Switches and Circuit Breakers."

C. Furnish and install power wiring. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

D. Furnish and install raceways. Comply with requirements in Section 260533 "Raceways and Boxes for Electrical Systems."

3.4 LEVEL INSTRUMENTS INSTALLATION

A. Mounting Location: Rough-in instrument-mounting locations before setting instruments and routing, cable, wiring, tubing, and conduit to final location.

3.5 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Each piece of wire, cable, and tubing shall have the same designation at each end for operators to determine continuity at points of connection. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

B. Install engraved phenolic nameplate with instrument identification on face.

3.6 CHECKOUT PROCEDURES

A. Check out installed products before continuity tests, leak tests, and calibration.

B. Check instruments for proper location and accessibility.

C. Check instruments for proper installation on direction of elevation, orientation, insertion depth, or other applicable considerations that impact performance.

3.7 ADJUSTMENT, CALIBRATION, AND TESTING

A. Description:

1. Calibrate each instrument installed that is not factory calibrated and provided with calibration documentation.
2. Provide a written description of proposed field procedures and equipment for calibrating each type of instrument. Submit procedures before calibration and adjustment.
3. For each analog instrument, perform a three-point calibration test for both linearity and accuracy.
4. Equipment and procedures used for calibration shall comply with instrument manufacturer's written recommendations.
5. Provide diagnostic and test equipment for calibration and adjustment.
6. Field instruments and equipment used to test and calibrate installed instruments shall have an accuracy of at least twice the instrument accuracy being calibrated. For example, an installed instrument with an accuracy of 1 percent shall be checked by an instrument with an accuracy of 0.5 percent.
7. Calibrate each instrument according to instrument instruction manual supplied by manufacturer.
8. If, after calibration, indicated performance cannot be achieved, replace out-of-tolerance instruments.
9. Comply with field-testing requirements and procedures in ASHRAE Guideline 11, "Field Testing of HVAC Control Components," in the absence of specific requirements, and to supplement requirements indicated.

B. Analog Signals:

1. Check analog voltage signals using a precision voltage meter at zero, 50, and 100 percent.
2. Check analog current signals using a precision current meter at zero, 50, and 100 percent.
3. Check resistance signals for temperature sensors at zero, 50, and 100 percent of operating span using a precision-resistant source.

C. Digital Signals:

1. Check digital signals using a jumper wire.
2. Check digital signals using an ohmmeter to test for contact.

D. Switches: Calibrate switches to make or break contact at setpoints indicated.

E. Transmitters:

1. Check and calibrate transmitters at zero, 50, and 100 percent of Project design values.
2. Calibrate resistance temperature transmitters at zero, 50, and 100 percent of span using a precision-resistance source.

3.8 MAINTENANCE SERVICE

A. Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by manufacturer's authorized service representative. Include annual preventive maintenance, repair or replacement of worn or defective components, cleaning, and adjusting as required for proper operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.

3.9 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain instrumentation and control devices.

B. Coordinate level instrument demonstration video with operation and maintenance manuals and classroom instruction for use by Owner in operating, maintaining, and troubleshooting.

C. Record videos on DVD disks.

D. Owner shall have right to make additional copies of video for internal use without paying royalties.

END OF SECTION 230923.17

This page intentionally left blank.

SECTION 230923.23 - PRESSURE INSTRUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Air-pressure sensors.

B. Related Requirements:

1. Section 230923 "Direct-Digital Control System for HVAC" for control equipment and software, relays, electrical power devices, uninterruptible power supply units, wire, and cable.
2. Section 230993 "Sequence of Operations for HVAC Controls" for requirements that relate to Section 230923.23.

1.3 DEFINITIONS

A. HART: Highway addressable remote transducer protocol is the global standard for sending and receiving digital information across analog wires between smart devices and control or monitoring systems through bi-directional communication that provides data access between intelligent field instruments and host systems. A host can be any software application from technician's hand-held device or laptop to a control, asset management, safety, or other system using any control platform.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product, including the following:

1. Construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Operating characteristics; electrical characteristics; and furnished accessories indicating process operating range, accuracy over range, control signal over range, default control signal with loss of power, calibration data specific to each unique application, electrical power requirements, and limitations of ambient operating environment, including temperature and humidity.
3. Product description with complete technical data, performance curves, and product specification sheets.
4. Installation instructions, including factors affecting performance.

B. Shop Drawings:

1. Include plans, elevations, sections, and mounting details.
2. Include details of product assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Number-coded identification system for unique identification of wiring, cable, and tubing ends.

1.5 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each product requiring a certificate.

B. Product Test Reports: For each product requiring test performed by a qualified testing agency.

C. Source quality-control reports.

D. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For instruments to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Environmental Conditions:

1. Instruments shall operate without performance degradation under the ambient environmental temperature, pressure, humidity, and vibration conditions specified and encountered for installed location.

   a. If instrument alone cannot comply with requirement, install instrument in a protective enclosure that is isolated and protected from conditions impacting performance. Enclosure shall be internally insulated, electrically heated and cooled, filtered, and ventilated as required by instrument and application.

2. Instruments and accessories shall be protected with enclosures satisfying the following minimum requirements unless more stringent requirements are indicated. Instruments not available with integral enclosures complying with requirements indicated shall be housed in protective secondary enclosures. Instrument-installed location shall dictate following NEMA 250 enclosure requirements:

   a. Indoors, Heated and Air-Conditioned: Type 1.
   b. Within Duct Systems and Air-Moving Equipment Not Exposed to Possible Condensation: Type 12.

2.2 AIR-PRESSURE SENSORS

A. Duct Insertion Static Pressure Sensor:

1. 2-wire strain gauge type, designed for media sensed for static pressure or differential pressure. The span shall be continuously adjustable from 0% to 125% of the expected full pressure or full flow differential pressure. The zero shall be continuously adjustable on outputs. Transmitters shall produce a 4-20 mA signal with an accuracy of ±1.0% of the upper range limit for 6 months from calibration. Instruments shall be capable of withstanding an overrange pressure limit of 300% normal.
2. <u>Manufacturers:</u> Subject to compliance with requirements, provide products by the following:

   a. MAMAC Systems, Inc.

3. Sensor probe with two opposing orifices designed to reduce error-associated air velocity.
4. Sensor insertion length shall be 8 inches.
5. Construct sensor of Type 304 stainless steel.
6. Connection: Threaded, NPS 1/8 swivel fitting for connection to copper tubing or NPS 1/4 barbed fitting for connection to polyethylene tubing.
7. Sensor probe attached to a mounting flange with neoprene gasket and two holes for fasteners.
8. Mounting flange shall be suitable for flat oval, rectangular, and round duct configurations.
9. Pressure Rating: 10 psig.

B. Outdoor Static Pressure Sensor:
   1. Manufacturers: Subject to compliance with requirements, provide products by the following:
      a. Air Monitor Corporation.
   2. Sensor with no moving parts.
   3. Operation not affected and impaired by rain and snow.
   4. Sensing plates constructed of 0.1406-inch Type 316 stainless steel.
   5. Accuracy within:
      a. 1 percent of the actual outdoor atmospheric pressure when subjected to varying horizontal radial wind velocities up to 40 mph.
      b. 2 percent of the actual outdoor atmospheric pressure while subjected to varying radial wind velocities up to 40 mph with approach angles up to 30 degrees to horizontal.
      c. 3 percent of the actual outdoor atmospheric pressure while subjected to varying radial wind velocities up to 40 mph with approach angles up to 60 degrees to horizontal.
      d. Threaded,NPS 2 connection.

C. Space Static Pressure Sensor for Wall Mounting:
   1. Manufacturers: Subject to compliance with requirements, provide products by the following:
      a. Air Monitor Corporation.
   2. Stainless-steel wall plate with perforated center arranged to sense space static pressure. Exposed surfaces are provided with brush finish.
   3. Wall plate provided with screws and sized to fit standard single-gang electrical box.
   4. Back of sensor plate fitted with multiple sensing ports, pressure impulse suppression chamber, airflow shielding, and 0.125-inch fitting for tubing connection.
   5. Performance: Within 1 percent of actual room static pressure in vicinity of sensor while being subjected to an air velocity of 1000 fpm from a 360-degree radial source.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for instruments installed in piping to verify actual locations of connections before installation.

C. Examine roughing-in for instruments installed in duct systems to verify actual locations of connections before installation.

D. Prepare written report, endorsed by Installer, listing conditions detrimental to performance.

E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install products level, plumb, parallel, and perpendicular with building construction.

B. Properly support instruments, tubing, piping wiring, and conduit to comply with requirements indicated. Brace all products to prevent lateral movement, sway, or a break in attachment when subjected to a force.

C. Provide ceiling, floor, roof, wall openings, and sleeves required by installation. Before proceeding with drilling, punching, or cutting, check location first for concealed products that could potentially be damaged. Patch, flash, grout, seal, and refinish openings to match adjacent condition.

D. Fastening Hardware:

1. Stillson wrenches, pliers, and other tools that cause injury to or mar surfaces of rods, nuts, and other parts are prohibited for work of assembling and tightening nuts.
2. Tighten bolts and nuts firmly and uniformly. Do not to overstress threads by using excessive force or oversized wrenches.
3. Lubricate threads of bolts, nuts, and screws with graphite and oil before assembly.

E. Install products in locations that are accessible and that permit calibration and maintenance from floor, equipment platforms, or catwalks. Where ladders are required for Owner's access, confirm unrestricted ladder placement is possible under occupied condition.

F. Corrosive Environments:

1. Use products that are suitable for environment to which they are subjected.
2. If possible, avoid or limit use of materials in corrosive environments.
3. When conduit is in contact with a corrosive environment, use Type 316 stainless-steel conduit and fittings or conduit and fittings that are coated with a corrosive-resistant coating that is suitable for environment.
4. Where instruments are located in a corrosive environment and are not corrosive resistant from the manufacturer, field install products in a NEMA 250, Type 4X enclosure constructed of Type 316L stainless steel.

3.3 ELECTRICAL POWER

A. Furnish and install electrical power to products requiring electrical connections.

B. Furnish and install circuit breakers. Comply with requirements in Section 262816 "Enclosed Switches and Circuit Breakers."

C. Furnish and install power wiring. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

D. Furnish and install raceways. Comply with requirements in Section 260533 "Raceways and Boxes for Electrical Systems."

3.4 PRESSURE INSTRUMENT INSTALLATION

A. Mounting Location:

1. Rough-in: Outline instrument-mounting locations before setting instruments and routing, cable, wiring, tubing, and conduit to final location.
2. Install switches and transmitters for air and liquid pressure associated with individual air-handling units and associated connected ductwork and piping near air-handlings units co-located in air-handling unit system control panel, to provide service personnel a single and convenient location for inspection and service.
3. Install liquid and steam pressure switches and transmitters for indoor applications in mechanical equipment rooms. Do not locate in user-occupied space unless indicated specifically on Drawings.
4. Install air-pressure switches and transmitters for indoor applications in mechanical equipment rooms. Do not locate in user-occupied space unless indicated specifically on Drawings.
5. Mount switches and transmitters not required to be mounted within system control panels on walls, floor-supported freestanding pipe stands, or floor-supported structural support frames. Use

manufacturer mounting brackets to accommodate field mounting. Securely support and brace products to prevent vibration and movement.

B. Seal penetrations to ductwork, plenums, and air-moving equipment to comply with duct static pressure class and leakage and seal classes indicated using neoprene gaskets or grommets.

C. Duct Pressure Sensors:

1. Install sensors using manufacturer's recommended upstream and downstream distances.
2. Unless indicated on Drawings, locate sensors approximately 67 percent of distance of longest run. Location of sensors shall be submitted and approved before installation.
3. Install mounting hardware and gaskets to make sensor installation airtight.
4. Route tubing from the sensor to transmitter.
5. Use compression fittings at terminations.
6. Install sensor in accordance with manufacturer's instructions.
7. Support sensor to withstand maximum air velocity, turbulence, and vibration encountered to prevent instrument failure.

D. Outdoor Pressure Sensors:

1. Install roof-mounted sensor in least-noticeable location and as far away from exterior walls as possible.
2. Locate wall-mounted sensor in an inconspicuous location.
3. Submit sensor location for approval before installation.
4. Verify signal from sensor is stable and consistent to all connected transmitters. Modify installation to achieve proper signal.
5. Route outdoor signal pipe full size of sensor connection to transmitters. Install branch connection of size required to match to transmitter.
6. Install sensor signal pipe with dirt leg and drain valve below roof penetration.
7. Insulate signal pipe with flexible elastomeric insulation as required to prevent condensation.
8. Connect roof-mounted signal pipe exposed to outdoors to building grounding system.

E. Air-Pressure Differential Switches:

1. Install air-pressure sensor in system for each switch connection. Install sensor in an accessible location for inspection and replacement.
2. A single sensor may be used to share a common signal to multiple pressure instruments.
3. Install access door in duct and equipment to access sensors that cannot be inspected and replaced from outside.
4. Route NPS 3/8 tubing from sensor to switch connection.
5. Do not mount switches on rotating equipment.
6. Install switches in a location free from vibration, heat, moisture, or adverse effects, which could damage the switch and hinder accurate operation.
7. Install switches in an easily accessible location serviceable from floor.
8. Install switches adjacent to system control panel if within 50 feet ; otherwise, locate switch in vicinity of system connection.

3.5 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Each piece of wire, cable, and tubing shall have the same designation at each end for operators to determine continuity at points of connection. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

B. Install engraved phenolic nameplate with instrument identification and on face of ceiling directly below instruments concealed above ceilings.

3.6 CHECKOUT PROCEDURES

A. Check out installed products before continuity tests, leak tests, and calibration.

B. Check instruments for proper location and accessibility.

C. Check instruments for proper installation with respect to direction of flow, elevation, orientation, insertion depth, or other applicable considerations that impact performance.

3.7 ADJUSTMENT, CALIBRATION, AND TESTING

A. Description:

1. Calibrate each instrument installed that is not factory calibrated and provided with calibration documentation.
2. Provide a written description of proposed field procedures and equipment for calibrating each type of instrument. Submit procedures before calibration and adjustment.
3. For each analog instrument, perform a three-point calibration test for both linearity and accuracy.
4. Equipment and procedures used for calibration shall comply with instrument manufacturer's recommendations.
5. Provide diagnostic and test equipment for calibration and adjustment.
6. Field instruments and equipment used to test and calibrate installed instruments shall have accuracy at least twice the instrument accuracy being calibrated. For example, an installed instrument with an accuracy of 1 percent shall be checked by an instrument with an accuracy of 0.5 percent.
7. Calibrate each instrument according to instrument instruction manual supplied by manufacturer.
8. If, after calibration, indicated performance cannot be achieved, replace out-of-tolerance instruments.
9. Comply with field-testing requirements and procedures indicated by ASHRAE Guideline 11, "Field Testing of HVAC Control Components," in the absence of specific requirements, and to supplement requirements indicated.

B. Analog Signals:

1. Check analog voltage signals using a precision voltage meter at zero, 50, and 100 percent.
2. Check analog current signals using a precision current meter at zero, 50, and 100 percent.

C. Digital Signals:

1. Check digital signals using a jumper wire.
2. Check digital signals using an ohmmeter to test for contact.

D. Sensors: Check sensors at zero, 50, and 100 percent of project design values.

E. Switches: Calibrate switches to make or break contact at set points indicated.

F. Transmitters:

1. Check and calibrate transmitters at zero, 50, and 100 percent of project design values.

3.8 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.9 MAINTENANCE SERVICE

A. Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by manufacturer's authorized service representative. Include annual preventive maintenance, repair or replacement of worn or defective components, cleaning, and adjusting as required for proper operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.

END OF SECTION 230923.23

This page intentionally left blank.

SECTION 230923.27 - TEMPERATURE INSTRUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Air temperature sensors.

B. Related Requirements:

1. Section 230923 "Direct-Digital Control System for HVAC" for control equipment and software, relays, electrical power devices, uninterruptible power supply units, wire, and cable.
2. Section 230993 "Sequence of Operations for HVAC Controls" for requirements that relate to Section 230923.27.

1.3 DEFINITIONS

A. HART (Highway Addressable Remote Transducer) Protocol: The global standard for sending and receiving digital information across analog wires between smart devices and control or monitoring systems through bidirectional communication that provides data access between intelligent field instruments and host systems. A host can be any software application from a technician's hand-held device or laptop to a plant's process control, asset management, safety, or other system using any control platform.

B. RTD: Resistance temperature detector.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product, including the following:

1. Construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Operating characteristics, electrical characteristics, and furnished accessories indicating process operating range, accuracy over range, control signal over range, default control signal with loss of power, calibration data specific to each unique application, electrical power requirements, and limitations of ambient operating environment, including temperature and humidity.
3. Product description with complete technical data, performance curves, and product specification sheets.
4. Installation operation and maintenance instructions, including factors affecting performance.

B. Shop Drawings:

1. Include plans, elevations, sections, and mounting details.
2. Include details of product assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.
4. Include number-coded identification system for unique identification of wiring, cable, and tubing ends.

1.5 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plan drawings and corresponding product installation details, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Product installation location shown in relationship to room, duct, pipe, and equipment.
2. Wall-mounted instruments located in finished space showing relationship to light switches, fire-alarm devices, and other installed devices.
3. Sizes and locations of wall access panels for instruments installed behind walls.
4. Sizes and locations of ceiling access panels for instruments installed in inaccessible ceilings.

B. Product Certificates: For each product requiring a certificate.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Environmental Conditions:

1. Instruments shall operate without performance degradation under the ambient environmental temperature, pressure, humidity, and vibration conditions specified and encountered for installed location.
2. Instruments and accessories shall be protected with enclosures satisfying the following minimum requirements unless more stringent requirements are indicated. Instruments not available with integral enclosures complying with requirements indicated shall be housed in protective secondary enclosures. Instrument's installed location shall dictate following NEMA 250 enclosure requirements:

a. Outdoors, Protected: Type 12.
b. Indoors, Heated with Filtered Ventilation: Type 1.
c. Indoors, Heated with Non-Filtered Ventilation: Type 12.
d. Indoors, Heated and Air Conditioned: Type 1.
e. Mechanical Equipment Rooms:

1) Chiller and Boiler Rooms: Type 4.
2) Air-Moving Equipment Rooms: Type 1.

f. Localized Areas Exposed to Washdown: Type 4.
g. Within Duct Systems and Air-Moving Equipment Not Exposed to Possible Condensation: Type 2.
h. Within Duct Systems and Air-Moving Equipment Exposed to Possible Condensation: Type 4.
i. Hazardous Locations: Explosion-proof rating for condition.

2.2 AIR TEMPERATURE SENSORS

A. Provide sensors, controls, instruments, and control interfaces to meet the performance specified herein. Sensors shall be high quality precision electronic type, selected to be compatible with the BCS controllers and appropriate for the service specified herein. Accuracy values specified herein include sensor, wiring, signal conditioning and display accuracies for overall end-to-end performance. Sensors shall be selected to place the expected value in the middle third of the device's range.

B. Air temperature sensing shall be provided by duct insertion type sensors for supply or return duct temperatures and by extended element averaging type for plenum, and coil entering or leaving temperatures. RTD transmitters shall be a 2-wire, loop-powered device, producing a linear 4-20 mA output

corresponding to the temperature span of the connected sensor. The output error shall not exceed 0.1% of calibrated span. Transmitters shall include noninteracting offset and span adjustments and RFI shielding and rejection circuitry to prevent disruption from ambient signals. Transmitter drift shall be less than 0.1ºF per year.

C. Space temperature sensors: space temperature type with setpoint adjustment range of 45ºF to 85ºF. The setpoint adjustment shall be locked out, overridden, or limited as to time or temperature in software from a central or remote operator's terminal. Precision thermistors may be used in space temperature sensing applications below 200ºF. Sensor accuracy over the application range shall be minimum 0.5ºF between the range of 32ºF to 150ºF including sensor error and A/D conversion resolution error. Sensor manufacturer shall utilize 100% screening to verify accuracy. Thermistors shall be pre-aged and inherently stable. Stability error of the thermistor over 5 years shall not exceed 0.25ºF cumulative. Sensor element and leads shall be encapsulated. Bead thermistors shall not be used. Space temperature sensors shall include a communications port for local connection of a portable test/terminal device for communications/programming access to the associated BCS controller.

D. Platinum RTDs: Common Requirements:

1. 100 or 1000 ohms at zero deg C and a temperature coefficient of 0.00385 ohm/ohm/deg C.
2. Two-wire, PTFE-insulated, 22-gage stranded copper leads.
3. Performance Characteristics:
   a. Range: Minus 50 to 275 deg F.
   b. Interchangeable Accuracy: At 32 deg F within 0.5 deg F.
   c. Repeatability: Within 0.5 deg F.
   d. Self-Heating: Negligible.
4. Transmitter Requirements:
   a. Transmitter required for each 100-ohm RTD.
   b. Transmitter optional for 1000-ohm RTD, contingent on compliance with end-to-end control accuracy.

E. Platinum RTD, Single-Point Air Temperature Duct Sensors:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
   a. Minco.
2. 100 or 1000 ohms.
3. Temperature Range: Minus 50 to 275 deg F.
4. Probe: Single-point sensor with a stainless-steel sheath.
5. Length: As required by application to achieve tip at midpoint of air tunnel, up to 18 inches.
6. Enclosure: Junction box with removable cover; NEMA 250, Type 1 for indoor applications and Type 4 for outdoor applications.
7. Gasket for attachment to duct or equipment to seal penetration airtight.
8. Conduit Connection: 1/2-inch trade size.

F. Platinum RTD Outdoor Air Temperature Sensors:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
   a. Minco.
2. 1000 ohms.
3. Temperature Range: Minus 50 to 275 deg F.
4. Probe: Single-point sensor with a stainless-steel sheath.
5. Solar Shield: Stainless steel.
6. Enclosure: NEMA 250, Type 4 or 4X junction box or combination conduit and outlet box with removable cover and gasket.

7. Conduit Connection: 1/2-inch trade size.

G. Platinum RTD Space Air Temperature Sensors:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. Minco.

2. 1000 ohms.
3. Temperature Range: Minus 50 to 212 deg F.
4. Sensor assembly shall include a temperature sensing element mounted under a flush, brushed-aluminum cover.
5. Provide a mounting plate that is compatible with the surface shape that it is mounted to and electrical box used.
6. Concealed wiring connection.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for instruments installed in piping to verify actual locations of connections before installation.

C. Examine roughing-in for instruments installed in duct systems to verify actual locations of connections before installation.

D. Prepare written report, endorsed by Installer, listing conditions detrimental to performance.

E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install products level, plumb, parallel, and perpendicular with building construction.

B. Fastening Hardware:

1. Stillson wrenches, pliers, and other tools that cause injury to or mar surfaces of rods, nuts, and other parts are prohibited for work of assembling and tightening nuts.
2. Tighten bolts and nuts firmly and uniformly. Do not overstress threads by excessive force or by oversized wrenches.
3. Lubricate threads of bolts, nuts, and screws with graphite and oil before assembly.

C. Install products in locations that are accessible and that permit calibration and maintenance from floor, equipment platforms, or catwalks. Where ladders are required for Owner's access, confirm unrestricted ladder placement is possible under occupied condition.

D. Corrosive Environments:

1. Use products that are suitable for environment to which they are subjected.
2. If possible, avoid or limit use of materials in corrosive environments.
3. When conduit is in contact with a corrosive environment, use Type 316 stainless-steel conduit and fittings or conduit and fittings that are coated with a corrosive-resistant coating that is suitable for environment.

4. Where instruments are located in a corrosive environment and are not corrosive resistant from manufacturer, field install products in a NEMA 250, Type 4X enclosure constructed of Type 316L stainless steel.

3.3 ELECTRIC POWER

A. Furnish and install electrical power to products requiring electrical connections.

B. Furnish and install circuit breakers. Comply with requirements in Section 262816 "Enclosed Switches and Circuit Breakers."

C. Furnish and install power wiring. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

D. Furnish and install raceways. Comply with requirements in Section 260533 "Raceways and Boxes for Electrical Systems."

3.4 TEMPERATURE INSTRUMENT INSTALLATIONS

A. Mounting Location:

1. Roughing In:

a. Outline instrument mounting locations before setting instruments and routing cable, wiring, tubing, and conduit to final location.

b. Provide independent inspection to confirm that proposed mounting locations comply with requirements indicated and approved submittals.

1) Indicate dimensioned locations with mounting height for all surface-mounted products on Shop Drawings.

2) Do not begin installation without submittal approval of mounting location.

c. Complete installation rough-in only after confirmation by independent inspection is complete and approval of location is documented for review by Owner and Architect on request.

2. Install switches and transmitters for air and liquid temperature associated with individual air-handling units and associated connected ductwork and piping near air-handling units co-located in air-handling unit system control panel to provide service personnel a single and convenient location for inspection and service.

3. Install liquid and steam temperature switches and transmitters for indoor applications in mechanical equipment rooms. Do not locate in user-occupied space unless indicated specifically on Drawings.

4. Install air temperature switches and transmitters for indoor applications in mechanical equipment rooms. Do not locate in user-occupied space unless indicated specifically on Drawings.

5. Mount switches and transmitters on walls, floor-supported freestanding pipe stands, or floor-supported structural support frames. Use manufacturer's mounting brackets to accommodate field mounting. Securely support and brace products to prevent vibration and movement.

B. Special Mounting Requirements:

1. Protect products installed outdoors from solar radiation, building and wind effect with stand-offs and shields constructed of Type 316 stainless.

2. Temperature instruments having performance impacted by temperature of mounting substrate shall be isolated with an insulating barrier located between instrument and substrate to eliminate effect. Where instruments requiring insulation are located in finished space, conceal insulating barrier in a cover matching the instrument cover.

C. Mounting Height:

1. Mount temperature instruments in user-occupied space to match mounting height of light switches unless otherwise indicated on Drawings. Mounting height shall comply with codes and accessibility requirements.
2. Mount switches and transmitters located in mechanical equipment rooms and other similar space not subject to code or state and Federal accessibility requirements within a range of 42 to 72 inches above the adjacent floor, grade, or service catwalk or platform.

    a. Make every effort to mount at 60 inches.

D. Seal penetrations to ductwork, plenums, and air-moving equipment to comply with duct static-pressure class and leakage and seal classes indicated using neoprene gaskets or grommets.

E. Space Temperature Sensor Installation:

1. Conceal assembly in an electrical box of sufficient size to house sensor and transmitter, if provided.
2. Install electrical box with a faceplate to match sensor cover if sensor cover does not completely cover electrical box.
3. In finished areas, recess electrical box within wall.
4. In unfinished areas, electrical box may be surface mounted if electrical light switches are surface mounted. Use a cast-aluminum electric box for surface-mounted installations.
5. Align electrical box with other electrical devices such as visual alarms and light switches located in the vicinity to provide a neat and well-thought-out arrangement. Where possible, align in both horizontal and vertical axis.

F. Outdoor Air Temperature Sensor Installation:

1. Mount sensor in a discrete location facing north.
2. Protect installed sensor from solar radiation and other influences that could impact performance.
3. If required to have a transmitter, mount transmitter remote from sensor in an accessible and serviceable location indoors.

G. Single-Point Duct Temperature Sensor Installation:

1. Install single-point-type, duct-mounted, supply- and return-air temperature sensors. Install sensors in ducts with sensitive portion of the element installed in center of duct cross section and located to sense near average temperature. Do not exceed 24 inches in sensor length.
2. Install return-air sensor in location that senses return-air temperature without influence from outdoor or mixed air.
3. Rigidly support sensor to duct and seal penetration airtight.
4. If required to have transmitter, mount transmitter remote from sensor at accessible and serviceable location.

H. Averaging Duct Temperature Sensor Installation:

1. Install averaging-type air temperature sensor for temperature sensors located within air-handling units, similar equipment, and large ducts with air tunnel cross-sectional area of 20 sq. ft. and larger.
2. Install sensor length to maintain coverage over entire cross-sectional area. Install multiple sensors where required to maintain the minimum coverage.
3. Fasten and support sensor with manufacturer-furnished clips to keep sensor taut throughout entire length.
4. If required to have transmitter, mount transmitter in an accessible and serviceable location.

I. Low-Limit Air Temperature Switch Installation:

1. Install multiple low-limit switches to maintain coverage over entire cross-sectional area of air tunnel.

2. Fasten and support sensing element with manufacturer-furnished clips to keep element taut throughout entire length.
3. Mount switches outside of airstream at a location and mounting height to provide easy access for switch set-point adjustment and manual reset.
4. Install on entering side of cooling coil unless otherwise indicated on Drawings.

J. Liquid Temperature Sensor Installation:

1. Assembly shall include sensor, thermowell and connection head.
2. For pipe NPS 4 and larger, install sensor and thermowell length to extend into pipe between 50 to 75 percent of pipe cross section.
3. For pipe smaller than NPS 4:
   a. Install reducers to increase pipe size to NPS 4at point of thermowell installation.
   b. For pipe sizes NPS 2-1/2 and NPS 3, thermowell and sensor may be installed at pipe elbow or tee to achieve manufacturer-recommended immersion depth in lieu of increasing pipe size.
   c. Minimum insertion depth shall be 2-1/2 inches.
4. Install matching thermowell.
5. Fill thermowell with heat-transfer fluid before inserting sensor.
6. Tip of spring-loaded sensors shall contact inside of thermowell.
7. For insulated piping, install thermowells with extension neck to extend beyond face of insulation.
8. Install thermowell in top dead center of horizontal pipe positioned in an accessible location to allow for inspection and replacement. If top dead center location is not possible due to field constraints, install thermowell at location along top half of pipe.
9. For applications with transmitters, mount transmitter remote from sensor in an accessible and serviceable location from floor service platform or catwalk.

3.5 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Each piece of wire, cable, and tubing shall have the same designation at each end for operators to determine continuity at points of connection. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

B. Install engraved phenolic nameplate with instrument identification and on face of ceiling directly below instruments concealed above ceilings.

3.6 CLEANING

A. Remove grease, mastic, adhesives, dust, dirt, stains, fingerprints, labels, and other foreign materials from exposed interior and exterior surfaces.

B. Wash and shine glazing.

C. Polish glossy surfaces to a clean shine.

3.7 CHECK-OUT PROCEDURES

A. Check installed products before continuity tests, leak tests, and calibration.

B. Check temperature instruments for proper location and accessibility.

C. Verify sensing element type and proper material.

D. Verify location and length.

E. Verify that wiring is correct and secure.

3.8 ADJUSTMENT, CALIBRATION, AND TESTING

A. Description:

1. Calibrate each instrument installed that is not factory calibrated and provided with calibration documentation.
2. Provide a written description of proposed field procedures and equipment for calibrating each type of instrument. Submit procedures before calibration and adjustment.
3. For each analog instrument, make a three-point test of calibration for both linearity and accuracy.
4. Equipment and procedures used for calibration shall meet instrument manufacturer's written instructions.
5. Provide diagnostic and test equipment for calibration and adjustment.
6. Field instruments and equipment used to test and calibrate installed instruments shall have accuracy at least twice the instrument accuracy being calibrated. For example, an installed instrument with an accuracy of 1 percent shall be checked by an instrument with an accuracy of 0.5 percent.
7. Calibrate each instrument according to instrument instruction manual supplied by manufacturer.
8. If after calibration indicated performance cannot be achieved, replace out-of-tolerance instruments.
9. Comply with field-testing requirements and procedures indicated by ASHRAE Guideline 11, "Field Testing of HVAC Control Components," in the absence of specific requirements and to supplement requirements indicated.

B. Analog Signals:

1. Check analog voltage signals using a precision voltage meter at zero, 50, and 100 percent.
2. Check analog current signals using a precision current meter at zero, 50, and 100 percent.
3. Check resistance signals for temperature sensors at zero, 50, and 100 percent of operating span using a precision-resistance source.

C. Digital Signals:

1. Check digital signals using a jumper wire.
2. Check digital signals using an ohmmeter to test for contact.

D. Sensors: Check sensors at zero, 50, and 100 percent of Project design values.

E. Switches: Calibrate switches to make or break contact at set points indicated.

F. Transmitters:

1. Check and calibrate transmitters at zero, 50, and 100 percent of Project design values.
2. Calibrate resistance temperature transmitters at zero, 50, and 100 percent of span using a precision-resistance source.

3.9 FIELD QUALITY CONTROL

A. Testing Agency: a qualified testing agency to perform tests and inspections.

B. Perform the following tests and inspections:

1. Perform according to manufacturer's written instruction.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

C. Prepare test and inspection reports.

3.10 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.11 MAINTENANCE SERVICE

A. Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by manufacturer's authorized service representative. Include annual preventive maintenance, repair or replacement of worn or defective components, cleaning and adjusting as required for proper operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.

END OF SECTION 230923.27

This page intentionally left blank.

SECTION 232300 - REFRIGERANT PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Copper tube and fittings.
2. Refrigerants.

1.2 ACTION SUBMITTALS

A. Product Data: For refrigerant piping.

B. Shop Drawings:

1. Show layout of refrigerant piping and specialties, including pipe, tube, and fitting sizes; flow capacities; valve arrangements and locations; slopes of horizontal runs; oil traps; double risers; wall and floor penetrations; and equipment connection details.
2. Show piping size and piping layout, including oil traps, double risers, specialties, and pipe and tube sizes to accommodate, as a minimum, equipment provided, elevation difference between compressor and evaporator, and length of piping to ensure proper operation and compliance with warranties of connected equipment.
3. Show interface and spatial relationships between piping and equipment.
4. Shop Drawing Scale: 1/8 inch equals 1ft..

1.3 INFORMATIONAL SUBMITTALS

A. Welding certificates.

B. Field quality-control reports.

C. Installer Qualification Certificates: Acceptable to press fitting manufacturer to receive manufacturer's warranty on fittings.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For refrigerant valves and piping specialties to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel in accordance with 2010 ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."

B. Comply with ASHRAE 15, "Safety Code for Refrigeration Systems."

C. Comply with ASME B31.5, "Refrigeration Piping and Heat Transfer Components."

1.6 PRODUCT STORAGE AND HANDLING

A. Store piping with end caps in place to ensure that piping interior and exterior are clean when installed.

B. Store press fittings that have been factory-cleaned, bagged with air and watertight seal, and labelled, to comply with ASTM B280 and ASTM B88

1.7 WARRANTY - PRESS SEAL FITTINGS

A. Manufacturer agrees to replace components that fail in materials or workmanship within specified warranty period.

1. Warranty Period: 10 years from date of purchase by installer.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Line Test Pressure for Refrigerant R-410A:

1. Suction Lines for Air-Conditioning Applications: 300 psig.
2. Suction Lines for Heat-Pump Applications: 535 psig.
3. Hot-Gas and Liquid Lines: 535 psig.

2.2 COPPER TUBE AND FITTINGS

A. Copper Tube: ASTM B88, Type K or L.

B. Wrought-Copper Fittings, Solder-Joint: ASME B16.22.

C. Wrought-Copper Fittings, Brazed-Joint: ASME B16.50.

D. Wrought-Copper Unions: ASME B16.22.

E. Solder Filler Metals: ASTM B32. Use 95-5 tin antimony or alloy HB solder to join copper socket fittings on copper pipe.

F. Brazing Filler Metals: AWS A5.8/A5.8M.

2.3 REFRIGERANTS

A. ASHRAE 34, R-410A: Pentafluoroethane/Difluoromethane.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Arkema Inc.
b. DuPont Fluorochemicals Div.
c. Genetron Refrigerants; Honeywell International Inc.
d. Mexichem Fluor Inc.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS FOR REFRIGERANT R-410A

A. Suction Lines NPS 1-1/2 and Smaller for Conventional Air-Conditioning Applications: Copper, Type ACR, annealed-temper tubing and wrought-copper fittings with soldered joints.

B. Suction Lines NPS 2 to NPS 3-1/2 for Conventional Air-Conditioning Applications: Copper, Type L, drawn-temper tubing and wrought-copper fittings with soldered joints.

C. Hot-Gas and Liquid Lines:

1. Copper, Type L, annealed- or drawn-temper tubing and wrought-copper fittings with soldered joints.
2. Copper, Type L, annealed- or drawn-temper tubing and wrought-copper fittings with soldered joints.
3. Copper, Type L, drawn-temper tubing and wrought-copper fittings with 95-5 tin-antimony soldered joints.
4. Copper, Type L, drawn-temper tubing and wrought-copper fittings with Alloy HB soldered joints.

D. Hot-Gas and Liquid Lines, Multiple Tube Types and Joining Methods:

1. NPS 5/8 and Smaller : Copper, Type L, annealed- or drawn-temper tubing and wrought-copper fittings with or soldered joints.
2. NPS 3/4 TO NPS 1 : Copper, Type L, annealed- or drawn-temper tubing and wrought-copper fittings with soldered joints.
3. NPS 1-1/4 : Copper, Type L, drawn-temper tubing and wrought-copper fittings with 95-5 tin-antimony soldered joints.
4. NPS 1-1/2 to NPS 2 : Copper, Type L, drawn-temper tubing and wrought-copper fittings with Alloy HB soldered joints.

E. Safety-Relief-Valve Discharge Piping:

1. Copper, Type L, annealed- or drawn-temper tubing and wrought-copper fittings with soldered joints.
2. Copper, Type K, annealed- or drawn-temper tubing and wrought-copper fittings with soldered joints.
3. Copper, Type L, drawn-temper tubing and wrought-copper fittings with 95-5 tin-antimony soldered joints.
4. Copper, Type L, drawn-temper tubing and wrought-copper fittings with Alloy HB soldered joints.

F. Safety-Relief-Valve Discharge Piping, Multiple Tube Sizes and Joining Materials:

1. NPS 5/8 and Smaller : Copper, Type L, annealed- or drawn-temper tubing and wrought-copper fittings with soldered joints.
2. NPS 3/4 TO NPS 1 : Copper, Type K, annealed- or drawn-temper tubing and wrought-copper fittings with soldered joints.
3. NPS 1-1/4 : Copper, Type L, drawn-temper tubing and wrought-copper fittings with 95-5 tin-antimony soldered joints.
4. NPS 1-1/2 to NPS 2 : Copper, Type L, drawn-temper tubing and wrought-copper fittings with Alloy HB soldered joints.

3.2 INSTALLATION OF PIPING, GENERAL

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems; indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump

sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on Shop Drawings.

B. Install refrigerant piping in accordance with ASHRAE 15.

C. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.

D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.

F. Install piping adjacent to machines to allow service and maintenance.

G. Install piping free of sags and bends.

H. Install fittings for changes in direction and branch connections.

I. Select system components with pressure rating equal to or greater than system operating pressure.

J. Refer to Section 230923 "Direct Digital Control (DDC) System for HVAC" and Section 230993.11 "Sequence of Operations for HVAC DDC" for solenoid valve controllers, control wiring, and sequence of operation.

K. Install piping as short and direct as possible, with a minimum number of joints, elbows, and fittings.

L. Arrange piping to allow inspection and service of refrigeration equipment. Install valves and specialties in accessible locations to allow for service and inspection. Install access doors or panels as specified in Section 083113 "Access Doors and Frames" if valves or equipment requiring maintenance is concealed behind finished surfaces.

M. Install refrigerant piping in protective conduit where installed belowground.

N. Install refrigerant piping in rigid or flexible conduit in locations where exposed to mechanical injury.

O. Slope refrigerant piping as follows:

1. Install horizontal hot-gas discharge piping with a uniform slope downward away from compressor.
2. Install horizontal suction lines with a uniform slope downward to compressor.
3. Install traps and double risers to entrain oil in vertical runs.
4. Liquid lines may be installed level.

P. When brazing or soldering, remove solenoid-valve coils and sight glasses; also remove valve stems, seats, and packing, and accessible internal parts of refrigerant specialties. Do not apply heat near expansion-valve bulb.

Q. Install piping with adequate clearance between pipe and adjacent walls and hangers or between pipes for insulation installation.

R. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 230517 "Sleeves and Sleeve Seals for HVAC Piping."

S. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 230517 "Sleeves and Sleeve Seals for HVAC Piping."

T. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 230518 "Escutcheons for HVAC Piping."

3.3 PIPE JOINT CONSTRUCTION

A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.

B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.

C. Fill pipe and fittings with an inert gas (nitrogen or carbon dioxide), during brazing or welding, to prevent scale formation.

D. Soldered Joints: Construct joints in accordance with ASTM B828 or CDA's "Copper Tube Handbook."

E. Welded Joints: Construct joints in accordance with AWS D10.12M/D10.12.

F. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.

G. Pressure Seal Joint: Install pressure seal joints using press fitting manufacturer's recommended tools and equipment.

3.4 INSTALLATION OF HANGERS AND SUPPORTS

A. Comply with requirements for seismic restraints in Section 230548 "Vibration and Seismic Controls for HVAC."

B. Comply with Section 230529 "Hangers and Supports for HVAC Piping and Equipment" for hangers, supports, and anchor devices.

C. Install the following pipe attachments:

1. Adjustable steel clevis hangers for individual horizontal runs less than 20 ft. long.
2. Roller hangers and spring hangers for individual horizontal runs 20 ft. or longer.
3. Pipe Roller: MSS SP-58, Type 44 for multiple horizontal piping 20 ft. or longer, supported on a trapeze.
4. Spring hangers to support vertical runs.
5. Copper-clad hangers and supports for hangers and supports in direct contact with copper pipe.

D. Install hangers for copper tubing , with maximum horizontal spacing and minimum rod diameters, to comply with MSS-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

E. Support horizontal piping within 12 inches of each fitting.

F. Support vertical runs of copper tubing to comply with MSS-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.5 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Comply with ASME B31.5, Chapter VI.
2. Test refrigerant piping from test pressure if they are not rated above the test pressure.

3. Test high- and low-pressure side piping of each system separately at not less than the pressures indicated in "Performance Requirements" Article.

    a. Fill system with nitrogen to the required test pressure.
    b. System shall maintain test pressure at the manifold gauge throughout duration of test.
    c. Test joints and fittings with electronic leak detector or by brushing a small amount of soap and glycerin solution over joints.
    d. Remake leaking joints using new materials, and retest until satisfactory results are achieved.

B. Prepare test and inspection reports.

3.6 SYSTEM CHARGING

A. Charge system using the following procedures:

1. Install core in filter dryers after leak test but before evacuation.
2. Evacuate entire refrigerant system with a vacuum pump to 500 micrometers. If vacuum holds for 12 hours, system is ready for charging.
3. Break vacuum with refrigerant gas, allowing pressure to build up to 2 psig.
4. Charge system with a new filter-dryer core in charging line.

3.7 ADJUSTING

A. Adjust high- and low-pressure switch settings to avoid short cycling in response to fluctuating suction pressure.

B. Adjust set-point temperature of air-conditioning or chilled-water controllers to the system design temperature.

C. Perform the following adjustments before operating the refrigeration system, in accordance with manufacturer's written instructions:

1. Verify that compressor oil level is correct.
2. Open compressor suction and discharge valves.
3. Check open compressor-motor alignment and verify lubrication for motors and bearings.

D. Replace core of replaceable filter dryer after system has been adjusted and after design flow rates and pressures are established.

END OF SECTION 232300

SECTION 233113 - METAL DUCTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Single-wall rectangular ducts and fittings.
2. Single-wall round ducts and fittings.
3. Sheet metal materials.
4. Sealants and gaskets.
5. Hangers and supports.

B. Related Sections:

1. Section 230593 "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing requirements for metal ducts.
2. Section 233119 "HVAC Casings" for factory- and field-fabricated casings for mechanical equipment.
3. Section 233300 "Air Duct Accessories" for dampers, sound-control devices, duct-mounting access doors and panels, turning vanes, and flexible ducts.

1.3 DEFINITIONS

A. OSHPD: Office of Statewide Health Planning and Development (State of California).

1.4 ACTION SUBMITTALS

A. Product Data: For each type of the following products:

1. Liners and adhesives.
2. Sealants and gaskets.

B. Shop Drawings:

1. Fabrication, assembly, and installation, including plans, elevations, sections, components, and attachments to other work.
2. Factory- and shop-fabricated ducts and fittings.
3. Duct layout indicating sizes, configuration, liner material, and static-pressure classes.
4. Elevation of top and bottom of ducts.
5. Dimensions of duct runs from building grid lines.
6. Locations for duct accessories, including dampers, turning vanes, and access doors and panels.

1.5 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: A single set of plans or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.

B. Field quality-control reports.

1.6 QUALITY ASSURANCE

A. Air conditioning systems shall conform to the following:

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Airstream Surfaces: Surfaces in contact with airstream shall comply with requirements in ASHRAE 62.1.

B. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment," and Section 7 - "Construction and System Startup."

C. ASHRAE/IES Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.4.4 - "HVAC System Construction and Insulation."

D. Duct Dimensions: Unless otherwise indicated, all duct dimensions indicated on Drawings are inside clear dimensions and do not include insulation or duct wall thickness.

2.2 SINGLE-WALL RECTANGULAR DUCTS AND FITTINGS

A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" based on indicated static-pressure class unless otherwise indicated.

1. Construct ducts of galvanized sheet steel unless otherwise indicated.

B. Transverse Joints: Fabricate joints in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-1, "Rectangular Duct/Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

1. For ducts with longest side less than 36 inches, select joint types in accordance with Figure 2-1.
2. For ducts with longest side 36 inches or greater, use flange joint connector Type T-22, T-24, T-24A, T-25a, or T-25b. Factory-fabricated flanged duct connection system may be used if submitted and approved by engineer of record.
3. Where specified for specific applications, all joints shall be welded.

C. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Duct/Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

1. Where specified for specific applications, all joints shall be welded.

D. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 4, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.3 SINGLE-WALL ROUND DUCTS AND FITTINGS

A. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 3, "Round, Oval, and Flexible Duct," based on indicated static-pressure class unless otherwise indicated.

1. Construct ducts of galvanized sheet steel unless otherwise indicated.

B. Transverse Joints: Select joint types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-1, "Round Duct Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

1. Transverse Joints in Ducts Larger Than 60 Inches in Diameter: Flanged.

C. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-2, "Round Duct Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

1. Fabricate round ducts larger than 90 inches in diameter with butt-welded longitudinal seams.
2. Fabricate flat-oval ducts larger than 72 inches in width (major dimension) with butt-welded longitudinal seams.

D. Tees and Laterals: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.4 SHEET METAL MATERIALS

A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

B. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M.

1. Galvanized Coating Designation: G60.
2. Finishes for Surfaces Exposed to View: Mill phosphatized.

C. Reinforcement Shapes and Plates: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.

1. Where black- and galvanized-steel shapes and plates are used to reinforce aluminum ducts, isolate the different metals with butyl rubber, neoprene, or EPDM gasket materials.

D. Tie Rods: Galvanized steel, 1/4-inch- minimum diameter for lengths 36 inches or less; 3/8-inch- minimum diameter for lengths longer than 36 inches.

2.5 SEALANT AND GASKETS

A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets shall be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested in accordance with UL 723; certified by an NRTL.

B. Water-Based Joint and Seam Sealant:

1. Application Method: Brush on.
2. Solids Content: Minimum 65 percent.
3. Shore A Hardness: Minimum 20.
4. Water resistant.
5. Mold and mildew resistant.
6. VOC: Maximum 75 g/L (less water).
7. Maximum Static-Pressure Class: 10 inch wg, positive and negative.
8. Service: Indoor or outdoor.
9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.

2.6 HANGERS AND SUPPORTS

A. Hanger Rods for Noncorrosive Environments: Galvanized-steel rods and nuts.

B. Hanger Rods for Corrosive Environments: Electrogalvanized, all-thread rods or galvanized rods with threads painted with zinc-chromate primer after installation.

C. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct."

D. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A 603.

E. Steel Cable End Connections: Galvanized-steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.

F. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.

G. Trapeze and Riser Supports:

1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.
2. Supports for Stainless-Steel Ducts: Stainless-steel shapes and plates.
3. Supports for Aluminum Ducts: Aluminum or galvanized steel coated with zinc chromate.

PART 3 - EXECUTION

3.1 DUCT INSTALLATION

A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and coordination drawings.

B. Install ducts in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" unless otherwise indicated.

C. Install ducts in maximum practical lengths with fewest possible joints.

D. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.

E. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.

F. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.

G. Install ducts with a clearance of 1 inch, plus allowance for insulation thickness.

H. Route ducts to avoid passing through transformer vaults and electrical equipment rooms and enclosures.

I. Where ducts pass through non-fire-rated interior partitions and exterior walls and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches.

J. Install fire , combination fire/smoke, and smoke dampers where indicated on Drawings and as required by code, and by local authorities having jurisdiction. Comply with requirements in Section 233300 "Air Duct Accessories" for fire and smoke dampers and specific installation requirements of the damper UL listing.

K. Install heating coils, cooling coils, air filters, dampers, and all other duct-mounted accessories in air ducts where indicated on Drawings.

L. Protect duct interiors from moisture, construction debris and dust, and other foreign materials both before and after installation. Comply with SMACNA's "IAQ Guidelines for Occupied Buildings Under Construction," Appendix G, "Duct Cleanliness for New Construction Guidelines."

M. Elbows: Use long-radius elbows wherever they fit.

1. Fabricate 90-degree rectangular mitered elbows to include turning vanes.
2. Fabricate 90-degree round elbows with a minimum of three segments for 12 inches and smaller and a minimum of five segments for 14 inches and larger.

N. Branch Connections: Use lateral or conical branch connections.

3.2 INSTALLATION OF EXPOSED DUCTWORK

A. Protect ducts exposed in finished spaces from being dented, scratched, or damaged.

B. Trim duct sealants flush with metal. Create a smooth and uniform exposed bead. Do not use two-part tape sealing system.

C. Grind welds to provide smooth surface free of burrs, sharp edges, and weld splatter. When welding stainless steel with a No. 3 or 4 finish, grind the welds flush, polish the exposed welds, and treat the welds to remove discoloration caused by welding.

D. Maintain consistency, symmetry, and uniformity in arrangement and fabrication of fittings, hangers and supports, duct accessories, and air outlets.

E. Repair or replace damaged sections and finished work that does not comply with these requirements.

3.3 DUCTWORK EXPOSED TO WEATHER

A. All external joints are to be welded. Seal all openings to provide weatherproof construction.

B. Construct ductwork to resist external loads of wind, snow, ice, and other effects of weather. Provide necessary supporting structures.

C. Single Wall:

1. Ductwork shall be galvanized steel.

   a. If duct outer surface is uninsulated, protect outer surface with suitable paint. Paint materials and application requirements are specified in Section 099113 "Exterior Painting."

2. Where ducts have external insulation, provide weatherproof aluminum jacket. See Section 230713 "Duct Insulation."

3.4 DUCT SEALING

A. Seal ducts for duct static-pressure, seal classes, and leakage classes specified in "Duct Schedule" Article in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

B. Seal ducts at a minimum to the following seal classes in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible":

1. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
2. Outdoor, Supply-Air Ducts: Seal Class A.
3. Outdoor, Exhaust Ducts: Seal Class C.
4. Outdoor, Return-Air Ducts: Seal Class C.
5. Conditioned Space, Supply-Air Ducts in Pressure Classes 2-Inch wg and Lower: Seal Class C.
6. Conditioned Space, Supply-Air Ducts in Pressure Classes Higher Than 2-Inch wg: Seal Class B.
7. Conditioned Space, Exhaust Ducts: Seal Class B.
8. Conditioned Space, Return-Air Ducts: Seal Class C.

3.5 HANGER AND SUPPORT INSTALLATION

A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 5, "Hangers and Supports."

B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.

1. Where practical, install concrete inserts before placing concrete.
2. Install powder-actuated concrete fasteners after concrete is placed and completely cured.
3. Use powder-actuated concrete fasteners for standard-weight aggregate concretes or for slabs more than 4 inches thick.
4. Do not use powder-actuated concrete fasteners for lightweight-aggregate concretes or for slabs less than 4 inches thick.

C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct," for maximum hanger spacing; install hangers and supports within 24 inches of each elbow and within 48 inches of each branch intersection.

D. Hangers Exposed to View: Threaded rod and angle or channel supports.

E. Support vertical ducts with steel angles or channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor and at a maximum intervals of 16 feet.

F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.6 CONNECTIONS

A. Make connections to equipment with flexible connectors complying with Section 233300 "Air Duct Accessories."

B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for branch, outlet and inlet, and terminal unit connections.

3.7 PAINTING

A. Paint interior of metal ducts that are visible through registers and grilles and that do not have duct liner. Apply one coat of flat, black, latex paint over a compatible galvanized-steel primer. Paint materials and application requirements are specified in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."

3.8 STARTUP

A. Air Balance: Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.9 DUCT SCHEDULE

A. Fabricate ducts with galvanized sheet steel except as otherwise indicated and as follows:

1. Fabricate all ducts to achieve SMACNA pressure class, seal class, and leakage class as indicated below.
2. The first 20' of rectangular supply and return ductwork outside the HVAC room shall be constructed of 16 gauge sheet metal with a 6" wg static pressure classification for ductwork and transverse joints. The test pressure for duct leakage testing specified in 23 00 95, Testing, Adjusting and Balancing may be equal to that used for downstream ductwork.

B. Supply Ducts:

1. Ducts Connected to Terminal Units :

a. Pressure Class: Positive 2- inch wg.
b. Minimum SMACNA Seal Class: C.
c. SMACNA Leakage Class for Rectangular: 16.
d. SMACNA Leakage Class for Round and Flat Oval: 8.

2. Ducts Connected to Variable-Air-Volume Air-Handling Units :

a. Pressure Class: Positive 4- inch wg.
b. Minimum SMACNA Seal Class: A B.
c. SMACNA Leakage Class for Rectangular: 4.
d. SMACNA Leakage Class for Round and Flat Oval: 2.

C. Return Ducts:

1. Ducts Connected to Terminal Units :

a. Pressure Class: Positive or negative 2- inch wg.
b. Minimum SMACNA Seal Class: C.
c. SMACNA Leakage Class for Rectangular: 16.
d. SMACNA Leakage Class for Round and Flat Oval: 8.

2. Ducts Connected to Air-Handling Units :

   a. Pressure Class: Positive or negative 2- inch wg.
   b. Minimum SMACNA Seal Class: A.
   c. SMACNA Leakage Class for Rectangular: 16.
   d. SMACNA Leakage Class for Round and Flat Oval: 8.

D. Exhaust Ducts:

1. Ducts Connected to Fans Exhausting (ASHRAE 62.1, Class 1 and 2) Air:

   a. Pressure Class: Negative 2- inch wg.
   b. Minimum SMACNA Seal Class: A if negative pressure, and A if positive pressure.
   c. SMACNA Leakage Class for Rectangular: 16.
   d. SMACNA Leakage Class for Round and Flat Oval: 8.

E. Elbow Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."

   a. Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
   b. Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
   c. Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."

2. Round Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "Round Duct Elbows."

   a. Minimum Radius-to-Diameter Ratio and Elbow Segments: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 3-1, "Mitered Elbows." Elbows with less than 90-degree change of direction have proportionately fewer segments.

      1) Radius-to Diameter Ratio: 1.5.

   b. Round Elbows, 12 Inches and Smaller in Diameter: Stamped or pleated.
   c. Round Elbows, 14 Inches and Larger in Diameter: Standing seam.

F. Branch Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-6, "Branch Connection."

   a. Rectangular Main to Rectangular Branch: 45-degree entry.
   b. Rectangular Main to Round Branch: Conical spin in.

2. Round and Flat Oval: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees." Saddle taps are permitted in existing duct.

   a. Velocity 1000 fpm or Lower: 90-degree tap.
   b. Velocity 1000 to 1500 fpm: Conical tap.
   c. Velocity 1500 fpm or Higher: 45-degree lateral.

END OF SECTION 233113

SECTION 233300 - AIR DUCT ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Manual volume dampers.
2. Flange connectors.
3. Turning vanes.
4. Duct-mounted access doors.
5. Duct accessory hardware.

B. Related Requirements:

1. Section 233346 "Flexible Ducts" for insulated and non-insulated flexible ducts.
2. Section 233723 "HVAC Gravity Ventilators" for roof-mounted ventilator caps.
3. Section 284621.11 "Addressable Fire-Alarm Systems" for duct-mounted fire and smoke detectors.
4. Section 284621.13 "Conventional Fire-Alarm Systems" for duct-mounted fire and smoke detectors.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. For duct silencers, include pressure drop and dynamic insertion loss data.

B. Shop Drawings: For duct accessories. Include plans, elevations, sections, details and attachments to other work.

1. Detail duct accessories fabrication and installation in ducts and other construction. Include dimensions, weights, loads, and required clearances; and method of field assembly into duct systems and other construction. Include the following:

a. Special fittings.
b. Manual volume damper installations.
c. Control-damper installations.
d. Fire-damper, smoke-damper, combination fire- and smoke-damper, ceiling, and corridor damper installations, including sleeves; and duct-mounted access doors and remote damper operators.
e. Duct security bars.
f. Wiring Diagrams: For power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which ceiling-mounted access panels and access doors required for access to duct accessories are shown and coordinated with each other, using input from Installers of the items involved.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTION

A. Comply with NFPA 90A, "Installation of Air Conditioning and Ventilating Systems," and with NFPA 90B, "Installation of Warm Air Heating and Air Conditioning Systems."

B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

2.2 MATERIALS

A. Galvanized Sheet Steel: Comply with ASTM A653/A653M.

1. Galvanized Coating Designation: G60.
2. Exposed-Surface Finish: Mill phosphatized.

B. Stainless-Steel Sheets: Comply with ASTM A480/A480M, Type 304, and having a No. 2 finish for concealed ducts and exposed ducts.

C. Aluminum Sheets: Comply with ASTM B209, Alloy 3003, Temper H14; with mill finish for concealed ducts and standard, 1-side bright finish for exposed ducts.

D. Extruded Aluminum: Comply with ASTM B221, Alloy 6063, Temper T6.

E. Reinforcement Shapes and Plates: Galvanized-steel reinforcement where installed on galvanized sheet metal ducts; compatible materials for aluminum and stainless-steel ducts.

F. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches.

2.3 MANUAL VOLUME DAMPERS

A. Standard, Steel, Manual Volume Dampers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. McGill AirFlow LLC.
b. Nailor Industries Inc.
c. Ruskin; Air Distribution Technologies, Inc.; Johnson Controls, Inc.

2. Standard leakage rating.
3. Suitable for horizontal or vertical applications.
4. Frames:

a. Frame: Hat-shaped, 0.094-inch- thick, galvanized sheet steel.
b. Mitered and welded corners.
c. Flanges for attaching to walls and flangeless frames for installing in ducts.

5. Blades:

a. Multiple or single blade.
b. Parallel- or opposed-blade design.
c. Stiffen damper blades for stability.
d. Galvanized -steel, 0.064 inch thick.

6. Blade Axles: Galvanized steel.

7. Bearings:
   a. Molded synthetic.
   b. Dampers in ducts with pressure classes of 3-inch wg or less shall have axles full length of damper blades and bearings at both ends of operating shaft.
8. Tie Bars and Brackets: Galvanized steel.

B. Standard, Aluminum, Manual Volume Dampers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. McGill AirFlow LLC.
   b. Nailor Industries Inc.
   c. Ruskin; Air Distribution Technologies, Inc.; Johnson Controls, Inc.
2. Standard leakage rating.
3. Suitable for horizontal or vertical applications.
4. Frames: Hat-shaped, 0.10-inch- thick, aluminum sheet channels; frames with flanges for attaching to walls and flangeless frames for installing in ducts.
5. Blades:
   a. Multiple or single blade.
   b. Parallel- or opposed-blade design.
   c. Stiffen damper blades for stability.
   d. Roll-Formed Aluminum Blades: 0.10-inch- thick aluminum sheet.
6. Blade Axles: Nonferrous metal.
7. Bearings:
   a. Molded synthetic.
   b. Dampers in ducts with pressure classes of 3-inch wg or less shall have axles full length of damper blades and bearings at both ends of operating shaft.
8. Tie Bars and Brackets: Aluminum.

C. Jackshaft:

1. Size: 0.5-inch diameter.
2. Material: Galvanized-steel pipe rotating within pipe-bearing assembly mounted on supports at each mullion and at each end of multiple-damper assemblies.
3. Length and Number of Mountings: As required to connect linkage of each damper in multiple-damper assembly.

D. Damper Hardware:

1. Zinc-plated, die-cast core with dial and handle made of 3/32-inch- thick zinc-plated steel, and a 3/4-inch hexagon locking nut.
2. Include center hole to suit damper operating-rod size.
3. Include elevated platform for insulated duct mounting.

2.4 FLANGE CONNECTORS

A. Manufacturers: Subject to compliance with requirements, undefined:

1. DynAir; a Carlisle Company.
2. Elgen Manufacturing.
3. Ward Industries; a brand of Hart & Cooley, LLC.

B. Description: Add-on or roll-formed, factory-fabricated, slide-on transverse flange connectors, gaskets, and components.

C. Material: Galvanized steel.

D. Gauge and Shape: Match connecting ductwork.

2.5 TURNING VANES

A. Manufacturers: Subject to compliance with requirements, undefined:

1. DynAir; a Carlisle Company.
2. Elgen Manufacturing.
3. Ward Industries; a brand of Hart & Cooley, LLC.

B. Manufactured Turning Vanes for Metal Ducts: Curved blades of galvanized sheet steel; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.

1. Acoustic Turning Vanes: Fabricate airfoil-shaped aluminum extrusions with perforated faces and fibrous-glass fill.

C. General Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figures 4-3, "Vanes and Vane Runners," and 4-4, "Vane Support in Elbows."

D. Vane Construction: Double wall.

E. Vane Construction: Single wall for ducts up to 48 inches wide and double wall for larger dimensions.

2.6 DUCT-MOUNTED ACCESS DOORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. McGill AirFlow LLC.
2. Ruskin; Air Distribution Technologies, Inc.; Johnson Controls, Inc.
3. Ward Industries; a brand of Hart & Cooley, LLC.

B. Duct-Mounted Access Doors: Fabricate access panels according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figures 7-2, "Duct Access Doors and Panels," and 7-3, "Access Doors - Round Duct."

1. Door:

a. Double wall, rectangular.
b. Galvanized sheet metal with insulation fill and thickness as indicated for duct pressure class.
c. Vision panel.
d. Hinges and Latches: 1-by-1-inch butt or piano hinge and cam latches.
e. Fabricate doors airtight and suitable for duct pressure class.

2. Frame: Galvanized sheet steel, with bend-over tabs and foam gaskets.
3. Number of Hinges and Locks:

a. Access Doors Less Than 12 Inches Square: No hinges and two sash locks.
b. Access Doors up to 18 Inches Square: Two hinges and two sash locks.
c. Access Doors up to 24 by 48 Inches: Three hinges and two compression latches with outside and inside handles.
d. Access Doors Larger Than 24 by 48 Inches: Four hinges and two compression latches with outside and inside handles.

2.7 DUCT ACCESSORY HARDWARE

A. Instrument Test Holes: Cast iron or cast aluminum to suit duct material, including screw cap and gasket. Size to allow insertion of pitot tube and other testing instruments and of length to suit duct-insulation thickness.

B. Adhesives: High strength, quick setting, neoprene based, waterproof, and resistant to gasoline and grease.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install duct accessories according to applicable details in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts and in NAIMA AH116, "Fibrous Glass Duct Construction Standards," for fibrous-glass ducts.

B. Install duct accessories of materials suited to duct materials; use galvanized-steel accessories in galvanized-steel and fibrous-glass ducts, stainless-steel accessories in stainless-steel ducts, and aluminum accessories in aluminum ducts.

C. Install dampers at inlet of exhaust fans or exhaust ducts as close as possible to exhaust fan unless otherwise indicated.

D. Install volume dampers at points on supply, return, and exhaust systems where branches extend from larger ducts. Where dampers are installed in ducts having duct liner, install dampers with hat channels of same depth as liner, and terminate liner with nosing at hat channel.

1. Install steel volume dampers in steel ducts.
2. Install aluminum volume dampers in aluminum ducts.

E. Set dampers to fully open position before testing, adjusting, and balancing.

F. Install test holes at fan inlets and outlets and elsewhere as indicated.

G. Install duct access doors on sides of ducts to allow for inspecting, adjusting, and maintaining accessories and equipment at the following locations:

1. On both sides of duct coils.
2. Upstream and downstream from duct filters.
3. At outdoor-air intakes and mixed-air plenums.
4. At drain pans and seals.
5. Downstream from manual volume dampers, control dampers, backdraft dampers, and equipment.
6. Adjacent to and close enough to fire or smoke dampers, to reset or reinstall fusible links. Access doors for access to fire or smoke dampers having fusible links shall be pressure relief access doors and shall be outward operation for access doors installed upstream from dampers and inward operation for access doors installed downstream from dampers.
7. At each change in direction and at maximum 50-foot spacing.
8. Upstream and downstream from turning vanes.
9. Upstream or downstream from duct silencers.
10. Control devices requiring inspection.
11. Elsewhere as indicated.

H. Install access doors with swing against duct static pressure.

I. Access Door Sizes:

1. Two-Hand Access: 12 by 12 inches.
2. Head and Hand Access: 24 by 24 inches.

J. Label access doors according to Section 230553 "Identification for HVAC Piping and Equipment" to indicate the purpose of access door.

K. For fans developing static pressures of 5-inch wg and more, cover flexible connectors with loaded vinyl sheet held in place with metal straps.

L. Install duct test holes where required for testing and balancing purposes.

3.2 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Operate dampers to verify full range of movement.
2. Inspect locations of access doors and verify that purpose of access door can be performed.
3. Operate fire, smoke, and combination fire and smoke dampers to verify full range of movement and verify that proper heat-response device is installed.
4. Inspect turning vanes for proper and secure installation.
5. Operate remote damper operators to verify full range of movement of operator and damper.

END OF SECTION 233300

SECTION 233346 - FLEXIBLE DUCTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Insulated flexible ducts.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For flexible ducts.

1. Include plans showing locations and mounting and attachment details.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTION

A. Comply with NFPA 90A, "Installation of Air Conditioning and Ventilating Systems," and with NFPA 90B, "Installation of Warm Air Heating and Air Conditioning Systems."

B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials shall be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

C. Comply with the Air Diffusion Council's "ADC Flexible Air Duct Test Code FD 72-R1."

D. Comply with ASTM E 96/E 96M, "Test Methods for Water Vapor Transmission of Materials."

2.2 INSULATED FLEXIBLE DUCTS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Flexmaster U.S.A., Inc.
2. Thermaflex; a Flex-Tek Group company.

B. Insulated, Flexible Duct: UL 181, Class 1, two-ply vinyl film supported by helically wound, spring-steel wire; fibrous-glass insulation; vapor-barrier film.

1. Pressure Rating: 10-inch wg positive and 1.0-inch wg negative.
2. Maximum Air Velocity: 4000 fpm.
3. Temperature Range: Minus 10 to plus 160 deg F.
4. Insulation R-Value: R6.

C. Insulated, Flexible Duct: UL 181, Class 1, multiple layers of aluminum laminate supported by helically wound, spring-steel wire; fibrous-glass insulation; vapor-barrier film.

1. Pressure Rating: 10-inch wg positive and 1.0-inch wg negative.
2. Maximum Air Velocity: 4000 fpm.
3. Temperature Range: Minus 20 to plus 210 deg F.
4. Insulation R-Value: R6.

D. Insulated, Flexible Duct: UL 181, Class 1, aluminum laminate and polyester film with latex adhesive supported by helically wound, spring-steel wire; fibrous-glass insulation; vapor-barrier film.

1. Pressure Rating: 10-inch wg positive and 1.0-inch wg negative.
2. Maximum Air Velocity: 4000 fpm.
3. Temperature Range: Minus 20 to plus 210 deg F.
4. Insulation R-Value: R6.

E. Insulated, Flexible Duct: UL 181, Class 0, interlocking spiral of aluminum foil; fibrous-glass insulation; vapor-barrier film.

1. Pressure Rating: 8-inch wg positive or negative.
2. Maximum Air Velocity: 5000 fpm.
3. Temperature Range: Minus 20 to plus 250 deg F.
4. Insulation R-Value: R6.

2.3 FLEXIBLE DUCT CONNECTORS

A. Clamps: Nylon strap in sizes 3 through 18 inches, to suit duct size.

B. Non-Clamp Connectors.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install flexible ducts according to applicable details in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts and in NAIMA AH116, "Fibrous Glass Duct Construction Standards," for fibrous-glass ducts.

B. Install in indoor applications only. Flexible ductwork should not be exposed to UV lighting.

C. Connect terminal units to supply ducts directly or with maximum 12-inch lengths of flexible duct. Do not use flexible ducts to change directions.

D. Connect diffusers or light troffer boots to ducts directly or with maximum 60-inch lengths of flexible duct clamped or strapped in place.

E. Connect flexible ducts to metal ducts with draw bands.

F. Install duct test holes where required for testing and balancing purposes.

G. Installation:

1. Install ducts fully extended.
2. Do not bend ducts across sharp corners.
3. Bends of flexible ducting shall not exceed a minimum of one duct diameter.
4. Avoid contact with metal fixtures, water lines, pipes, or conduits.

5. Install flexible ducts in a direct line, without sags, twists, or turns.

H. Supporting Flexible Ducts:

1. Suspend flexible ducts with bands 1-1/2 inches wide or wider and spaced a maximum of 48 inches apart. Maximum centerline sag between supports shall not exceed 1/2 inch per 12 inches.
2. Install extra supports at bends placed approximately one duct diameter from center line of the bend.
3. Ducts may rest on ceiling joists or truss supports. Spacing between supports shall not exceed the maximum spacing per manufacturer's written installation instructions.
4. Vertically installed ducts shall be stabilized by support straps at a maximum of 72 inches o.c.

END OF SECTION 233346

This page intentionally left blank.

SECTION 233416 - CENTRIFUGAL HVAC FANS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Backward-inclined centrifugal fans, including airfoil and curved blade fans.
2. Forward-curved centrifugal fans.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Construction details, material descriptions, dimensions of individual components and profiles, and finishes for fans.
2. Rated capacities, operating characteristics, and furnished specialties and accessories.
3. Certified fan performance curves with system operating conditions indicated.
4. Certified fan sound-power ratings.
5. Motor ratings and electrical characteristics, plus motor and electrical accessories.
6. Material thickness and finishes, including color charts.
7. Dampers, including housings, linkages, and operators.

B. Shop Drawings:

1. Include plans, elevations, sections, and attachment details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.
4. Design Calculations: Calculate requirements for selecting vibration isolators and for designing vibration isolation bases.
5. Vibration Isolation Base Details: Detail fabrication, including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Fan room layout and relationships between components and adjacent structural and mechanical elements, drawn to scale, and coordinated with each other, using input from installers of the items involved.

B. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For centrifugal fans to include in normal operation, emergency operation, and maintenance manuals with replacement parts listing.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials , from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Belts: One set(s) for each belt-driven unit.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design vibration isolators and supports.

2.2 MOTORS

A. Comply with NEMA designation, temperature rating, service factor, and efficiency requirements for motors specified in Section 230513 "Common Motor Requirements for HVAC Equipment."

B. Where variable-frequency drives are indicated or scheduled, provide fan motor compatible with variable-frequency drive.

2.3 SOURCE QUALITY CONTROL

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.

B. AMCA Compliance: Fans shall comply with AMCA 11 and bear the AMCA-Certified Ratings Seal.

C. Fan Sound Ratings: Comply with AMCA 311 and label fans with the AMCA-Certified Ratings Seal. Sound ratings shall comply with AMCA 301. The fans shall be tested according to AMCA 300.

D. Fan Performance Ratings: Comply with AMCA 211 and label fans with AMCA-Certified Rating Seal. The fans shall be tested for air performance - flow rate, fan pressure, power, fan efficiency, air density, speed of rotation, and fan efficiency - according to AMCA 210/ASHRAE 51.

E. Operating Limits: Classify fans according to AMCA 99.

PART 3 - EXECUTION

3.1 INSTALLATION OF CENTRIFUGAL HVAC FANS

A. Install centrifugal fans level and plumb.

B. Disassemble and reassemble units, as required for moving to the final location, according to manufacturer's written instructions.

C. Lift and support units with manufacturer's designated lifting or supporting points.

D. Equipment Mounting:

1. Install floor- or roof-mounted centrifugal fans on cast-in-place concrete equipment base(s). Comply with requirements for equipment bases and foundations specified in Section 033053 "Miscellaneous Cast-in-Place Concrete."

E. Curb Support, Field Built-Up: Install roof curb on roof structure, level and secure, according to "The NRCA Roofing and Waterproofing Manual," detail "Equipment Support Curb," number "SPF-9" (page 1409) and detail "Equipment Support Curb," number "SPF-9S" (page 1410). Install and secure centrifugal fans on curbs, and coordinate roof penetrations and flashing with roof construction. Secure units to curb support with anchor bolts.

F. Curb Support, Prefabricated: Rail-type wood support provided by fan manufacturer.

G. Unit Support: Install centrifugal fans level on structural curbs. Coordinate wall penetrations and flashing with wall construction. Secure units to structural support with anchor bolts.

H. Install units with clearances for service and maintenance.

I. Label fans according to requirements specified in Section 230553 "Identification for HVAC Piping and Equipment."

3.2 DUCTWORK AND PIPING CONNECTIONS

A. Drawings indicate general arrangement of ducts and duct accessories.

B. Install ducts adjacent to fans to allow service and maintenance.

C. Install piping from scroll drain connection, with trap with seal equal to 1.5 times specified static pressure, to nearest floor drain with pipe sizes matching the drain connection.

D. Install heat tracing on all drain piping subject to freezing temperature and as indicated on Drawings. Furnish and install heat tracing according to Section 230533 "Heat Tracing for HVAC Piping."

3.3 ELECTRICAL CONNECTIONS

A. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, according to NFPA 70 and NECA 1.

1. Nameplate shall be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate shall be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.4 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring according to Section 260523 "Control-Voltage Electrical Power Cables."

3.5 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. Verify that shipping, blocking, and bracing are removed.
2. Verify that unit is secure on mountings and supporting devices and that connections to ducts and electrical components are complete. Verify that proper thermal-overload protection is installed in motors, starters, and disconnect switches.
3. Verify that there is adequate maintenance and access space.
4. Verify that cleaning and adjusting are complete.
5. Disconnect fan drive from motor, verify proper motor rotation direction, and verify fan wheel free rotation and smooth bearing operation. Reconnect fan drive system, align and adjust belts, and install belt guards.
6. Adjust belt tension.
7. Adjust damper linkages for proper damper operation.
8. Verify lubrication for bearings and other moving parts.
9. Verify that manual and automatic volume control and fire and smoke dampers in connected ductwork systems are in fully open position.
10. See Section 230593 "Testing, Adjusting, and Balancing For HVAC" for testing, adjusting, and balancing procedures.
11. Remove and replace malfunctioning units and retest as specified above.

C. Test and adjust controls and safeties. Controls and equipment will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports.

3.6 ADJUSTING

A. Adjust damper linkages for proper damper operation.

B. Adjust belt tension.

C. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing procedures.

D. Replace fan and motor pulleys as required to achieve design airflow.

E. Lubricate bearings.

END OF SECTION 233416

SECTION 233600 - AIR TERMINAL UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Modulating, single-duct air terminal units.
2. Casing liner.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of air terminal unit.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for air terminal units.
2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

B. Shop Drawings: For air terminal units.

1. Include plans, elevations, sections, and mounting details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.
4. Hangers and supports, including methods for duct and building attachment and vibration isolation.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Ceiling suspension assembly members.
2. Size and location of initial access modules for acoustic tile.
3. Ceiling-mounted items including lighting fixtures, diffusers, grilles, speakers, sprinklers, access panels, and special moldings.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and System Start-up."

C. ASHRAE Compliance: Applicable requirements in ASHRAE/IES 90.1, "Section 6 - Heating, Ventilating, and Air Conditioning."

2.2 MODULATING, SINGLE-DUCT AIR TERMINAL UNITS

A. Manufacturers: Subject to compliance with requirements, undefined:

1. Nailor Industries Inc.
2. Price Industries.
3. Titus.

B. Configuration: Volume-damper assembly inside unit casing with control components inside a protective metal shroud.

C. Casing: 0.034-inch- thick galvanized steel, single wall.

1. Casing Liner: Comply with requirements in "Casing Liner" Article for fibrous-glass duct liner.
2. Air Inlet: Round stub connection or S-slip and drive connections for duct attachment.
3. Air Outlet: S-slip and drive connections.
4. Access: Removable panels for access to parts requiring service, adjustment, or maintenance; with airtight gasket.
5. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.

D. Volume Damper: Galvanized steel with peripheral gasket and self-lubricating bearings.

1. Maximum Damper Leakage: AHRI 880 rated, 3 percent of nominal airflow at 3-inch wg inlet static pressure.
2. Damper Position: Normally open.

E. Attenuator Section: 0.032-inch aluminum sheet.

1. Attenuator Section Liner: Comply with requirements in "Casing Liner" Article for fibrous-glass duct liner.
2. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.

F. Electric-Resistance Heating Coils: Nickel-chromium heating wire, free of expansion noise and hum, mounted in ceramic inserts in a galvanized-steel housing; with primary automatic, and secondary manual, reset thermal cutouts. Terminate elements in stainless-steel, machine-staked terminals secured with stainless-steel hardware. Provide electric-resistance heating coils for air terminal units scheduled on Drawings.

1. SCR controlled.
2. Access door interlocked disconnect switch.
3. Downstream air temperature sensor with local connection to override discharge-air temperature to not exceed a maximum temperature set point (adjustable).
4. Nickel chrome 80/20 heating elements.
5. Airflow switch for proof of airflow.
6. Fan interlock contacts.
7. Fuses in terminal box for overcurrent protection (for coils more than 48 A).
8. Mercury contactors.
9. Magnetic contactor for each step of control (for three-phase coils).

G. Control Sequences:

1. Occupied:

a. On a call for cooling, airflow will increase as the damper opens towards maximum setting to satisfy set point.
b. On a call for less cooling, airflow will decrease as the damper closes towards minimum setting to satisfy set point.
c. On a call for heating, after terminal unit has reached minimum airflow set point, hydronic heating coil valve will modulate toward open to satisfy set point.

2. Unoccupied:

a. Damper closes to minimum setting.

2.3 CASING LINER

A. Casing Liner: Fibrous-glass duct liner, complying with ASTM C1071, NFPA 90A, or NFPA 90B; and with NAIMA AH124, "Fibrous Glass Duct Liner Standard."

1. Minimum Thickness: 1 inch.

a. Maximum Thermal Conductivity:

1) Type I, Flexible: 0.27 Btu x in./h x sq. ft. x deg F at 75 deg F mean temperature.
2) Type II, Rigid: 0.23 Btu x in./h x sq. ft. x deg F at 75 deg F mean temperature.

2. Antimicrobial Erosion-Resistant Coating: Apply to the surface of the liner that will form the interior surface of the duct to act as a moisture repellent and erosion-resistant coating. Antimicrobial compound shall be tested for efficacy by an NRTL and registered by the EPA for use in HVAC systems.
3. Water-Based Liner Adhesive: Comply with NFPA 90A or NFPA 90B and with ASTM C916.

PART 3 - EXECUTION

3.1 HANGER AND SUPPORT INSTALLATION

A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 5, "Hangers and Supports" and with Section 230529 "Hangers and Supports for HVAC Piping and Equipment."

B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.

1. Where practical, install concrete inserts before placing concrete.
2. Do not use powder-actuated concrete fasteners for lightweight-aggregate concretes and for slabs less than 4 inches thick.

C. Hangers Exposed to View: Threaded rod and angle or channel supports.

D. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.2 TERMINAL UNIT INSTALLATION

A. Install air terminal units according to NFPA 90A, "Standard for the Installation of Air Conditioning and Ventilating Systems."

B. Install air terminal units level and plumb. Maintain sufficient clearance for normal service and maintenance.

C. Install wall-mounted thermostats.

D. Comply with requirements for vibration isolation and seismic-control devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."

E. Comply with requirements for vibration isolation devices specified in Section 230548.13 "Vibration Controls for HVAC."

3.3 PIPING CONNECTIONS

A. Where installing piping adjacent to air terminal unit, allow space for service and maintenance.

B. Hot-Water Piping: Comply with requirements in Section 232113 "Hydronic Piping" and Section 232116 Hydronic Piping Specialties," and connect heating coils to supply with shutoff valve, strainer, control valve, and union or flange; and to return with balancing valve and union or flange.

3.4 DUCTWORK CONNECTIONS

A. Comply with requirements in Section 233113 "Metal Ducts" for connecting ducts to air terminal units.

3.5 ELECTRICAL CONNECTIONS

A. Install field power to each air terminal unit electrical power connection. Coordinate with air terminal unit manufacturer and installers.

B. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

C. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

D. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

E. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate shall be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate shall be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.6 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring in accordance with Section 260523 "Control-Voltage Electrical Power Cables."

3.7 IDENTIFICATION

A. Label each air terminal unit with plan number, nominal airflow, and maximum and minimum factory-set airflows. Comply with requirements in Section 230553 "Identification for HVAC Piping and Equipment" for equipment labels and warning signs and labels.

END OF SECTION 233600

This page intentionally left blank.

SECTION 233723 - HVAC GRAVITY VENTILATORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Hooded ventilators.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For gravity ventilators.

1. Include plans, elevations, sections, details, ventilator attachments to curbs, and curb attachments to roof structure.
2. Show weep paths, gaskets, flashing, sealant, and other means of preventing water intrusion.

1.4 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum."

1.5 COORDINATION

A. Coordinate sizes and locations of roof curbs, equipment supports, and roof penetrations with actual equipment provided.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Structural Performance: Ventilators shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated without permanent deformation of ventilator components, noise or metal fatigue caused by ventilator blade rattle or flutter, or permanent damage to fasteners and anchors. Wind pressures shall be considered to act normal to the face of the building.

B. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1.

C. ASHRAE 62.1 Compliance: Section 5, "Systems and Equipment" and Section 7, "Construction and System Start-up."

D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes, without buckling, opening of joints, overstressing of components, failure of connections, or other detrimental effects.

1. Temperature Change (Range):
   a. Ambient: 120 deg F.
   b. Material Surfaces: 180 deg F.

E. Water Entrainment: Limit water penetration through unit to comply with ASHRAE 62.1.

2.2 FABRICATION

A. Factory or shop fabricate gravity ventilators to minimize field splicing and assembly. Disassemble units to the minimum extent as necessary for shipping and handling. Clearly mark units for reassembly and coordinated installation.

B. Fabricate frames, including integral bases, to fit in openings of sizes indicated, with allowances made for fabrication and installation tolerances, adjoining material tolerances, and perimeter sealant joints.

C. Fabricate units with closely fitted joints and exposed connections accurately located and secured.

D. Fabricate supports, anchorages, and accessories required for complete assembly.

E. Perform shop welding by AWS-certified procedures and personnel.

2.3 HOODED VENTILATORS

A. Description: Hooded rectangular ventilator for intake air.

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Greenheck Fan Corporation.
2. Loren Cook Company.
3. Twin City Fan & Blower.

C. Source Limitations: Obtain hooded ventilators from single manufacturer.

D. Construction:

1. Material: Aluminum, of thickness required to comply with structural performance requirements, but not less than 0.063-inch- thick base and 0.050-inch- thick hood; suitably reinforced.
2. Insulation: None.
3. Insect Screening: Aluminum, 18-by-16 mesh wire.

E. Dampers:

1. Location: Hood neck.
2. Control: Motorized.
3. Tray: Provide damper tray or shelf with opening 3 inches less than interior curb dimensions indicated.

F. Roof Curbs: Aluminum sheet; with mitered and welded corners; 1-1/2-inch- thick, rigid fiberglass insulation adhered to inside walls; and 1-1/2-inch wood nailer. Size as required to fit roof opening and ventilator base.

1. Configuration: Built-in raised cant and mounting flange.
2. Overall Height: 24 inches.

2.4 MATERIALS

A. Aluminum Extrusions: ASTM B 221, Alloy 6063-T5 or T-52.

B. Aluminum Sheet: ASTM B 209, Alloy 3003 or 5005, with temper as required for forming or as otherwise recommended by metal producer for required finish.

C. Fasteners: Same basic metal and alloy as fastened metal or 300 Series stainless steel unless otherwise indicated. Do not use metals that are incompatible with joined materials.

1. Use types and sizes to suit unit installation conditions.
2. Use hex-head or Phillips pan-head screws for exposed fasteners unless otherwise indicated.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install gravity ventilators level, plumb, and at indicated alignment with adjacent work.

B. Secure gravity ventilators to roof curbs with zinc-plated hardware. Use concealed anchorages where possible. Refer to Section 077200 "Roof Accessories."

C. Install gravity ventilators with clearances for service and maintenance.

D. Install perimeter reveals and openings of uniform width for sealants and joint fillers, as indicated.

E. Install concealed gaskets, flashings, joint fillers, and insulation as installation progresses. Comply with Section 079200 "Joint Sealants" for sealants applied during installation.

F. Label gravity ventilators according to requirements specified in Section 230553 "Identification for HVAC Piping and Equipment."

G. Repair finishes damaged by cutting, welding, soldering, and grinding. Restore finishes, so no evidence remains of corrective work. Return items that cannot be refinished in the field to the factory, make required alterations, and refinish entire unit or provide new units.

H. Refer to Section 077200 "Roof Accessories" for flashing and counterflashing of roof curbs.

3.2 CONNECTIONS

A. Duct installation and connection requirements are specified in Section 233113 "Metal Ducts" and Section 233116 "Nonmetal Ducts." Drawings indicate general arrangement of ducts and duct accessories.

3.3 ADJUSTING

A. Adjust damper linkages for proper damper operation.

END OF SECTION 233723

SECTION 237416.13 - PACKAGED, LARGE-CAPACITY, ROOFTOP AIR-CONDITIONING UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes packaged, large-capacity, rooftop air conditioning units (RTUs) with the following components:

1. Casings.
2. Fans, drives, and motors.
3. Coils.
4. Refrigerant circuit components.
5. Air filtration.
6. Dampers.
7. Electrical power connections.
8. Controls.
9. Accessories.

1.3 DEFINITIONS

A. RTU: Rooftop unit. As used in this Section, this abbreviation means packaged, large-capacity, rooftop air-conditioning units. This abbreviation is used regardless of whether the unit is mounted on the roof or on a concrete base on ground.

1.4 ACTION SUBMITTALS

A. Product Data: For each RTU.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Include rated capacities, dimensions, required clearances, characteristics, furnished specialties, and accessories.
3. Include unit dimensions and weight.
4. Include cabinet material, metal thickness, finishes, insulation, and accessories.
5. Fans:
    a. Include certified fan-performance curves with system operating conditions indicated.
    b. Include certified fan-sound power ratings.
    c. Include fan construction and accessories.
    d. Include motor ratings, electrical characteristics, and motor accessories.
6. Include certified coil-performance ratings with system operating conditions indicated.
7. Include filters with performance characteristics.
8. Include gas furnaces with performance characteristics.
9. Include factory selection calculations for each antimicrobial ultraviolet lamp installation.
10. Include dampers, including housings, linkages, and operators.

B. Shop Drawings: For each packaged, large-capacity, rooftop air-conditioning units.

1. Include plans, elevations, sections, and mounting details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.

1.5 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Floor plans and other details, or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.

B. Seismic Qualification Data: Certificates, for RTUs, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
4. Restraint of internal components.

C. Product Certificates: Submit certification that specified equipment will withstand wind forces identified in "Performance Requirements" Article and in Section 230548 "Vibration and Seismic Controls for HVAC."

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculations.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of wind force and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

D. Source quality-control reports.

E. System startup reports.

F. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For RTUs to include in emergency, operation, and maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Filters: One set(s) of filters for each unit.
2. Gaskets: One set(s) for each access door.
3. Fan Belts: One set(s) for each belt-driven fan.

1.8 WARRANTY

A. Warranty: Manufacturer agrees to repair or replace components of outdoor, semi-custom, air-handling unit that fail in materials or workmanship within specified warranty period.

1. Warranty Period: 1 year(s) from date of Substantial Completion.
2. Warranty Period for Compressors: Manufacturer's standard, but not less than 10 years from date of Substantial Completion

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.

B. NFPA Compliance: Comply with NFPA 90A for design, fabrication, and installation of RTUs and components.

C. Test in accordance with ASHRAE 51 / AMCA 210-2016

D. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."

E. ASHRAE 15 Compliance: For refrigeration system safety.

F. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."

G. UL Compliance: Comply with UL 1995.

H. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design mounting and restraints for RTUs, including comprehensive engineering analysis.

1. Design RTU supports to comply with wind and seismic performance requirements.

I. Wind-Restraint Performance:

1. Basic Wind Speed: Refer to Structural Drawings.
2. Building Classification Category: I II III IV.
3. Minimum 10 lb/sq. ft. multiplied by the maximum area of the mechanical component projected on a vertical plane that is normal to the wind direction, and 45 degrees either side of normal.

J. Seismic Performance: RTUs shall withstand the effects of earthquake motions determined according to ASCE 7.

1. The term "withstand" means "the unit will remain in place without separation of any parts when subjected to the seismic forces specified" and the unit will be fully operational after the seismic event.
2. Component Importance Factor: 1.5 1.0.

2.2 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Carrier Corporation; a unit of United Technologies Corp.

2. Daikin Applied.
3. Trane.

2.3 UNIT CASINGS

A. General Fabrication Requirements for Casings: Formed and reinforced double-wall insulated panels, fabricated to allow removal for access to internal parts and components, with joints between sections sealed.

B. Double-Wall Construction:

1. Outside Casing Wall: Galvanized steel , minimum 18 gauge thick with corrosion-resistant coating , with pitched roof panels and knockouts with grommet seals for electrical and piping connections and lifting lugs.
2. Inside Casing Wall: G90-coated galvanized steel, 0.034 inch thick.
3. Floor Plate: G90 galvanized steel , minimum 18 gauge thick.
4. Casing Insulation:

a. Materials: Injected polyurethane foam insulation.
b. Casing Panel K-Value: Minimum 0.167 BTU-in/ (h-ft^2-deg F) at 75 deg F.
c. Insulation Thickness: 2 inches.
d. Thermal Break: Provide continuity of insulation with no through-casing metal in casing walls, floors, or roof of unit.

C. Airstream Surfaces: Surfaces in contact with airstream shall comply with requirements in ASHRAE 62.1.

D. Static-Pressure Classifications:

1. For Unit Sections Upstream of Fans: Minus 2-inch wg.
2. For Unit Sections Downstream and Including Fans: 3-inch wg.

E. Panels and Doors:

1. Access Doors:

a. Hinges: A minimum of two ball-bearing hinges or stainless steel piano hinge and two wedge-lever-type latches, operable from inside and outside. Arrange doors to be opened against air-pressure differential.
b. Gasket: Neoprene, applied around entire perimeters of panel frames.
c. Size: Large enough to allow inspection and maintenance of air-handling unit's internal components. Dimensions to be at least 24 inches wide by full height of unit casing up to a maximum height of 60 inches.

2. Locations and Applications:

a. Fan Section: Doors.
b. Access Section: Doors.
c. Coil Section: Doors.
d. Damper Section: Doors.
e. Filter Section: Doors large enough to allow periodic removal and installation of filters.
f. Mixing Section: Doors.

3. Service Light: 100-W vaporproof fixture with switched junction box located inside adjacent to door.

a. Locations: Fan section.

F. Condensate Drain Pans:

1. Location: Each type of cooling coil.

2. Construction:

   a. Double-wall, galvanized-steel or noncorrosive polymer stainless steel sheet with space between walls filled with foam insulation and moisture-tight seal.

3. Drain Connection:

   a. Located at lowest point of pan and sized to prevent overflow. Terminate with threaded nipple on one end of pan.
   b. Minimum Connection Size: NPS 2.

4. Slope: Minimum 0.125-in./ft. slope , to comply with ASHRAE 62.1, in at least two planes to collect condensate from cooling coils (including coil piping connections, coil headers, and return bends) and from humidifiers and to direct water toward drain connection.
5. Length: Extend drain pan downstream from leaving face for distance to comply with ASHRAE 62.1.
6. Width: Entire width of water producing device.
7. Depth: A minimum of 2 inches deep.
8. Pan-Top Surface Coating for Galvanized-Steel Drain Pans: Asphaltic waterproofing compound.
9. Units with stacked coils shall have an intermediate drain pan to collect condensate from top coil.

2.4 FANS, DRIVES, AND MOTORS

A. Fan and Drive Assemblies: Statically and dynamically balanced and designed for continuous operation at maximum-rated fan speed and motor horsepower.

B. Draw through type

C. Supply-Air Fans: Centrifugal, rated according to AMCA 210; galvanized or painted steel; mounted on solid-steel shaft.

1. Shafts: With field-adjustable alignment.

   a. Turned, ground, and polished hot-rolled steel with keyway.

2. Shaft Bearings:

   a. Heavy-duty, self-aligning, pillow-block type with an L-50 rated life of minimum 100,000 hours according to ABMA 9.

3. Housings: Formed- and reinforced-steel panels to form curved scroll housings with shaped cutoff and spun-metal inlet bell.

   a. Bracing: Steel angle or channel supports for mounting and supporting fan scroll, wheel, motor, and accessories.

4. Centrifugal Fan Wheels: Inlet flange, backplate, and shallow blades with inlet and tip curved forward in direction of airflow and mechanically fastened to flange and backplate; steel or aluminum hub swaged to backplate and fastened to shaft with setscrews.
5. Shaft Lubrication Lines: Extended to a location outside the casing.
6. Flexible Connector: Factory fabricated with a fabric strip minimum 3-1/2 inches wide, attached to two strips of minimum 2-3/4-inch-wide by 0.028-inch- thick, galvanized-steel sheet.

   a. Flexible Connector Fabric: Glass fabric, double coated with neoprene. Fabrics, coatings, and adhesives shall comply with UL 181, Class 1.

D. Drives, Direct: Factory-mounted, direct drive.

E. Motors:

1. Comply with NEMA designation, temperature rating, service factor, and efficiency requirements for motors specified in Section 230513 "Common Motor Requirements for HVAC Equipment."

2. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.
3. Motor Pulleys: Adjustable pitch for use with 5 -hp motors and smaller; fixed pitch for use with motors larger than 5 hp. Select pulley size so pitch adjustment is at the middle of adjustment range at fan design conditions.
4. Controllers, Electrical Devices, and Wiring: Comply with requirements for electrical devices and connections specified in electrical Sections.

2.5 COILS

A. General Requirements for Coils:

1. Comply with AHRI 410.
2. Fabricate coils section to allow removal and replacement of coil for maintenance and to allow in-place access for service and maintenance of coil(s).
3. Coils shall not act as structural component of unit.

B. Supply-Air Refrigerant Coil:

1. Tubes: Copper.
2. Fins:
   a. Material: Aluminum.
   b. Fin Spacing: Maximum 12 fins per inch.
3. Fin and Tube Joints: Mechanical bond.
4. Headers: Seamless-copper headers with brazed connections.
5. Frames: Galvanized steel.
6. Coatings: Corrosion-resistant coating.
7. Ratings: Designed, tested, and rated according to ASHRAE 33 and AHRI 410.
   a. Working Pressure: Minimum 300 psig.

C. Electric-Resistance Heating Coils: Comply with UL 1995.

1. Casing Assembly: Flanged type with galvanized-steel frame.
2. Open Heating Elements: Resistance wire of 80 percent nickel and 20 percent chromium supported and insulated by floating ceramic bushings recessed into casing openings, fastened to supporting brackets, and mounted in galvanized-steel frame.
3. Overtemperature Protection: Disk-type, automatically resetting, thermal-cutout, safety device; serviceable through terminal box without removing heater from coil section.
4. Secondary Protection: Load-carrying, manually resetting or manually replaceable, thermal cutouts; factory wired in series with each heater stage.
5. Control Panel: Unit mounted with disconnecting means and overcurrent protection.
   a. Magnetic contactor.
   b. Solid-state, stepless pulse controller.
   c. Toggle switches, one per step.
   d. SCR controller.
   e. Time-delay relay.
   f. Pilot lights, one per step.
   g. Airflow proving switch.

2.6 REFRIGERANT CIRCUIT COMPONENTS

A. Number of Refrigerant Circuits: One.

B. Compressor: Hermetic, variable speed scroll, mounted on vibration isolators; with internal overcurrent and high-temperature protection, internal pressure relief, cylinder unloaders , compressor ambient lockout, crankcase heaters, oil sight glass, refrigerant sight glass, manually reset low oil pressure cutout, winding thermostat, Refrigerant solenoid valves.

C. Refrigeration Specialties:

1. Refrigerant: R-410A.
2. Expansion valve with replaceable thermostatic element.
3. Refrigerant filter/dryer.
4. Manual-reset high-pressure safety switch.
5. Automatic-reset low-pressure safety switch.
6. Minimum off-time relay.
7. Automatic-reset compressor motor thermal overload.
8. Brass service valves installed in compressor suction and liquid lines. These shall allow the refrigerant charge to be isolated in the condenser.
9. Low-ambient kit high-pressure sensor.
10. Hot-gas reheat solenoid valve modulating with a replaceable magnetic coil.
11. Hot-gas bypass solenoid valve with a replaceable magnetic coil.
12. Four-way reversing valve with a replaceable magnetic coil, thermostatic expansion valves with bypass check valves, and a suction line accumulator.

2.7 AIR FILTRATION

A. Particulate air filtration is specified in Section 234100 "Particulate Air Filtration."

2.8 DAMPERS

A. Dampers: Comply with requirements in Section 230923.12 "Control Dampers."

B. Outdoor- and Return-Air Dampers: Low-leakage, double-skin, airfoil-blade, galvanized-steel dampers with compressible jamb seals and extruded-vinyl blade edge seals in parallel-blade arrangement with zinc-plated steel operating rods rotating in sintered bronze or nylon bearings mounted in a single galvanized-steel frame, and with operating rods connected with a common linkage. Leakage rate shall not exceed 4 cfm/sq. ft. at 1-inch wg and 8 cfm/sq. ft. at 4-inch wg

C. Damper Operators: Comply with requirements in Section 230923.12 "Control Dampers."

2.9 ELECTRICAL POWER CONNECTIONS

A. RTU shall have a single connection of power to unit with unit-mounted disconnect switch accessible from outside unit and control-circuit transformer with built-in overcurrent protection.

2.10 ACCESSORIES

A. Duplex, 115-V, ground-fault-interrupter outlet with 15-A overcurrent protection. Include transformer if required. Outlet shall be energized even if the unit main disconnect is open.

B. Low-ambient kit using variable-speed condenser fans for operation down to 35 deg F.

C. Filter differential pressure switch with sensor tubing on either side of filter. Set for final filter pressure loss.

D. Remote potentiometer to adjust minimum economizer damper position.

E. Return-air bypass damper.

F. Factory- or field-installed demand-controlled ventilation.

G. Safeties:

1. Smoke detector.
2. Condensate overflow switch.
3. Phase-loss reversal protection.
4. High and low pressure control.
5. Electric coil airflow-proving switch.

H. Outdoor air intake weather hood with moisture eliminator.

I. Service Lights and Switch: Factory installed in fan and coil sections with weatherproof cover. Factory wire lights to a single-point field connection.

2.11 MATERIALS

A. Galvanized Steel: ASTM A653/A653M.

B. Corrosion-Resistant Coating: Coat with a corrosion-resistant coating capable of withstanding a 3000 -hour salt-spray test according to ASTM B117.

1. Standards:

a. ASTM B117 for salt spray.
b. ASTM D2794 for minimum impact resistance of 100 in-lb.
c. ASTM B3359 for cross-hatch adhesion of 5B.

2. Application: Immersion.
3. Thickness: 1 mil.
4. Gloss: Minimum gloss of 60 on a 60-degree meter.

2.12 SOURCE QUALITY CONTROL

A. AHRI Compliance:

1. Comply with AHRI 340/360 for testing and rating energy efficiencies for RTUs.
2. Comply with AHRI 210/240 for testing and rating energy efficiencies for RTUs
3. Comply with AHRI 270 for testing and rating sound performance for RTUs.
4. Comply with AHRI 1060 for testing and rating performance for air-to-air exchanger.

B. AMCA Compliance:

1. Comply with AMCA 11 and bear the AMCA-Certified Ratings Seal for air and sound performance according to AMCA 211 and AMCA 311.
2. Damper leakage tested in accordance with AMCA 500-D.
3. Operating Limits: Classify according to AMCA 99.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of RTUs.

B. Examine roughing-in for RTUs to verify actual locations of piping and duct connections before equipment installation.

C. Examine roofs for suitable conditions where RTUs will be installed.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Unit Support: Install unit level on structural curbs steel supports. Coordinate wall penetrations and flashing with wall construction. Secure RTUs to structural support with anchor bolts.

B. Equipment Mounting:

1. Comply with requirements for vibration isolation devices specified in Section 230548.13 "Vibration Controls for HVAC."

3.3 PIPING CONNECTIONS

A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to RTU, allow space for service and maintenance.

C. Connect condensate drain pans using NPS 1-1/4 , ASTM B88, Type M copper tubing. Extend to nearest equipment or roof drain. Construct deep trap at connection to drain pan and install cleanouts at changes in direction.

3.4 DUCT CONNECTIONS

A. Comply with duct installation requirements specified in other HVAC Sections. Drawings indicate the general arrangement of ducts. The following are specific connection requirements:

1. Install ducts to termination at top of roof curb.

3.5 ELECTRICAL CONNECTIONS

A. Connect electrical wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, according to NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate shall be laminated acrylic or melamine plastic signs as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate shall be laminated acrylic or melamine plastic signs as layers of black with engraved white letters at least 1/2 inch high.
3. Locate nameplate where easily visible.

3.6 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring according to Section 260523 "Control-Voltage Electrical Power Cables."

3.7 STARTUP SERVICE

A. Engage a factory-authorized service representative to perform startup service.

B. Complete installation and startup checks according to manufacturer's written instructions.

1. Inspect for visible damage to unit casing.
2. Inspect for visible damage to compressor, coils, and fans.
3. Inspect internal insulation.
4. Verify that labels are clearly visible.
5. Verify that clearances have been provided for servicing.
6. Verify that controls are connected and operable.
7. Verify that filters are installed.
8. Clean condenser coil and inspect for construction debris.
9. Remove packing from vibration isolators.
10. Verify lubrication on fan and motor bearings.
11. Inspect fan-wheel rotation for movement in correct direction without vibration and binding.
12. Start unit according to manufacturer's written instructions.
    a. Start refrigeration system.
    b. Do not operate below recommended low-ambient temperature.
    c. Complete startup sheets and attach copy with Contractor's startup report.
13. Inspect and record performance of interlocks and protective devices; verify sequences.
14. Operate unit for an initial period as recommended or required by manufacturer.
15. Calibrate thermostats.
16. Adjust and inspect high-temperature limits.
17. Inspect outdoor-air dampers for proper stroke and interlock with return-air dampers.
18. Start refrigeration system and measure and record the following when ambient is a minimum of 15 deg F above return-air temperature:
    a. Coil leaving-air, dry- and wet-bulb temperatures.
    b. Coil entering-air, dry- and wet-bulb temperatures.
    c. Outdoor-air, dry-bulb temperature.
    d. Outdoor-air-coil, discharge-air, dry-bulb temperature.
19. Inspect controls for correct sequencing of heating, mixing dampers, refrigeration, and normal and emergency shutdown.
20. Measure and record the following minimum and maximum airflows. Plot fan volumes on fan curve.
    a. Supply-air volume.
    b. Return-air volume.
    c. Outdoor-air intake volume.
21. Simulate maximum cooling demand and inspect the following:
    a. Compressor refrigerant suction and hot-gas pressures.
    b. Short circuiting of air through condenser coil or from condenser fans to outdoor-air intake.
22. Verify operation of remote panel and failure modes. Inspect the following:
    a. Low-temperature safety operation.
    b. Filter high-pressure differential alarm.
    c. Economizer to minimum outdoor-air changeover.

d. Smoke and firestat alarms.

23. After startup and performance testing and prior to Substantial Completion, replace existing filters with new filters.

3.8 ADJUSTING

A. Adjust damper linkages for proper damper operation.

B. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC" for air-handling system testing, adjusting, and balancing.

C. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.9 CLEANING

A. After completing system installation and testing, adjusting, and balancing RTUs and air-distribution systems and after completing startup service, clean RTUs internally to remove foreign material and construction dirt and dust. Clean fan wheels, cabinets, dampers, coils, and filter housings, and install new, clean filters.

3.10 FIELD QUALITY CONTROL

A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

B. RTU will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

3.11 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain RTUs.

END OF SECTION 237416.13

This page intentionally left blank.

SECTION 238126 - SPLIT-SYSTEM AIR-CONDITIONERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes split-system air-conditioning and heat-pump units consisting of separate evaporator-fan and compressor-condenser components.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product indicated. Include rated capacities, operating characteristics, and furnished specialties and accessories. Include performance data in terms of capacities, outlet velocities, static pressures, sound power characteristics, motor requirements, and electrical characteristics.

B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
2. Wiring Diagrams: For power, signal, and control wiring.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For split-system air-conditioning units to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. ASHRAE Compliance:

1. Fabricate and label refrigeration system to comply with ASHRAE 15, "Safety Standard for Refrigeration Systems."
2. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 4 - "Outdoor Air Quality," Section 5 - "Systems and Equipment," Section 6 - " Procedures," and Section 7 - "Construction and System Start-up."

C. ASHRAE/IES Compliance: Applicable requirements in ASHRAE/IES 90.1.

1.6 COORDINATION

A. Coordinate sizes and locations of concrete bases with actual equipment provided. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork are specified in Section 033000 "Cast-in-Place Concrete."

B. Coordinate sizes and locations of roof curbs, equipment supports, and roof penetrations with actual equipment provided.

1.7 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of split-system air-conditioning units that fail in materials or workmanship within specified warranty period.

1. Warranty Period:

a. For Compressor: Five year(s) from date of Substantial Completion.
b. For Parts: Five year(s) from date of Substantial Completion.
c. For Labor: Five year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Daikin.
2. Mitsubishi Electric & Electronics USA, Inc.
3. Trane.

2.2 INDOOR UNITS (5 TONS OR LESS)

A. Wall-Mounted, Evaporator-Fan Components:

1. Cabinet: Enameled steel with removable panels on front and ends in color selected by Architect, and discharge drain pans with drain connection.
2. Refrigerant Coil: Copper tube, with mechanically bonded aluminum fins and thermal-expansion valve. Comply with ARI 206/110.
3. Fan: Direct drive, centrifugal.
4. Fan Motors:

a. Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements specified in Section 230513 "Common Motor Requirements for HVAC Equipment."
b. Multitapped, multispeed with internal thermal protection and permanent lubrication.
c. Enclosure Type: Totally enclosed, fan cooled.
d. NEMA Premium (TM) efficient motors as defined in NEMA MG 1.
e. Controllers, Electrical Devices, and Wiring: Comply with requirements for electrical devices and connections specified in electrical Sections.
f. Mount unit-mounted disconnect switches on exterior of unit.

5. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.
6. Condensate Drain Pans:

a. Fabricated with one percent slope in at least two planes to collect condensate from cooling coils (including coil piping connections, coil headers, and return bends) and humidifiers, and to direct water toward drain connection.

1) Length: Extend drain pan downstream from leaving face to comply with ASHRAE 62.1.
2) Depth: A minimum of 1 inch deep.

b. Double-wall, stainless-steel sheet with space between walls filled with foam insulation and moisture-tight seal.
c. Drain Connection: Located at lowest point of pan and sized to prevent overflow. Terminate with threaded nipple on one end of pan.
d. Pan-Top Surface Coating: Asphaltic waterproofing compound.

7. Air Filtration Section:

a. General Requirements for Air Filtration Section:

1) Comply with NFPA 90A.
2) Minimum MERV according to ASHRAE 52.2.
3) Filter-Holding Frames: Arranged for flat or angular orientation, with access doors on both sides of unit. Filters shall be removable from one side or lifted out from access plenum.

b. Disposable Panel Filters:

1) Factory-fabricated, viscous-coated, flat-panel type.
2) Thickness: 1 inch.
3) MERV according to ASHRAE 52.2: 8.
4) Media: Interlaced glass fibers sprayed with nonflammable adhesive.
5) Frame: Galvanized steel, with metal grid on outlet side, steel rod grid on inlet side, and hinged; with pull and retaining handles.

2.3 OUTDOOR UNITS (5 TONS OR LESS)

A. Air-Cooled, Compressor-Condenser Components:

1. Casing: Steel, finished with baked enamel in color selected by Architect, with removable panels for access to controls, weep holes for water drainage, and mounting holes in base. Provide brass service valves, fittings, and gage ports on exterior of casing.
2. Compressor: Hermetically sealed with crankcase heater and mounted on vibration isolation device. Compressor motor shall have thermal- and current-sensitive overload devices, start capacitor, relay, and contactor.

a. Compressor Type: Scroll.
b. Two-speed compressor motor with manual-reset high-pressure switch and automatic-reset low-pressure switch.
c. Refrigerant: R-410A.
d. Refrigerant Coil: Copper tube, with mechanically bonded aluminum fins and liquid subcooler. Comply with ARI 206/110.

3. Fan: Aluminum-propeller type, directly connected to motor.
4. Motor: Permanently lubricated, with integral thermal-overload protection.
5. Low Ambient Kit: Permits operation down to 32 deg F.
6. Mounting Base: Polyethylene.

2.4 ACCESSORIES

A. Thermostat: Low voltage with subbase to control compressor and evaporator fan.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install units level and plumb.

B. Install evaporator-fan components using manufacturer's standard mounting devices securely fastened to building structure.

C. Equipment Mounting:

1. Install ground-mounted, compressor-condenser components on cast-in-place concrete equipment base(s). Comply with requirements for equipment bases and foundations specified in Section 033000 "Cast-in-Place Concrete."
2. Comply with requirements for vibration isolation devices specified in Section 230548.13 "Vibration Controls for HVAC."

D. Install and connect precharged refrigerant tubing to component's quick-connect fittings. Install tubing to allow access to unit.

3.2 CONNECTIONS

A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where piping is installed adjacent to unit, allow space for service and maintenance of unit.

3.3 STARTUP SERVICE

A. Perform startup service.
1. Complete installation and startup checks according to manufacturer's written instructions.

END OF SECTION 238126

SECTION 238239.13 - CABINET UNIT HEATERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes cabinet unit heaters with centrifugal fans and electric-resistance heating coils.

1.3 DEFINITIONS

A. CWP: Cold working pressure.

B. DDC: Direct digital control.

C. PTFE: Polytetrafluoroethylene plastic.

D. TFE: Tetrafluoroethylene plastic.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include rated capacities, operating characteristics, furnished specialties, and accessories.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For cabinet unit heaters to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Berko; Marley Engineered Products.
2. Carrier Corporation.
3. INDEECO.
4. Markel Products; TPI Corporation.
5. QMark; Marley Engineered Products.
6. Trane.

2.2 DESCRIPTION

A. Factory-assembled and -tested unit complying with AHRI 440.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

C. Comply with UL 2021.

2.3 PERFORMANCE REQUIREMENTS

A. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."

2.4 CABINETS

A. Material: Steel with baked-enamel finish with manufacturer's standard paint, in color selected by Architect.

2.5 COILS

A. Electric-Resistance Heating Coil: Nickel-chromium heating wire, free from expansion noise and hum, mounted in ceramic inserts in galvanized-steel housing; with fuses in terminal box for overcurrent protection and limit controls for high-temperature protection. Terminate elements in stainless-steel machine-staked terminals secured with stainless-steel hardware.

2.6 CONTROLS

A. Basic Unit Controls:

1. Unit-mounted thermostat with the following features:

a. Concealed set point.

B. Electrical Connection: Factory-wired motors and controls for a single field connection.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas to receive cabinet unit heaters for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for electrical connections to verify actual locations before unit-heater installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install wall boxes in finished wall assembly; seal and weatherproof. Joint-sealant materials and applications are specified in Section 079200 "Joint Sealants."

B. Install cabinet unit heaters to comply with NFPA 90A.

3.3 CONNECTIONS

A. Comply with safety requirements in UL 1995.

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

END OF SECTION 238239.13

This page intentionally left blank.

SECTION 238239.16 - PROPELLER UNIT HEATERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes propeller unit heaters with electric-resistance heating coils.

1.3 DEFINITIONS

A. CWP: Cold working pressure.

B. PTFE: Polytetrafluoroethylene plastic.

C. TFE: Tetrafluoroethylene plastic.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include rated capacities, operating characteristics, furnished specialties, and accessories.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For propeller unit heaters to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Airtherm; a Mestek company.
2. CCI Thermal Technologies, Inc.
3. Engineered Air.
4. Rosemex Products.
5. Trane.

2.2 DESCRIPTION

A. Assembly including casing, coil, fan, and motor in vertical and horizontal discharge configuration with adjustable discharge louvers.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

C. Comply with UL 2021.

D. Comply with UL 823.

2.3 HOUSINGS

A. Finish: Manufacturer's custom baked enamel applied to factory-assembled and -tested propeller unit heaters before shipping.

B. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.

C. Discharge Louver: Adjustable fin diffuser for horizontal units and conical diffuser for vertical units.

2.4 COILS

A. General Coil Requirements: Test and rate propeller unit-heater coils according to ASHRAE 33.

B. Electric-Resistance Heating Coil: Nickel-chromium heating wire, free from expansion noise and 60-Hz hum, embedded in magnesium oxide refractory and sealed in steel or corrosion-resistant metallic sheath with fins no closer than 0.16 inch. Element ends shall be enclosed in terminal box. Fin surface temperature shall not exceed 550 deg F at any point during normal operation.

1. Circuit Protection: One-time fuses in terminal box for overcurrent protection and limit controls for high-temperature protection of heaters.
2. Wiring Terminations: Stainless-steel or corrosion-resistant material.

2.5 FAN AND MOTOR

A. Fan: Propeller type with aluminum wheel directly mounted on motor shaft in the fan venturi.

B. Motor: Permanently lubricated, explosion proof multispeed. Comply with requirements in Section 230513 "Common Motor Requirements for HVAC Equipment."

2.6 CONTROLS

A. Control Devices:

1. Unit -mounted, fan-speed switch.
2. Wall-mounted thermostat.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas to receive propeller unit heaters for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for electrical connections to verify actual locations before unit-heater installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install propeller unit heaters to comply with NFPA 90A.

B. Install propeller unit heaters level and plumb.

C. Suspend propeller unit heaters from structure with all-thread hanger rods and spring hangers with vertical-limit stop. Hanger rods and attachments to structure are specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment." Vibration hangers are specified in Section 230548.13 "Vibration Controls for HVAC."

D. Install wall-mounted thermostats and switch controls in electrical outlet boxes at heights to match lighting controls. Verify location of thermostats and other exposed control sensors with Drawings and room details before installation.

3.3 CONNECTIONS

A. Comply with safety requirements in UL 1995.

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

3.4 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
2. Operate electric heating elements through each stage to verify proper operation and electrical connections.
3. Test and adjust controls and safety devices. Replace damaged and malfunctioning controls and equipment.

B. Units will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports.

3.5 ADJUSTING

A. Adjust initial temperature set points.

B. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.6 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain propeller unit heaters.

END OF SECTION 238239.16

This page intentionally left blank.

SECTION 260010 - SUPPLEMENTAL REQUIREMENTS FOR ELECTRICAL

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Supplemental requirements applicable to Work specified in Division 26.

1.2 REFERENCES

A. Abbreviations and Acronyms for Electrical Terms and Units of Measure:

1. 8PSJ or 8P8C: Miniature 8-position series jack, also called an 8-position 8-contact modular jack for some applications.
2. A: Ampere, unit of electrical current.
3. AC or ac: Alternating current.
4. AFCI: Arc-fault circuit interrupter.
5. AIC: Ampere interrupting capacity.
6. AL, Al, or ALUM: Aluminum.
7. ASD: Adjustable-speed drive.
8. ATS: Automatic transfer switch.
9. AWG: American wire gauge; see ASTM B258.
10. BAS: Building automation system.
11. BIL: Basic impulse insulation level.
12. BIM: Building information modeling.
13. CAD: Computer-aided design or drafting.
14. CATV: Community antenna television.
15. CB: Circuit breaker.
16. CO/ALR: Copper-aluminum, revised.
17. CU or Cu: Copper.
18. CU-AL or AL-CU: Copper-aluminum.
19. dB: Decibel, a unitless logarithmic ratio of two electrical, acoustical, or optical power values.
20. dB(A-weighted) or dB(A): Decibel acoustical sound pressure level with A-weighting applied in accordance with IEC 61672-1.
21. dB(adjusted) or dBa: Decibel weighted absolute noise power with respect to 3.16 pW (minus 85 dBm).
22. dBm: Decibel absolute power with respect to 1 mW.
23. DC or dc: Direct current.
24. DCOA: Designated critical operations area.
25. DDC: Direct digital control (HVAC).
26. EGC: Equipment grounding conductor.
27. EMF: Electromotive force.
28. EMI: Electromagnetic interference.
29. EPM: Electrical preventive maintenance.
30. EPS: Emergency power supply.
31. EPSS: Emergency power supply system.
32. ESS: Energy storage system.
33. EV: Electric vehicle.
34. EVPE: Electric vehicle power export equipment.
35. EVSE: Electric vehicle supply equipment.
36. fc: Footcandle, a unit of illuminance equal to one lumen per square foot.
37. FLC: Full-load current.
38. ft: Foot.

39. GEC: Grounding electrode conductor.
40. GFCI: Ground-fault circuit interrupter.
41. GFPE: Ground-fault protection of equipment.
42. GND: Ground.
43. HACR: Heating, air conditioning, and refrigeration.
44. HDPE: High-density polyethylene.
45. HID: High-intensity discharge.
46. HP or hp: Horsepower.
47. HVAC: Heating, ventilating, and air conditioning.
48. Hz: Hertz.
49. IBT: Intersystem bonding termination.
50. inch: Inch. To avoid confusion, the abbreviation "in." is Not Applicable.
51. IP: Ingress protection rating (enclosures); Internet protocol (communications).
52. IR: Infrared.
53. IS: Intrinsically safe.
54. IT&R: Inspecting, testing, and repair.
55. ITE: Information technology equipment.
56. kAIC: Kiloampere interrupting capacity.
57. kcmil or MCM: One thousand circular mils.
58. kV: Kilovolt.
59. kVA: Kilovolt-ampere.
60. kVAr or kVAR: Kilovolt-ampere reactive.
61. kW: Kilowatt.
62. kWh: Kilowatt-hour.
63. LAN: Local area network.
64. lb: Pound (weight).
65. LCD: Liquid-crystal display.
66. LCDI: Leakage-current detector-interrupter.
67. LED: Light-emitting diode.
68. LNG: Liquefied natural gas.
69. LP-Gas: Liquefied petroleum gas.
70. LRC: Locked-rotor current.
71. MCC: Motor-control center.
72. MG set: Motor-generator set.
73. MLO: Main lugs only.
74. MVA: Megavolt-ampere.
75. mW: Milliwatt.
76. MW: Megawatt.
77. MWh: Megawatt-hour.
78. NC: Normally closed.
79. NiCd: Nickel cadmium.
80. NIU: Network interface unit.
81. NO: Normally open.
82. NPT: National (American) standard pipe taper.
83. OCPD: Overcurrent protective device.
84. ONT: Optical network terminal.
85. PC: Personal computer.
86. PCS: Power conversion system.
87. PCU: Power-conditioning unit.
88. PF or pf: Power factor.
89. PHEV: Plug-in hybrid electric vehicle.
90. PLC: Programmable logic controller.
91. PLFA: Power-limited fire alarm.
92. PoE: Power over Ethernet.
93. PV: Photovoltaic.
94. PVC: Polyvinyl chloride.

95. pW: Picowatt.
96. RFI: Radio-frequency interference (electrical); Request for interpretation (contract).
97. RMS or rms: Root-mean-square.
98. RPM or rpm: Revolutions per minute.
99. SCADA: Supervisory control and data acquisition.
100. SCR: Silicon-controlled rectifier.
101. SPD: Surge protective device.
102. sq.: Square.
103. SWD: Switching duty.
104. TCP/IP: Transmission control protocol/Internet protocol.
105. TEFC: Totally enclosed fan-cooled.
106. TR: Tamper resistant.
107. TVSS: Transient voltage surge suppressor.
108. UL: Underwriters Laboratories, Inc. (standards) or UL LLC (services).
109. UL CCN: UL Category Control Number.
110. UPS: Uninterruptible power supply.
111. USB: Universal serial bus.
112. UV: Ultraviolet.
113. V: Volt, unit of electromotive force.
114. V(ac): Volt, alternating current.
115. V(dc): Volt, direct current.
116. VA: Volt-ampere, unit of complex electrical power.
117. VAr: Volt-ampere reactive, unit of reactive electrical power.
118. VFC: Variable-frequency controller.
119. VOM: Volt-ohm-multimeter.
120. VPN: Virtual private network.
121. VRLA: Valve-regulated lead acid.
122. W: Watt, unit of real electrical power.
123. Wh: Watt-hour, unit of electrical energy usage.
124. WPT: Wireless power transfer.
125. WPTE: Wireless power transfer equipment.
126. WR: Weather resistant.

B. Abbreviations and Acronyms for Electrical Raceway Types:

1. EMT: Electrical metallic tubing.
2. EMT-A: Aluminum electrical metallic tubing.
3. EMT-S: Steel electrical metallic tubing.
4. EMT-SS: Stainless steel electrical metallic tubing.
5. ENT: Electrical nonmetallic tubing.
6. EPEC: Electrical HDPE underground conduit.
7. EPEC-40: Schedule 40 electrical HDPE underground conduit.
8. EPEC-80: Schedule 80 electrical HDPE underground conduit.
9. EPEC-A: Type A electrical HDPE underground conduit.
10. EPEC-B: Type B electrical HDPE underground conduit.
11. ERMC: Electrical rigid metal conduit.
12. ERMC-A: Aluminum electrical rigid metal conduit.
13. ERMC-S: Steel electrical rigid metal conduit.
14. ERMC-S-G: Galvanized-steel electrical rigid metal conduit.
15. ERMC-S-PVC: PVC-coated-steel electrical rigid metal conduit.
16. ERMC-SS: Stainless steel electrical rigid metal conduit.
17. FMC: Flexible metal conduit.
18. FMC-A: Aluminum flexible metal conduit.
19. FMC-S: Steel flexible metal conduit.
20. FMT: Steel flexible metallic tubing.
21. FNMC: Flexible nonmetallic conduit. See LFNC.

22. HDPE: See EPEC.
23. IMC: Steel electrical intermediate metal conduit.
24. LFMC: Liquidtight flexible metal conduit.
25. LFMC-A: Aluminum liquidtight flexible metal conduit.
26. LFMC-S: Steel liquidtight flexible metal conduit.
27. LFMC-SS: Stainless steel liquidtight flexible metal conduit.
28. LFNC: Liquidtight flexible nonmetallic conduit.
29. LFNC-A: Layered (Type A) liquidtight flexible nonmetallic conduit.
30. LFNC-B: Integral (Type B) liquidtight flexible nonmetallic conduit.
31. LFNC-C: Corrugated (Type C) liquidtight flexible nonmetallic conduit.
32. PVC: Rigid PVC conduit.
33. PVC-40: Schedule 40 rigid PVC conduit.
34. PVC-80: Schedule 80 rigid PVC Conduit.
35. PVC-A: Type A rigid PVC concrete-encased conduit.
36. PVC-EB: Type EB rigid PVC concrete-encased underground conduit.
37. RGS: See ERMC-S-G.
38. RMC: See ERMC.
39. RTRC: Reinforced thermosetting resin conduit.
40. RTRC-AG: Low-halogen, aboveground reinforced thermosetting resin conduit.
41. RTRC-AG-HW: Heavy wall, low-halogen, aboveground reinforced thermosetting resin conduit.
42. RTRC-AG-SW: Standard wall, low-halogen, aboveground reinforced thermosetting resin conduit.
43. RTRC-AG-XW: Extra heavy wall, low-halogen, aboveground reinforced thermosetting resin conduit.
44. RTRC-BG: Low-halogen, belowground reinforced thermosetting resin conduit.

C. Abbreviations and Acronyms for Electrical Cable Types:

1. AC: Armored cable.
2. CATV: Coaxial general-purpose cable.
3. CATVP: Coaxial plenum cable.
4. CATVR: Coaxial riser cable.
5. CI: Circuit integrity cable.
6. CL2: Class 2 cable.
7. CL2P: Class 2 plenum cable.
8. CL2R: Class 2 riser cable.
9. CL2X: Class 2 cable, limited use.
10. CL3: Class 3 cable.
11. CL3P: Class 3 plenum cable.
12. CL3R: Class 3 riser cable.
13. CL3X: Class 3 cable, limited use.
14. CM: Communications general-purpose cable.
15. CMG: Communications general-purpose cable.
16. CMP: Communications plenum cable.
17. CMR: Communications riser cable.
18. CMUC: Under-carpet communications wire and cable.
19. CMX: Communications cable, limited use.
20. DG: Distributed generation cable.
21. FC: Flat cable.
22. FCC: Flat conductor cable.
23. FPL: Power-limited fire-alarm cable.
24. FPLP: Power-limited fire-alarm plenum cable.
25. FPLR: Power-limited fire-alarm riser cable.
26. IGS: Integrated gas spacer cable.
27. ITC: Instrumentation tray cable.
28. ITC-ER: Instrumentation tray cable, exposed run.
29. MC: Metal-clad cable.

30. MC-HL: Metal-clad cable, hazardous location.
31. MI: Mineral-insulated, metal-sheathed cable.
32. MTW: Moisture-, heat-, and oil-resistant thermoplastic cable (machine tool wiring).
33. MV: Medium-voltage cable.
34. NM: Nonmetallic sheathed cable.
35. NMC: Nonmetallic sheathed cable with corrosion-resistant nonmetallic jacket.
36. NMS: Nonmetallic sheathed cable with signaling, data, and communications conductors, plus power or control conductors.
37. NPLF: Non-power-limited fire-alarm circuit cable.
38. NPLFP: Non-power-limited fire-alarm circuit cable for environmental air spaces.
39. NPLFR: Non-power-limited fire-alarm circuit riser cable.
40. NUCC: Nonmetallic underground conduit with conductors.
41. OFC: Conductive optical fiber general-purpose cable.
42. OFCG: Conductive optical fiber general-purpose cable.
43. OFCP: Conductive optical fiber plenum cable.
44. OFCR: Conductive optical fiber riser cable.
45. OFN: Nonconductive optical fiber general-purpose cable.
46. OFNG: Nonconductive optical fiber general-purpose cable.
47. OFNP: Nonconductive optical fiber plenum cable.
48. OFNR: Nonconductive optical fiber riser cable.
49. P: Marine shipboard cable.
50. PLTC: Power-limited tray cable.
51. PLTC-ER: Power-limited tray cable, exposed run.
52. PV: Photovoltaic cable.
53. RHH: Thermoset rubber, heat-resistant cable (high heat).
54. RHW: Thermoset rubber, moisture-resistant cable.
55. SA: Silicone rubber cable.
56. SE: Service-entrance cable.
57. SER: Service-entrance cable, round.
58. SEU: Service-entrance cable, flat.
59. SIS: Thermoset cable for switchboard and switchgear wiring.
60. TBS: Thermoplastic cable with outer braid.
61. TC: Tray cable.
62. TC-ER: Tray cable, exposed run.
63. TC-ER-HL: Tray cable, exposed run, hazardous location.
64. THW: Thermoplastic, heat- and moisture-resistant cable.
65. THHN: Thermoplastic, heat-resistant cable with nylon jacket outer sheath.
66. THHW: Thermoplastic, heat- and moisture-resistant cable.
67. THWN: Thermoplastic, moisture- and heat-resistant cable with nylon jacket outer sheath.
68. TW: Thermoplastic, moisture-resistant cable.
69. UF: Underground feeder and branch-circuit cable.
70. USE: Underground service-entrance cable.
71. XHH: Cross-linked polyethylene, heat-resistant cable.
72. XHHW: Cross-linked polyethylene, heat- and moisture-resistant cable.

D. Definitions:

1. Basic Impulse Insulation Level: Reference insulation level expressed in impulse crest voltage with a standard wave not longer than 1.5 times 50 microseconds and 1.5 times 40 microseconds.
2. Communications Jack: A fixed connecting device designed for insertion of a communications cable plug.
3. Communications Outlet: One or more communications jacks, or cables and plugs, mounted in a box or ring, with a suitable protective cover.
4. Designated Seismic System: A system component that requires design in accordance with ASCE/SEI 7, Ch. 13 and for which the Component Importance Factor is greater than 1.0.
5. Direct Buried: Installed underground without encasement in concrete or other protective material.

6. Enclosure: The case or housing of an apparatus, or the fence or wall(s) surrounding an installation, to prevent personnel from accidentally contacting energized parts or to protect the equipment from physical damage. Types of enclosures and enclosure covers include the following:
    a. Cabinet: An enclosure that is designed for either surface mounting or flush mounting and is provided with a frame, mat, or trim in which a swinging door or doors are or can be hung.
    b. Concrete Box: A box intended for use in poured concrete.
    c. Conduit Body: A means for providing access to the interior of a conduit or tubing system through one or more removable covers at a junction or terminal point. In the United States, conduit bodies are listed in accordance with outlet box requirements.
    d. Conduit Box: A box having threaded openings or knockouts for conduit, EMT, or fittings.
    e. Cutout Box: An enclosure designed for surface mounting that has swinging doors or covers secured directly to and telescoping with the walls of the enclosure.
    f. Device Box: A box with provisions for mounting a wiring device directly to the box.
    g. Extension Ring: A ring intended to extend the sides of an outlet box or device box to increase the box depth, volume, or both.
    h. Floor Box: A box mounted in the floor intended for use with a floor box cover and other components to complete the floor box enclosure.
    i. Floor-Mounted Enclosure: A floor box and floor box cover assembly with means to mount in the floor that is sealed against the entrance of scrub water at the floor level.
    j. Floor Nozzle: An enclosure used on a wiring system, intended primarily as a housing for a receptacle, provided with a means, such as a collar, for surface-mounting on a floor, which may or may not include a stem to support it above the floor level, and is sealed against the entrance of scrub water at the floor level.
    k. Junction Box: A box with a blank cover that joins different runs of raceway or cable and provides space for connection and branching of the enclosed conductors.
    l. Outlet Box: A box that provides access to a wiring system having pryout openings, knockouts, threaded entries, or hubs in either the sides or the back, or both, for the entrance of conduit, conduit or cable fittings, or cables, with provisions for mounting an outlet box cover, but without provisions for mounting a wiring device directly to the box.
    m. Pedestal Floor Box Cover: A floor box cover that, when installed as intended, provides a means for typically vertical or near-vertical mounting of receptacle outlets above the floor's finished surface.
    n. Pull Box: A box with a blank cover that joins different runs of raceway and provides access for pulling or replacing the enclosed cables or conductors.
    o. Raised-Floor Box: A floor box intended for use in raised floors.
    p. Recessed Access Floor Box: A floor box with provisions for mounting wiring devices below the floor surface.
    q. Recessed Access Floor Box Cover: A floor box cover with provisions for passage of cords to recessed wiring devices mounted within a recessed floor box.
    r. Ring: A sleeve, which is not necessarily round, used for positioning a recessed wiring device flush with the plaster, concrete, drywall, or other wall surface.
    s. Ring Cover: A box cover, with raised center portion to accommodate a specific wall or ceiling thickness, for mounting wiring devices or luminaires flush with the surface.
    t. Termination Box: An enclosure designed for installation of termination base assemblies consisting of bus bars, terminal strips, or terminal blocks with provision for wire connectors to accommodate incoming or outgoing conductors, or both.
7. Emergency Systems: Those systems legally required and classed as emergency by municipal, state, federal, or other codes, or by any governmental agency having jurisdiction that are designed to ensure continuity of lighting, electrical power, or both, to designated areas and equipment in the event of failure of the normal supply for safety to human life.
8. Essential Electrical Systems: Those systems designed to ensure continuity of electrical power to designated areas and functions of a healthcare facility during disruption of normal power sources, and also to minimize disruption within the internal wiring system. (healthcare facilities)
9. High-Performance Building: A building that integrates and optimizes on a life-cycle basis all major high-performance attributes, including energy conservation, environment, safety, security,

durability, accessibility, cost-benefit, productivity, sustainability, functionality, and operational considerations.

10. Jacket: A continuous nonmetallic outer covering for conductors or cables.
11. Luminaire: A complete lighting unit consisting of a light source such as a lamp, together with the parts designed to position the light source and connect it to the power supply. It may also include parts to protect the light source or the ballast or to distribute the light.
12. Miniature 8-Position Series Jack (8PSJ): Also called an 8-position 8-contact (8P8C) modular jack. An unkeyed jack with up to eight contacts commonly used to terminate twisted-pair and multiconductor Ethernet cable. Shape and dimensions are specified by TIA-1096.

    a. Caution: An 8PSJ is not the same thing as an FCC "registered jack" RJ45S, now called a miniature 8-position keyed jack (8PKJ). Ethernet cable plugs do not have rejection keys. Many manufacturers and suppliers incorrectly use "RJ45" as a generic term to describe any 8-position series plug or jack whether it has a rejection key or not.

13. Mode: The terms "Active Mode," "Off Mode," and "Standby Mode" are used as defined in the Energy Independence and Security Act (EISA) of 2007.
14. Multi-Outlet Assembly: A type of surface, flush, or freestanding raceway designed to hold conductors, receptacles, and switches, assembled in the field or at the factory.
15. Plenum: A compartment or chamber to which one or more air ducts are connected and that forms part of the air distribution system.
16. Receptacle: A fixed connecting device arranged for insertion of a power cord plug. Also called a power jack.
17. Receptacle Outlet: One or more receptacles mounted in a box with a suitable protective cover.
18. Sheath: A continuous metallic covering for conductors or cables.
19. UL Category Control Number: An alphabetic or alphanumeric code used to identify product categories covered by UL's Listing, Classification, and Recognition Services.
20. Voltage Class: For specified circuits and equipment, voltage classes are defined as follows:

    a. Control Voltage: Having electromotive force between any two conductors, or between a single conductor and ground, that is supplied from a battery or other Class 2 or Class 3 power-limited source.
    b. Line Voltage: (1) (controls) Designed to operate using the supplied low-voltage power without transformation. (2) (transmission lines, transformers, SPDs) The line-to-line voltage of the supplying power system.
    c. Extra-Low Voltage: Not having electromotive force between any two conductors, or between a single conductor and ground, exceeding 30 V(ac rms), 42 V(ac peak), or 60 V(dc).
    d. Low Voltage: Having electromotive force between any two conductors, or between a single conductor and ground, that is rated above 30 V but not exceeding 1000 V.
    e. Medium Voltage: Having electromotive force between any two conductors, or between a single conductor and ground, that is rated about 1 kV but not exceeding 69 kV.
    f. High Voltage: (1) (circuits) Having electromotive force between any two conductors, or between a single conductor and ground, that is rated above 69 kV but not exceeding 230 kV. (2) (safety) Having sufficient electromotive force to inflict bodily harm or injury.

1.3 ACTION SUBMITTALS

A. Coordination Drawings for Conduit Routing: Conduit routing plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of items involved:

1. Structural members in paths of conduit groups with common supports.
2. HVAC and plumbing items and architectural features in paths of conduit groups with common supports.

B. Coordination Drawings for Large Equipment Indoor Installations:

1. Location plan, drawn to scale, showing heavy equipment or truck access paths to loading dock or other freight access into building. Indicate available width and height of doors or openings.
2. Floor plan for entry floor and floor where equipment is located, drawn to scale, showing heavy equipment access paths for maintenance and replacement, with the following items shown and coordinated with each other, based on input from installers of the items involved:

   a. Dimensioned concrete bases, outlines of equipment, conduit entries, and grounding equipment locations.
   b. If freight elevator must be used, indicate width and height of door and depth of car. Indicate if large equipment must be tipped to use elevator.
   c. Dimensioned working clearances and dedicated areas below and around electrical equipment where obstructions and tripping hazards are prohibited.

3. Reflected ceiling plans for entry floor and floor where equipment is located, drawn to scale, on which the following items shown and coordinated with each other, based on input from installers of the items involved:

   a. Support locations, type of support, and weight on each support. Locate structural supports for structure-supported raceways, busways.
   b. Location of lighting fixtures, sprinkler piping and sprinklers, ducts and diffusers, and other obstructions, indicating available overhead clearance.
   c. Dimensioned working clearances and dedicated areas above and around electrical equipment where foreign systems and equipment are prohibited.

C. Coordination Drawings for Large Equipment Outdoor Installations:

1. Utilities site plan, drawn to scale, showing heavy equipment or truck access paths for maintenance and replacement, with the following items shown and coordinated with each other, based on input from installers of the items involved:

   a. Fences and walls, dimensioned concrete bases, outlines of equipment, conduit entries, and grounding and bonding locations.
   b. Indicate clear dimensions for fence gates and wall openings.
   c. Indicate depth and type of ground cover, and locations of trees, shrubbery, and other obstructions in access path.
   d. Indicate clear height below tree branches, overhead lines, bridges, and other overhead obstructions in access path, or where cranes and hoists will be needed to handle large electrical equipment.
   e. Support locations, type of support, and weight on each support. Locate structural supports for structure-supported raceways, busways.
   f. Dimensioned working clearances and dedicated areas around electrical equipment.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data:

1. Include the following information:

   a. Manufacturer's operating specifications.
   b. User's guides for software and hardware.
   c. Schedule of maintenance material items recommended to be stored at Project site.
   d. Detailed instructions covering operation under both normal and abnormal conditions.
   e. Time-current curves for overcurrent protective devices and manufacturer's written instructions for testing and adjusting their settings.
   f. List of load-current and overload-relay heaters with related motor nameplate data.
   g. List of lamp types and photoelectric relays used on Project, with ANSI and manufacturers' codes.

h. Manufacturer's instructions for setting field-adjustable components.
i. Manufacturer's instructions for testing, adjusting, and reprogramming microprocessor controls.
j. Exterior pole inspection and repair procedures.

B. Software and Firmware Operational Documentation: Provide software and firmware operational documentation in Facility EPM Program Binders, including the following:

1. Software operating and upgrade manuals.
2. Names, versions, and website addresses for locations of installed software.
3. Device address list.
4. Printout of software application and graphic screens.
5. Testing and adjusting of panic and emergency power features.
6. For lighting controls include the following:

a. Adjustments of scene preset controls, adjustable fade rates, and fade overrides.
b. Operation of adjustable zone controls.

1.5 FIELD CONDITIONS

A. Service Conditions for Electrical Power Equipment: specified electrical power equipment must be suitable for operation under service conditions specified as usual service conditions in applicable NEMA PB series, IEEE C37 series, and IEEE C57 series standards, except for the following:

1. Exposure to significant solar radiation.
2. Exposure to fumes, vapors, or dust.
3. Exposure to explosive environments.
4. Ambient temperature not exceeding 104 deg F.
5. Exposure to hot and humid climate or to excessive moisture, including steam, salt spray, and dripping water.
6. Unusual transportation or storage conditions.
7. Unusual grounding resistance conditions.
8. Unusual space limitations.

PART 2 - PRODUCTS

2.1 SUBSTITUTION LIMITATIONS FOR ELECTRICAL EQUIPMENT

A. Substitution requests for electrical equipment will be entertained under the following conditions:

1. Substitution requests may be submitted for consideration prior to the Electrical Preconstruction Conference if accompanied by value analysis data indicating that substitution will comply with Project performance requirements while significantly increasing value for Owner throughout life of facility.
2. Substitution requests may be submitted for consideration concurrently with submission of power system study reports when those reports indicate that substitution is necessary for safety of maintenance personnel and facility occupants.
3. Contractor is responsible for sequencing and scheduling power system studies and electrical equipment procurement. After the Electrical Preconstruction Conference, insufficient lead time for electrical equipment delivery will not be considered a valid reason for substitution.

B. Materials and equipment shall be third party listed by an approved and accredited agency. Third party agencies shall be among those accredited by the North Carolina Building Code Council (NCBCC) to label electrical and mechanical equipment.

2.2 FACILITY ELECTRICAL PREVENTIVE MAINTENANCE (EPM) PROGRAM BINDERS

A. Description: Set of binders containing operation and maintenance data for facility's electrical equipment that was compiled during analysis of installed electrical Work for Facility EPM Program development.

B. Applicable Standards:

1. Regulatory Requirements: Comply with recommendations in NFPA 70B.
2. General Characteristics:

a. Volume 1 - Introduction:

1) Summarize how Facility EPM Program Analysis was performed, how data were collected, and how volumes are organized.
2) Describe Facility EPM Program and provide recommended policies and procedures for implementing the program and keeping it current.
3) Provide place for Owner to identify contact information for employees responsible for implementing and maintaining Facility EPM Program.

b. Volume 2 - Facility Safety, Hazards Awareness, and Emergency Procedures:

1) Include training requirements for employees and contractors.
2) Include list of known facility hazards impacting IT&R activities.
3) Include approval and permitting procedures for IT&R activities.
4) Include incident emergency response procedures.
5) Include emergency shutdown procedures.
6) Include electrical disaster recovery procedures.

c. Volume 4 - Facility Diagrams and Schedules:

1) Include single-line diagrams.
2) Include grounding and bonding diagrams.
3) Include system automation diagrams (, BMS, lighting, HVAC, etc.).
4) Include records of panelboard schedules.
5) Include time-current curves for overcurrent protective devices.
6) Include list of load-current and overload-relay heaters with related motor nameplate data.

d. Volume 5 - Inventory of Facility Equipment Using Electrical Power:

1) Include simplified floor plans showing equipment locations.
2) Identify critical equipment (electrical or otherwise).
3) Include identifying designations and nameplate data.
4) Include warranty and maintenance contract information.

e. Volume 6 - Inventory of Facility Tools, Supplies, and Personnel Protective Equipment:

1) Include schedules of maintenance material items recommended to be stored at facility.
2) Include list of lamp types and photoelectric relays used in facility with ANSI and manufacturers' codes.
3) Include calibration and servicing data for each item.

f. Volume 7 - Inspection, Testing, and Repair (IT&R) Plan:

1) Include tables showing frequency of activities for each item.
2) Include annual schedule with activities mapped to specific days of the year.
3) Include exterior pole inspection and repair procedures.

g. Volume 10 - Spare Parts List:

1) Include list of all parts required to perform IT&R procedures.
2) Identify quantities of which parts are recommended to be stored on-site.

3) Include source contact information and budget cost for each item.

h. Volume 11 - Construction Project Closeout Record Documentation:

1) Include records of power system studies and photometric studies.
2) Include records of risk assessment studies.
3) Include records of electrical system startup and commissioning activities.
4) Include records of baseline inspections and tests.
5) Include records of baseline infrared photographs with normal light photographs showing the location, direction, angle, and conditions necessary for reproducing each infrared photograph.
6) Include records of baseline settings for adjustable equipment and devices.

PART 3 - EXECUTION

3.1 DEVELOPMENT OF FACILITY EPM PROGRAM

A. Facility EPM Program must be developed by qualified EPM specialist.

B. Conduct Facility EPM Program analysis in accordance with NFPA 70B recommendations.

1. Renovation Projects:

a. Facility diagrams must include connected existing equipment for entire facility where known. Areas of uncertainty should be clearly indicated.
b. Obtain copies of existing operation and maintenance data and existing Facility EPM Program information from Owner.
c. Facility EPM Program analysis should identify existing equipment that does not have available operation and maintenance data, and should explain the Owner's risks because this equipment is not included in Facility EPM Program.
d. Data for existing equipment outside scope of Project may be inserted in Facility EPM Program Binders without analysis.
e. Data for existing equipment impacted by scope of Project should be analyzed and documented similar to Project's new equipment data as much as possible.

C. Compile operation and maintenance data from Facility EPM Program analysis and submit Facility EPM Program Binders.

3.2 INSTALLATION OF ELECTRICAL WORK

A. Unless more stringent requirements are specified in the Contract Documents or manufacturers' written instructions, comply with NFPA 70 and NECA NEIS 1 for installation of Work specified in Division 26.

3.3 FIELD QUALITY CONTROL

A. Administrant for Low-Voltage Electrical Tests and Inspections:

1. Will engage qualified low-voltage electrical testing and inspecting agency to administer and perform tests and inspections.
2. Engage qualified low-voltage electrical testing and inspecting agency to administer and perform tests and inspections.

B. Administrant for Field Tests and Inspections of Lighting Installations:

1. Engage factory-authorized service representative to administer and perform tests and inspections on components, assemblies, and equipment installations, including connections.
2. Administer and perform tests and inspections.

3.4 CLOSEOUT ACTIVITIES

A. Training:

1. With assistance from factory-authorized service representatives, train Owner's maintenance personnel on the following topics:

   a. How to implement Facility EPM Program.
   b. How to operate normal and emergency electrical systems, including justifications for, and limitations of, protective device settings recommended in study report specified in Section 260573.16 "Coordination Studies."
   c. Electrical power safety fundamentals refresher including arc-flash hazard safety features of electrical power distribution equipment in facility, interpreting arc-flash warning labels, selecting appropriate personal protective equipment, and understanding significance of findings documented in study report specified in Section 260573.19 "Arc-Flash Hazard Analysis."

2. Provide video recordings of training sessions to Owner.

END OF SECTION 260010

SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Copper building wire.
2. Metal – Clad CableFire-alarm wire and cable.
3. Connectors and splices.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.

1.2 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 COPPER BUILDING WIRE

A. Description: Flexible, insulated and uninsulated, drawn copper current-carrying conductor with an overall insulation layer or jacket, or both, rated 600 V or less.

B. Manufacturers: Subject to compliance with requirements, undefined:

1. Cerro Wire LLC.
2. Encore Wire Corporation.
3. General Cable; Prysmian Group North America.
4. Okonite Company (The).
5. Southwire Company.

C. Standards:

1. Listed and labeled by an NCBCC approved third party testing agency accredited by the NCBCC.
2. Conductor and Cable Marking: Comply with wire and cable marking according to UL's "Wire and Cable Marking and Application Guide."

D. Conductors: Copper, complying with ASTM B3 for bare annealed copper and with ASTM B8 ASTM B496 for stranded conductors.

E. Conductor Insulation:

1. Dual rated Type THHN/THWN: Comply with UL 83.

2.2 METAL-CLAD CABLE

A. Metal-clad cable shall have a steel or aluminum sheath of interlocking tape, or a smooth or corrugated tube. Grounding conductors shall be insulated.

B. Connectors shall be insertion or totally enclosed clamp type, galvanized malleable iron or steel, with insulated throats.

C. Camlock type connectors shall not be used.

D. Manufacturer: AFC Cable Systems, General Cable, or Southwire.

2.3 FIRE-ALARM WIRE AND CABLE

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Allied Wire & Cable Inc.
2. CommScope, Inc.
3. Comtran Corporation.
4. Genesis Cable Products; Honeywell International, Inc.
5. Vent (PYROTENAX).
6. Prysmian Cables and Systems; Prysmian Group North America.
7. Radix Wire.
8. Rockbestos-Suprenant Cable Corp.
9. Superior Essex Inc.
10. West Penn Wire.

B. General Wire and Cable Requirements: NRTL listed and labeled as complying with NFPA 70, Article 760.

1. Lead Content: Less than 300 parts per million.

C. Signaling Line Circuits: Twisted, shielded pair, not less than No 18 AWG.

1. Circuit Integrity Cable: Twisted shielded pair, NFPA 70, Article 760, Classification CI, for power-limited fire-alarm signal service Type FPL. NRTL listed and labeled as complying with UL 1424 and UL 2196 for a two-hour rating.

D. Non-Power-Limited Circuits: Solid-copper conductors with 600 V rated, 75 deg C, color-coded insulation, and complying with requirements in UL 2196 for a two-hour rating.

1. Low-Voltage Circuits: No. 18 AWG, minimum, in pathway.
2. Line-Voltage Circuits: No. 12 AWG, minimum, in pathway.

2.4 CONNECTORS AND SPLICES

A. Description: Factory-fabricated connectors, splices, and lugs of size, ampacity rating, material, type, and class for application and service indicated; listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.

B. Manufacturers:

Joints in solid conductors shall be spliced using the following:

1. 3M Electrical Products.
2. T&B Connectors.
3. Ideal Industries, Inc.

C. "Sta-Kon", "Piggy", or other permanent type crimp connectors shall be used for #10 AWG and smaller conductors.

D. Joints in stranded conductors shall be spliced by approved mechanical connectors that are insulated with gum rubber tape and insulating tape. Permanent compression connectors for splices and taps, provided with UL-approved insulating covers, may be used instead of mechanical connectors plus tape. Power Distribution Blocks may be used where listed for the enclosure size and available fault current.

E. Jacketed Cable Connectors: For steel and aluminum jacketed cables, zinc die-cast with set screws, designed to connect conductors specified in this Section.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

A. Feeders: Copper; solid for No. 10 AWG and smaller; Class B stranded for No. 8 AWG and larger.

B. Branch Circuits :Copper. Solid for No. 10 AWG and smaller; Class B stranded for No. 8 AWG and larger.

C. Power-Limited Fire Alarm and Control: Solid for No. 12 AWG and smaller.

3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

A. Service Entrance: Dual Type THHN/THWN, single conductors in raceway.

B. Exposed Feeders: Dual Type THHN/THWN, single conductors in raceway.

C. Feeders Concealed in Ceilings, Walls, Partitions, and Crawlspaces: Dual Type THHN/THWN, single conductors in raceway.

D. Exposed Branch Circuits: Dual Type THHN/THWN, single conductors in raceway.

E. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Dual Type THHN/THWN, single conductors in raceway.

3.3 INSTALLATION, GENERAL

A. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.

B. Complete raceway installation between conductor and cable termination points according to Section 260533 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.

C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.

D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.

E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.

F. Support cables according to Section 260529 "Hangers and Supports for Electrical Systems."

G. Power and lighting circuits' minimum conductor size shall be #12 AWG, and maximum conductor size allowed shall be 500 Kcmil.

H. Where the conductor length from the panel to the first outlet on a 277-volt circuit exceeds 125 feet, the branch circuit conductors from the panel to the first outlet shall not be smaller than #10 AWG. Where ungrounded conductors are increased in size from the minimum size that has sufficient ampacity for the intended installation, wire-type equipment grounding conductor shall be in creased in size proportionally, according to the circular mil area of the ungrounded conductors.

I. Where the conductor length from the panel to the first outlet on a 120-volt circuit exceeds 50 feet, the branch circuit conductors from the panel to the first outlet shall not be smaller than #10 AWG.

J. Where ungrounded conductors are increased in size from the minimum size that has sufficient ampacity for the intended installation, wire-type equipment grounding conductor shall be increased in size proportionally, according to the circular mil area of the ungrounded conductors.

3.4 INSTALLATION OF METAL-CLAD CABLE

A. Metal-clad cable shall only be used for branch circuit wiring between wiring devices and between luminaires downstream (away from the branch circuit panel) of a junction box located not more than 10' (circuit length) upstream (toward the branch circuit panel) of the first wiring device or luminaire on that circuit. Raceways extended from this junction box to the branch circuit panel shall comply with the requirements of Section 26 05 33, Raceway and Boxes For Electrical Systems.

B. Install in hollow spaces of columns and walls, and above suspended ceilings for branch circuit wiring.

C. Metal-clad cable shall not be used for exposed installations, including mechanical and electrical rooms.

3.5 INSTALLATION OF FIRE-ALARM WIRE AND CABLE

A. Comply with NFPA 72.

B. Wiring Method: Install wiring in metal pathway according to Section 270529 "Hangers and Supports for Communications Systems."

1. Fire-alarm circuits and equipment control wiring associated with fire-alarm system must be installed in a dedicated pathway system.

   a. Cables and pathways used for fire-alarm circuits, and equipment control wiring associated with fire-alarm system, may not contain any other wire or cable.

2. Fire-Rated Cables: Use of two-hour, fire-rated fire-alarm cables, NFPA 70, Types MI and CI, is permitted.
3. Signaling Line Circuits: Power-limited fire-alarm cables must not be installed in the same cable or pathway as signaling line circuits.

C. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by manufacturer. Install conductors parallel with or at right angles to sides and back of the enclosure. Bundle, lace, and train conductors to terminal points with no excess. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with fire-alarm system to terminal blocks. Mark each terminal according to system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

D. Cable Taps: Use numbered terminal strips in junction, pull, and outlet boxes; cabinets; or equipment enclosures where circuit connections are made.

E. Color-Coding: Shall be performed in accordance with electrical specification section 260553 "Identification for electrical systems".

F. Risers: Install at least two vertical cable risers to serve the fire-alarm system. Separate risers in close proximity to each other with a minimum one-hour-rated wall, so the loss of one riser does not prevent receipt or transmission of signals from other floors or zones.

G. Wiring to Remote Alarm Transmitting Device: 1 inch conduit between the fire-alarm control panel and the transmitter. Install number of conductors and electrical supervision for connecting wiring as needed to suit monitoring function.

3.6 CONNECTIONS

A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.

B. Make splices, terminations, and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.

3.7 IDENTIFICATION

A. Identify and color-code conductors and cables according to Section 260553 "Identification for Electrical Systems."

B. Identify each spare conductor at each end with identity number and location of other end of conductor, and identify as spare conductor.

3.8 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."

3.9 FIRESTOPPING

A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly according to Section 078413 "Penetration Firestopping."

3.10 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. After installing conductors and cables and before electrical circuitry has been energized, test service entrance and feeder conductors for compliance with requirements.
2. Perform each of the following visual and electrical tests:
   a. Inspect exposed sections of conductor and cable for physical damage and correct connection according to the single-line diagram.
   b. Test bolted connections for high resistance using one of the following:
      1) A low-resistance ohmmeter.
      2) Calibrated torque wrench.
      3) Thermographic survey.
   c. Inspect compression-applied connectors for correct cable match and indentation.

d. Inspect for correct identification.
e. Inspect cable jacket and condition.
f. Insulation-resistance test on each conductor for ground and adjacent conductors. Apply a potential of 500 V(dc) for 300 V rated cable and 1000 V(dc) for 600 V rated cable for a one-minute duration.
g. Continuity test on each conductor and cable.
h. Uniform resistance of parallel conductors.

B. Cables will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports to record the following:

1. Procedures used.
2. Results that comply with requirements.
3. Results that do not comply with requirements, and corrective action taken to achieve compliance with requirements.

END OF SECTION 260519

SECTION 260526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes grounding and bonding systems and equipment, plus the following special applications:

1. Ground bonding common with lightning protection system.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.

1.2 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council) to label electrical and mechanical equipment

B. Comply with UL 467 for grounding and bonding materials and equipment.

2.2 CONDUCTORS

A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.

B. Bare Copper Conductors:

1. Solid Conductors: ASTM B3.
2. Stranded Conductors: ASTM B8.
3. Tinned Conductors: ASTM B33.

C. Grounding Bus: Predrilled rectangular bars of annealed copper, 1/4 by 4 inch in cross section, with 9/32 inch holes spaced 1-1/8 inch apart. Stand-off insulators for mounting must comply with UL 891 for use in switchboards, 600 V and must be Lexan or PVC, impulse tested at 5000 V.

2.3 CONNECTORS

A. Listed and labeled by an NRTL for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.

B. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

C. Mechanical-Type Bus-Bar Connectors: Cast silicon bronze, solderless compression -type wire terminals, and long-barrel, two-bolt connection to ground bus bar.

D. Beam Clamps: Mechanical type, terminal, ground wire access from four directions, with dual, tin-plated or silicon bronze bolts.

E. Cable-to-Cable Connectors: Compression type, copper or copper alloy.

F. Cable Tray Ground Clamp: Mechanical type, zinc-plated malleable iron.

G. Conduit Hubs: Mechanical type, terminal with threaded hub.

H. Ground Rod Clamps: Mechanical type, copper or copper alloy, terminal with hex head bolt.

I. Ground Rod Clamps: Mechanical type, copper or copper alloy, terminal with hex head bolt.

J. Lay-in Lug Connector: Mechanical type, copper rated for direct burial terminal with set screw.

K. Service Post Connectors: Mechanical type, bronze alloy terminal, in short- and long-stud lengths, capable of single and double conductor connections.

L. Signal Reference Grid Clamp: Mechanical type, stamped-steel terminal with hex head screw.

M. Straps: Solid copper, copper lugs. Rated for 600 A.

N. Tower Ground Clamps: Mechanical type, copper or copper alloy, terminal two-piece clamp.

O. U-Bolt Clamps: Mechanical type, copper or copper alloy, terminal listed for direct burial.

P. Water Pipe Clamps:

1. Mechanical type, two pieces with zinc-plated bolts.

a. Material: Tin-plated aluminum.
b. Listed for direct burial.

2. U-bolt type listed for indicated application.

2.4 GROUNDING ELECTRODES

A. Ground Rods: Copper-clad steel; 3/4 inch by 10 ft.

B. Ground Plates: 1/4 inch thick, hot-dip galvanized.

PART 3 - EXECUTION

3.1 APPLICATIONS

A. Conductors: Install solid conductor for No. 10 AWG and smaller, and stranded conductors for No. 8 AWG and larger unless otherwise indicated.

B. Underground Grounding Conductors: Install bare copper conductor, No. 3/0 AWG minimum.

1. Bury at least 30 inch below grade.

C. Grounding Conductors: Green-colored insulation.

D. Grounding Bus: Install in electrical equipment rooms, in rooms housing service equipment, and elsewhere as indicated.

1. Install bus horizontally, on insulated spacers 2 inch minimum from wall, 6 inch above finished floor unless otherwise indicated.
2. Identify each grounding electrode that is connected to a common ground bus. The common ground bus shall not be less than 2" high by 1/4" thick.

E. Conductor Terminations and Connections:

1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
3. Connections to Ground Rods at Test Wells: Bolted connectors.
4. Connections to Structural Steel: Welded connectors.

F. The raceway system shall not be relied on for equipment ground continuity. A green equipment grounding conductor shall be run in all raceways except for telecommunications, data, audio systems, and low voltage raceways for fire alarm systems.

G. Boxes with concentric, eccentric, or over-sized knockouts shall be provided with bonding bushings and jumpers. The jumper shall be sized per NEC Table 250-122 and lugged to the box.

3.2 GROUNDING AT THE SERVICE

A. Equipment grounding conductors and grounding electrode conductors must be connected to the ground bus. Install a main bonding jumper between the neutral and ground buses.

B. The electrical service shall be grounded by three (3) means, when available:

1. To the metallic cold-water pipe, as per NEC article 250-52.
2. To the steel frame of the building, provided the building frame is effectively grounded. In new construction, effectively ground and bond steel building frame.
3. To ground rod(s). Ground rods shall be 10 feet long and 3/4-inch in diameter and shall be of copper-clad steel construction. All ground connections shall be accessible. Provide a minimum of one test well at one driven ground rod.

3.3 GROUNDING UNDERGROUND DISTRIBUTION SYSTEM COMPONENTS

A. Comply with IEEE C2 grounding requirements.

3.4 EQUIPMENT GROUNDING

A. Install insulated equipment grounding conductors with all feeders and branch circuits.

B. Air-Duct Equipment Circuits: Install insulated equipment grounding conductor to duct-mounted electrical devices operating at 120 V and more, including air cleaners, heaters, dampers, humidifiers, and other duct electrical equipment. Bond conductor to each unit and to air duct and connected metallic piping.

3.5 INSTALLATION

A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.

B. Ground Rods: Drive rods until tops are 2 inch below finished floor or final grade unless otherwise indicated.

1. Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating if any.
2. Use exothermic welds for all below-grade connections.
3. For grounding electrode system, install at least three rods spaced at least one-rod length from each other and located at least the same distance from other grounding electrodes, and connect to the service grounding electrode conductor.

C. Test Wells: Ground rod driven through drilled hole in bottom of handhole. Handholes must be at least 12 inch deep, with cover.

1. Install at least one test well for each service unless otherwise indicated. Install at the ground rod electrically closest to service entrance. Set top of test well flush with finished grade or floor.

D. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.

1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
3. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.

E. Grounding and Bonding for Piping:

1. Metal Water Service Pipe: Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes; use a bolted clamp connector or bolt a lug-type connector to a pipe flange by using one of the lug bolts of the flange. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
2. Bond each aboveground portion of ident system downstream from equipment shutoff valve.

F. Grounding for Steel Building Structure: Install a driven ground rod at base of each corner column and at intermediate exterior columns at distances not more than 60 ft. apart.

G. Connections: Make connections so possibility of galvanic action or electrolysis is minimized. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact are galvanically compatible.

1. Use electroplated or hot-tin-coated materials to ensure high conductivity and to make contact points closer in order of galvanic series.
2. Make connections with clean, bare metal at points of contact.
3. Coat and seal connections having dissimilar metals with inert material to prevent future penetration of moisture to contact surfaces.

H. Grounding electrode conductors #4 AWG and larger shall be installed in a raceway system.

I. All building interior portions of grounding electrode conductors less than 6 feet above finished floor shall be protected against physical damage by routing in raceway except for final terminations to equipment where concealed.

3.6 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal, and at individual ground rods. Make tests at ground rods before any conductors are connected.

a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
b. Perform tests by fall-of-potential method according to IEEE 81.

B. Grounding system will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

D. Report measured ground resistances that exceed the following values:

1. Power and Lighting Equipment or System: 25 ohms.

E. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Engineer promptly and include recommendations to reduce ground resistance.

END OF SECTION 260526

This page intentionally left blank.

SECTION 260529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Support, anchorage, and attachment components.
2. Fabricated metal equipment support assemblies.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.

PART 2 - PRODUCTS

2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

A. Steel Slotted Support Systems: Preformed steel channels and angles with minimum 13/32 inch diameter holes at a maximum of 8 inch on center in at least one surface.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. ABB, Electrification Products Division.
   b. Allied Tube & Conduit; Atkore International.
   c. B-line; Eaton, Electrical Sector.
   d. Unistrut; Atkore International.

2. Standard: Comply with MFMA-4 factory-fabricated components for field assembly.
3. Material for Channel, Fittings, and Accessories: Galvanized steel.
4. Channel Width: Selected for applicable load criteria.
5. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
6. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Conduit and Cable Support Devices: Steel hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.

C. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for nonarmored electrical conductors or cables in riser conduits. Plugs must have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body must be made of malleable iron.

D. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:

1. Clamps for Attachment to Steel Structural Elements: MSS SP-58 units are suitable for attached structural element.
2. Toggle Bolts: All steel springhead type.
3. Hanger Rods: Threaded steel.

E. Powder actuated fasteners are not allowed.

PART 3 - EXECUTION

3.1 SELECTION

A. Comply with the following standards for selection and installation of hangers and supports, except where requirements on Drawings or in this Section are stricter:

1. NECA NEIS 101
2. NECA NEIS 102.
3. NECA NEIS 105.

B. Comply with requirements for raceways and boxes specified in Section 260533 "Raceway and Boxes for Electrical Systems."

C. Provide vibration and seismic controls with hangers and supports in accordance with requirements specified in "Section 260548 "Vibration and Seismic Controls for Electrical Systems."

D. Maximum Support Spacing and Minimum Hanger Rod Size for Raceways: Space supports for EMT, IMC, and ERMC as required by NFPA 70. Minimum rod size must be 3/8 inch in diameter.

E. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.

1. Secure raceways and cables to these supports with single-bolt conduit clamps.

F. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2 inch and smaller raceways serving branch circuits and communication systems above suspended ceilings, and for fastening raceways to trapeze supports.

3.2 INSTALLATION OF SUPPORTS

A. Comply with NECA NEIS 101 for installation requirements except as specified in this article.

B. Raceway Support Methods: In addition to methods described in NECA NEIS 1, EMT and ERMC may be supported by openings through structure members, in accordance with NFPA 70.

C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination must be weight of supported components plus 200 lb.

D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:

1. To Wood: Fasten with lag screws or through bolts.
2. To New Concrete: Bolt to concrete inserts.
3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
4. To Existing Concrete: Expansion anchor fasteners.
5. To Steel: Beam clamps (MSS SP-58, Type 19, 21, 23, 25, or 27), complying with MSS SP-69.
6. To Light Steel: Sheet metal screws.
7. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate by means that comply with seismic-restraint strength and anchorage requirements.

E. Drill holes for expansion anchors in concrete at locations and to depths that avoid the need for reinforcing bars.

F. Conduits installed on the interior of exterior walls shall be spaced off the wall surface a minimum of ¼ inch using "clamp-backs" or struts.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.

B. Field Welding: Comply with AWS D1.1/D1.1M. Submit welding certificates.

3.4 CONCRETE BASES

A. Construct concrete bases of dimensions indicated, but not less than 4 inch larger in both directions than supported unit, and so anchors will be a minimum of 10 bolt diameters from edge of the base.

B. Use 3000 psi, 28-day compressive-strength concrete.

C. Anchor equipment to concrete base as follows:

1. Place and secure anchorage devices. Use supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
2. Install anchor bolts to elevations required for proper attachment to supported equipment.
3. Install anchor bolts according to anchor-bolt manufacturer's written instructions.

3.5 PAINTING

A. Touchup:

1. Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

a. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.

B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A780.

END OF SECTION 260529

This page intentionally left blank.

SECTION 260533 - RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Metal raceways and fittings.
2. Nonmetallic raceways and fittings.
3. Fittings for conduit, tubing, and cable.
4. Solvent cements.
5. Surface metal raceways and fittings.
6. Wireways and auxiliary gutters.
7. Metallic outlet boxes, device boxes, rings, and covers.
8. Cabinets, cutout boxes, junction boxes, pull boxes, and miscellaneous enclosures.
9. Cover plates for device boxes.
10. Hoods for outlet boxes.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.

1.2 ACTION SUBMITTALS

A. Product Data: For the following:

1. Floor boxes.

PART 2 - PRODUCTS

2.1 TYPE EMT-S RACEWAYS AND ELBOWS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 797 and UL Category Control Number FJMX.

B. Steel Electrical Metal Tubing (EMT-S) and Elbows:

1. <u>Manufacturers:</u> Subject to compliance with requirements, provide products by one of the following:

   a. Allied Tube & Conduit; Atkore International.
   b. Emerson Electric Co.
   c. Republic Conduit; Nucor Corporation, Nucor Tubular Products.
   d. Western Tube; Zekelman Industries.
   e. Wheatland Tube; Zekelman Industries.

2. Material: Steel.
3. Options:

   a. Exterior Coating: Zinc.
   b. Interior Coating: Zinc with organic top coating.
   c. Minimum Trade Size: Metric designator 21 (trade size 3/4).

d. Colors: As indicated on Drawings.

2.2 TYPE ERMC-S RACEWAYS, ELBOWS, COUPLINGS, AND NIPPLES

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 6 and UL Category Control Number DYIX.

B. Galvanized-Steel Electrical Rigid Metal Conduit (ERMC-S-G), Elbows, Couplings, and Nipples:

1. Manufacturers: Subject to compliance with requirements, undefined:

   a. Allied Tube & Conduit; Atkore International.
   b. Crouse-Hinds; brand of Eaton, Electrical Sector.
   c. Republic Conduit; Nucor Corporation, Nucor Tubular Products.
   d. Western Tube; Zekelman Industries.

2. Exterior Coating: Zinc.
3. Options:

   a. Interior Coating: Zinc with organic top coating.
   b. Minimum Trade Size: Metric designator 21 (trade size 3/4).
   c. Colors: As indicated on Drawings.

2.3 TYPE FMC-S RACEWAYS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 1 and UL Category Control Number DXUZ.

B. Steel Flexible Metal Conduit (FMC-S):

1. Manufacturers: Subject to compliance with requirements, undefined:

   a. ABB, Electrification Business.
   b. Electri-Flex Company.
   c. Topaz Lighting & Electric.

2. Material: Steel.
3. Options:

   a. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.4 TYPE IMC RACEWAYS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 1242 and UL Category Control Number DYBY.

B. Steel Electrical Intermediate Metal Conduit (IMC):

1. Manufacturers: Subject to compliance with requirements, undefined:

   a. Allied Tube & Conduit; Atkore International.

b. Republic Conduit; Nucor Corporation, Nucor Tubular Products.
c. Western Tube; Zekelman Industries.
d. Wheatland Tube; Zekelman Industries.

2. Options:

a. Exterior Coating: Zinc.
b. Interior Coating: Zinc with organic top coating.
c. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.5 TYPE LFMC RACEWAYS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 360 and UL Category Control Number DXHR.

B. Steel Liquidtight Flexible Metal Conduit (LFMC-S):

1. Manufacturers: Subject to compliance with requirements, undefined:

a. ABB, Electrification Business.
b. Electri-Flex Company.
c. International Metal Hose Co.

2. Material: Steel.
3. Options:

a. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.6 TYPE PVC RACEWAYS AND FITTINGS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 651 and UL Category Control Number DZYR.

B. Schedule 40 Rigid PVC Conduit (PVC-40) and Fittings:

1. Manufacturers: Subject to compliance with requirements, undefined:

a. ABB, Electrification Business.
b. Calconduit; Atkore International.
c. Carlon T&B
d. Topaz Lighting & Electric.

2. Dimensional Specifications: Schedule 40.
3. Options:

a. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.7 FITTINGS FOR CONDUIT, TUBING, AND CABLE

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.

B. Fittings for Type ERMC, Type IMC, Type PVC Raceways:

1. Manufacturers: Subject to compliance with requirements, undefined:

a. ABB, Electrification Business.
b. Crouse-Hinds; brand of Eaton, Electrical Sector.
c. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
d. Southwire Company, LLC.

2. General Characteristics: UL 514B and UL Category Control Number DWTT.
3. Options:

a. Material: Steel.
b. Coupling Method: Compression coupling.
c. Expansion and Deflection Fittings: UL 651 with flexible external bonding jumper.

C. Fittings for Type EMT Raceways:

1. Manufacturers: Subject to compliance with requirements, undefined:

a. ABB, Electrification Business.
b. Crouse-Hinds; brand of Eaton, Electrical Sector.
c. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated.

2. General Characteristics: UL 514B and UL Category Control Number FKAV.
3. Options:

a. Material: Steel.
b. Coupling Method: Compression coupling.
c. Conduit Fittings for Hazardous (Classified) Locations: UL 1203.
d. Expansion and Deflection Fittings: UL 651 with flexible external bonding jumper.

D. Fittings for Type FMC Raceways:

1. Manufacturers: Subject to compliance with requirements, undefined:

a. American Fittings Corp. (AMFICO).
b. Liquid Tight Connector Co.
c. Southwire Company, LLC.

2. General Characteristics: UL 514B and UL Category Control Number ILNR.

E. Fittings for Type LFMC and Type LFNC Raceways:

1. Manufacturers: Subject to compliance with requirements, undefined:

a. Liquid Tight Connector Co.

2. General Characteristics: UL 514B and UL Category Control Number DXAS.

2.8 ELECTRICALLY CONDUCTIVE CORROSION-RESISTANT COMPOUNDS FOR THREADED CONDUIT

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 2419 and UL Category Control Number FOIZ.

B. Manufacturers: Subject to compliance with requirements, undefined:

1. ABB, Electrification Business.

2.9 SOLVENT CEMENTS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: As recommended by conduit manufacturer in accordance with UL 514B and UL Category Control Number DWTT.

2.10 WIREWAYS AND AUXILIARY GUTTERS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 870 and UL Category Control Number ZOYX.

B. Metal Wireways and Auxiliary Gutters:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. ABB, Electrification Business.
   b. Cooper B-line; brand of Eaton, Electrical Sector.
   c. Hoffman; brand of nVent Electrical plc.
   d. Square D; Schneider Electric USA.
2. Additional Characteristics:
   a. Fittings and Accessories: Include covers, couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for complete system.
   b. Finish: Manufacturer's standard enamel finish.
3. Options:
   a. Degree of Protection: Type 1 for indoor locations, Type 3R for outdoor locations unless otherwise indicated.
   b. Wireway Covers: Screw - cover type unless otherwise indicated.

2.11 METALLIC OUTLET BOXES, DEVICE BOXES, RINGS, AND COVERS

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 514A and UL Category Control Number QCIT.

B. Metallic Outlet Boxes:

1. Description: Box having pryout openings, knockouts, threaded entries, or hubs in either the sides of the back, or both, for entrance of conduit, conduit or cable fittings, or cables, with provisions for mounting outlet box cover, but without provisions for mounting wiring device directly to box.
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
   b. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group.
   c. Pass & Seymour; Legrand North America, LLC.

3. Options:
    a. Material: Sheet steel.
    b. Sheet Metal Depth: Minimum 2.5 inch.
    c. Luminaire Outlet Boxes and Covers: Nonadjustable, listed and labeled for attachment of luminaire weighing up to 50 lb .
    d. Paddle Fan Outlet Boxes and Covers: Nonadjustable, designed for attachment of paddle fan weighing up to 70 lb.

C. Metallic Conduit Bodies:
1. Description: Means for providing access to interior of conduit or tubing system through one or more removable covers at junction or terminal point. In the United States, conduit bodies are listed in accordance with outlet box requirements.

D. Metallic Device Boxes:
1. Description: Box with provisions for mounting wiring device directly to box.
2. Options:
    a. Material: Sheet steel.
    b. Sheet Metal Depth: minimum 2.5 inch.

E. Metallic Extension Rings:
1. Description: Ring intended to extend sides of outlet box or device box to increase box depth, volume, or both.

F. Metallic Floor Boxes and Floor Box Covers:
1. Description: Box mounted in floor with floor box cover and other components to complete floor box enclosure.
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    a. FSR Inc.
    b. Hubbell Premise Wiring; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
    c. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
    d. Pass & Seymour; Legrand North America, LLC.
    e. Wiremold; Legrand North America, LLC.

G. Metallic Concrete Boxes and Covers:
1. Description: Box intended for use in poured concrete.
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
    a. FSR Inc
    b. Hubbell Premise Wiring; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
    c. Wiremold; Legrand North America, LLC.

2.12 TERMINATION BOXES

A. Description: Enclosure for termination base consisting of lengths of bus bars, terminal strips, or terminal blocks with provision for wire connectors to accommodate incoming or outgoing conductors or both.

B. Performance Criteria:
1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics: UL 1773 and UL Category Control Number XCKT.

C. Termination Boxes and Termination Bases for Installation on Line Side of Service Equipment:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. ABB, Electrification Business.
   b. Cooper B-line; brand of Eaton, Electrical Sector.
   c. Hoffman; brand of nVent Electrical plc.
   d. Square D; Schneider Electric USA.

2. Additional Characteristics: Listed and labeled for installation on line side of service equipment.

D. Termination Boxes and Termination Bases for Installation on Load Side of Service Equipment:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. ABB, Electrification Business.
   b. Cooper B-line; brand of Eaton, Electrical Sector.
   c. Hoffman; brand of nVent Electrical plc.
   d. Square D; Schneider Electric USA.

2. Additional Characteristics: Listed and labeled for installation on load side of service equipment.

2.13 CABINETS, CUTOUT BOXES, JUNCTION BOXES, PULL BOXES, AND MISCELLANEOUS ENCLOSURES

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics:

   a. Non-Environmental Characteristics: UL 50.
   b. Environmental Characteristics: UL 50E.

B. Indoor Sheet Metal Cabinets:

1. Description: Enclosure provided with frame, mat, or trim in which swinging door or doors are or can be hung.
2. Additional Characteristics: UL Category Control Number CYIV.
3. Options:

   a. Degree of Protection: Type 1.

C. Indoor Sheet Metal Cutout Boxes:

1. Description: Enclosure that has swinging doors or covers secured directly to and telescoping with walls of enclosure.
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. ABB, Electrification Business.
   b. Cooper B-line; brand of Eaton, Electrical Sector.
   c. Hoffman; brand of nVent Electrical plc.
   d. Square D; Schneider Electric USA.

3. Additional Characteristics: UL Category Control Number CYIV.
4. Options:

   a. Degree of Protection: Type 1.

D. Indoor Sheet Metal Junction and Pull Boxes:

1. Description: Box with a blank cover that serves the purpose of joining different runs of raceway or cable.
2. Additional Characteristics: UL Category Control Number BGUZ.
3. Options:

a. Degree of Protection: Type 1.

E. Outdoor Cast-Metal Junction and Pull Boxes:

1. Description: Box with a blank cover that serves the purpose of joining different runs of raceway or cable.
2. Additional Characteristics: UL Category Control Number BGUZ.
3. Options:

a. Degree of Protection: Type 3R.

2.14 COVER PLATES FOR DEVICES BOXES

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics:

a. Reference Standards: UL 514D and UL Category Control Numbers QCIT and QCMZ.
b. Wallplate-Securing Screws: Metal with head color to match wallplate finish.

B. Metallic Cover Plates for Device Boxes:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. ABB, Electrification Business.
b. Crouse-Hinds; brand of Eaton, Electrical Sector.
c. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
d. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group.
e. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
f. Wiremold; Legrand North America, LLC.

2. Options:

a. Damp and Wet Locations: Listed, labeled, and marked for location and use. Provide gaskets and accessories necessary for compliance with listing.
b. Wallplate Material: 0.032 inch thick Type 302/304 non-magnetic stainless steel with brushed finish.

2.15 HOODS FOR OUTLET BOXES

A. Performance Criteria:

1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70 and marked for intended location and use.
2. General Characteristics:

a. Reference Standards:

1) UL 514D and UL Category Control Numbers QCIT and QCMZ.

2) Receptacle, hood, cover plate, gaskets, and seals comply with UL 498 Supplement SA when mated with box or enclosure complying with UL 514A, UL 514C, or UL 50E.

b. Mounts to box using fasteners different from wiring device.

B. Extra-Duty, While-in-Use Hoods for Outlet Boxes:

1. Additional Characteristics: Marked "Extra-Duty" in accordance with UL 514D.
2. Options:

a. Provideweatherproof, "while-in-use" cover.
b. Manufacturer may combine nonmetallic device box with hood as extra-duty rated assembly.

PART 3 - EXECUTION

3.1 SELECTION OF RACEWAYS

A. Unless more stringent requirements are specified in Contract Documents or manufacturers' written instructions, comply with NFPA 70 for selection of raceways. Consult Architect for resolution of conflicting requirements.

B. Outdoors:

1. Exposed and Subject to Severe Physical Damage: ERMC.
2. Exposed and Subject to Physical Damage: ERMC.
3. Concealed Aboveground: ERMC.
4. Direct Buried: PVC-40.
5. Concrete Encased in Trench: PVC-40.
6. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.

C. Indoors:

1. Exposed and Subject to Physical Damage: ERMC. Subject to physical damage includes the following locations:

a. Locations less than 2.5 m (8 ft) above finished floor.

2. Exposed and Not Subject to Physical Damage: EMT.
3. Concealed in Ceilings and Interior Walls and Partitions: EMT.
4. Damp or Wet Locations: ERMC.
5. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC.

D. Raceway Fittings: Select fittings in accordance with NEMA FB 2.10 guidelines.

1. ERMC and IMC: Provide threaded type fittings unless otherwise indicated.

2. EMT: Provide compression steel fittings and couplings.

3. Set screw, crimp and die cast compression fitting are not allowed.

3.2 SELECTION OF BOXES AND ENCLOSURES

A. Unless more stringent requirements are specified in Contract Documents or manufacturers' written instructions, comply with NFPA 70 for selection of boxes and enclosures. Consult Architect for resolution of conflicting requirements.

B. Degree of Protection:

1. Outdoors:

a. Type 3R unless otherwise indicated.
b. Locations in-Ground or Exposed to Corrosive Agents: Type 4X Type 3RX.

2. Indoors:

a. Type 1 unless otherwise indicated.
b. Locations Exposed to Spraying Oil or Coolants: Type 13.

C. Exposed Boxes Installed Less Than 2.5 m (8 ft) Above Floor:

1. Provide exposed cover. Flat covers with angled mounting slots or knockouts are prohibited.

3.3 INSTALLATION OF RACEWAYS

A. Installation Standards:

1. Unless more stringent requirements are specified in Contract Documents or manufacturers' written instructions, comply with NFPA 70 for installation of raceways. Consult Architect for resolution of conflicting requirements.
2. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.
3. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for hangers and supports.
4. Comply with NECA NEIS 101 for installation of steel raceways.
5. Comply with NECA NEIS 102 for installation of aluminum raceways.
6. Comply with NECA NEIS 111 for installation of nonmetallic raceways.
7. Install raceways square to the enclosure and terminate at enclosures without hubs with locknuts on both sides of enclosure wall. Install locknuts hand tight, plus one-quarter turn more.
8. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to metric designator 35 (trade size 1-1/4) and insulated throat metal bushings on metric designator 41 (trade size 1-1/2) and larger conduits terminated with locknuts.
9. Raceway Terminations at Locations Subject to Moisture or Vibration:

a. Provide insulating bushings to protect conductors, including conductors smaller than No. 4 AWG.

B. General Requirements for Installation of Raceways:

1. Complete raceway installation before starting conductor installation.
2. Provide stub-ups through floors with coupling threaded inside for plugs, set flush with finished floor. Plug coupling until conduit is extended above floor to final destination or a minimum of 2 ft above finished floor.
3. Install no more than equivalent of three 90-degree bends in conduit run. Support within 12 inch of changes in direction.
4. Make bends in raceway using large-radius preformed ells except for parallel bends. Field bending must be in accordance with NFPA 70 minimum radii requirements. Provide only equipment specifically designed for material and size involved.
5. Conceal conduit within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
6. Support conduit within 12 inch of enclosures to which attached.
7. Install raceway sealing fittings at accessible locations in accordance with NFPA 70 and fill them with listed sealing compound. For concealed raceways, install fitting in flush steel box with blank cover plate having finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings in accordance with NFPA 70.

8. Install devices to seal raceway interiors at accessible locations. Locate seals so no fittings or boxes are between the seal and the following changes of environments. Seal interior of raceways at the following points:
    a. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
    b. Where an underground service raceway enters a building or structure.
    c. Conduit extending from interior to exterior of building.
    d. Conduit extending into pressurized duct and equipment.
    e. Conduit extending into pressurized zones that are automatically controlled to maintain different pressure set points.
    f. Where otherwise required by NFPA 70.
9. Do not install raceways or electrical items on "explosion-relief" walls or rotating equipment.
10. Do not install conduits within 2 inch of the bottom side of a metal deck roof.
11. Keep raceways at least 6 inch away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
12. Cut conduit perpendicular to the length. For conduits metric designator 53 (trade size 2) and larger, use roll cutter or a guide to make cut straight and perpendicular to the length. Ream inside of conduit to remove burrs.
13. Install pull wires in empty raceways. Provide polypropylene or monofilament plastic line with not less than 200 lb tensile strength. Leave at least 12 inch of slack at both ends of pull wire. Cap underground raceways designated as spare above grade alongside raceways in use.
14. Where underground raceways are required to turn up to cabinets, equipment, etc., and on to poles, the elbow required and the stub-up out of the slab or earth shall be of rigid steel for the last two feet minimum.
15. Where grounding electrode conductors are required to be installed in raceway, and that raceway is metallic, the conduit must be bonded to the grounding electrode conductor on both ends.

C. Requirements for Installation of Specific Raceway Types:

1. Types ERMC and IMC:
    a. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound that maintains electrical conductivity to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.
2. Types FMC, LFMC:
    a. Comply with NEMA RV 3. Provide a maximum of 72 inch of flexible conduit for recessed and semirecessed luminaires, equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
3. Types PVC and EPEC:
    a. Do not install Type PVC or Type EPEC conduit where ambient temperature exceeds 122 deg F . Conductor ratings must be limited to 75 deg C except where installed in a trench outside buildings with concrete encasement, where 90 deg C conductors are permitted.
    b. Comply with manufacturer's written instructions for solvent welding and fittings.

D. Raceways Embedded in Slabs:

1. Run raceways larger than metric designator 27 (trade size 1) below concrete slab.
2. Arrange raceways to cross building expansion joints with expansion fittings at right angles to the joint.
3. Arrange raceways to ensure that each is surrounded by a minimum of 2 inch of concrete without voids.
4. Do not embed threadless fittings in concrete unless locations have been specifically approved by Architect.

E. Stub-ups to Above Recessed Ceilings:

1. Provide EMT, IMC, or ERMC for raceways.
2. Provide a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.

F. Raceway Fittings: Install fittings in accordance with NEMA FB 2.10 guidelines.

1. ERMC-S-PVC: Provide only fittings listed for use with this type of conduit. Patch and seal joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Provide sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
2. EMT: Provide compression, steel fittings. Comply with NEMA FB 2.10.
3. Flexible Conduit: Provide only fittings listed for use with flexible conduit type. Comply with NEMA FB 2.20.

G. Expansion-Joint Fittings:

1. Install in runs of aboveground PVC that are located where environmental temperature change may exceed 30 deg F and that have straight-run length that exceeds 25 ft. Install in runs of aboveground ERMC and EMT conduit that are located where environmental temperature change may exceed 100 deg F and that have straight-run length that exceeds 100 ft.
2. Install type and quantity of fittings that accommodate temperature change listed for the following locations:

   a. Outdoor Locations Not Exposed to Direct Sunlight: 125 deg F temperature change.
   b. Outdoor Locations Exposed to Direct Sunlight: 155 deg F temperature change.
   c. Indoor Spaces Connected with Outdoors without Physical Separation: 125 deg F temperature change.
   d. Attics: 135 deg F temperature change.

3. Install fitting(s) that provide expansion and contraction for at least 0.00041 inch per foot of length of straight run per deg F of temperature change for PVC conduits. Install fitting(s) that provide expansion and contraction for at least 0.000078 inch per foot of length of straight run per deg F of temperature change for metal conduits.
4. Install expansion fittings at locations where conduits cross building or structure expansion joints.
5. Install expansion-joint fitting with position, mounting, and piston setting selected in accordance with manufacturer's written instructions for conditions at specific location at time of installation. Install conduit supports to allow for expansion movement.

H. Raceways Penetrating Rooms or Walls with Acoustical Requirements:

1. Seal raceway openings on both sides of rooms or walls with acoustically rated putty or firestopping.

3.4 INSTALLATION OF BOXES AND ENCLOSURES

A. Provide boxes in wiring and raceway systems wherever required for pulling of wires, making connections, and mounting of devices or fixtures.

B. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements. Install boxes with height measured to center of box unless otherwise indicated.

C. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block and install box flush with surface of wall. Prepare block surfaces to provide a flat surface for a raintight connection between box and cover plate or supported equipment and box, whether installed indoors or outdoors.

D. Horizontally separate boxes mounted on opposite sides of walls so they are not in the same vertical channel.

E. Locate boxes so that cover or plate will not span different building finishes.

F. Support boxes in recessed ceilings independent of ceiling tiles and ceiling grid.

G. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for purpose.

H. Fasten junction and pull boxes to, or support from, building structure. Do not support boxes by conduits.

I. Set metal floor boxes level and flush with finished floor surface.

J. Set nonmetallic floor boxes level. Trim after installation to fit flush with finished floor surface.

K. Do not install aluminum boxes, enclosures, or fittings in contact with concrete or earth.

L. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure to ensure a continuous ground path.

M. Boxes and Enclosures in Areas or Walls with Acoustical Requirements:

1. Seal openings and knockouts in back and sides of boxes and enclosures with acoustically rated putty.
2. Provide gaskets for wallplates and covers.

3.5 FIRESTOPPING

A. Install firestopping at penetrations of fire-rated floor and wall assemblies. Comply with requirements in Section 078413 "Penetration Firestopping."

3.6 PROTECTION

A. Protect coatings, finishes, and cabinets from damage and deterioration.

1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

3.7 CLEANING

A. Boxes: Remove construction dust and debris from device boxes, outlet boxes, and floor-mounted enclosures before installing wallplates, covers, and hoods.

END OF SECTION 260533

This page intentionally left blank.

SECTION 260544 - SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Round sleeves.
2. Sleeve seal systems.
3. Grout.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.

PART 2 - PRODUCTS

2.1 ROUND SLEEVES

A. Wall Sleeves, Steel:

1. Description: ASTM A53/A53M, Type E, Grade B, Schedule 40, zinc coated, plain ends and integral waterstop.

2.2 SLEEVE SEAL SYSTEMS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CALPICO, Inc.
2. Metraflex Company (The).
3. Pipeline Seal and Insulator, Inc.

B. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and raceway or cable or between raceway and cable.

1. Sealing Elements: EPDM rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
2. Pressure Plates: Fiber-reinforced plastic.
3. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements.

2.3 GROUT

A. Description: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.

1. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
2. Design Mix: 5000 psi, 28-day compressive strength.
3. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 INSTALLATION OF SLEEVES FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

A. Sleeves for Conduits Penetrating Above-Grade, Non-Fire-Rated, Concrete and Masonry-Unit Floors and Walls:

1. Interior Penetrations of Non-Fire-Rated Walls and Floors:

a. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall or floor so no voids remain. Tool exposed surfaces smooth; protect material while curing.
b. Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint.

2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
3. Size pipe sleeves to provide 1/4 inch annular clear space between sleeve and raceway or cable, unless sleeve seal system is to be installed or seismic criteria require different clearance.
4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.

B. Sleeves for Conduits Penetrating Non-Fire-Rated Wall Assemblies:
1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
2. Seal space outside of sleeves with approved joint compound for wall assemblies.

C. Roof-Penetration Sleeves: Seal penetration of individual raceways and cables with flexible boot-type flashing units applied in coordination with roofing work.

D. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve seal systems. Size sleeves to allow for 1 inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

E. Underground, Exterior-Wall and Floor Penetrations:

1. Install steel pipe sleeves with integral waterstops. Size sleeves to allow for 1 inch annular clear space between raceway or cable and sleeve for installing sleeve seal system. Install sleeve during construction of floor or wall.
2. Install steel pipe sleeves. Size sleeves to allow for 1 inch annular clear space between raceway or cable and sleeve for installing sleeve seal system. Grout sleeve into wall or floor opening.

3.2 INSTALLATION OF SLEEVE SEAL SYSTEMS

A. Install sleeve seal systems in sleeves in exterior concrete walls and slabs-on-grade at raceway entries into building.

B. Install type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

END OF SECTION 260544

SECTION 260548 - VIBRATION AND SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Vibration isolators.
2. Neoprene Isolation Washers and Grommets
3. Restraints - rigid type.
4. Restraints - cable type.
5. Restraint accessories.
6. Post-Installed concrete anchors.
7. Concrete inserts.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.
2. Section 260529 "Hangers and Supports for Electrical Systems" for commonly used electrical supports and installation requirements.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include rated load capacity for each seismic - and wind-load-restraint device.
2. Illustrate and indicate style, material, strength, fastening provision, and finish for each type and size of seismic - and wind-load-restraint component used.
3. Annotate types and sizes of seismic restraints and accessories, complete with listing markings or report numbers and load rating in tension and compression as evaluated by an evaluation service member of ICC-ES.
4. Annotate to indicate application of each product submitted and compliance with requirements.

B. Shop Drawings:

1. Detail fabrication and assembly of equipment bases.
2. Vibration Isolation Base Details: Detail fabrication including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.

C. Delegated Design Submittal for Each Seismic-Restraint Device: Not required for this project seismic category.

D. Delegated Design Submittal for Each Wind-Load Protection Device: Signed and sealed by qualified structural professional engineer.

1. For each wind-load protection device, including restraint - rigid and cable type, restraint accessory, and concrete anchor and insert that is required by this Section or is indicated on Drawings, submit the following:

a. Wind-Load Restraint: Select wind-load restraints complying with performance requirements, design criteria, and analysis data.

b. Post-Installed Concrete Anchors and Inserts: Include calculations showing anticipated wind loads. Include certification that device is approved by an NRTL for reinforcement use.
c. Wind-Load Design Calculations: Submit static and dynamic loading calculations prepared under "Wind-Load Design Calculations" Paragraph in "Performance Requirements" Article.

2. Product Listing, Preapproval, and Evaluation Documentation: By an evaluation service member of ICC-ES, showing maximum ratings of restraint items and the basis for approval (tests or calculations).

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage qualified structural professional engineer to design seismic and wind-load control system in accordance with criteria specified in Section 260010 "Supplemental Requirements for Electrical".

B. Seismic - and Wind-Load-Restraint Device Load Ratings: Devices to be tested and rated in accordance with applicable code requirements and authorities having jurisdiction. Devices to be listed by a nationally recognized third party that requires periodic follow-up inspections and has a listing directory available to the public. Provide third-party listing by one or more of the following: an evaluation service member of ICC-ES.

C. Consequential Damage: Provide additional seismic and wind-load restraints for suspended components or anchorage of floor-, roof-, or wall-mounted components so that failure of a non-essential or essential component will not cause failure of any other essential building component.

D. Fire/Smoke Resistance: Seismic - and wind-load-restraint devices that are not constructed of ferrous metals must have a maximum flame-spread index of 25 and maximum smoke-developed index of 50 when tested by an NRTL in accordance with ASTM E84 or UL 723, and be so labeled.

E. Component Supports:

1. Load ratings, features, and applications of reinforcement components must be based on testing standards of a nationally recognized testing agency.

2.2 VIBRATION ISOLATORS

A. Type DN - Double-deflection neoprene type, with neoprene-coated metal surfaces, and top and bottom surfaces ribbed. Isolators shall have bolt holes in the base.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following

a. Kinetics Noise Control RD,
b. Mason ND,
c. Vibration Eliminator T44 or D44,
d. VMC Group R or RVD, or
e. Vibro-Acoustics RD

B. Type NH: Double-deflection neoprene or natural rubber hanger type, with neoprene or natural rubber grommet between hanger rod and housing. Neoprene or natural rubber element shall have neoprene- or natural rubber-coated metal surfaces.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following

a. Kinetics Noise Control RH,

b. Mason HD,
c. Vibration Eliminator C,
d. VMC Group HR,
e. or Vibro-Acoustics NH

C. Elastomeric Isolation Pads: NP.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Kinetics Noise Control, Inc.
b. Mason Industries, Inc.
c. Vibration Eliminator Co., Inc.
d. Vibration Mountings & Controls, Inc.
e. Vibro-Acoustics.

2. Fabrication: Single or multiple layers of sufficient durometer stiffness for uniform loading over pad area.
3. Size: Factory or field cut to match requirements of supported equipment.
4. Pad Material: Oil and water resistant with elastomeric properties. Neoprene rubber, silicone rubber, or other elastomeric material.
5. Ribbed or waffled on both sides.
6. Minimum thickness 0.75 inches.
7. Load-bearing metal plates adhered to pads as recommended by isolation pad manufacturer for loading conditions.
8. Sandwich-Core Material: Resilient and elastomeric.

2.3 NEOPRENE ISOLATION WASHERS AND GROMMETS

A. Neoprene Isolation Washers and Grommets: IWG.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Kinetics Noise Control, Inc.
b. Mason Industries, Inc.
c. Vibration Eliminator Co., Inc.
d. Vibration Mountings & Controls, Inc.
e. Vibro-Acoustics.

2. Neoprene isolation washer and grommets shall have a nominal durometer of Shore 50A.

2.4 RESTRAINTS - RIGID TYPE

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CADDY; nVent.
2. Gripple Inc.
3. International Seismic Application Technology (ISAT).
4. Kinetics Noise Control, Inc.
5. Mason Industries, Inc.
6. Vibration Eliminator Co., Inc.
7. Vibration Mountings & Controls, Inc.
8. Vibro-Acoustics.

B. Description: Shop- or field-fabricated bracing assembly made of ANSI/AISI S110-07-S1 slotted steel channels, ANSI/ASTM A53/A53M steel pipe, or other rigid steel brace member. Includes accessories for attachment to braced component at one end and to building structure at the other end and other matching components and with corrosion-resistant coating; rated in tension, compression, and torsion forces.

2.5 RESTRAINTS - CABLE TYPE

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CADDY; nVent.
2. Gripple Inc.
3. International Seismic Application Technology (ISAT).
4. Kinetics Noise Control, Inc.
5. Mason Industries, Inc.
6. Vibration Eliminator Co., Inc.
7. Vibration Mountings & Controls, Inc.
8. Vibro-Acoustics.

B. Seismic - and Wind-Load-Restraint Cables: ASTM A492 stainless steel cables. End connections made of steel assemblies with thimbles, brackets, swivel, and bolts designed for seismic-restraining cable service; with fittings attached by means of poured socket, swaged socket, or mechanical (Flemish eye) loop.

C. Restraint cable assembly and cable fittings must comply with ASCE/SEI 19. Cable fittings and complete cable assembly must maintain the minimum cable breaking force. U-shaped cable clips and wedge-type end fittings do not comply and are unacceptable.

2.6 RESTRAINT ACCESSORIES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. CADDY; nVent.
2. Gripple Inc.
3. International Seismic Application Technology (ISAT).
4. Kinetics Noise Control, Inc.
5. Mason Industries, Inc.
6. Vibration Eliminator Co., Inc.
7. Vibration Mounting & Controls, Inc.
8. Vibro-Acoustics.

B. Hanger-Rod Stiffener: Steel tube or steel slotted-support-system sleeve with internally bolted connections to hanger rod. Non-metallic stiffeners are unacceptable.

C. Bushings for Floor-Mounted Equipment Anchor Bolts: Neoprene bushings designed for rigid equipment mountings, and matched to type and size of anchor bolts and studs.

D. Resilient Isolation Washers and Bushings: One-piece, molded, oil- and water-resistant neoprene, with a flat washer face.

2.7 POST-INSTALLED CONCRETE ANCHORS

A. Mechanical Anchor Bolts:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. DeWALT.
   b. Hilti, Inc.
   c. Simpson Strong-Tie Co., Inc.

2. Drilled-in and stud-wedge or female-wedge type in zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength for anchor and as tested according to ASTM E488/E488M.

B. Provide post-installed concrete anchors that have been prequalified for use in seismic and wind-load applications.

1. Prequalify post-installed anchors in concrete in accordance with ACI 355.2 or other approved qualification testing procedures.
2. Prequalify post-installed anchors in masonry in accordance with approved qualification procedures.

C. Expansion-type anchor bolts are not permitted for equipment in excess of 10 hp that is not vibration isolated.

1. Undercut expansion anchors are permitted.

2.8 CONCRETE INSERTS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. DeWALT.
2. Gripple, Inc.
3. Hilti, Inc.
4. International Seismic Application Technology (ISAT).
5. Simpson Strong-Tie Co., Inc.

B. Provide preset concrete inserts that are seismically prequalified in accordance with ICC-ES AC446 testing.

C. Comply with MSS SP-58.

PART 3 - EXECUTION

3.1 VIBRATION ISOLATION

A. General:

1. Select and locate vibration isolation equipment to give uniform loading and deflection, according to weight distribution of equipment.
2. Vibration isolators shall be installed and connected, as specified herein, or as indicated on the Drawings, in accordance with the manufacturer's written instruction and certified submittal data.

B. Equipment isolation:

1. Floor-mounted transformers shall be mounted on Type DN isolators with a minimum static deflection of 0.1".
2. Suspended transformers shall be supported with Type NH isolators with a minimum static deflection of 0.1".

END OF SECTION 260548

This page intentionally left blank.

SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Labels.
2. Bands and tubes.
3. Tapes and stencils.
4. Tags.
5. Signs.
6. Cable ties.
7. Miscellaneous identification products.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Comply with ASME A13.1.

B. Comply with NFPA 70.

C. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.

D. Comply with ANSI Z535.4 for safety signs and labels.

E. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.

F. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 COLOR AND LEGEND REQUIREMENTS

A. Raceways and Cables Carrying Circuits at 600 V or Less:

1. Labels shall match the color scheme outlined in 2.2.E.
2. Legend: Indicate voltage and system or service type.
3. Conduit color coding shall match existing in the building.

B. Color-Coding for Phase- Identification, 600 V or Less: Use colors listed below for ungrounded service feeder and conductors.

1. Wires shall be color coded for the entire lengths. Field application of marking tape is not allowed.

2. Colors for 208/120-V Circuits:

   a) Phase A: Black.
   b) Phase B: Red.
   c) Phase C: Blue.
   d) Neutral: White

3. Colors for 480/277-V Circuits:

   a) Phase A: Brown.
   b) Phase B: Orange.
   c) Phase C: Yellow.
   d) Neutral: Gray.

4. Color for Equipment Grounds: Green.

C. Warning Label Colors:

1. Identify system voltage with black letters on an orange background.

D. Warning labels and signs shall include, but are not limited to, the following legends:

1. Multiple Power Source Warning: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."
2. Workspace Clearance Warning: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 36 INCHES."

E. Equipment and Boxes Identification Labels:

1. White core/surface with black lettering for 120/208-volts system.
2. Bright red core/surface with white lettering for fire alarm system.
3. Yellow core/ surface with white lettering for data systems.
4. Dark red (burgundy) core/surface with white lettering for security system.
5. Purple core/surface with white lettering for AV system.
6. Blue core/surface with white lettering for HVAC Controls.

2.3 LABELS

A. Vinyl Wraparound Labels: Preprinted, flexible labels laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing label ends.

1. Manufacturers: Subject to compliance with requirements, undefined:

   a) Brady Corporation.
   b) emedco.
   c) HellermannTyton.
   d) LEM Products Inc.
   e) Marking Services, Inc.
   f) Panduit Corp.
   g) Seton Identification Products; a Brady Corporation company.

B. Self-Adhesive Wraparound Labels: Preprinted Write-on, 3-mil- thick, polyester vinyl flexible label with acrylic pressure-sensitive adhesive.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a) Brady Corporation.
   b) emedco.
   c) Ideal Industries, Inc.
   d) LEM Products Inc.

e) Marking Services, Inc.
f) Panduit Corp.
g) Seton Identification Products; a Brady Corporation company.

2. Self-Lamination: Clear; UV-, weather- and chemical-resistant; self-laminating, protective shield over the legend. Labels sized such that the clear shield overlaps the entire printed legend.
3. Marker for Labels:

a) Machine-printed, permanent, waterproof, black ink recommended by printer manufacturer.

C. Self-Adhesive Labels: Vinyl, thermal, transfer-printed, 3-mil- thick, multicolor, weather- and UV-resistant, pressure-sensitive adhesive labels, configured for intended use and location.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a) Brady Corporation.
b) emedco.
c) HellermannTyton.
d) Ideal Industries, Inc.
e) LEM Products Inc.
f) Marking Services, Inc.
g) Panduit Corp.
h) Seton Identification Products; a Brady Corporation company.

2. Minimum Nominal Size:

a) 1-1/2 by 6 inches for raceway and conductors.
b) 3-1/2 by 5 inches for equipment.
c) As required by authorities having jurisdiction.

2.4 BANDS AND TUBES

A. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tubes with machine-printed identification labels, sized to suit diameter and shrunk to fit firmly. Full shrink recovery occurs at a maximum of 200 deg F. Comply with UL 224.

B. TAPES AND STENCILS

1. Marker Tapes: Vinyl or vinyl-cloth, self-adhesive wraparound type, with circuit identification legend machine printed by thermal transfer or equivalent process.

a) Manufacturers: Subject to compliance with requirements, undefined:

1) Carlton Industries, LP.
2) HellermannTyton.
3) Ideal Industries, Inc.
4) Marking Services, Inc.
5) Panduit Corp.

C. Self-Adhesive Vinyl Tape: Colored, heavy duty, waterproof, fade resistant; not less than 3 mils thick by 1 to 2 inches wide; compounded for outdoor use.

1. Manufacturers: Subject to compliance with requirements, undefined:

a) Brady Corporation.
b) Carlton Industries, LP.
c) emedco.
d) Marking Services, Inc.

D. Tape and Stencil: 4-inch- wide black stripes on 10-inch centers placed diagonally over orange background and are 12 inches wide. Stop stripes at legends.

1. Manufacturers: Subject to compliance with requirements, undefined:

a) HellermannTyton.
b) LEM Products Inc.
c) Marking Services, Inc.
d) Seton Identification Products; a Brady Corporation company.

E. Stenciled Legend: In nonfading, waterproof, black ink or paint. Minimum letter height shall be 1 inch.

2.5 ARC-FLASH WARNING LABELS

A. Label shall have an orange header with the wording, "WARNING, ARC-FLASH HAZARD," and shall include the following information taken directly from the arc-flash hazard analysis:

1. Location designation.
2. Nominal voltage.
3. Protection boundaries.

a) Arc-flash boundary.
b) Restricted approach boundary.
c) Limited approach boundary.

4. Arc flash PPE category.
5. Required minimum arc rating of PPE in Cal/cm squared.
6. Available incident energy.
7. Available fault current.
8. Working distance.
9. Engineering report number, revision number, and issue date.

B. Labels shall be machine printed, with no field-applied markings.

C. Labels shall be provided for electrical equipment, such as panelboards, meter socket enclosures that is likely to require examination, adjustment, servicing, or maintenance while energized as listed within paragraph 3.4.B.

2.6 TAGS

A. Nonmetallic Preprinted Tags: Polyethylene tags, 0.023 inch thick, color-coded for phase and voltage level, with factory printed permanent designations; punched for use with self-locking cable tie fastener.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a) Brady Corporation.
b) Carlton Industries, LP.
c) emedco.
d) LEM Products Inc.
e) Marking Services, Inc.
f) Panduit Corp.
g) Seton Identification Products; a Brady Corporation company.

2.7 SIGNS

A. Engraved laminated phenolic Nameplates and Signs:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a) Brady Corporation.
b) Carlton Industries, LP.
c) emedco.
d) Marking Services, Inc.
e) Seton Identification Products; a Brady Corporation company.

2. Engraved legend.
3. Thickness:

a) For signs up to 20 sq. in., minimum 1/16 inch thick.
b) For signs larger than 20 sq. in., 1/8 inch thick.

2.8 CABLE TIES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. HellermannTyton.
2. Ideal Industries, Inc.
3. Marking Services, Inc.
4. Panduit Corp.

B. Plenum-Rated Cable Ties: Self-extinguishing, UV stabilized, one piece, and self-locking.

1. Minimum Width: 3/16 inch.
2. Tensile Strength at 73 Deg F according to ASTM D638: 7000 psi.
3. UL 94 Flame Rating: 94V-0.
4. Temperature Range: Minus 50 to plus 284 deg F.
5. Color: Black.

2.9 MISCELLANEOUS IDENTIFICATION PRODUCTS

A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Retain paint system applicable for surface material and location (exterior or interior).

B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.1 PREPARATION

A. Self-Adhesive Identification Products: Before applying electrical identification products, clean substrates of substances that could impair bond, using materials and methods recommended by manufacturer of identification product.

3.2 INSTALLATION

A. Verify and coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and operation and maintenance manual. Use consistent designations throughout Project.

B. Install identifying devices before installing acoustical ceilings and similar concealment.

C. Verify identity of each item before installing identification products.

D. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and operation and maintenance manual.

E. Apply identification devices to surfaces that require finish after completing finish work.

F. Install signs with approved legend to facilitate proper identification, operation, and maintenance of electrical systems and connected items.

G. System Identification for Raceways and Cables under 600 V: Identification shall completely encircle cable or conduit. Place identification of two-color markings in contact, side by side.

1. Secure tight to surface of conductor, cable, or raceway.

H. System Identification for Raceways and Cables over 600 V: Identification shall completely encircle cable or conduit. Place adjacent identification of two-color markings in contact, side by side.

1. Secure tight to surface of conductor, cable, or raceway.

I. Auxiliary Electrical Systems Conductor Identification: Identify field-installed alarm, control, and signal connections.

J. Elevated Components: Increase sizes of labels, signs, and letters to those appropriate for viewing from the floor.

K. Vinyl Wraparound Labels:

1. Secure tight to surface of raceway or cable at a location with high visibility and accessibility.
2. Attach labels that are not self-adhesive type with clear vinyl tape, with adhesive appropriate to the location and substrate.

L. Self-Adhesive Wraparound Labels: Secure tight to surface at a location with high visibility and accessibility.

M. Self-Adhesive Labels:

1. On each item, install unique designation label that is consistent with wiring diagrams, schedules, and operation and maintenance manual.
2. Unless otherwise indicated, provide a single line of text with 1/2-inch- high letters on 1-1/2-inch-high label; where two lines of text are required, use labels 2 inches high.

N. Heat-Shrink, Preprinted Tubes: Secure tight to surface at a location with high visibility and accessibility.

O. Marker Tapes: Secure tight to surface at a location with high visibility and accessibility.

P. Self-Adhesive Vinyl Tape: Secure tight to surface at a location with high visibility and accessibility.

1. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding.

Q. Tape and Stencil: Comply with requirements in painting Sections for surface preparation and paint application.

R. Nonmetallic Preprinted Tags:

1. Place in a location with high visibility and accessibility.
2. Secure using plenum-rated cable ties.

S. Engraved laminated phenolic Nameplates and Signs:

1. Attach nameplates and signs that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.
2. Unless otherwise indicated, provide a single line of text with 1/2-inch- high letters on 1-1/2-inch-high sign; where two lines of text are required, use labels 2 inches high.

T. Cable Ties: General purpose, for attaching tags, except as listed below:

1. Outdoors: UV-stabilized nylon.
2. In Spaces Handling Environmental Air: Plenum rated.

U. Arch-flash labels:

1. Provide self-adhesive labels.
2. Apply one arc-flash label on the front cover of each section of the equipment and on side or rear covers with accessible live parts and hinged doors or removable plates for each equipment included in the study. Base arc-flash label data on highest values calculated at each location.

3.3 IDENTIFICATION SCHEDULE

A. Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment. Install access doors or panels to provide view of identifying devices.

B. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, pull points, and locations of high visibility. Identify by system and circuit designation.

C. All panelboards supplied by feeders shall be permanently marked to indicate each equipment where the power originates. The label shall be self-adhesive type and permanently affixed.

D. Prior to energizing, all equipment shall be properly identified with equipment identification, equipment controlled, panel and circuit feeding equipment, electrical ratings and date of installation.

E. All outlet boxes, junction boxes, and pull boxes shall have their covers and exterior visible surfaces painted with colors to match the surface color scheme outlined in section 2.2.E. This includes covers on boxes above lift-out and other type accessible ceilings.

F. Power-Circuit Conductor Identification, 600 V or Less: For conductors in vaults, pull and junction boxes, manholes, and handholes, use vinyl wraparound labels to identify the phase.

1. Locate identification at changes in direction, at penetrations of walls and floors, at 50-foot maximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.

G. Control-Circuit Conductor Identification: For conductors and cables in pull and junction boxes, manholes, and handholes, use self-adhesive labels with the conductor or cable designation, origin, and destination.

H. Control-Circuit Conductor Termination Identification: For identification at terminations, provide heat-shrink preprinted tubes with the conductor designation.

I. Empty Conduits and Conductors to Be Extended in the Future: Identification shall be by tags with cord or wire attached to conduit or fitting and shall indicate where they terminate.

J. Auxiliary Electrical Systems Conductor Identification: Self-adhesive vinyl tape that is uniform and consistent with system used by manufacturer for factory-installed connections.

1. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, and pull points. Identify by system and circuit designation.

K. Instructional Signs: Self-adhesive labels, including the color code for grounded and ungrounded conductors.

L. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Self-adhesive labels Baked-enamel warning signs.

1. Apply to exterior of door, cover, or other access.
2. For equipment with multiple power or control sources, apply to door or cover of equipment, including, but not limited to, the following:

a) Power-transfer switches.
b) Controls with external control power connections.

M. Arc Flash Warning Labeling:

1. Each piece of equipment listed below shall have an arc-flash label applied to it:

a) All panelboards, enclosed circuit breakers, enclosed safety switches.
b) Variable frequency motor controllers.
c) Motor Disconnects
d) Generator docking station.

N. Operating Instruction Signs: Laminated engraved phenolic signs.

O. Emergency Operating Instruction Signs: Baked-enamel warning signs Laminated acrylic or melamine plastic signs with white legend on a red background with minimum 3/8-inch- high letters for emergency instructions at equipment used for power transfer.

P. Equipment Identification Labels:

1. Indoor Equipment: Laminated engraved phenolic sign.
2. Outdoor Equipment: Laminated engraved phenolic sign.
3. Equipment to Be Labeled:

a) Panelboards: Typewritten directory of circuits in the location provided by panelboard manufacturer. Panelboard identification shall be in the form of a self-adhesive, engraved, laminated acrylic or melamine label.
b) Enclosures and electrical cabinets.
c) Access doors and panels for concealed electrical items.
d) Enclosed circuit breakers. Each disconnecting means shall be legibly marked to indicate its purpose.
e) Enclosed controllers.
f) Push-button stations.
g) Power-transfer equipment.
h) Contactors.

i) Remote-controlled switches, dimmer modules, and control devices.
j) Monitoring and control equipment.
k) Wiring Devices.
l) Lighting Control System head end and all associated system components.

END OF SECTION 260553

This page intentionally left blank.

SECTION 260573.13 - SHORT-CIRCUIT STUDIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes a computer-based, fault-current study to determine the minimum interrupting capacity of circuit protective devices.

1.2 DEFINITIONS

A. One-Line Diagram: A diagram that shows, by means of single lines and graphic symbols, the course of an electric circuit or system of circuits and the component devices or parts used therein.

B. Power System Analysis Software Developer: An entity that commercially develops, maintains, and distributes computer software used for power system studies.

C. Power Systems Analysis Specialist: Professional engineer in charge of performing the study and documenting recommendations, licensed in the state where Project is located.

D. Protective Device: A device that senses when an abnormal current flow exists and then removes the affected portion of the circuit from the system.

E. SCCR: Short-circuit current rating.

F. Service: The conductors and equipment for delivering electric energy from the serving utility to the wiring system of the premises served.

G. Single-Line Diagram: See "One-Line Diagram."

1.3 ACTION SUBMITTALS

A. Product Data:

1. Submit the following concurrently or prior to the approval of system protective devices submittals. Submittals shall be in digital form.

   a. Short-circuit study input data, including completed computer program input data sheets.
   b. Short-circuit study and equipment evaluation report; signed, dated, and sealed by a qualified professional engineer.

      1) Submit study report for action prior to receiving final approval of distribution equipment submittals. If formal completion of studies will cause delay in equipment manufacturing, obtain approval from Architect for preliminary submittal of sufficient study data to ensure that selection of devices and associated characteristics is satisfactory.
      2) Revised one-line diagram, reflecting field investigation results and results of short-circuit study.

1.4 CLOSEOUT SUBMITTALS

A. A complete copy of the study, along with a tabulation of all individual breaker settings, shall be presented to the Owner no later than at completion of building Level 4 commissioning. This shall include a soft copy

of the input data that was used to determine the fault current levels, to enable future re-evaluation of the system if loads are added or removed or parameters are changed.

B. Operation and Maintenance Data:

1. For overcurrent protective devices to include in emergency, operation, and maintenance manuals.
2. The following are from the Short-Circuit Study Report:

a. Final one-line diagram.
b. Final Short-Circuit Study Report.
c. Short-circuit study data files.
d. Power system data.

1.5 QUALITY ASSURANCE

A. Study shall be performed using commercially developed and distributed software designed specifically for power system analysis.

B. Software algorithms shall comply with requirements of standards and guides specified in this Section.

C. Manual calculations are unacceptable.

1. Power System Analysis Software Qualifications: Computer program shall be designed to perform short-circuit studies or have a function, component, or add-on module designed to perform short-circuit studies.
2. Computer program shall be developed under the charge of a licensed professional engineer who holds IEEE Computer Society's Certified Software Development Professional certification.

D. Power Systems Analysis Specialist Qualifications: Professional engineer licensed in the state where Project is located. All elements of the study shall be performed under the direct supervision and control of this professional engineer.

E. Short-Circuit Study Certification: Short-Circuit Study Report shall be signed and sealed by Power Systems Analysis Specialist.

PART 2 - PRODUCTS

2.1 POWER SYSTEM ANALYSIS SOFTWARE DEVELOPERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. EasyPower, LLC (formerly ESA Inc.).
2. Power Analytics, Corporation.
3. SKM Systems Analysis, Inc.

B. Comply with IEEE 399 and IEEE 551.

1. Analytical features of power systems analysis software program shall have capability to calculate "mandatory," "very desirable," and "desirable" features as listed in IEEE 399.

C. Computer software program shall be capable of plotting and diagramming time-current-characteristic curves as part of its output.

2.2 SHORT-CIRCUIT STUDY REPORT CONTENTS

A. Executive summary of study findings.

B. Study descriptions, purpose, basis, and scope. Include case descriptions, definition of terms, and guide for interpretation of results.

C. One-line diagram of modeled power system, showing the following:

1. Protective device designations and ampere ratings.
2. Conductor types, sizes, and lengths.
3. Transformer kilovolt ampere (kVA) and voltage ratings.
4. Motor and generator designations and kVA ratings.
5. Switchgear, switchboard, motor-control center, and panelboard designations and ratings.
6. Derating factors and environmental conditions.
7. Any revisions to electrical equipment required by the study.

D. Comments and recommendations for system improvements or revisions in a written document, separate from one-line diagram.

E. Protective Device Evaluation:

1. Evaluate equipment and protective devices and compare to available short-circuit currents. Verify that equipment withstand ratings exceed available short-circuit current at equipment installation locations.
2. Tabulations of circuit breaker, fuse, and other protective device ratings versus calculated short-circuit duties.
3. For 600-V overcurrent protective devices, ensure that interrupting ratings are equal to or higher than calculated 1/2-cycle symmetrical fault current.
4. For devices and equipment rated for asymmetrical fault current, apply multiplication factors listed in standards to 1/2-cycle symmetrical fault current.
5. Verify adequacy of phase conductors at maximum three-phase bolted fault currents; verify adequacy of equipment grounding conductors and grounding electrode conductors at maximum ground-fault currents. Ensure that short-circuit withstand ratings are equal to or higher than calculated 1/2-cycle symmetrical fault current.

F. Short-Circuit Study Input Data:

1. One-line diagram of system being studied.
2. Power sources available.
3. Manufacturer, model, and interrupting rating of protective devices.
4. Conductors.
5. Transformer data.

G. Short-Circuit Study Output Reports:

1. Low-Voltage Fault Report: Three-phase and unbalanced fault calculations, showing the following for each overcurrent device location:

   a. Voltage.
   b. Calculated fault-current magnitude and angle.
   c. Fault-point X/R ratio.
   d. Equivalent impedance.

2. Momentary Duty Report: Three-phase and unbalanced fault calculations, showing the following for each overcurrent device location:

   a. Voltage.
   b. Calculated symmetrical fault-current magnitude and angle.

c. Fault-point X/R ratio.
d. Calculated asymmetrical fault currents:

1) Based on fault-point X/R ratio.
2) Based on calculated symmetrical value multiplied by 1.6.
3) Based on calculated symmetrical value multiplied by 2.7.

3. Interrupting Duty Report: Three-phase and unbalanced fault calculations, showing the following for each overcurrent device location:

a. Voltage.
b. Calculated symmetrical fault-current magnitude and angle.
c. Fault-point X/R ratio.
d. No AC Decrement (NACD) ratio.
e. Equivalent impedance.
f. Multiplying factors for 2-, 3-, 5-, and 8-cycle circuit breakers rated on a symmetrical basis.
g. Multiplying factors for 2-, 3-, 5-, and 8-cycle circuit breakers rated on a total basis.

PART 3 - EXECUTION

3.1 POWER SYSTEM DATA

A. Obtain all data necessary for conduct of the study.

1. Verify completeness of data supplied on one-line diagram. Call any discrepancies to Architect's attention.
2. For equipment included as Work of this Project, use characteristics submitted under provisions of action submittals and information submittals for this Project.

B. Gather and tabulate the required input data to support the short-circuit study. Comply with requirements in Section 017839 "Project Record Documents" for recording circuit protective device characteristics. Record data on a Record Document copy of one-line diagram. Comply with recommendations in IEEE 551 as to the amount of detail that is required to be acquired in the field. Data include, but are not limited to, the following:

1. Product Data for Project's overcurrent protective devices involved in overcurrent protective device coordination studies. Use equipment designation tags that are consistent with electrical distribution system diagrams, overcurrent protective device submittals, input and output data, and recommended device settings.
2. Obtain electrical power utility impedance at the service.
3. Power sources and ties.
4. For transformers, include kVA, primary and secondary voltages, connection type, impedance, X/R ratio, taps measured in percent, and phase shift.
5. For circuit breakers and fuses, provide manufacturer and model designation. List type of breaker, type of trip, SCCR, current rating, and breaker settings.
6. Generator short-circuit current contribution data, including short-circuit reactance, rated kVA, rated voltage, and X/R ratio.
7. Motor horsepower and NEMA MG 1 code letter designation.
8. Conductor sizes, lengths, number, conductor material and conduit material (magnetic or nonmagnetic).
9. Derating factors.

3.2 SHORT-CIRCUIT STUDY

A. Perform study following the general study procedures contained in IEEE 399.

B. Calculate short-circuit currents according to IEEE 551.

C. Base study on device characteristics supplied by device manufacturer.

D. Begin short-circuit current analysis at the service, extending down to the lowest bus of the power distribution system depicted in the riser diagrams within the project drawings.

E. Study electrical distribution system from normal and alternate power sources throughout electrical distribution system for Project. Study all cases of system-switching configurations and alternate operations that could result in maximum fault conditions.

F. Include the ac fault-current decay from induction motors, synchronous motors, and asynchronous generators and apply to low- and medium-voltage, three-phase ac systems. Also account for the fault-current dc decrement to address asymmetrical requirements of interrupting equipment.

G. Calculate short-circuit momentary and interrupting duties for a three-phase bolted fault and a single line-to-ground fault to the lowest bus of the power distribution system depicted in the riser diagrams within the project drawings. In addition, calculate short circuit current at all points to be evaluated within the arc flash hazard analyses of Section 260573.19 as well as: motor controllers of multi-motor and combination load equipment associated with air-conditioning and refrigeration; industrial control panels listed to UL 508(A); elevator controllers; and fire pump controllers/transfer switches.

1. For grounded systems, provide a bolted line-to-ground fault-current study for areas as defined for the three-phase bolted fault short-circuit study.

H. Include in the report identification of any protective device applied outside its capacity.

END OF SECTION 260573.13

This page intentionally left blank.

SECTION 260573.16 - COORDINATION STUDIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes computer-based, overcurrent protective device coordination studies to determine overcurrent protective devices and to determine overcurrent protective device settings for selective tripping.

1.2 DEFINITIONS

A. One-Line Diagram: A diagram that shows, by means of single lines and graphic symbols, the course of an electric circuit or system of circuits and the component devices or parts used therein.

B. Power System Analysis Software Developer: An entity that commercially develops, maintains, and distributes computer software used for power system studies.

C. Power System Analysis Specialist: Professional engineer in charge of performing the study and documenting recommendations, licensed in the state where Project is located.

D. Protective Device: A device that senses when an abnormal current flow exists and then removes the affected portion of the circuit from the system.

E. SCCR: Short-circuit current rating.

F. Service: The conductors and equipment for delivering electric energy from the serving utility to the wiring system of the premises served.

G. Single-Line Diagram: See "One-Line Diagram."

1.3 ACTION SUBMITTALS

A. Product Data:

1. Submit the following after the approval of system protective devices submittals. Submittals shall be in digital form.

   a. Coordination-study input data, including completed computer program input data sheets.
   b. Study and equipment evaluation reports.

2. Overcurrent protective device coordination study report; signed, dated, and sealed by a qualified professional engineer licensed in the state of NC.

   a. Submit study report for action prior to receiving final approval of distribution equipment submittals. If formal completion of studies will cause delay in equipment manufacturing, obtain approval from Architect for preliminary submittal of sufficient study data to ensure that selection of devices and associated characteristics is satisfactory.

1.4 CLOSEOUT SUBMITTALS

A. A complete copy of the study, along with a tabulation of all individual breaker settings, shall be presented to the Owner no later than at completion of building Level 4 commissioning. This shall include a soft copy of the input data that was used to determine the fault current levels, to enable future re-evaluation of the system if loads are added or removed or parameters are changed.

B. Operation and Maintenance Data: For overcurrent protective devices to include in emergency, operation, and maintenance manuals.

1. The following are from the Coordination Study Report:

a. Final one-line diagram.
b. Final protective device coordination study.
c. Coordination study data files.
d. List of all protective device settings.
e. Time-current coordination curves.
f. Power system data.

1.5 QUALITY ASSURANCE

A. Studies shall be performed using commercially developed and distributed software designed specifically for power system analysis.

B. Software algorithms shall comply with requirements of standards and guides specified in this Section.

C. Manual calculations are unacceptable.

D. Power System Analysis Software Qualifications:

1. Computer program shall be designed to perform coordination studies or have a function, component, or add-on module designed to perform coordination studies.
2. Computer program shall be developed under the charge of a licensed professional engineer who holds IEEE Computer Society's Certified Software Development Professional certification.

E. Power Systems Analysis Specialist Qualifications: Professional engineer licensed in the state where Project is located. All elements of the study shall be performed under the direct supervision and control of this professional engineer.

PART 2 - PRODUCTS

2.1 POWER SYSTEM ANALYSIS SOFTWARE DEVELOPERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. EasyPower, LLC (formerly ESA Inc.).
2. Power Analytics, Corporation.
3. SKM Systems Analysis, Inc.

B. Comply with IEEE 242 and IEEE 399.

C. Analytical features of device coordination study computer software program shall have the capability to calculate "mandatory," "very desirable," and "desirable" features as listed in IEEE 399.

D. Computer software program shall be capable of plotting and diagramming time-current-characteristic curves as part of its output. Computer software program shall report device settings and ratings of all overcurrent protective devices and shall demonstrate selective coordination by computer-generated, time-current coordination plots.

2.2 COORDINATION STUDY REPORT CONTENTS

A. Executive summary of study findings.

B. Study descriptions, purpose, basis, and scope. Include case descriptions, definition of terms, and guide for interpretation of results.

C. One-line diagram of modeled power system, showing the following:

1. Protective device designations and ampere ratings.
2. Conductor types, sizes, and lengths.
3. Transformer kilovolt ampere (kVA) and voltage ratings.
4. Motor and generator designations and kVA ratings.
5. Switchgear, switchboard, motor-control center, and panelboard designations.
6. Any revisions to electrical equipment required by the study.
7. Study Input Data: As described in "Power System Data" Article.

   a. Short-Circuit Study Output: As specified in "Short-Circuit Study Output Reports" Paragraph in "Short-Circuit Study Report Contents" Article in Section 260573.13 "Short-Circuit Studies."

D. Protective Device Coordination Study:

1. Report recommended settings of protective devices, ready to be applied in the field. Use manufacturer's data sheets for recording the recommended setting of overcurrent protective devices when available.

   a. Phase and Ground Relays:

      1) Device tag.
      2) Relay current transformer ratio and tap, time dial, and instantaneous pickup value.
      3) Recommendations on improved relaying systems, if applicable.

   b. Circuit Breakers:

      1) Adjustable pickups and time delays (long time, short time, and ground).
      2) Adjustable time-current characteristic.
      3) Adjustable instantaneous pickup.
      4) Recommendations on improved trip systems, if applicable.

   c. Fuses: Show current rating, voltage, and class.

E. Time-Current Coordination Curves: Determine settings of overcurrent protective devices to achieve selective coordination. Graphically illustrate that adequate time separation exists between devices installed in series, including power utility company's upstream devices. Prepare separate sets of curves for the switching schemes and for emergency periods where the power source is local generation. Show the following information:

1. Device tag and title, one-line diagram with legend identifying the portion of the system covered.
2. Terminate device characteristic curves at a point reflecting maximum symmetrical or asymmetrical fault current to which the device is exposed.
3. Identify the device associated with each curve by manufacturer type, function, and, if applicable, tap, time delay, and instantaneous settings recommended.
4. Plot the following listed characteristic curves, as applicable:

   a. Medium- and low-voltage fuses including manufacturer's minimum melt, total clearing, tolerance, and damage bands.
   b. Low-voltage equipment circuit-breaker trip devices, including manufacturer's tolerance bands.

c. Transformer full-load current, magnetizing inrush current, and ANSI through-fault protection curves.
d. Cables and conductors damage curves.
e. Ground-fault protective devices.
f. Motor-starting characteristics and motor damage points.
g. Generator short-circuit decrement curve and generator damage point.
h. The largest feeder circuit breaker in each motor-control center and panelboard.

5. Maintain selectivity for tripping currents caused by overloads.
6. Provide adequate time margins between device characteristics such that selective operation is achieved.
7. Comments and recommendations for system improvements.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine Project overcurrent protective device submittals for compliance with electrical distribution system coordination requirements and other conditions affecting performance of the Work. Emergency and legally required power branches shall be selectively coordinated for any fault time extending beyond 0.1 sec..

1. Proceed with coordination study only after relevant equipment submittals have been assembled. Overcurrent protective devices that have not been submitted and approved prior to coordination study may not be used in study.

3.2 POWER SYSTEM DATA

A. Obtain all data necessary for conduct of the overcurrent protective device study.

1. Verify completeness of data supplied in one-line diagram on Drawings. Call any discrepancies to Architect's attention.
2. For equipment included as Work of this Project, use characteristics submitted under provisions of action submittals and information submittals for this Project.

B. Gather and tabulate all required input data to support the coordination study. List below is a guide. Comply with recommendations in IEEE 551 for the amount of detail required to be acquired in the field. Data include, but are not limited to, the following:

1. Product Data for overcurrent protective devices specified in other Sections and involved in overcurrent protective device coordination studies. Use equipment designation tags that are consistent with electrical distribution system diagrams, overcurrent protective device submittals, input and output data, and recommended device settings.
2. Electrical power utility impedance at the service.
3. Power sources and ties.
4. Short-circuit current at each system bus (three phase and line to ground).
5. Full-load current of all loads.
6. Voltage level at each bus.
7. For transformers, include kVA, primary and secondary voltages, connection type, impedance, X/R ratio, taps measured in percent, and phase shift.
8. For circuit breakers and fuses, provide manufacturer and model designation. List type of breaker, type of trip and available range of settings, SCCR, current rating, and breaker settings.
9. Generator short-circuit current contribution data, including short-circuit reactance, rated kVA, rated voltage, and X/R ratio.
10. Motor horsepower and NEMA MG 1 code letter designation.
11. Low-voltage cable sizes, lengths, number, conductor material, and conduit material (magnetic or nonmagnetic).

12. Data sheets to supplement electrical distribution system one-line diagram, cross-referenced with tag numbers on diagram, showing the following:
    a. Special load considerations, including starting inrush currents and frequent starting and stopping.
    b. Transformer characteristics, including primary protective device, magnetic inrush current, and overload capability.
    c. Motor full-load current, locked rotor current, service factor, starting time, type of start, and thermal-damage curve.
    d. Generator thermal-damage curve.
    e. Ratings, types, and settings of utility company's overcurrent protective devices.
    f. Special overcurrent protective device settings or types stipulated by utility company.
    g. Time-current-characteristic curves of devices indicated to be coordinated.
    h. Manufacturer, frame size, interrupting rating in amperes root mean square (rms) symmetrical, ampere or current sensor rating, long-time adjustment range, short-time adjustment range, and instantaneous adjustment range for circuit breakers.
    i. Manufacturer and type, ampere-tap adjustment range, time-delay adjustment range, instantaneous attachment adjustment range, and current transformer ratio for overcurrent relays.
    j. Switchgear, switchboards, motor-control centers, and panelboards ampacity, and SCCR in amperes rms symmetrical.

3.3 COORDINATION STUDY

A. Comply with IEEE 242 for calculating short-circuit currents and determining coordination time intervals.

B. Comply with IEEE 399 for general study procedures.

C. Base study on device characteristics supplied by device manufacturer.

D. Begin analysis at the service, extending down tothe lowest bus of the power distribution system depicted in the riser diagrams within the project drawings.:

E. Study electrical distribution system from normal and alternate power sources throughout electrical distribution system for Project. Study all cases of system-switching configurations and alternate operations that could result in maximum fault conditions.

F. Transformer Primary Overcurrent Protective Devices:
    1. Device shall not operate in response to the following:
        a. Inrush current when first energized.
        b. Self-cooled, full-load current or forced-air-cooled, full-load current, whichever is specified for that transformer.
        c. Permissible transformer overloads according to IEEE C57.96 if required by unusual loading or emergency conditions.
    2. Device settings shall protect transformers according to IEEE C57.12.00, for fault currents.

G. Motor Protection:
    1. Select protection for low-voltage motors according to IEEE 242 and NFPA 70.

H. Conductor Protection: Protect cables against damage from fault currents according to ICEA P-32-382, ICEA P-45-482, and protection recommendations in IEEE 242. Demonstrate that equipment withstands the maximum short-circuit current for a time equivalent to the tripping time of the primary relay protection or

total clearing time of the fuse. To determine temperatures that damage insulation, use curves from cable manufacturers or from listed standards indicating conductor size and short-circuit current.

I. Generator Protection: Select protection according to manufacturer's written instructions and to IEEE 242.

J. Include the ac fault-current decay from induction motors, synchronous motors, and asynchronous generators and apply to low- and medium-voltage, three-phase ac systems. Also account for fault-current dc decrement, to address asymmetrical requirements of interrupting equipment.

K. Calculate short-circuit momentary and interrupting duties for a three-phase bolted fault and a single line-to-ground fault at each equipment indicated on one-line diagram.

1. For grounded systems, provide a bolted line-to-ground fault-current study for areas as defined for the three-phase bolted fault short-circuit study.

L. Protective Device Evaluation:

1. Evaluate equipment and protective devices and compare to short-circuit ratings.
2. Adequacy of switchgear, motor-control centers, and panelboard bus bars to withstand short-circuit stresses.
3. Include in the report identification of any protective device applied outside its capacity.

3.4 FIELD ADJUSTING

A. Adjust relay and protective device settings according to recommended settings provided by the coordination study. Field adjustments shall be completed by the engineering service division of equipment manufacturer under the "Startup and Acceptance Testing" contract portion.

B. Make minor modifications to equipment as required to accomplish compliance with protective device coordination studies.

3.5 DEMONSTRATION

A. Engage Power Systems Analysis Specialist to train Owner's maintenance personnel in the following:

1. Acquaint personnel in fundamentals of operating the power system in normal and emergency modes.
2. Hand-out and explain the coordination study objectives, study descriptions, purpose, basis, and scope. Include case descriptions, definition of terms, and guide for interpreting time-current coordination curves.
3. For Owner's maintenance staff certified as NETA ETT-Certified Technicians Level III or NICET Electrical Power Testing Level III Technicians, teach how to adjust, operate, and maintain overcurrent protective device settings.

END OF SECTION 260573.16

SECTION 260573.19 - ARC-FLASH HAZARD ANALYSIS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes a computer-based, arc-flash study to determine the arc-flash hazard distance and the incident energy to which personnel could be exposed during work on or near electrical equipment.

1.2 DEFINITIONS

A. One-Line Diagram: A diagram that shows, by means of single lines and graphic symbols, the course of an electric circuit or system of circuits and the component devices or parts used therein.

B. Power System Analysis Software Developer: An entity that commercially develops, maintains, and distributes computer software used for power system studies.

C. Power Systems Analysis Specialist: Professional engineer in charge of performing the study and documenting recommendations, licensed in the state where Project is located.

D. Protective Device: A device that senses when an abnormal current flow exists and then removes the affected portion from the system.

E. SCCR: Short-circuit current rating.

F. Service: The conductors and equipment for delivering electric energy from the serving utility to the wiring system of the premises served.

G. Single-Line Diagram: See "One-Line Diagram."

1.3 ACTION SUBMITTALS

A. Study Submittals: Submit the following submittals after the approval of system protective devices submittals. Submittals shall be in digital form:

1. Arc-flash study input data, including completed computer program input data sheets.
2. Arc-flash study report; signed, dated, and sealed by Power Systems Analysis Specialist.
3. Submit study report for action prior to receiving final approval of distribution equipment submittals. If formal completion of studies will cause delay in equipment manufacturing, obtain approval from Architect for preliminary submittal of sufficient study data to ensure that selection of devices and associated characteristics is satisfactory.

1.4 CLOSEOUT SUBMITTALS

A. A complete copy of the study, along with a tabulation of all individual breaker settings, shall be presented to the Owner no later than at completion of building Level 4 commissioning. This shall include a soft copy of the input data that was used to determine the fault current levels, to enable future re-evaluation of the system if loads are added or removed or parameters are changed.

B. Operation and Maintenance Data:

1. Provide maintenance procedures in equipment manuals according to requirements in NFPA 70E.

2. Operation and Maintenance Procedures: In addition to items specified in Section 017823 "Operation and Maintenance Data," provide maintenance procedures for use by Owner's personnel that comply with requirements in NFPA 70E.

1.5 QUALITY ASSURANCE

A. Study shall be performed using commercially developed and distributed software designed specifically for power system analysis.

B. Software algorithms shall comply with requirements of standards and guides specified in this Section.

C. Manual calculations are unacceptable.

D. Power System Analysis Software Qualifications: An entity that owns and markets computer software used for studies, having performed successful studies of similar magnitude on electrical distribution systems using similar devices.

1. Computer program shall be designed to perform arc-flash analysis or have a function, component, or add-on module designed to perform arc-flash analysis.
2. Computer program shall be developed under the charge of a licensed professional engineer who holds IEEE Computer Society's Certified Software Development Professional certification.

E. Power Systems Analysis Specialist Qualifications: Professional engineer in charge of performing the arc-flash study, analyzing the arc flash, and documenting recommendations, licensed in the state where Project is located. All elements of the study shall be performed under the direct supervision and control of this professional engineer.

F. Arc-Flash Study Certification: Arc-Flash Study Report shall be signed and sealed by Power Systems Analysis Specialist.

PART 2 - PRODUCTS

2.1 COMPUTER SOFTWARE DEVELOPERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. EasyPower, LLC (formerly ESA Inc.).
2. Power Analytics, Corporation.
3. SKM Systems Analysis, Inc.

B. Comply with IEEE 1584 and NFPA 70E.

C. Analytical features of device coordination study computer software program shall have the capability to calculate "mandatory," "very desirable," and "desirable" features as listed in IEEE 399.

2.2 ARC-FLASH STUDY REPORT CONTENT

A. Executive summary of study findings.

B. Study descriptions, purpose, basis, and scope. Include case descriptions, definition of terms, and guide for interpretation of results.

C. One-line diagram, showing the following:

1. Protective device designations and ampere ratings.
2. Conductor types, sizes, and lengths.
3. Transformer kilovolt ampere (kVA) and voltage ratings, including derating factors and environmental conditions.
4. Motor and generator designations and kVA ratings.
5. Switchgear, switchboard, motor-control center, panelboard designations, and ratings.

D. Study Input Data: As described in "Power System Data" Article.

E. Short-Circuit Study Output Data: As specified in "Short-Circuit Study Output Reports" Paragraph in "Short-Circuit Study Report Contents" Article in Section 260573.13 "Short-Circuit Studies."

F. Protective Device Coordination Study Report Contents: As specified in "Coordination Study Report Contents" Article in Section 260573.16 "Coordination Studies."

G. Arc-Flash Study Output Reports:

1. Interrupting Duty Report: Three-phase and unbalanced fault calculations, showing the following for each equipment location included in the report:

a. Voltage.
b. Calculated symmetrical fault-current magnitude and angle.
c. Fault-point X/R ratio.
d. No AC Decrement (NACD) ratio.
e. Equivalent impedance.
f. Multiplying factors for 2-, 3-, 5-, and 8-cycle circuit breakers rated on a symmetrical basis.
g. Multiplying factors for 2-, 3-, 5-, and 8-cycle circuit breakers rated on a total basis.

H. Incident Energy and Flash Protection Boundary Calculations:

1. Arcing fault magnitude.
2. Protective device clearing time.
3. Duration of arc.
4. Arc-flash boundary.
5. Restricted approach boundary.
6. Limited approach boundary.
7. Working distance.
8. Incident energy.
9. Hazard risk category.
10. Recommendations for arc-flash energy reduction.

I. Fault study input data, case descriptions, and fault-current calculations including a definition of terms and guide for interpretation of computer printout.

2.3 ARC-FLASH WARNING LABELS

A. Comply with requirements in Section 260553 "Identification for Electrical Systems" for self-adhesive equipment labels. Produce a 3.5-by-5-inch self-adhesive equipment label for each work location included in the analysis.

B. Label shall have an orange header with the wording, "WARNING, ARC-FLASH HAZARD," and shall include the following information taken directly from the arc-flash hazard analysis:

1. Location designation.
2. Nominal voltage.

3. Protection boundaries.
   a. Arc-flash boundary.
   b. Restricted approach boundary.
   c. Limited approach boundary.
4. Arc flash PPE category.
5. Required minimum arc rating of PPE in Cal/cm squared.
6. Available incident energy.
7. Available fault current.
8. Working distance.
9. Engineering report number, revision number, and issue date.

C. Labels shall be machine printed, with no field-applied markings.

D. Labels shall be provided for electrical equipment, such as switchboards, switchgear, panelboards, meter socket enclosures that is likely to require examination, adjustment, servicing, or maintenance while energized as listed within paragraph 3.4.B.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine Project overcurrent protective device submittals. Proceed with arc-flash study only after relevant equipment submittals have been assembled. Overcurrent protective devices that have not been submitted and approved prior to arc-flash study may not be used in study.

3.2 ARC-FLASH HAZARD ANALYSIS

A. Comply with NFPA 70E and its Annex D for hazard analysis study.

B. Preparatory Studies: Perform the Short-Circuit and Protective Device Coordination studies prior to starting the Arc-Flash Hazard Analysis.
   1. Short-Circuit Study Output: As specified in "Short-Circuit Study Output Reports" Paragraph in "Short-Circuit Study Report Contents" Article in Section 260573.13 "Short-Circuit Studies."
   2. Coordination Study Report Contents: As specified in "Coordination Study Report Contents" Article in Section 260573.16 "Coordination Studies."

C. Calculate maximum and minimum contributions of fault-current size.
   1. Maximum calculation shall assume a maximum contribution from the utility and shall assume motors to be operating under full-load conditions.
   2. Calculate arc-flash energy at 38 percent of maximum short-circuit current according to NFPA 70E recommendations.

D. Calculate the arc-flash protection boundary and incident energy at locations in electrical distribution system where personnel could perform work on energized parts.

E. Include medium- and low-voltage equipment locations as listed within paragraph 3.4.B..

F. Calculate the limited, restricted, and prohibited approach boundaries for each location.

G. Incident energy calculations shall consider the accumulation of energy over time when performing arc-flash calculations on buses with multiple sources. Iterative calculations shall take into account the changing

current contributions, as the sources are interrupted or decremented with time. Fault contribution from motors and generators shall be decremented as follows:

1. Fault contribution from induction motors shall not be considered beyond three to five cycles.
2. Fault contribution from synchronous motors and generators shall be decayed to match the actual decrement of each as closely as possible (for example, contributions from permanent magnet generators will typically decay from 10 per unit to three per unit after 10 cycles).

H. Arc-flash energy shall generally be reported for the maximum of line or load side of a circuit breaker. However, arc-flash computation shall be performed and reported for both line and load side of a circuit breaker as follows:

1. When the circuit breaker is in a separate enclosure.
2. When the line terminals of the circuit breaker are separate from the work location.

I. Base arc-flash calculations on actual overcurrent protective device clearing time. Cap maximum clearing time at two seconds based on IEEE 1584, Section B.1.2.

3.3 POWER SYSTEM DATA

A. Obtain all data necessary for conduct of the arc-flash hazard analysis.

1. Verify completeness of data supplied on one-line diagram on Drawings and under "Preparatory Studies" Paragraph in "Arc-Flash Hazard Analysis" Article. Call discrepancies to Architect's attention.
2. For new equipment, use characteristics from approved submittals under provisions of action submittals and information submittals for this Project.

B. Electrical Survey Data: Gather and tabulate the following input data to support study. Comply with recommendations in IEEE 1584 and NFPA 70E as to the amount of detail that is required to be acquired in the field. Data include, but are not limited to, the following:

1. Product Data for overcurrent protective devices specified in other Sections and involved in overcurrent protective device coordination studies. Use equipment designation tags that are consistent with electrical distribution system diagrams, overcurrent protective device submittals, input and output data, and recommended device settings.
2. Obtain electrical power utility impedance or available short circuit current at the service.
3. Power sources and ties.
4. Short-circuit current at each system bus (three phase and line to ground).
5. Full-load current of all loads.
6. Voltage level at each bus.
7. For transformers, include kVA, primary and secondary voltages, connection type, impedance, X/R ratio, taps measured in percent, and phase shift.
8. For circuit breakers and fuses, provide manufacturer and model designation. List type of breaker, type of trip and available range of settings, SCCR, current rating, and breaker settings.
9. Generator short-circuit current contribution data, including short-circuit reactance, rated kVA, rated voltage, and X/R ratio.
10. Motor horsepower and NEMA MG 1 code letter designation.
11. Low-voltage conductor sizes, lengths, number, conductor material and conduit material (magnetic or nonmagnetic).

3.4 LABELING

A. Apply one arc-flash label on the front cover of each section of the equipment and on side or rear covers with accessible live parts and hinged doors or removable plates for each equipment included in the study. Base arc-flash label data on highest values calculated at each location.

B. Each piece of equipment listed below shall have an arc-flash label applied to it:
   1. All panelboards, enclosed circuit breakers, enclosed safety switches.
   2. Variable frequency motor controllers.
   3. Motor Disconnects
   4. Generator docking station.

C. Note on record Drawings the location of equipment where the personnel could be exposed to arc-flash hazard during their work.
   1. Indicate arc-flash energy.
   2. Indicate protection level required.

3.5 APPLICATION OF WARNING LABELS

A. Install arc-flash warning labels under the direct supervision and control of Power System Analysis Specialist.

END OF SECTION 260573.19

SECTION 260923 - LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Indoor occupancy and vacancy sensors.
2. Switchbox-mounted occupancy sensors.
3. Conductors and cables.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.
2. Section 262726.11 "General – Use – Switches, Dimmer Switches, and Fan – Speed Controller Switches" for wall-box dimmers, non-networkable wall-switch occupancy sensors, and manual light switches.

1.2 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

B. Shop Drawings:

1. Show installation details for the following:
   a. Occupancy sensors.
   b. Vacancy sensors.
2. Interconnection diagrams showing field-installed wiring.
3. Include diagrams for power, signal, and control wiring.

C. Field quality-control reports.

1.3 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For manufacturer's warranties.

1.4 WARRANTY

A. Special Extended Warranty: Manufacturer and Installer warrant that installed lighting control devices perform in accordance with specified requirements and agree to repair or replace, including labor, materials, and equipment, devices that fail to perform as specified within extended warranty period.

1. Failures include, but are not limited to, the following:
   a. Faulty operation of lighting control software.
   b. Faulty operation of lighting control devices.
2. Extended Warranty Period: Two year(s) from date of Final Acceptance.

PART 2 - PRODUCTS

2.1 INDOOR OCCUPANCY AND VACANCY SENSORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Cooper Industries, Inc.
2. Hubbell Control Solutions; brand of Hubbell Electrical Solutions; Hubbell Incorporated.
3. Lithonia Lighting; Acuity Brands Lighting, Inc.

B. General Requirements for Sensors:

1. Ceiling-mounted, solid-state indoor occupancy and vacancy sensors.
2. Dual technology.
3. Hardwired connection to switcLow voltage type.
4. Listed and labeled in accordance with NFPA 70, by a qualified electrical testing laboratory recognized by authorities having jurisdiction and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council to label electrical and mechanical equipment.
5. Operation:

   a. Combination Sensor: Unless otherwise indicated, sensor must be programmed to turn lights on when coverage area is occupied and turn them off when unoccupied, or to turn off lights that have been manually turned on; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.

6. Mounting:

   a. Sensor: Suitable for mounting in any position in a standard device box or outlet box.
   b. Relay: Externally mounted through a 1/2 inch knockout in a standard electrical enclosure.
   c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.

7. Indicator: Digital display, to show when motion is detected during testing and normal operation of sensor.
8. Bypass Switch: Override the "on" function in case of sensor failure.
9. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc; turn lights off when selected lighting level is present.

C. Dual-Technology Type: Ceiling mounted; detect occupants in coverage area using PIR and ultrasonic detection methods. The particular technology or combination of technologies that control on-off functions is selectable in the field by operating controls on unit.

1. Sensitivity Adjustment: Separate for each sensing technology.
2. Detector Sensitivity: Detect occurrences of 6-inch minimum movement of any portion of a human body that presents a target of not less than 36 sq. inch, and detect a person of average size and weight moving not less than 12 inch in either a horizontal or a vertical manner at an approximate speed of 12 inch/s.
3. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. when mounted on a 96-inch-high ceiling.

2.2 SWITCHBOX-MOUNTED OCCUPANCY SENSORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Cooper Industries, Inc.
2. Hubbell Control Solutions; Hubbell Incorporated, Lighting.
3. Lithonia Lighting; Acuity Brands Lighting, Inc.

B. General Requirements for Sensors: Low voltage automatic-wall-switch occupancy sensor with manual on-off switch, suitable for mounting in a single gang switchbox.

1. Listed and labeled in accordance with NFPA 70, by a qualified electrical testing laboratory recognized by authorities having jurisdiction and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council to label electrical and mechanical equipment.
2. Occupancy Sensor Operation: Unless otherwise indicated, turn lights on when coverage area is occupied, and turn lights off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
3. Operating Ambient Conditions: Dry interior conditions, 32 to 120 deg F.

C. Wall-Switch Sensor:

1. Standard Range: 180-degree field of view, field adjustable from 180 to 40 degrees; with a minimum coverage area of 2100 sq. ft.
2. Sensing Technology: Dual technology - PIR and ultrasonic.
3. Switch Type: low voltage field-selectable automatic "on," or manual "on," automatic "off."
4. Capable of controlling load in three-way application.
5. Voltage: Low voltage
6. Ambient-Light Override: Concealed, field-adjustable, light-level sensor from 10 to 150 fc. The switch prevents the lights from turning on when the light level is higher than the set point of the sensor.
7. Concealed, field-adjustable, "off" time-delay selector at up to 30 minutes.
8. Adaptive Technology: Self-adjusting circuitry detects and memorizes usage patterns of the space and helps eliminate false "off" switching.

2.3 CONDUCTORS AND CABLES

A. Power Wiring to Supply Side of Remote-Control Power Sources: Not smaller than No. 12 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Classes 2 and 3 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 24 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

C. Class 1 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than No. 18 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine lighting control devices before installation. Reject lighting control devices that are wet, moisture damaged, or mold damaged.

B. Examine walls and ceilings for suitable conditions where lighting control devices will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF SENSORS

A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression systems, and partition assemblies.

B. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's instructions.

3.3 INSTALLATION OF CONTACTORS

A. Mount electrically held lighting contactors with elastomeric isolator pads to eliminate structure-borne vibration unless contactors are installed in an enclosure with factory-installed vibration isolators.

3.4 INSTALLATION OF WIRING

A. Wiring Method: Comply with Section 260519 "Low-Voltage Electrical Power Conductors and Cables." Minimum conduit size is 1/2 inch.

B. Wiring within Enclosures: Separate power-limited and nonpower-limited conductors in accordance with conductor manufacturer's instructions.

C. Size conductors in accordance with lighting control device manufacturer's instructions unless otherwise indicated.

D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, device, and outlet boxes; terminal cabinets; and equipment enclosures.

3.5 IDENTIFICATION

A. Identify components and power and control wiring in accordance with Section 260553 "Identification for Electrical Systems.

1. Identify controlled circuits in lighting contactors.
2. Identify circuits or luminaires controlled by photoelectric and occupancy sensors at each sensor.

B. Label time switches and contactors with a unique designation.

3.6 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Operational Test: After installing time switches and sensors, and after electrical circuitry has been energized, start units to confirm proper unit operation.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

B. Nonconforming Work:

1. Lighting control devices will be considered defective if they do not pass tests and inspections.
2. Remove and replace defective units and retest.

C. Prepare test and inspection reports.

D. Manufacturer Services:

1. Engage factory-authorized service representative to support field tests and inspections.

3.7 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months from date of Final Acceptance, provide on-site assistance in adjusting lighting control devices to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

1. For occupancy and motion sensors, verify operation at outer limits of detector range. Set time delay to suit Owner's operations.
2. Align high-bay occupancy sensors using manufacturer's laser aiming tool.

END OF SECTION 260923

This page intentionally left blank.

SECTION 262416 - PANELBOARDS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Distribution panelboards.
2. Lighting and appliance branch-circuit panelboards.

B. Related Requirements:

1. Refer to section 26 67 10 "Surge Protective Devices" for surge protective devices.

1.2 DEFINITIONS

A. ATS: Acceptance testing specification.

B. GFCI: Ground-fault circuit interrupter.

C. GFEP: Ground-fault equipment protection.

D. MCCB: Molded-case circuit breaker.

E. SPD: Surge protective device.

F. VPR: Voltage protection rating.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of panelboard.

1. Include materials, switching and overcurrent protective devices, SPDs, accessories, and components indicated.
2. Include dimensions and manufacturers' technical data on features, performance, electrical characteristics, ratings, and finishes.

B. Shop Drawings: For each panelboard and related equipment.

1. Include dimensioned plans, elevations, sections, and details.
2. Show tabulations of installed devices with nameplates, conductor termination sizes, equipment features, and ratings.
3. Detail enclosure types including mounting and anchorage, environmental protection, knockouts, corner treatments, covers and doors, gaskets, hinges, and locks.
4. Detail bus configuration, current, and voltage ratings.
5. Short-circuit current rating of panelboards and overcurrent protective devices.
6. Include evidence of NRTL listing for SPD as installed in panelboard.
7. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices and auxiliary components.
8. Include wiring diagrams for power, signal, and control wiring.
9. Include time-current coordination curves for each type and rating of overcurrent protective device included in panelboards. Submit on translucent log-log graft paper; include selectable ranges for each type of overcurrent protective device. Include an Internet link for electronic access to downloadable PDF of the coordination curves.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For panelboards and components to include in emergency, operation, and maintenance manuals.

1. Manufacturer's written instructions for testing and adjusting overcurrent protective devices.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications: ISO 9001 or ISO 9002 certified.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Remove loose packing and flammable materials from inside panelboards; install temporary electric heating (250 W per panelboard) to prevent condensation.

B. Handle and prepare panelboards for installation according to NEMA PB 1.

1.7 FIELD CONDITIONS

A. Environmental Limitations:

1. Do not deliver or install panelboards until spaces are enclosed and weathertight, wet work in spaces is complete and dry, work above panelboards is complete, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

B. Interruption of Existing Electric Service: Do not interrupt electric service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electric service according to requirements indicated:

1. Notify Owner no fewer than two days in advance of proposed interruption of electric service.
2. Do not proceed with interruption of electric service without Owner's written permission.
3. Comply with NFPA 70E.

PART 2 - PRODUCTS

2.1 PANELBOARDS COMMON REQUIREMENTS

A. Product Selection for Restricted Space: Drawings indicate maximum dimensions for panelboards including clearances between panelboards and adjacent surfaces and other items. Comply with indicated maximum dimensions.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council to label electrical and mechanical equipment.

C. Comply with NEMA PB 1.

D. Comply with NFPA 70.

E. Enclosures: Flush and Surface-mounted, dead-front cabinets.

1. Rated for environmental conditions at installed location.

   a. Shall be door-in-door type construction with concealed hinges
   b. Indoor Dry and Clean Locations: NEMA 250, Type 1.
   c. Outdoor Locations: NEMA 250, Type 3R.
   d. Kitchen Areas: NEMA 250, Type 4X, stainless steel.
   e. Other Wet or Damp Indoor Locations: NEMA 250, Type 4.
   f. Indoor Locations Subject to Dust, Falling Dirt, and Dripping Noncorrosive Liquids: NEMA 250, Type 5.

2. Height: 84 inches maximum.
3. Hinged Front Cover: Entire front trim hinged to box and with standard door within hinged trim cover. Trims shall cover all live parts and shall have no exposed hardware.
4. Finishes:

   a. Panels and Trim: Steel and galvanized steel, factory finished immediately after cleaning and pretreating with manufacturer's standard two-coat, baked-on finish consisting of prime coat and thermosetting topcoat.
   b. Back Boxes: Galvanized steel.

F. Phase, Neutral, and Ground Buses:

1. Material: Hard-drawn copper, 98 percent conductivity.

   a. Plating shall run entire length of bus.
   b. Bus shall be fully rated the entire length.

2. Interiors shall be factory assembled into a unit. Replacing switching and protective devices shall not disturb adjacent units or require removing the main bus connectors.
3. Equipment Ground Bus: Adequate for feeder and branch-circuit equipment grounding conductors; bonded to box.
4. Full-Sized Neutral: Equipped with full-capacity bonding strap for service entrance applications. Mount electrically isolated from enclosure. Do not mount neutral bus in gutter.

G. Conductor Connectors: Suitable for use with conductor material and sizes.

1. Terminations shall allow use of 75 deg C rated conductors without derating.
2. Size: Lugs suitable for indicated conductor sizes, with additional gutter space, if required, for larger conductors.
3. Main and Neutral Lugs: Mechanical type, with a lug on the neutral bar for each pole in the panelboard.
4. Ground Lugs and Bus-Configured Terminators: Mechanical type, with a lug on the bar for each pole in the panelboard.
5. Feed-Through Lugs: Mechanical type, suitable for use with conductor material. Locate at opposite end of bus from incoming lugs or main device.
6. Subfeed (Double) Lugs: Mechanical type suitable for use with conductor material. Locate at same end of bus as incoming lugs or main device.
7. Gutter-Tap Lugs: Mechanical type suitable for use with conductor material and with matching insulating covers. Locate at same end of bus as incoming lugs or main device.

H. Future Devices: Panelboards shall have mounting brackets, bus connections, filler plates, and necessary appurtenances required for future installation of devices.

1. Percentage of Future Space Capacity: 20 percent.

I. Panelboard Short-Circuit Current Rating: Fully rated to interrupt symmetrical short-circuit current available at terminals. Assembly listed by an NRTL for 100 percent interrupting capacity.

1. Panelboards and overcurrent protective devices rated 240 V or less shall have short-circuit ratings as shown on Drawings, but not less than 10,000 A rms symmetrical.
2. Panelboards and overcurrent protective devices rated above 240 V and less than 600 V shall have short-circuit ratings as shown on Drawings, but not less than 14,000 A rms symmetrical.

2.2 SURGE PROTECTION DEVICES

A. Manufacturers: Same as panelboard manufacturer.

B. Factory installed as an integral part of indicated panelboards, complying with UL 1449 SPD Type 2.

C. Refer to specification section 26 67 10 “Surge Protective Devices” for additional requirements.

D. Each unit shall incorporate an integral test feature to verify the operational integrity of the unit's monitoring system.

E. Peak Surge Current Rating: The minimum single-pulse surge current withstand rating per phase shall not be less than 150kA for devices installed in distribution and power panelboards and not less than 100kA for devices installed in branch circuit panelboards. The peak surge current rating shall be the arithmetic sum of the ratings of the individual MOVs in a given mode.

2.3 POWER PANELBOARDS

A. Manufacturers: Subject to compliance with requirements, provide products by:

1. Square D; Schneider Electric USA.
2. Eaton.
3. Siemens Industry, Inc., Energy Management Division

B. Panelboards: NEMA PB 1, distribution type.

C. Doors: Secured with vault-type latch with tumbler lock; keyed alike.

1. For doors more than 36 inches high, provide two latches, keyed alike.

D. Mains: Circuit breaker Fused switch Lugs only.

E. Branch Overcurrent Protective Devices for Circuit-Breaker Frame Sizes Larger Than 125 A: Bolt-on circuit breakers.

2.4 LIGHTING AND APPLIANCE BRANCH-CIRCUIT PANELBOARDS

A. Manufacturers: Subject to compliance with requirements, provide products by:

1. Square D; Schneider Electric USA.

B. Panelboards: NEMA PB 1, lighting and appliance branch-circuit type.

C. Mains: Circuit breaker or lugs only.

D. Branch Overcurrent Protective Devices: Bolt-on circuit breakers, replaceable without disturbing adjacent units.

E. Doors: Door-in-door construction with concealed hinges; secured with multipoint latch with tumbler lock; keyed alike. Outer door shall permit full access to the panel interior. Inner door shall permit access to breaker operating handles and labeling, but current carrying terminals and bus shall remain concealed.

2.5 DISCONNECTING AND OVERCURRENT PROTECTIVE DEVICES

A. Manufacturers: Subject to compliance with requirements, provide products by:

1. Square D; Schneider Electric USA.
2. Eaton.
3. Siemens Industry, Inc., Energy Management Division

B. MCCB: Comply with UL 489, with interrupting capacity to meet available fault currents.

1. Thermal-Magnetic Circuit Breakers:
   a. Inverse time-current element for low-level overloads.
   b. Instantaneous magnetic trip element for short circuits.
   c. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.
2. Adjustable Instantaneous-Trip Circuit Breakers: Magnetic trip element with front-mounted, field-adjustable trip setting.
3. Electronic Trip Circuit Breakers:
   a. RMS sensing.
   b. Field-replaceable rating plug or electronic trip.
   c. Digital display of settings, trip targets, and indicated metering displays.
   d. Multi-button keypad to access programmable functions and monitored data.
   e. Ten-event, trip-history log. Each trip event shall be recorded with type, phase, and magnitude of fault that caused the trip.
   f. Integral test jack for connection to portable test set or laptop computer.
   g. Field-Adjustable Settings:
      1) Instantaneous trip.
      2) Long- and short-time pickup levels.
      3) Long and short time adjustments.
      4) Ground-fault pickup level, time delay, and I squared T response.
4. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller; let-through ratings less than NEMA FU 1, RK-5.
5. GFCI Circuit Breakers: Single- and double-pole configurations with Class A ground-fault protection (6-mA trip).
6. GFEP Circuit Breakers: Class B ground-fault protection (30-mA trip).
7. Arc-Fault Circuit Interrupter Circuit Breakers: Comply with UL 1699; 120/240-V, single-pole configuration.
8. Subfeed Circuit Breakers: Vertically mounted.
9. MCCB Features and Accessories:
   a. Standard frame sizes, trip ratings, and number of poles.
   b. Breaker handle indicates tripped status.
   c. UL listed for reverse connection without restrictive line or load ratings.
   d. Lugs: Mechanical style, suitable for number, size, trip ratings, and conductor materials.
   e. Ground-Fault Protection: Integrally mounted Remote-mounted relay and trip unit with adjustable pickup and time-delay settings, push-to-test feature, and ground-fault indicator.
   f. Rating Plugs: Three-pole breakers with ampere ratings greater than 150 amperes shall have interchangeable rating plugs or electronic adjustable trip units.

2.6 IDENTIFICATION

A. Panelboard Label: Manufacturer's name and trademark, voltage, amperage, number of phases, and number of poles shall be located on the interior of the panelboard door.

B. Breaker Labels: Faceplate shall list current rating, UL and IEC certification standards, and AIC rating.

C. Circuit Directory: Directory card inside panelboard door, mounted in transparent card holder.

1. Circuit directory shall identify specific purpose with detail sufficient to distinguish it from all other circuits.

D. Circuit Directory: Computer-generated circuit directory mounted inside panelboard door with transparent plastic protective cover.

1. Circuit directory shall identify specific purpose with detail sufficient to distinguish it from all other circuits.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify actual conditions with field measurements prior to ordering panelboards to verify that equipment fits in allocated space in, and comply with, minimum required clearances specified in NFPA 70.

B. Receive, inspect, handle, and store panelboards according to NEMA PB 1.1.

C. Examine panelboards before installation. Reject panelboards that are damaged, rusted, or have been subjected to water saturation.

D. Examine elements and surfaces to receive panelboards for compliance with installation tolerances and other conditions affecting performance of the Work.

E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Coordinate layout and installation of panelboards and components with other construction that penetrates walls or is supported by them, including electrical and other types of equipment, raceways, piping, encumbrances to workspace clearance requirements, and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

B. Comply with NECA 1.

C. Install panelboards and accessories according to NEMA PB 1.1.

1. SPDs shall be integrated within panelboards and shall be direct bus bar mounted.

D. Equipment Mounting:

1. Install panelboards on cast-in-place concrete equipment base(s).
2. Attach panelboard to the vertical finished or structural surface behind the panelboard.

E. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from panelboards.

F. Mount top of trim 90 inches above finished floor unless otherwise indicated.

G. Mount panelboard cabinet plumb and rigid without distortion of box.

H. Mount recessed panelboards with fronts uniformly flush with wall finish and mating with back box.

I. Mount surface-mounted panelboards to steel slotted supports 5/8 inch in depth. Orient steel slotted supports vertically.

J. Install overcurrent protective devices and controllers not already factory installed.

1. Set field-adjustable, circuit-breaker trip ranges.
2. Tighten bolted connections and circuit breaker connections using calibrated torque wrench or torque screwdriver per manufacturer's written instructions.

K. Make grounding connections and bond neutral for services and separately derived systems to ground. Make connections to grounding electrodes, separate grounds for isolated ground bars, and connections to separate ground bars.

L. Install filler plates in unused spaces.

M. Stub four 1-inch empty conduits from panelboard into accessible ceiling space or space designated to be ceiling space in the future.

N. Arrange conductors in gutters into groups and bundle and wrap with wire ties.

O. Mount spare fuse cabinet in accessible location.

3.3 IDENTIFICATION

A. Identify field-installed conductors, interconnecting wiring, and components; install warning signs complying with requirements in Section 260553 "Identification for Electrical Systems."

B. Create a directory to indicate installed circuit loads; incorporate Owner's final room designations. Obtain approval before installing. Handwritten directories are not acceptable. Install directory inside panelboard door.

C. Panelboard Nameplates: Label each panelboard with a nameplate complying with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

D. Device Nameplates: Label each branch circuit device in power panelboards with a nameplate complying with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

E. Install warning signs complying with requirements in Section 260553 "Identification for Electrical Systems" identifying source of remote circuit.

3.4 FIELD QUALITY CONTROL

A. Perform tests and inspections.

1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.

B. Acceptance Testing Preparation:

1. Test insulation resistance for each panelboard bus, component, connecting supply, feeder, and control circuit.
2. Test continuity of each circuit.

C. Tests and Inspections:

1. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.

D. Panelboards will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports, including a certified report that identifies panelboards included and that describes scanning results, with comparisons of the two scans. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.

3.5 ADJUSTING

A. Adjust moving parts and operable components to function smoothly, and lubricate as recommended by manufacturer.

B. Set field-adjustable circuit-breaker trip ranges as indicated in coordination study report.

3.6 PROTECTION

A. Temporary Heating: Prior to energizing panelboards, apply temporary heat to maintain temperature according to manufacturer's written instructions.

END OF SECTION 262416

SECTION 262726.11 - GENERAL-USE SWITCHES, DIMMER SWITCHES, AND FAN-SPEED CONTROLLER SWITCHES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. General-use switches.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Toggle switches.

PART 2 - PRODUCTS

2.1 GENERAL-USE SWITCHES

A. Description: Snap switches intended for mounting in device boxes.

B. Performance Criteria:

1. Regulatory Requirements:

a. Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council) to label electrical and mechanical equipment.

2. General Characteristics:

a. Reference Standards: UL CCN WMUZ and UL 20.

C. Toggle Switch :

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Arrow Hart, Wiring Devices; Eaton, Electrical Sector.
b. Leviton Manufacturing Co., Inc.
c. Pass & Seymour; Legrand North America, LLC.
d. Wiring Device-Kellems; Hubbell Incorporated, Commercial and Industrial.

2. Options:

a. Device Color: Ivory for use on normal power circuits.
b. Configuration:

1) Extra-heavy-duty, 120-277 V, 20 A, single pole double pole three way four way.
2) Extra-heavy-duty, 120-277 V, 30 A, single pole double pole three way.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with manufacturer's instructions.

B. Reference Standards:

1. Unless more stringent requirements are specified in Contract Documents or manufacturers' instructions, comply with installation instructions in NECA NEIS 130.
2. Mounting Heights: Unless otherwise indicated in Contract Documents, comply with mounting heights recommended in NECA NEIS 1.
3. Consult Architect for resolution of conflicting requirements.

C. Identification:

1. Identify cover or cover plate for device with panelboard identification and circuit number in accordance with Section 260553 "Identification for Electrical Systems."

3.2 PROTECTION

A. Schedule and sequence installation to minimize risk of contamination of wires and cables, devices, device boxes, outlet boxes, covers, and cover plates by plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other materials.

B. After installation, protect wires and cables, devices, device boxes, outlet boxes, covers, and cover plates from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 262726.11

SECTION 262726.33 – INDUSTRIAL -GRADE DUPLEX STRAIGHT-BLADE RECEPTACLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Duplex straight-blade receptacles.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.
2. Section 262726.37 "Receptacles with Arc-Fault and Ground-Fault Protective Devices" for AFCI and GFCI receptacles.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Duplex straight-blade receptacles.

PART 2 - PRODUCTS

2.1 DUPLEX STRAIGHT-BLADE RECEPTACLES

A. Description: Industrial-grade duplex receptacles for use in wiring systems recognized by NFPA 70.

B. Performance Criteria:

1. Regulatory Requirements:

a. Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council) to label electrical and mechanical equipment.

2. General Characteristics:

a. Reference Standards:

1) UL CCN RTRT and UL 498.
2) Surge Protective Devices: UL 1449, Type 3.

C. Duplex Straight-Blade Receptacle :

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Arrow Hart, Wiring Devices; Eaton, Electrical Sector.
b. Leviton Manufacturing Co., Inc.
c. Pass & Seymour; Legrand North America, LLC.
d. Wiring Device-Kellems; Hubbell Incorporated, Commercial and Industrial.

2. Options:

a. Device Color: Ivory for use on normal power circuits.

b. Configuration:

1) Extra-heavy-duty, NEMA 5-20R.
2) Extra-heavy-duty, NEMA 6-20R.

D. Weather-Resistant Duplex Straight-Blade Receptacle :

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Arrow Hart, Wiring Devices; Eaton, Electrical Sector.
b. Leviton Manufacturing Co., Inc.
c. Pass & Seymour; Legrand North America, LLC.
d. Wiring Device-Kellems; Hubbell Incorporated, Commercial and Industrial.

2. Options:

a. Device Color: Ivory for use on normal power circuits.
b. Configuration:

1) Extra-heavy-duty, NEMA 5-20R.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify that receptacles to be procured and installed for Owner-furnished equipment are compatible with mating attachment plugs on equipment.

3.2 INSTALLATION

A. Comply with manufacturer's instructions.

B. Reference Standards:

1. Unless more stringent requirements are specified in Contract Documents or manufacturers' instructions, comply with installation instructions in NECA NEIS 130.
2. Mounting Heights: Unless otherwise indicated in Contract Documents, comply with mounting heights recommended in NECA NEIS 1.
3. Receptacle Orientation: Unless otherwise indicated in Contract Documents, orient receptacle to match configuration diagram in NEMA WD 6.
4. Consult Architect for resolution of conflicting requirements.

C. Identification:

1. Identify cover or cover plate for device with panelboard identification and circuit number in accordance with Section 260553 "Identification for Electrical Systems."

3.3 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Insert and remove test plug to verify that device is securely mounted.
2. Verify polarity of hot and neutral pins.
3. Measure line voltage.
4. Measure percent voltage drop.
5. Measure grounding circuit continuity: impedance must be not greater than 2 ohms.

6. Perform additional installation and maintenance inspections and diagnostic tests in accordance with NECA NEIS 130 and manufacturers' instructions.

B. Nonconforming Work:

1. Device will be considered defective if it does not pass tests and inspections.
2. Remove and replace defective units and retest.

C. Assemble and submit test and inspection reports.

3.4 PROTECTION

A. Schedule and sequence installation to minimize risk of contamination of wires and cables, devices, device boxes, outlet boxes, covers, and cover plates by plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other materials.

B. After installation, protect wires and cables, devices, device boxes, outlet boxes, covers, and cover plates from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 262726.33

This page intentionally left blank.

SECTION 262726.37 - RECEPTACLES WITH ARC-FAULT AND GROUND-FAULT PROTECTIVE DEVICES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Receptacles with GFCI devices.

B. Related Requirements:

1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.
2. Section 262726.33 "Industrial -Grade Duplex Straight-Blade Receptacles" for duplex receptacles that are not hospital grade.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Receptacles with GFCI devices.

PART 2 - PRODUCTS

2.1 RECEPTACLES WITH GFCI DEVICES

A. Description: Receptacles containing GFCI device for use in accordance with NFPA 70.

B. Performance Criteria:

1. Regulatory Requirements:

a. Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council) to label electrical and mechanical equipment.

2. General Characteristics:

a. Reference Standards: UL CCN KCXS, UL 498, and UL 943.

C. General-Grade Duplex Straight-Blade Receptacle with GFCI Device:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Arrow Hart, Wiring Devices; Eaton, Electrical Sector.
b. Leviton Manufacturing Co., Inc.
c. Pass & Seymour; Legrand North America, LLC.
d. Wiring Device-Kellems; Hubbell Incorporated, Commercial and Industrial.

2. Options:

a. Device Color: Ivory for use on normal power circuits.
b. Configuration: Heavy-duty, NEMA 5-20R.

D. General-Grade, Weather-Resistant Duplex Straight-Blade Receptacle with GFCI Device:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Arrow Hart, Wiring Devices; Eaton, Electrical Sector.
b. Leviton Manufacturing Co., Inc.
c. Pass & Seymour; Legrand North America, LLC.
d. Wiring Device-Kellems; Hubbell Incorporated, Commercial and Industrial.

2. Options:

a. Device Color: Ivory for use on normal power circuits.
b. Configuration: Heavy-duty, NEMA 5-20R.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify that receptacles to be procured and installed for Owner-furnished equipment are compatible with mating attachment plugs on equipment.

3.2 INSTALLATION

A. Comply with manufacturer's instructions.

B. Reference Standards:

1. Unless more stringent requirements are specified in Contract Documents or manufacturers' instructions, comply with installation instructions in NECA NEIS 130.
2. Mounting Heights: Unless otherwise indicated in Contract Documents, comply with mounting heights recommended in NECA NEIS 1.
3. Receptacle Orientation: Unless otherwise indicated in Contract Documents, orient receptacle to match configuration diagram in NEMA WD 6.
4. Consult Architect for resolution of conflicting requirements.

C. Identification:

1. Identify cover or cover plate for device with panelboard identification and circuit number in accordance with Section 260553 "Identification for Electrical Systems."

3.3 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Insert and remove test plug to verify that device is securely mounted.
2. Verify polarity of hot and neutral pins.
3. Measure line voltage.
4. Measure percent voltage drop.
5. Measure grounding circuit continuity: impedance must be not greater than 2 ohms.
6. Perform additional installation and maintenance inspections and diagnostic tests in accordance with NECA NEIS 130 and manufacturers' instructions.

B. Nonconforming Work:

1. Device will be considered defective if it does not pass tests and inspections.
2. Remove and replace defective units and retest.

C. Assemble and submit test and inspection reports.

3.4 PROTECTION

A. Schedule and sequence installation to minimize risk of contamination of wires and cables, devices, device boxes, outlet boxes, covers, and cover plates by plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other materials.

B. After installation, protect wires and cables, devices, device boxes, outlet boxes, covers, and cover plates from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 262726.37

This page intentionally left blank.

SECTION 262813 - FUSES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cartridge fuses rated 600 V ac and less for use in the following:

   a. Control circuits.
   b. Enclosed controllers.
   c. Enclosed switches.

2. Spare-fuse cabinets.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for spare-fuse cabinets. Include the following for each fuse type indicated:

1. Ambient Temperature Adjustment Information: If ratings of fuses have been adjusted to accommodate ambient temperatures, provide list of fuses with adjusted ratings.

   a. For each fuse having adjusted ratings, include location of fuse, original fuse rating, local ambient temperature, and adjusted fuse rating.
   b. Provide manufacturer's technical data on which ambient temperature adjustment calculations are based.

2. Dimensions and manufacturer's technical data on features, performance, electrical characteristics, and ratings.
3. Current-limitation curves for fuses with current-limiting characteristics.
4. Time-current coordination curves (average melt) and current-limitation curves (instantaneous peak let-through current) for each type and rating of fuse. Submit in electronic format suitable for use in coordination software and in PDF format.
5. Coordination charts and tables and related data.
6. Fuse sizes for elevator feeders and elevator disconnect switches.

1.3 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.

1.4 FIELD CONDITIONS

A. Where ambient temperature to which fuses are directly exposed is less than 40 deg F or more than 100 deg F, apply manufacturer's ambient temperature adjustment factors to fuse ratings.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Bussmann; Eaton, Electrical Sector.
2. Littelfuse, Inc.
3. Mersen USA.

B. Source Limitations: Obtain fuses, for use within a specific product or circuit, from single source from single manufacturer.

2.2 CARTRIDGE FUSES

A. Characteristics: NEMA FU 1, current-limiting, nonrenewable cartridge fuses with voltage ratings consistent with circuit voltages.

1. Type RK-1: 600-V, zero- to 600-A rating, 200 kAIC, time delay.
2. Type CC: 600-V, zero- to 30-A rating, 200 kAIC, time delay.
3. Type J: 600-V, zero- to 600-A rating, 200 kAIC.
4. Type L: 600-V, 601- to 6000-A rating, 200 kAIC, time delay.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council) to label electrical and mechanical equipment.

C. Comply with NEMA FU 1 for cartridge fuses.

D. Comply with NFPA 70.

E. Coordinate fuse ratings with utilization equipment nameplate limitations of maximum fuse size and with system short-circuit current levels.

2.3 SPARE-FUSE CABINET

A. Characteristics: Wall-mounted steel unit with full-length, recessed piano-hinged door and key-coded cam lock and pull.

1. Size: Adequate for storage of spare fuses specified with 15 percent spare capacity minimum.
2. Finish: Gray, baked enamel.
3. Identification: "SPARE FUSES" in 1-1/2-inch- high letters on exterior of door.
4. Fuse Pullers: For each size of fuse, where applicable and available, from fuse manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine fuses before installation. Reject fuses that are moisture damaged or physically damaged.

B. Examine holders to receive fuses for compliance with installation tolerances and other conditions affecting performance, such as rejection features.

C. Examine utilization equipment nameplates and installation instructions. Install fuses of sizes and with characteristics appropriate for each piece of equipment.

D. Evaluate ambient temperatures to determine if fuse rating adjustment factors must be applied to fuse ratings.

E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 FUSE APPLICATIONS

A. Cartridge Fuses:

1. Feeders: Class L, time delay Class RK1, time delay Class J, fast acting.
2. Motor Branch Circuits: Class RK1, time delay.
3. Large Motor Branch (601-4000 A): Class L, time delay.
4. Control Transformer Circuits: Class CC, time delay, control transformer duty.
5. Provide open-fuse indicator fuses or fuse covers with open fuse indication.

3.3 INSTALLATION

A. Install fuses in fusible devices. Arrange fuses so rating information is readable without removing fuse.

B. Install spare-fuse cabinet(s) in location shown on the Drawings or as indicated in the field by Owner.

3.4 IDENTIFICATION

A. Install labels complying with requirements for identification specified in Section 260553 "Identification for Electrical Systems" and indicating fuse replacement information inside of door of each fused switch and adjacent to each fuse block, socket, and holder.

END OF SECTION 262813

This page intentionally left blank.

SECTION 262816 - ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fusible switches.
2. Nonfusible switches.
3. Molded-case circuit breakers (MCCBs).
4. Enclosures.

1.2 DEFINITIONS

A. NC: Normally closed.

B. NO: Normally open.

C. SPDT: Single pole, double throw.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of enclosed switch, circuit breaker, accessory, and component indicated. Include nameplate ratings, dimensioned elevations, sections, weights, and manufacturers' technical data on features, performance, electrical characteristics, ratings, accessories, and finishes.

1. Enclosure types and details for types other than NEMA 250, Type 1.
2. Current and voltage ratings.
3. Short-circuit current ratings (interrupting and withstand, as appropriate).
4. Include evidence of a nationally recognized testing laboratory (NRTL) listing for series rating of installed devices.
5. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices, accessories, and auxiliary components.
6. Include time-current coordination curves (average melt) for each type and rating of overcurrent protective device; include selectable ranges for each type of overcurrent protective device. Provide in PDF and electronic format.

1.4 QUALITY ASSURANCE

A. Testing Agency Qualifications: Accredited by NETA.

1. Testing Agency's Field Supervisor: Currently certified by NETA to supervise on-site testing.

1.5 FIELD CONDITIONS

A. Environmental Limitations: Rate equipment for continuous operation under the following conditions unless otherwise indicated:

1. Ambient Temperature: Not less than minus 22 deg F and not exceeding 104 deg F.
2. Altitude: Not exceeding 6600 feet.

1.6 WARRANTY

A. Manufacturer's Warranty: Manufacturer and Installer agree to repair or replace components that fail in materials or workmanship within specified warranty period.

1. Warranty Period: One year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Enclosed switches and circuit breakers shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."

2.2 GENERAL REQUIREMENTS

A. Source Limitations: Obtain enclosed switches and circuit breakers, overcurrent protective devices, components, and accessories, within same product category, from single manufacturer.

B. Product Selection for Restricted Space: Drawings indicate maximum dimensions for enclosed switches and circuit breakers, including clearances between enclosures, and adjacent surfaces and other items. Comply with indicated maximum dimensions.

C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council) to label electrical and mechanical equipment.

D. Comply with NFPA 70.

2.3 FUSIBLE SWITCHES

A. Manufacturers: Subject to compliance with requirements, provide products by:

1. Eaton.
2. Siemens Industry, Inc., Energy Management Division.
3. Square D; Schneider Electric USA.

B. Type HD, Heavy Duty:

1. Single throw.
2. Three pole.
3. 600-V ac.
4. 1200 A and smaller.
5. UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses.
6. Lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

C. Accessories:

1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.

2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
3. Class R Fuse Kit: Provides rejection of other fuse types when Class R fuses are specified.
4. Lugs: Mechanical type, suitable for number, size, and conductor material.
5. For HVAC equipment mounted outdoors and equipped with on-board controls provide integral to disconnect switch surge protection device and external window to enable viewing of LEDs on SPD for quick status indication.

2.4 NONFUSIBLE SWITCHES

A. Manufacturers: Subject to compliance with requirements, provide products by:

1. Square D; Schneider Electric USA.
2. Eaton.
3. Siemens Industry, Inc., Energy Management Division

B. Type GD, General Duty, Three Pole, Single Throw, 240-V ac, 600 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept two padlocks, and interlocked with cover in closed position.

C. Type HD, Heavy Duty, Three Pole, Single Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

D. Type HD, Heavy Duty, Six Pole, Single Throw, 600-V ac, 200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

E. Type HD, Heavy Duty, Three Pole, Double Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.

F. Accessories:

1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
3. Isolated Ground Kit: Internally mounted; insulated, labeled for copper and aluminum neutral conductors.
4. Class R Fuse Kit: Provides rejection of other fuse types when Class R fuses are specified.
5. Auxiliary Contact Kit: One Two NO/NC (Form "C") auxiliary contact(s), arranged to activate before switch blades open. 24-V ac 120-V ac.
6. Hookstick Handle: Allows use of a hookstick to operate the handle.
7. Lugs: Mechanical type, suitable for number, size, and conductor material.
8. Service-Rated Switches: Labeled for use as service equipment.
9. For HVAC equipment mounted outdoors and equipped with on-board controls provide integral to disconnect switch surge protection device and external window to enable viewing of LEDs on SPD for quick status indication.

2.5 MOLDED-CASE CIRCUIT BREAKERS

A. Manufacturers: Subject to compliance with requirements, provide products by:

1. Eaton.
2. Siemens Industry, Inc., Energy Management Division.

3. Square D; Schneider Electric USA.

B. Circuit breakers shall be constructed using glass-reinforced insulating material. Current carrying components shall be completely isolated from the handle and the accessory mounting area.

C. Circuit breakers shall have a toggle operating mechanism with common tripping of all poles, which provides quick-make, quick-break contact action. The circuit-breaker handle shall be over center, be trip free, and reside in a tripped position between on and off to provide local trip indication. Circuit-breaker escutcheon shall be clearly marked on and off in addition to providing international I/O markings. Equip circuit breaker with a push-to-trip button, located on the face of the circuit breaker to mechanically operate the circuit-breaker tripping mechanism for maintenance and testing purposes.

D. The maximum ampere rating and UL, IEC, or other certification standards with applicable voltage systems and corresponding interrupting ratings shall be clearly marked on face of circuit breaker. Circuit breakers shall be 100 percent rated. "

E. MCCBs shall be equipped with a device for locking in the isolated position.

F. Lugs shall be suitable for 140 deg F rated wire on 125-A circuit breakers and below.

G. Standard: Comply with UL 489 with interrupting capacity to comply with available fault currents.

H. Thermal-Magnetic Circuit Breakers: Inverse time-current thermal element for low-level overloads and instantaneous magnetic trip element for short circuits. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.

I. Adjustable, Instantaneous-Trip Circuit Breakers: Magnetic trip element with front-mounted, field-adjustable trip setting.

J. Electronic Trip Circuit Breakers: Field-replaceable rating plug, rms sensing, with the following field-adjustable settings:

1. Instantaneous trip.
2. Long- and short-time pickup levels.
3. Long- and short-time time adjustments.
4. Ground-fault pickup level, time delay, and I-squared t response.

K. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller, and let-through ratings less than NEMA FU 1, RK-5.

L. Integrally Fused Circuit Breakers: Thermal-magnetic trip element with integral limiter-style fuse listed for use with circuit breaker and trip activation on fuse opening or on opening of fuse compartment door.

M. Ground-Fault Circuit-Interrupter (GFCI) Circuit Breakers: Single- and two-pole configurations with Class A ground-fault protection (6-mA trip).

N. Ground-Fault Equipment-Protection (GFEP) Circuit Breakers: With Class B ground-fault protection (30-mA trip).

O. Features and Accessories:

1. Standard frame sizes, trip ratings, and number of poles.
2. Lugs: Mechanical type, suitable for number, size, trip ratings, and conductor material.
3. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and high-intensity discharge lighting circuits.

4. Ground-Fault Protection: Comply with UL 1053; integrally mounted, self-powered type with mechanical ground-fault indicator; relay with adjustable pickup and time-delay settings, push-to-test feature, internal memory, and shunt trip unit; and three-phase, zero-sequence current transformer/sensor.
5. Communication Capability: Din-rail-mounted communication module with functions and features compatible with building power monitoring and control system.
6. Shunt Trip: Trip coil energized from separate circuit, with coil-clearing contact.
7. Undervoltage Trip: Set to operate at 35 to 75 percent of rated voltage without intentional time delay.
8. Auxiliary Contacts: One SPDT switch Two SPDT switches with "a" and "b" contacts; "a" contacts mimic circuit-breaker contacts, "b" contacts operate in reverse of circuit-breaker contacts.
9. Alarm Switch: One NO contact that operates only when circuit breaker has tripped.
10. Key Interlock Kit: Externally mounted to prohibit circuit-breaker operation; key shall be removable only when circuit breaker is in off position.
11. Zone-Selective Interlocking: Integral with electronic ground-fault trip unit; for interlocking ground-fault protection function.
12. Electrical Operator: Provide remote control for on, off, and reset operations.

2.6 ENCLOSURES

A. Enclosed Switches and Circuit Breakers: UL 489, NEMA KS 1, NEMA 250, and UL 50, to comply with environmental conditions at installed location.

B. Enclosure Finish: The enclosure shall be finished with gray baked enamel paint, electrodeposited on cleaned, phosphatized steel (NEMA 250 Type 1) gray baked enamel paint, electrodeposited on cleaned, phosphatized galvannealed steel (NEMA 250 Types 3R, 12) a brush finish on Type 304 stainless steel (NEMA 250 Type 4-4X stainless steel).

C. Conduit Entry: NEMA 250 Types 4, 4X, and 12 enclosures shall contain no knockouts. NEMA 250 Types 7 and 9 enclosures shall be provided with threaded conduit openings in both endwalls.

D. Operating Mechanism: The circuit-breaker operating handle shall be externally operable with the operating mechanism being an integral part of the box, not the cover directly operable through the front cover of the enclosure (NEMA 250 Type 1) directly operable through the dead front trim of the enclosure (NEMA 250 Type 3R). The cover interlock mechanism shall have an externally operated override. The override shall not permanently disable the interlock mechanism, which shall return to the locked position once the override is released. The tool used to override the cover interlock mechanism shall not be required to enter the enclosure in order to override the interlock.

E. Enclosures designated as NEMA 250 Type 4, 4X stainless steel, 12, or 12K shall have a dual cover interlock mechanism to prevent unintentional opening of the enclosure cover when the circuit breaker is ON and to prevent turning the circuit breaker ON when the enclosure cover is open.

F. NEMA 250 Type 7/9 enclosures shall be furnished with a breather and drain kit to allow their use in outdoor and wet location applications.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine elements and surfaces to receive enclosed switches and circuit breakers for compliance with installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

1. Commencement of work shall indicate Installer's acceptance of the areas and conditions as satisfactory.

3.2 PREPARATION

A. Interruption of Existing Electric Service: Do not interrupt electric service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electric service according to requirements indicated:

1. Notify Owner no fewer than seven days in advance of proposed interruption of electric service.
2. Indicate method of providing temporary electric service.
3. Do not proceed with interruption of electric service without Owner's written permission.
4. Comply with NFPA 70E.

3.3 ENCLOSURE ENVIRONMENTAL RATING APPLICATIONS

A. Enclosed Switches and Circuit Breakers: Provide enclosures at installed locations with the following environmental ratings.

1. Indoor, Dry and Clean Locations: NEMA 250, Type 1.
2. Outdoor Locations: NEMA 250, Type 3R.
3. Kitchen Areas: NEMA 250, Type 4X, stainless steel.
4. Other Wet or Damp, Indoor Locations: NEMA 250, Type 4.
5. Indoor Locations Subject to Dust, Falling Dirt, and Dripping Noncorrosive Liquids: NEMA 250, Type 12.

3.4 INSTALLATION

A. Coordinate layout and installation of switches, circuit breakers, and components with equipment served and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

B. Install individual wall-mounted switches and circuit breakers with tops at uniform height unless otherwise indicated.

C. Comply with mounting and anchoring requirements specified in Section 260548 "Vibration and Seismic Controls for Electrical Systems."

D. Temporary Lifting Provisions: Remove temporary lifting of eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.

E. Install fuses in fusible devices.

F. Comply with NFPA 70 and NECA 1.

3.5 IDENTIFICATION

A. Comply with requirements in Section 260553 "Identification for Electrical Systems."

1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
2. Label each enclosure with engraved nameplate.

3.6 FIELD QUALITY CONTROL

A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

C. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

D. Perform tests and inspections with the assistance of a factory-authorized service representative.

E. Tests and Inspections for Switches:

1. Visual and Mechanical Inspection:

a. Inspect physical and mechanical condition.
b. Inspect anchorage, alignment, grounding, and clearances.
c. Verify that the unit is clean.
d. Verify blade alignment, blade penetration, travel stops, and mechanical operation.
e. Verify that fuse sizes and types match the Specifications and Drawings.
f. Verify that each fuse has adequate mechanical support and contact integrity.
g. Inspect bolted electrical connections for high resistance using one of the two following methods:

1) Use a low-resistance ohmmeter.

a) Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from those of similar bolted connections by more than 50 percent of the lowest value.

2) Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data or NETA ATS Table 100.12.

a) Bolt-torque levels shall be in accordance with manufacturer's published data. In the absence of manufacturer's published data, use NETA ATS Table 100.12.

h. Verify that operation and sequencing of interlocking systems is as described in the Specifications and shown on the Drawings.
i. Verify correct phase barrier installation.
j. Verify lubrication of moving current-carrying parts and moving and sliding surfaces.

2. Electrical Tests:

a. Perform resistance measurements through bolted connections with a low-resistance ohmmeter. Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from adjacent poles or similar switches by more than 50 percent of the lowest value.
b. Measure contact resistance across each switchblade fuseholder. Drop values shall not exceed the high level of the manufacturer's published data. If manufacturer's published data are not available, investigate values that deviate from adjacent poles or similar switches by more than 50 percent of the lowest value.
c. Perform insulation-resistance tests for one minute on each pole, phase-to-phase and phase-to-ground with switch closed, and across each open pole. Apply voltage in accordance with manufacturer's published data. In the absence of manufacturer's published data, use Table 100.1 from the NETA ATS. Investigate values of insulation resistance less than those published in Table 100.1 or as recommended in manufacturer's published data.
d. Measure fuse resistance. Investigate fuse-resistance values that deviate from each other by more than 15 percent.

e. Perform ground fault test according to NETA ATS 7.14 "Ground Fault Protection Systems, Low-Voltage."

F. Tests and Inspections for Molded Case Circuit Breakers:

1. Visual and Mechanical Inspection:

a. Verify that equipment nameplate data are as described in the Specifications and shown on the Drawings.
b. Inspect physical and mechanical condition.
c. Inspect anchorage, alignment, grounding, and clearances.
d. Verify that the unit is clean.
e. Operate the circuit breaker to ensure smooth operation.
f. Inspect bolted electrical connections for high resistance using one of the two following methods:

1) Use a low-resistance ohmmeter.

a) Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from those of similar bolted connections by more than 50 percent of the lowest value.

2) Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data or NETA ATS Table 100.12.

a) Bolt-torque levels shall be in accordance with manufacturer's published data. In the absence of manufacturer's published data, use NETA ATS Table 100.12.

g. Inspect operating mechanism, contacts, and chutes in unsealed units.
h. Perform adjustments for final protective device settings in accordance with the coordination study.

2. Electrical Tests:

a. Perform resistance measurements through bolted connections with a low-resistance ohmmeter. Compare bolted connection resistance values to values of similar connections. Investigate values that deviate from adjacent poles or similar switches by more than 50 percent of the lowest value.
b. Perform insulation-resistance tests for one minute on each pole, phase-to-phase and phase-to-ground with circuit breaker closed, and across each open pole. Apply voltage in accordance with manufacturer's published data. In the absence of manufacturer's published data, use Table 100.1 from the NETA ATS. Investigate values of insulation resistance less than those published in Table 100.1 or as recommended in manufacturer's published data.
c. Perform a contact/pole resistance test. Drop values shall not exceed the high level of the manufacturer's published data. If manufacturer's published data are not available, investigate values that deviate from adjacent poles or similar switches by more than 50 percent of the lowest value.
d. Perform insulation resistance tests on all control wiring with respect to ground. Applied potential shall be 500-V dc for 300-V rated cable and 1000-V dc for 600-V rated cable. Test duration shall be one minute. For units with solid state components, follow manufacturer's recommendation. Insulation resistance values shall be no less than two megohms.
e. Determine the following by primary current injection:

1) Long-time pickup and delay. Pickup values shall be as specified. Trip characteristics shall not exceed manufacturer's published time-current characteristic tolerance band, including adjustment factors.

2) Short-time pickup and delay. Short-time pickup values shall be as specified. Trip characteristics shall not exceed manufacturer's published time-current characteristic tolerance band, including adjustment factors.
3) Ground-fault pickup and time delay. Ground-fault pickup values shall be as specified. Trip characteristics shall not exceed manufacturer's published time-current characteristic tolerance band, including adjustment factors.
4) Instantaneous pickup. Instantaneous pickup values shall be as specified and within manufacturer's published tolerances.

f. Test functionality of the trip unit by means of primary current injection. Pickup values and trip characteristics shall be as specified and within manufacturer's published tolerances.
g. Perform minimum pickup voltage tests on shunt trip and close coils in accordance with manufacturer's published data. Minimum pickup voltage of the shunt trip and close coils shall be as indicated by manufacturer.
h. Verify correct operation of auxiliary features such as trip and pickup indicators; zone interlocking; electrical close and trip operation; trip-free, anti-pump function; and trip unit battery condition. Reset all trip logs and indicators. Investigate units that do not function as designed.
i. Verify operation of charging mechanism. Investigate units that do not function as designed.

3. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
4. Test and adjust controls, remote monitoring, and safeties. Replace damaged and malfunctioning controls and equipment.

G. Enclosed switches and circuit breakers will be considered defective if they do not pass tests and inspections.

H. Prepare test and inspection reports.

1. Test procedures used.
2. Include identification of each enclosed switch and circuit breaker tested and describe test results.
3. List deficiencies detected, remedial action taken, and observations after remedial action.

3.7 ADJUSTING

A. Adjust moving parts and operable components to function smoothly, and lubricate as recommended by manufacturer.

B. Set field-adjustable circuit-breaker trip ranges to values indicated on the Drawings.

END OF SECTION 262816

This page intentionally left blank.

SECTION 264113 - LIGHTNING PROTECTION FOR STRUCTURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes lightning protection system for ordinary structures.

B. Section includes lightning protection system for the following:

1. Ordinary structures.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings:

1. Include layouts of the lightning protection system, with details of the components to be used in the installation.
2. Include raceway locations needed for the installation of conductors.
3. Details of air terminals, ground rods, ground rings, conductor supports, splices, and terminations, including concealment requirements.
4. Include roof attachment details, coordinated with roof installation.
5. Calculations required by NFPA 780 for bonding of metal bodies.

1.4 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

A. Completion Certificate:

1. UL Master Label Certificate.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: UL-listed installer, category OWAY.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Advanced Lightning Technology, Ltd.

2. East Coast Lightning Equipment Inc.
3. Harger Lightning & Grounding.
4. Independent Protection Co.
5. National Lightning Protection.
6. Robbins Lightning, Inc.
7. Thompson Lightning Protection, Inc.

2.2 PERFORMANCE REQUIREMENTS

A. NFPA Lightning Protection Standard: Comply with NFPA 780 requirements for Class I buildings.

B. UL Lightning Protection Standard: Comply with UL 96A requirements for Class I buildings.

C. Lightning Protection Components, Devices, and Accessories: Listed and labeled by a qualified testing agency as complying with UL 96, and marked for intended location and application.

2.3 MATERIALS

A. Electrical wire and cable shall have lead content less than 300 parts per million.

B. Air Terminals:

1. Copper unless otherwise indicated.
2. 5/8-inch diameter by 18 inches long.
3. Rounded tip.
4. Threaded base support.

C. Class 1 Main Conductors:

1. Stranded Copper: 57,400 circular mils in diameter.

D. Class II Main Conductors:

1. Stranded Copper: 115,000 circular mils in diameter.

E. Secondary Conductors:

1. Stranded Copper: 26,240 circular mils in diameter.

F. Ground Loop Conductor: Stranded copper.

G. Ground Rods:

1. Material: Copper-clad steel.
2. Diameter: 3/4 inch.
3. Rods shall be not less than 120 inches long.

H. Conductor Splices and Connectors: Compression fittings that are installed with hydraulically operated tools, or exothermic welds, approved for use with the class type.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install lightning protection components and systems according to UL 96A NFPA 780.

B. Install conductors with direct paths from air terminals to ground connections. Avoid bends less than 90 degrees and 8 inches in radius and narrow loops.

C. Conceal conductors within normal view from exterior locations at grade within 200 feet of building. Comply with requirements for concealed installations in UL 96A concealed systems in NFPA 780.

1. Roof penetrations required for down conductors and connections to structural-steel framework shall be made using listed through-roof fitting and connector assemblies with solid rods and appropriate roof flashings. Use materials approved by the roofing manufacturer for the purpose. Conform to the methods and materials required at roofing penetrations of the lightning protection components to ensure compatibility with the roofing specifications and warranty.
2. Install conduit where necessary to comply with conductor concealment requirements.
3. Air Terminals on Single-Ply Membrane Roofing: Comply with adhesive manufacturer's written instructions. Adhesive shall be compatible with the roof material and shall not compromise the warranty of the roof.

D. Ground Ring Electrode: The conductor shall be not less than the main-size lightning conductor.

3.2 CONNECTIONS

A. Aboveground concealed connections, and connections in earth or concrete, shall be done by exothermic welds or by high-compression fittings listed for the purpose.

B. Aboveground exposed connections shall be done using the following types of connectors, listed and labeled for the purpose: bolted connectors.

C. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance, except where routed through short lengths of conduit.

1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
3. Bonding to the building electrode system.

3.3 CORROSION PROTECTION

A. Do not combine materials that can form an electrolytic couple that will accelerate corrosion in the presence of moisture unless moisture is permanently excluded from junction of such materials.

B. Use conductors with protective coatings where conditions would cause deterioration or corrosion of conductors.

3.4 FIELD QUALITY CONTROL

A. Special Inspections: Engage a qualified special inspector to perform the following special inspections:

1. Perform inspections as required to obtain a UL Master Label for system.
2. Perform inspections to obtain an LPI certification.

B. Prepare test and inspection reports and certificates.

1. Upon completion and review by an NCBCC approved third-party lightning protection agency, Contractor shall obtain, and deliver to Owner the certifications.

END OF SECTION 264113

This page intentionally left blank.

SECTION 265119 - LED INTERIOR LIGHTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Materials.
2. Luminaire support.

B. Related Requirements:

1. Section 260923 "Lighting Control Devices" for automatic control of lighting, including time switches, photoelectric relays, occupancy sensors, and multipole lighting relays and contactors.

1.3 DEFINITIONS

A. CCT: Correlated color temperature.

B. CRI: Color Rendering Index.

C. Fixture: See "Luminaire."

D. IP: International Protection or Ingress Protection Rating.

E. LED: Light-emitting diode.

F. Lumen: Measured output of lamp and luminaire, or both.

G. Luminaire: Complete lighting unit, including lamp, reflector, and housing.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Arrange in order of luminaire designation.
2. Include data on features, accessories, and finishes.
3. Include physical description and dimensions of luminaires.
4. Include emergency lighting units, including batteries and chargers.
5. Include life, output (lumens, CCT, and CRI), and energy-efficiency data.
6. Photometric data and adjustment factors based on laboratory tests IES LM-79 and IES LM-80.

a. Manufacturers' Certified Data: Photometric data certified by manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.

B. Shop Drawings: For nonstandard or custom luminaires.

1. Include plans, elevations, sections, and mounting and attachment details.

2. Include details of luminaire assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.

1.5 QUALITY ASSURANCE

A. Provide luminaires from a single manufacturer for each luminaire type.

B. Each luminaire type shall be binned within a three-step MacAdam Ellipse to ensure color consistency among luminaires.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Protect finishes of exposed surfaces by applying a strippable, temporary protective covering before shipping.

PART 2 - PRODUCTS

2.1 WARRANTY

A. Provide a minimum 5 year luminaire warranty.

2.2 PERFORMANCE REQUIREMENTS

A. Altitude: Sea level to 1000 feet.

2.3 LUMINAIRE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application. Third party agencies shall be amongst those accredited by the NCBCC (North Carolina Building Code Council) to label electrical and mechanical equipment.

B. Recessed luminaires shall comply with NEMA LE 4.

2.4 MATERIALS

A. Metal Parts:

1. Free of burrs and sharp corners and edges.
2. Sheet metal components shall be steel unless otherwise indicated.
3. Form and support to prevent warping and sagging.

B. Steel:

1. ASTM A36/A36M for carbon structural steel.
2. ASTM A568/A568M for sheet steel.

C. Stainless Steel:

1. Manufacturer's standard grade.
2. Manufacturer's standard type, ASTM A240/240M.

D. Galvanized Steel: ASTM A653/A653M.

E. Aluminum: ASTM B209.

2.5 MAINTENANCE

A. Power supplies/drivers/ballasts, LED arrays, boards or light engines shall be easily field replaceable using common hand tools (e.g., screwdrivers, pliers, etc.) and without uninstalling the luminaire.

B. Where LED luminaire is connected to a circuit greater than 50-volts an integral disconnect plug shall be provided for disconnecting the driver from the circuit.

2.6 ELECTRICAL AND PHOTOMETRIC REQUIREMENTS

A. Operating voltage: 24 Vdc, 120 Vac at 60 Hz, 277 Vac at 60Hz, or universal voltage (120, 220/240, 277 Vac at 50/60 Hz)

B. Power factor: ≥ 0.90 (at full luminaire output and across specified voltage range)

C. Total harmonic distortion: ≤ 20% (at full luminaire output and across specified voltage range).

D. LED drivers shall operate from an input source of 47 Hz to 63 Hz and 90 V to 305 V.

E. Transient and surge protection: Indoor and building mounted exterior fixtures shall be provided with a minimum 2-KV surge suppression integral with the driver. Surge suppression device shall adhere to ANSI C62.41-2002 Category A surge protection standards

F. Sound: Class A not to exceed a measured value of 24dB

G. Maximum standby power: 1W

H. LED arrays in the product(s) will be considered defective in material or workmanship if a total of 10% or more of the individual light-emitting diodes in the product(s) fail to illuminate during normal operation after installation.

A. LED Driver Robustness

1. Driver efficiency (at full load):

a. ≥ 85% for drivers capable of ≥ 50 watts
b. ≥ 80% for drivers capable of < 50 watts

2. Federal Communications Commission (FCC) compliance: FCC 47 Part 15 Non-Consumer limits for EMI/RFI emissions

B. Temperature Rating

1. Each luminaire shall be designed to operate at an average operating temperature of 25°C.
2. The operating temperature range shall be 0°C to 25°C.

C. Thermal management

1. The thermal management (of the heat generated by the LEDs) shall be of sufficient capacity to assure proper operation of the luminaire over the expected useful life.
2. The LEDs manufacturer's maximum junction temperature for the expected life shall not be exceeded at the average operating ambient temperature.
3. The LED manufacturer's maximum junction temperature for the catastrophic failure shall not be exceeded at the maximum operating ambient temperature.

4. The driver manufacturer's maximum case temperature shall not be exceeded at the maximum operating temperature. Thermal management shall be passive by design. The use of fans or other mechanical cooling devices shall not be allowed.

D. Flicker criteria

1. Adhere to IESNA standards for flicker and IEEE PAR1789 Recommended Practice to limit flicker to acceptable levels. Flicker needs to be considered at both the luminaire level when fully powered and when dimmed.

E. EMI/RFI

2. The luminaire and associated on-board circuitry shall meet Class A emission limits referred in Federal Communications Commission (FCC) Title 47, Subpart B, Section 15 Non-Consumer requirements for EMI/RFI Emissions.

F. Inrush Current

1. Adhere to NEMA 410 requirements.

2.7 COLORIMETRIC PERFORMANCE

1. Correlated Color Temperature (CCT): Only allowed CCTs are 2700K, 3000K, 3500K, 4000/4100K, 4500K and 5000K
2. Acceptable tolerances as provided in ANSI C78.377-2015 (LED)
3. Color Rendering Index (CRI) [Ra] ≥ 80 with a positive R9 value
4. Color shift of no less than $\Delta u'v' < 0.007$ during the warranty period

2.8 METAL FINISHES

A. Variations in finishes are unacceptable in the same piece. Variations in finishes of adjoining components are acceptable if they are within the range of approved Samples and if they can be and are assembled or installed to minimize contrast.

2.9 LUMINAIRE SUPPORT

A. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for channel and angle iron supports and nonmetallic channel and angle supports.

B. Single-Stem Hangers: 1/2-inch steel tubing with swivel ball fittings and ceiling canopy. Finish same as luminaire.

C. Wires: ASTM A641/A641M, Class 3, soft temper, zinc-coated steel, 12 gage.

D. Rod Hangers: 3/16-inch minimum diameter, cadmium-plated, threaded steel rod.

E. Hook Hangers: Integrated assembly matched to luminaire, line voltage, and equipment with threaded attachment, cord, and locking-type plug.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for luminaire to verify actual locations of luminaire and electrical connections before luminaire installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 TEMPORARY LIGHTING

A. If approved by the Architect, use selected permanent luminaires for temporary lighting. When construction is sufficiently complete, clean luminaires used for temporary lighting. LED source shall not require replacement after temporary use.

3.3 INSTALLATION

A. Comply with NECA 1.

B. Install luminaires level, plumb, and square with ceilings and walls unless otherwise indicated.

C. Supports:

1. Sized and rated for luminaire weight.
2. Able to maintain luminaire position after cleaning.
3. Provide support for luminaire without causing deflection of ceiling or wall.
4. Luminaire-mounting devices shall be capable of supporting a horizontal force of 100 percent of luminaire weight and a vertical force of 400 percent of luminaire weight.

D. Flush-Mounted Luminaires:

1. Secured to outlet box.
2. Attached to ceiling structural members at four points equally spaced around circumference of luminaire.
3. Trim ring flush with finished surface.

E. Wall-Mounted Luminaires:

1. Attached to structural members in walls.
2. Do not attach luminaires directly to gypsum board.

F. Suspended Luminaires:

1. Ceiling Mount:

   a. Two 5/32-inch- diameter aircraft cable supports adjustable to 10 feet in length.

2. Pendants and Rods: Where longer than 48 inches, brace to limit swinging.
3. Stem-Mounted, Single-Unit Luminaires: Suspend with twin-stem hangers. Support with approved outlet box and accessories that hold stem and provide damping of luminaire oscillations. Support outlet box vertically to building structure using approved devices.
4. Continuous Rows of Luminaires: Use tubing or stem for wiring at one point and tubing or rod wire support for suspension for each unit length of luminaire chassis, including one at each end.
5. Do not use ceiling grid as support for pendant luminaires. Connect support wires or rods to building structure.

G. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for wiring connections.

H. Recessed Luminaires:

1. Recessed luminaires shall be supported from the structure independent of the ceiling support system. Provide at least two supports on diagonals where any horizontal dimension of the luminaire is 18" or larger. Supports shall be provided with the same type of wire as used to support the lay-in ceiling track and shall be distinguished by color and tag. Attach one end of the wire to one corner of the luminaire and the other end to the building's structural system. The lay-in luminaire shall be then secured to the main runners of the lay-in ceiling track at minimum two diagonally opposite corners.

3.4 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

3.5 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months of date of Final Acceptance, provide on-site assistance in adjusting the direction of aim of luminaires to suit occupied conditions. Make up to two visits to Project during other-than-normal hours for this purpose. Some of this work may be required during hours of darkness.

1. During adjustment visits, inspect all luminaires. Replace lamps or luminaires that are defective.
2. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.
3. Adjust the aim of luminaires in the presence of the Architect.

END OF SECTION 265119

SECTION 266710 - SURGE PROTECTIVE DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. General provisions and other electrical systems are specified in other Sections of Division 26.

B. This Section covers surge protective devices (SPDs) for low-voltage, 600 V or less, electrical distribution equipment.

1.2 QUALITY ASSURANCE

A. Conform to the following:

1. IEEE C62.41.1
2. IEEE C62.41.2
3. North Carolina State Electrical Code-2020.
4. UL 1283
5. UL 1449 4th edition
6. UL 96A requirements related to SPDs and in coordination with the lightning protection system .

B. SPDs shall have a 5 year warranty.

PART 2 - PRODUCTS

2.1 SURGE PROTECTIVE DEVICES

A. General:

1. UL 1449 voltage protection rating (VPR) label shall be permanently affixed to the units.
2. Maximum continuous operating voltage (MCOV) shall be greater than 115% of the nominal system operating voltage.
3. Protection modes: for a wye-configured system, devices shall have directly connected suppression elements between line-neutral (L-N), line-ground (L-G), and neutral-ground (N-G). For a delta-configured system, devices shall have suppression elements between line-line (L-L) and line-ground (L-G).
4. Nominal discharge current (in): SPDs applied to the distribution system shall have a 20 kA in rating regardless of their SPD type (including Types 1 and 2) or operating voltage.
5. UL 1449component voltage protection rating shall not exceed the following:

System Voltage	208Y/120	480Y/277
L-N; L-G; N-G	700 V	1200 V
L-L	1200 V	2000 V

6. Electrical noise filter: each unit shall include a high performance EMI/RFI noise rejection filter.
7. Internal connections: internal components shall be hardwired with connections utilizing low impedance conductors and compression fittings.
8. Overcurrent protection: each unit shall be provided with overcurrent protection to provide both thermal overload protection for small magnitude fault current conditions or temporary over voltage conditions as well as short circuit current protection for high magnitude fault conditions. Each MOV module or element shall be individually fused with 200000 RMS symmetrical AIC internal fuses.

9. Monitoring and Diagnostics:
   a. SPDs shall be equipped with visible indication of proper connection and operation. Indicator lights shall indicate which phase as well as which module is fully operable.
   b. SPDs shall be equipped with an audible alarm which shall activate when any one of the surge current modules has reached an end-of-life condition. An alarm on/off switch shall be provided to silence the alarm. The switches and alarm shall be located on the front cover of each enclosure.
   c. SPDs shall be equipped with contacts for remote annunciation of alarm or trouble.
   d. SPDs installed at service entrance locations or within switchboards shall be equipped with a transient event counter.
10. Each unit shall incorporate an integral test feature to verify the operational integrity of the unit's monitoring system.

2.2 SYSTEM APPLICATIONS

A. SPD applications covered under this Section include distribution and branch circuit panelboard locations, bus plugs, and switchboard assemblies.

B. SPDs shall be designed and tested for application within IEEE C62.41.1-2002 (R2008) Category C, B, and A environments.

C. Surge current capacity: the minimum surge current capacity that each unit is capable of withstanding shall be as shown in the following table:

IEEE 62.41-2002 (R2008) Location Category	Application	Minimum Surge Current Per Phase	Minimum Surge Current Per Mode *
C	Service entrance (switchboards. main entrance)	250 kA	100 kA
B	Distribution and power panelboards	150 kA	50 kA
A	Branch circuit panelboards, busways	100 kA	50 kA

*L-G, L-N and N-G (wye system); L-L, L-G (delta system).

D. SPD type: SPDs installed on the line side of the service entrance disconnect shall be Type 1. SPDs installed on the load side of the service entrance disconnect shall be Type 2.

E. Panelboard Requirements:
   1. Units shall be designed for IEEE C62.41.1-2002 (R2008) and IEEE C62.41.2-2002 (COR 1-2012) Category B environments.

F. Switchboard Requirements:
   1. Service entrance and other switchboard SPD units shall be designed for IEEE C62.41.1-2002 (R2008) and IEEE C62.41.2-2002 (COR 1-2012) Category C environments.
   2. Provide a disconnect switch directly ahead of or integral to the suppressor assembly.
   3. Monitoring diagnostic features such as indicator lights, trouble alarms, and surge counter shall be mounted on the front of the switchboard.

2.3 MANUFACTURER

A. Same as panelboard and switchboard manufacturer.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install SPDs in accordance with manufacturer's written instructions.

B. Install SPDs in service entrance equipment.

C. Provide SPDs for distribution panelboards, branch-circuit panelboards, where indicated in the Drawings. SPDs shall be installed integral to electrical distribution equipment by the electrical distribution equipment manufacturer.

1. Locate SPDs on the load side of the main disconnect device, as close as possible to the phase conductors and ground and neutral bar.
2. SPDs and integral disconnects shall be installed in switchgear and switchboards using a direct bus bar connection or cable connection between each bus bar and SPD. Maximum cable lead length between suppressor and bus bar shall not exceed 14".
3. SPDs shall be integrated within panelboards and shall be direct bus bar mounted.

3.2 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Compare equipment nameplate data for compliance with drawings and the specifications.
2. Inspect anchorage, alignment, grounding, and clearances.
3. Verify that electrical wiring installation complies with manufacturer's installation requirements.
4. SPDs that do not pass tests and inspections will be considered defective. Remove and replace defective units and retest.
5. Prepare test and inspection reports.

B. Startup Service:

1. Complete startup checks in accordance with manufacturer's instructions.
2. Do not perform insulation-resistance tests of the distribution wiring equipment with SPDs installed. Disconnect SPDs before conducting insulation-resistance tests; reconnect them immediately after the testing is over.
3. Energize SPDs after power system has been energized, stabilized, and tested.

END OF SECTION 266710

This page intentionally left blank.

SECTION 270526 - GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Grounding conductors.
2. Grounding connectors.
3. Grounding busbars.
4. Grounding rods.
5. Grounding labeling.

1.3 DEFINITIONS

A. BCT: Bonding conductor for telecommunications.

B. TGB: Telecommunications grounding busbar.

C. TMGB: Telecommunications main grounding busbar.

D. Service Provider: The operator of a service that provides telecommunications transmission delivered over access provider facilities.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For communications equipment room signal reference grid. Include plans, elevations, sections, details, and attachments to other work.

1.5 INFORMATIONAL SUBMITTALS

A. As-Built Data: Plans showing as-built locations of grounding and bonding infrastructure, including the following:

1. Ground rods.
2. BCT, TMGB, TGBs, and routing of their bonding conductors.

B. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For grounding to include in emergency, operation, and maintenance manuals.

1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:

a. Result of the ground-resistance test, measured at the point of BCT connection.
b. Result of the bonding-resistance test at each TGB and its nearest grounding electrode.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.

1. Installation Supervision: Installation shall be under the direct supervision of ITS Technician, who shall be present at all times when Work of this Section is performed at Project site.
2. Field Inspector: Currently registered by BICSI as Technician to perform the on-site inspection.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Comply with UL 467 for grounding and bonding materials and equipment.

C. Comply with TIA-607-D.

2.2 CONDUCTORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Chatsworth Products, Inc. (CPI).
2. Eaton (Cooper B-line).
3. Harger Lightning & Grounding.
4. Hubbell.
5. nVent.
6. Panduit Corp.

B. Comply with UL 486A-486B.

C. Insulated Conductors: Stranded copper wire, green or green with yellow stripe insulation, insulated for 600 V, and complying with UL 83.

1. Ground wire for custom-length equipment ground jumpers shall be No. 6 AWG, 19-strand, UL-listed, Type THHN wire.
2. Cable Tray Equipment Grounding Wire: No. 6 AWG.

D. Cable Tray Grounding Jumper:

1. Not smaller than No. 6 AWG and not longer than 12 inches. If jumper is a wire, it shall have a crimped grounding lug with two holes and long barrel for two crimps. If jumper is a flexible braid, it shall have a one-hole ferrule. Attach with grounding screw or connector provided by cable tray manufacturer.

2.3 CONNECTORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Chatsworth Products, Inc. (CPI).
2. Eaton (Cooper B-line).
3. Harger Lightning & Grounding.
4. Hubbell.
5. nVent.
6. Panduit Corp.

B. Irreversible connectors listed for the purpose. Listed by an NRTL as complying with NFPA 70 for specific types, sizes, and combinations of conductors and other items connected. Comply with UL 486A-486B.

C. Compression Wire Connectors: Crimp-and-compress connectors that bond to the conductor when the connector is compressed around the conductor. Comply with UL 467.

1. Electroplated tinned copper, C and H shaped.

D. Busbar Connectors: Cast silicon bronze, solderless compression -type, mechanical connector; with a long barrel and two holes spaced on 5/8- or 1-inch centers for a two-bolt connection to the busbar.

2.4 GROUNDING BUSBARS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Chatsworth Products, Inc. (CPI).
2. Eaton (Cooper B-line).
3. Harger Lightning & Grounding.
4. Hubbell.
5. nVent.
6. Panduit Corp.

B. TMGB: Predrilled, wall-mounted, rectangular bars of hard-drawn solid copper, 1/4 by 4 inches in cross section, length as indicated on Drawings. The busbar shall be NRTL listed for use as TMGB and shall comply with TIA-607-D.

1. Predrilling shall be with holes for use with lugs specified in this Section.
2. Mounting Hardware: Stand-off brackets that provide a 4-inch clearance to access the rear of the busbar. Brackets and bolts shall be stainless steel.
3. Stand-off insulators for mounting shall be Lexan or PVC. Comply with UL 891 for use in 600-V switchboards, impulse tested at 5000 V.

C. TGB: Predrilled rectangular bars of hard-drawn solid copper, 1/4 by 4 inches in cross section, length as indicated on Drawings. The busbar shall be for wall mounting, shall be NRTL listed as complying with UL 467, and shall comply with TIA-607-D.

1. Predrilling shall be with holes for use with lugs specified in this Section.
2. Mounting Hardware: Stand-off brackets that provide at least a 2-inch clearance to access the rear of the busbar. Brackets and bolts shall be stainless steel.
3. Stand-off insulators for mounting shall be Lexan or PVC. Comply with UL 891 for use in 600-V switchboards, impulse tested at 5000 V.

D. Rack and Cabinet Grounding Busbars: Rectangular bars of hard-drawn solid copper, accepting conductors ranging from No. 14 to No. 2/0 AWG, NRTL listed as complying with UL 467, and complying with TIA-607-D. Predrilling shall be with holes for use with lugs specified in this Section.

1. Cabinet-Mounted Busbar: Terminal block, with stainless-steel or copper-plated hardware for attachment to the cabinet.
2. Rack-Mounted Horizontal Busbar: Designed for mounting in 19- or 23-inch equipment racks. Include a copper splice bar for transitioning to an adjoining rack, and stainless-steel or copper-plated hardware for attachment to the rack.
3. Rack-Mounted Vertical Busbar: 72 inches long, with stainless-steel or copper-plated hardware for attachment to the rack.

2.5 GROUND RODS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Eaton (Cooper B-line).
2. Harger Lightning & Grounding.
3. nVent.

B. Ground Rods: Copper-clad steel ; 3/4 inch by 10 feet in diameter.

C. Ground rods to be installed at outdoor telecommunications enclosures, and in telecommunications handholes and manholes.

2.6 IDENTIFICATION

A. Comply with requirements for identification products in Section 270553 "Identification for Communications Systems."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine the ac grounding electrode system and equipment grounding for compliance with requirements for maximum ground-resistance level and other conditions affecting performance of grounding and bonding of the electrical system.

B. Inspect the test results of the ac grounding system measured at the point of BCT connection.

C. Prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.

D. Proceed with connection of the BCT only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Bonding shall include the ac utility power service entrance, the communications cable entrance, and the grounding electrode system. The bonding of these elements shall form a loop so that each element is connected to at least two others.

B. Comply with NECA 1.

C. Comply with TIA-607-D.

3.3 APPLICATION

A. Conductors: Install solid conductor for No. 8 AWG and smaller and stranded conductors for No. 6 AWG and larger unless otherwise indicated.

1. The bonding conductors between the TGB and structural steel of steel-frame buildings shall not be smaller than No. 6 AWG.
2. The bonding conductors between the TMGB and structural steel of steel-frame buildings shall not be smaller than No. 6 AWG.
3. The bonding conductor between the TMGB and the AC service equipment ground shall not be smaller than No. 3/0 AWG.

B. Conductor Terminations and Connections:

1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
3. Connections to Ground Rods at Test Wells: Bolted connectors.

C. Conductor Support:

1. Secure grounding and bonding conductors at intervals of not less than 36 inches.

D. Grounding and Bonding Conductors:

1. Install in the straightest and shortest route between the origination and termination point, and no longer than required. The bend radius shall not be smaller than eight times the diameter of the conductor. No one bend may exceed 90 degrees.
2. Install without splices.
3. Support at not more than 36-inch intervals.
4. Install grounding and bonding conductors in 3/4-inch PVC conduit until conduit enters a telecommunications room. The grounding and bonding conductor pathway through a plenum shall be in EMT. Conductors shall not be installed in EMT unless otherwise indicated.

   a. If a grounding and bonding conductor is installed in ferrous metallic conduit, bond the conductor to the conduit using a grounding bushing that complies with requirements in Section 270528 "Pathways for Communications Systems," and bond both ends of the conduit to a TGB.

3.4 GROUNDING BUSBARS

A. Indicate locations of grounding busbars on Drawings. Install busbars horizontally, on insulated spacers 2 inches minimum from wall, 12 inches above finished floor unless otherwise indicated.

B. Where indicated on both sides of doorways, route bus up to top of door frame, across top of doorway, and down; connect to horizontal bus.

3.5 CONNECTIONS

A. Bond metallic equipment in a telecommunications equipment room to the grounding busbar in that room, using equipment grounding conductors not smaller than No. 6 AWG.

B. Stacking of conductors under a single bolt is not permitted when connecting to busbars.

C. Assemble the wire connector to the conductor, complying with manufacturer's written instructions and as follows:

1. Use crimping tool and the die specific to the connector.
2. Pretwist the conductor.
3. Apply an antioxidant compound to all bolted and compression connections.

D. Primary Protector: Bond to the TMGB with insulated bonding conductor.

E. Interconnections: Interconnect all TGBs with the TMGB with the telecommunications backbone conductor. If more than one TMGB is installed, interconnect TMGBs using the grounding equalizer conductor. The telecommunications backbone conductor and grounding equalizer conductor size shall not be less than 2 kcmils/linear foot of conductor length, up to a maximum size of No. 3/0 AWG unless otherwise indicated.

F. Telecommunications Enclosures and Equipment Racks: Bond metallic components of enclosures to the telecommunications bonding and grounding system. Install top-mounted rack grounding busbar unless the enclosure and rack are manufactured with the busbar. Bond the equipment grounding busbar to the TGB No. 2 AWG bonding conductors.

G. Structural Steel: Where the structural steel of a steel frame building is readily accessible within the room or space, bond each TGB and TMGB to the vertical steel of the building frame.

H. Electrical Power Panelboards: Where an electrical panelboard for telecommunications equipment is located in the same room or space, bond each TGB to the ground bar of the panelboard.

I. Shielded Cable: Bond the shield of shielded cable to the TGB in communications rooms and spaces. Comply with TIA-568-C.1 and TIA-568-C.2 when grounding shielded balanced twisted-pair cables.

J. Rack- and Cabinet-Mounted Equipment: Bond powered equipment chassis to the cabinet or rack grounding bar. Power connection shall comply with NFPA 70; the equipment grounding conductor in the power cord of cord- and plug-connected equipment shall be considered as a supplement to bonding requirements in this Section.

K. Access Floors: Bond all metal parts of access floors to the TGB.

L. Equipment Room Signal Reference Grid: Provide a low-impedance path between telecommunications cabinets, equipment racks, and the reference grid, using No. 6 AWG bonding conductors.

1. Install the conductors in grid pattern on 4-foot centers, allowing bonding of one pedestal from each access floor tile.
2. Bond the TGB of the equipment room to the reference grid at two or more locations.
3. Bond all conduits and piping entering the equipment room to the TGB at the perimeter of the room.

M. Static Dissipative Flooring.

1. Install grounding tape at static-dissipating flooring in accordance with manufacturer's instructions. Ground to telecommunications or building ground system.

3.6 GROUNDING UNDERGROUND DISTRIBUTION SYSTEM COMPONENTS

A. Comply with IEEE C2 grounding requirements.

B. Grounding Manholes and Handholes: Install a driven ground rod through manhole or handhole floor, close to wall, and set rod depth so 4 inches extends above finished floor. If necessary, install ground rod before manhole is placed and provide No. 1/0 AWG bare, tinned-copper conductor from ground rod into manhole through a waterproof sleeve in manhole wall. Protect ground rods passing through concrete floor with a double wrapping of pressure-sensitive insulating tape or heat-shrunk insulating sleeve from 2 inches above to 6 inches below concrete. Seal floor opening with waterproof, nonshrink grout.

C. Grounding Connections to Manhole Components: Bond exposed-metal parts such as inserts, cable racks, pulling irons, ladders, and cable shields within each manhole or handhole, to ground rod or grounding conductor. Make connections with No. 4 AWG minimum, bonding conductor. Train conductors level or

plumb around corners and fasten to manhole walls. Connect grounding conductors to cable armor and cable shields according to written instructions by manufacturer of splicing and termination kits.

3.7 IDENTIFICATION

A. Labels shall be preprinted or computer-printed type.

1. Label TMGB(s) with "fs-TMGB," where "fs" is the telecommunications space identifier for the space containing the TMGB.
2. Label TGB(s) with "fs-TGB," where "fs" is the telecommunications space identifier for the space containing the TGB.
3. Label the BCT and each telecommunications backbone conductor at its attachment point: "WARNING! TELECOMMUNICATIONS BONDING CONDUCTOR. DO NOT REMOVE OR DISCONNECT!"

3.8 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
2. Test the bonding connections of the system using an ac earth ground-resistance tester, taking two-point bonding measurements in each telecommunications equipment room containing a TMGB and a TGB and using the process recommended by BICSI TDMM. Conduct tests with the facility in operation.

    a. Measure the resistance between the busbar and the nearest available grounding electrode. The maximum acceptable value of this bonding resistance is 100 milliohms.

3. Test for ground loop currents using a digital clamp-on ammeter, with a full-scale of not more than 10 A, displaying current in increments of 0.01 A at an accuracy of plus/minus 2.0 percent.

    a. With the grounding infrastructure completed and the communications system electronics operating, measure the current in every conductor connected to the TMGB. Maximum acceptable ac current level is 1 A.

C. Excessive Ground Resistance: If resistance to ground at the BCT exceeds 5 ohms, notify Architect promptly and include recommendations to reduce ground resistance.

D. Grounding system will be considered defective if it does not pass tests and inspections.

E. Prepare test and inspection reports.

END OF SECTION 270526

This page intentionally left blank.

SECTION 270528 - PATHWAYS FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Metal conduits and fittings.
2. Nonmetallic conduits and fittings.
3. Hooks.
4. Boxes, enclosures, and cabinets.

1.3 DEFINITIONS

A. ARC: Aluminum rigid conduit.

B. GRC: Galvanized rigid conduit.

C. IMC: Intermediate metal conduit.

D. RTRC: Reinforced thermosetting resin conduit.

1.4 ACTION SUBMITTALS

A. Product data for the following:

1. Surface pathways
2. Wireways and fittings.
3. Tele-power poles.
4. Boxes, enclosures, and cabinets.

B. Shop Drawings: For custom enclosures and cabinets and custom underground handholes and boxes. Include plans, elevations, sections, and attachment details.

1.5 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Pathway routing plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of items involved:

1. Structural members in paths of pathway groups with common supports.
2. HVAC and plumbing items and architectural features in paths of conduit groups with common supports.
3. Underground ducts, piping, and structures in location of underground enclosures and handholes.

B. Qualification Data: For professional engineer.

C. Seismic Qualification Data: Seismic rating for all pathway racks, enclosures, cabinets, equipment racks, and their mounting provisions, including those for internal components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which certification is based and their installation requirements.
4. Detailed description of conduit support devices and interconnections on which certification is based and their installation requirements.

D. Source quality-control reports.

PART 2 - PRODUCTS

2.1 METAL CONDUITS AND FITTINGS

A. Description: Metal raceway of circular cross section with manufacturer-fabricated fittings.

B. Manufacturers: Subject to compliance with requirements, provide one of the following:

1. Allied Tube & Conduit; Atkore International.
2. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group.
3. Southwire Company, LLC.

C. General Requirements for Metal Conduits and Fittings:

1. Listed and labeled as defined in NFPA 70, by a nationally recognized testing laboratory, and marked for intended location and application.
2. Comply with TIA-569-D.

D. GRC: Comply with ANSI C80.1 and UL 6.

1. Rigid metal conduit shall be galvanized steel. Connectors and couplings shall be threaded galvanized malleable iron or steel. Locknuts shall be of the type with sharp edges that bite into enclosure where connected. Plastic insulating bushings shall be high temperature type. Sealing bushings shall have galvanized malleable iron locking ring with molded neoprene sealing ring with predrilled holes to accommodate each individual conductor, stainless steel screws and washers, PVC-coated pressure discs, and factory-installed lay-in grounding conductor lugs. Hub fittings shall be 2-piece, insulated throat, liquidtight type of steel or malleable construction.

E. EMT: Comply with ANSI C80.3 and UL 797.

1. Electrical metallic tubing shall be galvanized steel. Connectors and couplings shall be malleable iron or steel, galvanized or cadmium-plated, compression type. Connectors shall have insulated throats.

F. Fittings for Metal Conduit: Comply with NEMA FB 1 and UL 514B.

1. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 1203 and NFPA 70.
2. Fittings for EMT:

   a. Material: Steel.
   b. Type: compression.

3. Expansion Fittings: PVC or steel to match conduit type, complying with UL-467, rated for environmental conditions where installed, and including flexible external bonding jumper.

4. Coating for Fittings for PVC-Coated Conduit: Minimum thickness of 0.040 inch, with overlapping sleeves protecting threaded joints.

G. Joint Compound for IMC, GRC, or ARC: Approved, as defined in NFPA 70, by authorities having jurisdiction for use in conduit assemblies, and compounded for use to lubricate and protect threaded conduit joints from corrosion and to enhance their conductivity.

H. Flexible metal conduit shall be galvanized steel. Connectors shall be of the twist-in, insertion or totally enclosed clamp type, galvanized malleable iron or steel, with insulated throats.

I. Liquidtight flexible metal conduit shall be extra flexible type, neoprene-jacketed. Connectors shall be watertight, of the twist-in, insertion type, galvanized malleable iron or steel, with insulated throats.

2.2 NONMETALLIC CONDUITS AND FITTINGS

A. Description: Nonmetallic raceway of circular section with manufacturer-fabricated fittings.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Allied Tube & Conduit; Atkore International.
2. Dura-Line.
3. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated.

C. General Requirements for Nonmetallic Conduits and Fittings:

1. Rigid nonmetallic conduit shall be rigid polyvinyl chloride, nonburning, high impact. Couplings and connectors shall be rigid polyvinyl chloride, high impact. Cement for connections of conduit shall be approved by the conduit manufacturer.
2. Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
3. Comply with TIA-569-D.

D. RNC: Type EPC-40-PVC, complying with NEMA TC 2 and UL 651 unless otherwise indicated.

E. Fittings: Comply with NEMA TC 3; match to conduit or tubing type and material.

2.3 HOOKS

A. Description: Prefabricated sheet metal cable supports for telecommunications cable.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. MonoSystems, Inc.
2. nVent.
3. Panduit Corp.
4. Wiremold; Legrand North America, LLC.

C. Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.

D. Non-continuous cable supports shall be available in multiple sizes, styles and materials. Rigid supports shall be equipped with flared edges and pre-configured bend radius controls.

E. Provide drop wire supports and threaded rod assemblies in areas where structural mounting surfaces are non-functional or inaccessible.

F. Sling assemblies/cable straps shall provide a bearing surface of sufficient width to comply with required bend radii of high-performance UTP and optical fiber cables. Support slings shall have a static load limit of 100 lbs.

G. Non-continuous cable supports sized 1 5/16” and larger shall have a cable retainer strap to provide containment of cables within the hanger. The cable retainer strap shall be removable and reusable.

H. Select approved non-continuous cable supports suitable for specific installation environments and/or air handling (plenum) spaces.

I. Multi-Tier Assembly:

1. Utilize manufacturer hardware to allow for multiple tiers of cable supports as indicated on the project drawings.
2. Continuous cable division shall be fully maintained within each open top cable support.

J. Comply with TIA-569-D.

K. Galvanized steel.

L. J shape.

2.4 BOXES, ENCLOSURES, AND CABINETS

A. Description: Enclosures for communications.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. FSR Inc.
2. Hoffman; brand of nVent Electrical plc.
3. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group.
4. Wiremold; Legrand North America, LLC.

C. General Requirements for Boxes, Enclosures, and Cabinets:

1. Comply with TIA-569-D.
2. Boxes, enclosures, and cabinets installed in wet locations shall be listed and labeled as defined in NFPA 70, by an NRTL, and marked for use in wet locations.
3. Box extensions used to accommodate new building finishes shall be of same material as recessed box.
4. Device Box Dimensions: 4 inches square by 2-1/8 inches deep.
5. Gangable boxes are prohibited.

D. Sheet Metal Outlet and Device Boxes: Comply with NEMA OS 1 and UL 514A.

E. Cast-Metal Outlet and Device Boxes: Comply with NEMA FB 1, ferrous alloy, Type FD, with gasketed cover.

F. Outlet boxes shall be constructed of code-gauge galvanized steel, unless otherwise specified herein. Where installed in hazardous locations or exposed to corrosive atmosphere, rain or spray, boxes shall be corrosion resistant cast metal with threaded entrances, removable covers, gaskets, and corrosion resistant screws.

1. Outlet boxes recessed in plaster or gypsum board walls or columns shall be 4" or 4.688" square, 2.125" deep with plaster rings.
2. Outlet boxes for devices recessed in metal door jambs shall be sheet metal partition boxes sized for the application.

3. Outlet boxes recessed in masonry walls shall be square cornered masonry boxes or standard 4" square boxes fitted with square cornered tile covers of proper depth for block. Both type boxes shall be 2.125" minimum depth.
4. Outlet boxes recessed in ceilings shall be 4" octagonal or square, 2.125" depth.
5. Outlet boxes recessed in concrete shall be UL approved for the application.
6. Through-wall type outlet boxes are not acceptable.
7. Wall telephone and data outlet boxes shall be 4", 2.125" deep with single-gang device plaster covers and coverplates.
8. Where special purpose devices require a larger outlet box than specified herein, provide outlet boxes for each specific device.
9. Boxes containing low voltage and line voltage devices shall have metal barriers.

G. Metal Floor Boxes:

1. Refer to Specification Section 260533 “Raceway and Boxes for Electrical Systems.”

H. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.

1. Boxes shall be the type, size and configuration required for its specific use, location, device, and number, size, and arrangement of raceways connecting thereto.

2.5 SOURCE QUALITY CONTROL FOR UNDERGROUND ENCLOSURES

A. Handhole and Pull-Box Prototype Test: Test prototypes of handholes and boxes for compliance with SCTE 77. Strength tests shall be for specified tier ratings of products supplied.

1. Tests of materials shall be performed by an independent testing agency.
2. Strength tests of complete boxes and covers shall be by either an independent testing agency or manufacturer. A qualified registered professional engineer shall certify tests by manufacturer.
3. Testing machine pressure gages shall have current calibration certification complying with ISO 9000 and ISO 10012, and traceable to NIST standards.

PART 3 - EXECUTION

3.1 PATHWAY APPLICATION

A. Indoors: Apply pathway products as specified below unless otherwise indicated:

1. Exposed, Not Subject to Physical Damage: EMT.
2. Exposed, Not Subject to Severe Physical Damage: EMT.
3. Exposed and Subject to Severe Physical Damage: GRC. Pathway locations include the following:

   a. Loading dock.
   b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units.
   c. Mechanical rooms.

4. Concealed in Ceilings and Interior Walls and Partitions: EMT or innerduct.
5. Damp or Wet Locations: GRC.
6. Pathways for Optical-Fiber or Communications Cable in Spaces Used for Environmental Air: Plenum-type, optical-fiber-cable pathway.
7. Pathways for Optical-Fiber or Communications-Cable Risers in Vertical Shafts: Riser-type, optical-fiber-cable pathway.
8. Pathways for Concealed General-Purpose Distribution of Optical-Fiber or Communications Cable: EMT.
9. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 stainless steel units in institutional and commercial kitchens and damp or wet locations.

B. Minimum Pathway Size: 1 inch trade size for copper and aluminum cables, and 1 inch for optical-fiber cables.

C. Pathway Fittings: Compatible with pathways and suitable for use and location.

1. Rigid and Intermediate Steel Conduit: Use threaded rigid steel conduit fittings unless otherwise indicated. Comply with NEMA FB 2.10.
2. PVC Externally Coated, Rigid Steel Conduits: Use only fittings listed for use with this type of conduit. Patch and seal all joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Use sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
3. EMT: Use compression, steel fittings. Comply with NEMA FB 2.10.

D. Do not install aluminum conduits, boxes, or fittings in contact with concrete or earth.

E. Install surface pathways only where indicated on Drawings.

F. Do not install nonmetallic conduit where ambient temperature exceeds 120 deg F.

3.2 INSTALLATION

A. Comply with the following standards for installation requirements except where requirements on Drawings or in this Section are stricter:

1. NECA 1.
2. NECA/BICSI 568.
3. TIA-569-D.
4. NECA 101
5. NECA 102.
6. NECA 105.
7. NECA 111.

B. Comply with NFPA 70 limitations for types of pathways allowed in specific occupancies and number of floors.

C. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping materials and installation for penetrations through fire-rated walls, ceilings, and assemblies.

D. Comply with requirements in Section 270544 "Sleeves and Sleeve Seals for Communications Pathways and Cabling" for sleeves and sleeve seals for communications.

E. Keep pathways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal pathway runs above water and steam piping.

F. Complete pathway installation before starting conductor installation.

G. The approximate locations of outlets are indicated on the Drawings. The exact locations shall be determined during construction. The right is reserved to change the exact location of any outlet box in any room before it is permanently installed, without additional cost to the Owner and as approved by the Architect and/or Engineer.

H. Arrange stub-ups so curved portions of bends are not visible above finished slab.

I. Install no more than the equivalent of two 90-degree bends in any pathway run. Support within 12 inches of changes in direction. Utilize long radius ells for all optical-fiber cables.

J. Conceal rigid conduit within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.

K. Support conduit within 12 inches of enclosures to which attached.

L. Pathways Embedded in Slabs:

1. Run conduit larger than 1-inch trade size, parallel or at right angles to main reinforcement. Where at right angles to reinforcement, place conduit close to slab support. Secure pathways to reinforcement at maximum 10-foot intervals.
2. Arrange pathways to cross building expansion joints at right angles with expansion fittings. Comply with requirements for expansion joints specified in this article.
3. Arrange pathways to keep a minimum of 2 inches of concrete cover in all directions or as otherwise directed by structural engineer.
4. Do not embed threadless fittings in concrete unless specifically approved by Architect for each specific location.
5. Change from nonmetallic conduit and fittings to GRC and fittings before rising above floor.

M. Stub-ups to Above Recessed Ceilings:

1. Use EMT for pathways.
2. Use a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.

N. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of pathway and fittings before making up joints. Follow compound manufacturer's written instructions.

O. Coat field-cut threads on PVC-coated pathway with a corrosion-preventing conductive compound prior to assembly.

P. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install insulated bushings on conduits terminated with locknuts.

Q. Install pathways square to the enclosure and terminate at enclosures with locknuts. Install locknuts hand tight plus one additional quarter-turn.

R. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure, to assure a continuous ground path.

S. Cut conduit perpendicular to the length. For conduits of 2-inch trade size and larger, use roll cutter or a guide to ensure cut is straight and perpendicular to the length.

T. Install pull wires in empty pathways. Use polypropylene or monofilament plastic line with not less than 200-lb tensile strength. Leave at least 12 inches of slack at each end of pull wire. Secure pull wire, so it cannot fall into conduit. Cap pathways designated as spare alongside pathways in use.

U. Install pathway-sealing fittings at accessible locations according to NFPA 70 and fill them with listed sealing compound. For concealed pathways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install pathway-sealing fittings according to NFPA 70.

V. Install devices to seal pathway interiors at accessible locations. Locate seals, so no fittings or boxes are between the seal and the following changes of environments. Seal the interior of all pathways at the following points:

1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.

2. Where an underground service pathway enters a building or structure.
3. Where otherwise required by NFPA 70.

W. Comply with manufacturer's written instructions for solvent welding PVC conduit and fittings.

X. Hooks:

1. Follow manufacturer’s instructions and recommended industry standards and guidelines.
2. Must be an independent support structure for the voice/data communication system.
3. Size to allow a minimum of 25 percent future capacity without exceeding design capacity limits.
4. Shall be supported by dedicated support wires. Do not use ceiling grid support wire or support rods.
5. Shall be installed using threaded rods secured to the slab above, manufacturer approved clips/clamps secured to structure or wall mounted to support the telecommunications cable infrastructure parallel to the slab throughout the cable plant, unless site conditions dictate a non-parallel installation.
6. Hook spacing shall allow no more than 6 inches of slack. The lowest point of the cables shall be no less than 6 inches adjacent to ceilings, mechanical ductwork and fittings, luminaires, power conduits, power and telecommunications outlets, and other electrical and communications equipment.
7. Space hooks no more than 5 feet o.c.
8. Provide a hook at each change in direction. Must be routed to follow existing corridors, and parallel or 90 degree angles from all walls and/or the cable tray whenever possible.
9. Draping cables over other structures in the ceiling is unacceptable. Water pipes, ceiling grid, sprinkler system, electrical supports, air ducts or any other in-ceiling structure may not be used for cable support.
10. Contractor installed supports shall be used to supplement the main cable support system when any cabling leaves the main support system or is unsupported for more than three feet (3’).

Y. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements. Install boxes with height measured to center of box unless otherwise indicated.

Z. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall. Prepare block surface to provide a flat surface for a raintight connection between box and cover plate or supported equipment and box.

1. Set outlet boxes for flush-mounted devices to within 0.125" of finished wall.
2. Adjust mounting heights of boxes in masonry walls to minimize cutting and patching of masonry.
3. Install outlet boxes in one vertical line when indicated adjacent on the Drawings but at different mounting heights.
4. Covers on recessed ceiling outlet boxes shall be painted to match the ceiling.

AA. Horizontally separate boxes mounted on opposite sides of walls, so they are not in the same vertical channel.

1. Outlet boxes shall not be installed back-to-back. Maintain minimum 24" separation between outlet boxes on opposite sides of rated walls, and minimum 6" separation in nonrated walls.

BB. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for the purpose.

CC. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits. Install boxes level, plumb, and square to the structure

DD. Set metal floor boxes level and flush with finished floor surface.

EE. Set nonmetallic floor boxes level. Trim after installation to fit flush with finished floor surface.

FF. Where raceways must pass through structural members, obtain approval from the Architect and/or Engineer regarding location and size of openings prior to drilling. Lateral raceways in masonry shall not exceed 0.75".

GG. Raceways shall be secured in place and protected to prevent damage to the work during construction. Open ends of raceways shall be taped or capped after installation to prevent entry of dirt and debris during construction prior to pulling wire. Installation of raceways shall be complete and shall be blown-out and swabbed clear of water and trash prior to pulling wire.

HH. Rigid metal conduit shall be installed for applications not otherwise specified herein. Rigid metal conduit shall be secured to metal enclosures using hub fittings. Insulated bushings or fittings shall be installed at connections to cabinets and boxes. Terminate stub-ups not attached to enclosures with an insulated throat grounding bushing. Commercial pipe joint compound shall be applied to the male threads on threaded joints and fittings. Connections shall be wrench-tight, and where subject to ground water, rain or spray shall be watertight.

II. Service provider raceways shall be installed as indicated on the Drawings and shall be coordinated with the local telephone company or other service provider. Raceways terminated at plywood backboards shall be turned-up out of the floor slab to 12" above the finished floor if routed from below, and turned down and terminated at the top of the backboard if routed from above.

3.3 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR COMMUNICATIONS PENETRATIONS

A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 270544 "Sleeves and Sleeve Seals for Communications Pathways and Cabling."

3.4 FIRESTOPPING

A. Install firestopping at penetrations of fire-rated floor and wall assemblies. Comply with requirements in Section 078413 "Penetration Firestopping."

B. Inspect fire stopping installation by others between building structure and conduit, wire way, and cable tray to verify integrity of installation.

C. Protect adjacent surfaces from damage during water seal or fire stop installation. Repair any damage.

3.5 PROTECTION

A. Protect coatings, finishes, and cabinets from damage or deterioration.

1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 270528

This page intentionally left blank.

SECTION 270536 - CABLE TRAYS FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Ladder cable tray.
2. Cable tray accessories.

B. Related Requirements:

1. Section 260536 "Cable Trays for Electrical Systems" for cable trays and accessories serving electrical systems.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of cable tray.

1. Include data sheets for each product (and accessories) indicating dimensions and finishes for each type of cable tray indicated.

B. Shop Drawings: For each type of cable tray.

1. Show fabrication and installation details of cable trays, including plans, elevations, and sections of components and attachments to other construction elements. Designate components and accessories, including clamps, brackets, hanger rods, splice-plate connectors, expansion-joint assemblies, straight lengths, and fittings.
2. Cable tray layout, showing cable tray route to scale, with relationship between the tray and adjacent structural, electrical, and mechanical elements. Include the following:

   a. Vertical and horizontal offsets and transitions.
   b. Clearances for access above and to sides of cable trays.
   c. Vertical elevation of cable trays above the floor or bottom of ceiling structure.
   d. Load calculations to show dead and live loads as not exceeding manufacturer's rating for tray and its support elements.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Floor plans and sections, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Scaled cable tray layout and relationships between components and adjacent structural, electrical, and mechanical elements.
2. Vertical and horizontal offsets and transitions.
3. Clearances for access above and to side of cable trays.
4. Vertical elevation of cable trays above the floor or below bottom of ceiling structure.

B. Seismic Qualification Data: Certificates, for cable trays, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Cable trays and supports shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1. The term "withstand" means "the cable trays will remain in place without separation of any parts when subjected to the seismic forces specified."
2. Component Importance Factor: Refer to Architectural and/or Structural Drawings.

B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes in cable tray installed outdoors.

2.2 GENERAL REQUIREMENTS FOR CABLE TRAYS

A. Cable Trays and Accessories: Identified as defined in NFPA 70 and marked for intended location, application, and grounding.

1. Source Limitations: Obtain cable trays and components from single manufacturer.

B. Sizes and Configurations: See the Cable Tray Schedule on Drawings for specific requirements for types, materials, sizes, and configurations.

C. Structural Performance: See articles for individual cable tray types for specific values for the following parameters:

1. Uniform Load Distribution: Capable of supporting a uniformly distributed load on the indicated support span when supported as a simple span and tested according to NEMA VE 1.
2. Concentrated Load: A load applied at midpoint of span and centerline of tray.
3. Load and Safety Factors: Applicable to both side rails and rung capacities.

2.3 LADDER CABLE TRAY (CABLE RUNWAY)

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Cooper B-line; brand of Eaton, Electrical Sector.
2. CPI Chatsworth Products, Inc.
3. Legrand.

B. Description:

1. Ladder cable tray shall form a wireway system for cable management inside communications rooms.
2. Runways shall be classified by UL and rated as an equipment grounding conductor.
3. Configuration: Two longitudinal side rails with transverse rungs swaged or welded to side rails, complying with NEMA VE 1.

4. Width: 12 inches unless otherwise indicated on Drawings.
5. Straight Section Lengths: 10 feet, except where shorter lengths are required to facilitate tray assembly.
6. Rung Spacing: 9 inches o.c.
7. Radius-Fitting Rung Spacing: 9 inches at center of tray's width.
8. Minimum Cable-Bearing Surface for Rungs: 7/8-inch width with radius edges.
9. No portion of the rungs shall protrude below the bottom plane of side rails.
10. Structural Performance of Each Rung: Capable of supporting a maximum cable load, with a safety factor of 1.5, plus a 200-lb concentrated load, when tested according to NEMA VE 1.
11. Cable Runway Accessories
    a. Fittings: Tees, crosses, risers, elbows, and other fittings as indicated, of same materials and finishes as ladder cable tray.
    b. Barrier Strips: Same materials and finishes as for ladder cable tray.
    c. Specific Accessory Products: Furnish and install all accessories, including but not limited to radius drops, splice kits, support kits, end closing kits, protective end caps, ground wire supports, elevation kits, and other accessories as indicated on the project drawings, and as required for a complete ladder cable tray system.
12. Class Designation: Comply with NEMA VE 1.
13. Splicing Assemblies: Bolted type using serrated flange locknuts.
14. Splice-Plate Capacity: Splices located within support span shall not diminish rated loading capacity of cable tray.

C. Materials and Finishes:

1. Steel:
    a. Straight Section and Fitting Side Rails and Rungs: Steel complies with the minimum mechanical properties of ASTM A 1011/A 1011M, SS, Grade 33 or ASTM A 1008/A 1008M, Grade 33, Type 2.
    b. Steel Tray Splice Plates: ASTM A 1011/A 1011M, HSLAS, Grade 50, Class 1.
    c. Fasteners: Steel complies with the minimum mechanical properties of ASTM A 510/A 510M, Grade 1008.
    d. Finish: Powder-coat enamel paint.
        1) Powder-Coat Enamel: Cable tray manufacturer's recommended primer and corrosion-inhibiting treatment, with factory-applied powder-coat paint.
        2) Hardware: Chromium-zinc plated, ASTM F 1136.

2.4 CABLE TRAY ACCESSORIES

A. Fittings: Tees, crosses, risers, elbows, and other fittings as indicated, of same materials and finishes as cable tray.

B. Cable tray supports and connectors, including bonding jumpers, as recommended by cable tray manufacturer.

C. Provide all components of the cable tray system (cable tray, turns, splices, supports and other accessories) for a complete and compliant system.

PART 3 - EXECUTION

3.1 CABLE TRAY INSTALLATION

A. Install cable trays according to NEMA VE 2.

B. Install cable trays as a complete system, including fasteners, hold-down clips, support systems, barrier strips, adjustable horizontal and vertical splice plates, elbows, reducers, tees, crosses, cable dropouts, adapters, covers, and bonding.

1. Provide all components of the cable tray system (cable tray, turns, splices, supports, and accessories) from a single manufacturer.

C. Install cable trays so that the tray is accessible for cable installation and all splices are accessible for inspection and adjustment.

1. Minimum clearance of 12” above the cable tray.
2. Leave a minimum of 12” in between cable tray and ceiling/building truss structure.
3. Leave a minimum of 3” in between ladder cable tray and the tops of equipment racks and/or cabinets.
4. Minimum clearance of 12” in between each tier of cable tray.
5. When located above an acoustical drop ceiling, leave a minimum of 3” clearance between the top of the drop ceiling tiles and the bottom of the cable tray.
6. When installed under a raised floor, cable tray shall be installed with a minimum 3” clearance between the top of the cable tray and the bottom of the floor tiles or floor system stringers, whichever is lower in elevation. Maintain a 3” clearance between cable trays wherever cable trays cross.
7. Maintain a 2’ separation between ladder cable tray used for communications cables and pathways for other utilities or building services.

D. Provide non-curing, re-penetrable, intumescent firestop materials around communications cable trays or ladder racks penetrating through a fire rated wall.

E. Remove burrs and sharp edges from cable trays.

F. Join aluminum cable tray with splice plates; use four square neck-carriage bolts and locknuts.

G. Fasten cable tray supports to building structure and install seismic restraints.

H. Design fasteners and supports to carry cable tray, the cables, and a concentrated load of 200 lb. Comply with requirements in Section 270529 "Hangers and Supports for Communications Systems." Comply with seismic-restraint details according to Section 270548.16 "Seismic Controls for Communications Systems."

I. Place supports so that spans do not exceed maximum spans on schedules and provide clearances shown on Drawings. Install intermediate supports when cable weight exceeds the load-carrying capacity of the tray rungs.

J. Construct supports from channel members, threaded rods, and other appurtenances furnished by cable tray manufacturer. Arrange supports in trapeze or wall-bracket form as required by application.

K. Support bus assembly to prevent twisting from eccentric loading.

L. Locate and install supports according to NEMA VE 2. Do not install more than one cable tray splice between supports.

M. Ladder cable tray:

1. Install all ladder cable tray per the manufacturer's recommended installation instructions, and as indicated in the project drawings.
2. Ladder cable tray shall be installed with side stringers facing down so that the ladder forms an inverted U-shape.
3. Ladder cable tray shall be secured to the structural ceiling, building truss system, wall, floor or the tops of equipment racks and/or cabinets using the manufacturer's recommended supports and appropriate installation hardware and methods as defined by local code or the authority having jurisdiction (AHJ).
4. Ladder cable tray splices will be made in mid-span, not over a support, with the manufacturer's recommended splice hardware.
5. Ladder cable tray support:
    a. Every 5' or less in accordance with TIA-569-D.
    b. Within 2' of every splice and within 2' on both/all sides of every intersection.
    c. Within 2' on both sides of every change in elevation.
    d. Every 2' when attached vertically to a wall.
6. Heavy-duty splices:
    a. Recommended for 18" wide or wider ladder cable tray.
    b. Required for any splice formed in the vertical orientation including changes in elevation formed using vertical-to-horizontal 90° turns or horizontal-to-vertical 90° turns.
    c. To secure all overhead turns to the overhead horizontal pathway(s).

N. Install expansion connectors where cable trays cross building expansion joints and in cable tray runs that exceed dimensions recommended in NEMA VE 2. Space connectors and set gaps according to applicable standard.

O. Make changes in direction and elevation using manufacturer's recommended fittings.

P. Make cable tray connections using manufacturer's recommended fittings.

Q. Seal penetrations through fire and smoke barriers. Comply with requirements in Section 078413 "Penetration Firestopping."

R. Install capped metal sleeves for future cables through firestop-sealed cable tray penetrations of fire and smoke barriers.

S. Install cable trays with minimum clearance of 12" above and 6" on the sides and below from all obstructions to permit access for installing cables.

T. Cover the exposed ends of cable trays that do not terminate against a wall, the floor or the ceiling, with end caps or an end closing kit.

U. Install permanent covers, if used, after installing cable. Refer to project drawings for requirements.

3.2 CABLE TRAY GROUNDING

A. Ground cable trays according to NFPA 70 unless additional grounding is specified. Comply with requirements in Section 270526 "Grounding and Bonding for Communications Systems."

B. Cable trays shall be bonded together with splice plates listed for grounding purposes or with listed bonding jumpers.

C. Cable trays with single-conductor power conductors shall be bonded together with a grounding conductor run in the tray along with the power conductors and bonded to the tray at 72-inch intervals. The grounding

conductor shall be sized according to NFPA 70, Article 250.122, "Size of Equipment Grounding Conductors," and Article 392, "Cable Trays."

D. When using epoxy- or powder-coat painted cable trays as a grounding conductor, completely remove coating at all splice contact points or ground connector attachment. After completing splice-to-grounding bolt attachment, repair the coated surfaces with coating materials recommended by cable tray manufacturer.

E. Bond cable trays to power source for cables contained within with bonding conductors sized according to NFPA 70, Article 250.122, "Size of Equipment Grounding Conductors."

F. Verify continuity through the bonds at splices and intersections between individual cable tray sections and turns and through the bond to the telecommunications grounding busbar.

3.3 CABLE INSTALLATION

A. Install cables only when each cable tray run has been completed and inspected.

B. Cables shall not hang off the ends or sides of the cable tray and/or runway during construction. Cables shall be bundled and coiled neatly on cable tray or runway until cables are ready for final placement.

C. Cables (cable bundles) will be secured to the cross members of cable runway with 3/4” wide reusable straps.

D. Fasten cables on vertical runs to cable trays every 18 inches.

E. Fasten and support cables that pass from one cable tray to another or drop from cable trays to equipment enclosures. Fasten cables to the cable tray at the point of exit and support cables independent of the enclosure. The cable length between cable trays or between cable tray and enclosure shall be no more than 72 inches.

F. When a single cable tray supports different types of cable media, the cable media will be separated within the pathway by cable spools that attach to the cross members on the cable tray. Treat each type of cable media and divided area of the cable tray separately when determining cable fill limits.

G. Use a radius drop to guide cables to access a rack, frame, cabinet or wall-mounted rack, cabinet or termination field. If necessary, provide a moveable cross member to attach and align the radius drop in between the welded cross members of a ladder cable tray.

H. Fill Ratio:

1. Not to exceed 50%.
2. Actual cable fill for ladder cable tray that is not equipped with cable retaining posts will not exceed 2” in height.
3. The combined weight of cables within the cable tray will not exceed the stated load capacity of the cable tray as stated in the manufacturer’s product specifications or load/design tables.

I. In existing construction, remove inactive or dead cables from cable trays.

3.4 CONNECTIONS

A. Remove paint from all connection points before making connections. Repair paint after the connections are completed.

B. Connect pathways to cable trays according to requirements in NEMA VE 2 and NEMA FG 1.

3.5 PROTECTION

A. Protect installed cable trays and cables.

1. Install temporary protection for cables in open trays to safeguard exposed cables against falling objects, paint or debris during construction. Temporary protection for cables and cable tray can be constructed of wood or metal materials and shall remain in place until the risk of damage is over.
2. Repair damage to galvanized finishes with zinc-rich paint recommended by cable tray manufacturer.
3. Repair damage to paint finishes with matching touchup coating recommended by cable tray manufacturer.

a. The installer will provide touch-up paint color-matched to the finish on the cable tray and will correct any minor cosmetic damage (chips, small scratches, etc.) resulting from normal handling during the installation process prior to delivery to the owner. If a component is cosmetically damaged to the extent that correction in the field is obvious against the factory finish, the component will be replaced with a new component finished from the factory. If a component is physically damaged due to mishandling or modification during the installation process, it shall not be used as part of the cable tray system.

END OF SECTION 270536

This page intentionally left blank.

SECTION 270543 - UNDERGROUND PATHWAYS AND STRUCTURES FOR COMMUNICATION SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Metal conduit and fittings, including GRC and PVC-coated GRC.
2. Rigid nonmetallic duct.
3. Duct accessories, including rigid innerduct and fabric innerduct.
4. Precast concrete handholes.

1.3 DEFINITIONS

A. Direct-Buried: Duct or a duct bank that is buried in the ground, without any additional casing materials, such as concrete.

B. Duct: A single duct or multiple ducts. Duct may be either installed singly or as component of a duct bank.

C. Duct Bank:

1. Two or more ducts installed in parallel, with or without additional casing materials.
2. Multiple duct banks.

D. GRC: Galvanized rigid conduit.

E. IMC: Intermediate metal conduit.

F. RNC: Rigid nonmetallic conduit.

G. Trafficways: Locations where vehicular or pedestrian traffic is a normal course of events.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include duct-bank materials, including spacers and miscellaneous components.
2. Include duct and conduits and their accessories, including elbows, end bells, bends, fittings, duct spacers and solvent cement.
3. Include accessories for manholes, handholes, and boxes, and other utility structures.
4. Include underground-line warning tape.

B. Shop Drawings:

1. Precast or Factory-Fabricated Underground Utility Structures:

a. Include plans, elevations, sections, details, attachments to other work, and accessories.
b. Include duct entry provisions, including location and duct size.

c. Include reinforcement details.
d. Include frame and cover design and manhole chimneys.
e. Include grounding details.
f. Include dimensioned locations of cable rack inserts, pulling-in and lifting irons, and sumps.
g. Include joint details.

2. Factory-Fabricated Handholes and Boxes Other Than Precast Concrete:

a. Include dimensioned plans, sections, and elevations, and fabrication and installation details.
b. Include duct entry provisions, including location and duct size.
c. Include cover design.
d. Include grounding details.
e. Include dimensioned locations of cable rack inserts, and pulling-in and lifting irons.

1.5 INFORMATIONAL SUBMITTALS

A. Duct and Duct-Bank Coordination Drawings: Show duct profiles and coordination with other utilities and underground structures.

1. Include plans and sections, drawn to scale, and show bends and locations of expansion fittings.
2. Drawings shall be signed and sealed by a qualified professional engineer.

B. Product Certificates: For concrete and steel used in precast concrete manholes and handholes, as required by ASTM C 858.

C. Qualification Data: For professional engineer and testing agency responsible for testing nonconcrete handholes and boxes.

D. Source quality-control reports.

1.6 FIELD CONDITIONS

A. Interruption of Existing Communications Service: Do not interrupt communications service to facilities occupied by Owner or others unless permitted under the following conditions, and then only after arranging to provide temporary communications service according to requirements indicated:

1. Notify Owner no fewer than seven days in advance of proposed interruption of communications service.
2. Do not proceed with interruption of communications service without Owner's written permission.

B. Ground Water: Assume ground-water level is 36 inches below ground surface unless a higher water table is noted on Drawings.

PART 2 - PRODUCTS

2.1 METAL CONDUITS AND FITTINGS

A. GRC: Comply with ANSI C80.1 and UL 6.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Atkore International (Allied Tube & Conduit).
2. Appleton - O-Z/Gedney; Emerson Electric Co., Automation Solutions.
3. Southwire Company.

C. General Requirements for Metal Conduits and Fittings:

1. Listed and labeled as defined in NFPA 70, by a nationally recognized testing laboratory, and marked for intended location and application.
2. Comply with TIA-569-C and TIA-758-C.

2.2 RIGID NONMETALLIC DUCTS

A. Underground Plastic Utilities Duct: Type EPC-40-PVCRNC or as indicated on project drawings, complying with NEMA TC 2 and UL 651, with matching fittings complying with NEMA TC 3 by same manufacturer as duct.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Carlon.
2. Dura-Line.
3. Lamson & Sessions.

C. General Requirements for Nonmetallic Ducts and Fittings:

1. Listed and labeled as defined in NFPA 70, by a nationally recognized testing laboratory, and marked for intended location and application.
2. Comply with TIA-569-C and TIA-758-C.

D. Solvents and Adhesives: As recommended by duct manufacturer.

1. VOC Content: 510 g/L or less for PVC conduit and fittings.

2.3 DUCT ACCESSORIES

A. Fabric Innerduct: Continuous, polyester, multi -pocket fabric innerduct, with internal pull tape and tracer wire.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. MaxCell.

2. Standard Outdoor Textile Innerduct: Micro, 2-inch, 3-inch and 4-inch single or multi-cell polyester/nylon textile innerduct containing 1250 lb polyester flat woven pull tape.
3. Each innerduct shall be installed with unique color striping, and with corresponding color-matched pull tapes.
4. Fabric Innerduct Fittings:

   a. Conduit Plugs: Compression-type conduit plugs with locking nuts for sealing and securing one or more textile innerducts within a 4-inch inside diameter conduit, e.g.:4-inch plug with nine holes for cables in a 3 pack (9-cell) configuration.
   b. Termination Bags: Inflation-type bags for sealing and securing around one or more textile innerducts and cables within 2-inch outside diameter or larger conduit.

B. Duct Spacers: Factory-fabricated rigid PVC interlocking spacers, sized for type and size of duct with which used, and selected to provide minimum duct spacing indicated while supporting duct during concreting or backfilling.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. Atkore International (Allied Tube & Conduits).

b. Cantex Inc.
c. Carlon; a brand of Thomas & Betts Corporations.

C. Underground-Line Warning Tape: Underground-line warning tape specified in Section 270553 "Identification for Communications Systems."

2.4 PRECAST CONCRETE HANDHOLES AND BOXES

A. Description: Monolithically poured, factory-fabricated, reinforced-concrete walls and bottom unless open-bottom enclosures are indicated. Frame and cover shall form top of enclosure and shall have load rating consistent with that of handhole or box.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Christy Concrete Products.
2. Oldcastle Precast, Inc.
3. Utility Concrete Products, LLC.

C. Comply with ASTM C 858 for design and manufacturing processes.

D. Frame and Cover: Weatherproof steel frame, with steel cover with recessed cover hook eyes and tamper-resistant, captive, cover-securing bolts.

E. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.

F. Cover Legend: Molded lettering, "COMMUNICATIONS."

G. Configuration: Units shall be designed for flush burial and have closed bottom unless otherwise indicated.

H. Extensions and Slabs: Designed to mate with bottom of enclosure, and made of same material as enclosure.

1. Extension shall provide increased depth of 12 inches.
2. Slab: Same dimensions as bottom of enclosure, and arranged to provide closure.

I. Joint Sealant: Asphaltic-butyl material with adhesion, cohesion, flexibility, and durability properties necessary to withstand maximum hydrostatic pressures at the installation location with the ground-water level at grade.

J. Knockout Panels: Precast openings in walls, arranged to match dimensions and elevations of approaching duct and duct banks, plus an additional 6 inches vertically and horizontally to accommodate alignment variations.

1. Knockout panels shall be located no less than 6 inches from interior surfaces of walls, floors, or frames and covers of handholes, but close enough to corners to facilitate racking of cables on walls.
2. Knockout panel opening shall have cast-in-place, welded-wire fabric reinforcement for field cutting and bending to tie in to concrete envelopes of duct banks.
3. Knockout panel openings shall be framed with at least two additional No. 3 steel reinforcing bars in concrete around each opening.
4. Knockout panels shall be 1-1/2 to 2 inches thick.

K. Duct Entrances in Handhole Walls: Cast end-bell or duct-terminating fitting in wall for each entering duct.

1. Type and size shall match fittings to duct or conduit to be terminated.
2. Fittings shall align with elevations of approaching duct and be located near interior corners of handholes to facilitate racking of cable.

L. Handholes 12 inches wide by 24 inches long and larger shall have inserts for cable racks and pulling-in irons installed before concrete is poured.

2.5 SOURCE QUALITY CONTROL

A. Test and inspect precast concrete utility structures according to ASTM C 1037.

B. Nonconcrete Handhole and Pull-Box Prototype Test: Test prototypes of manholes and boxes for compliance with SCTE 77. Strength tests shall be for specified tier ratings of products supplied.

1. Tests of materials shall be performed by an independent testing agency.
2. Strength tests of complete boxes and covers shall be by either an independent testing agency or manufacturer. A qualified registered professional engineer shall certify tests by manufacturer.
3. Testing machine pressure gages shall have current calibration certification, complying with ISO 9000 and ISO 10012, and traceable to NIST standards.

PART 3 - EXECUTION

3.1 PREPARATION

A. Coordinate layout and installation of duct, duct bank, manholes, handholes, and boxes with final arrangement of other utilities, site grading, and surface features as determined in the field. Notify Architect if there is a conflict between areas of excavation and existing structures or archaeological sites to remain.

B. Coordinate elevations of duct and duct-bank entrances into manholes, handholes, and boxes with final locations and profiles of duct and duct banks, as determined by coordination with other utilities, underground obstructions, and surface features. Revise locations and elevations as required to suit field conditions and to ensure that duct runs drain to manholes and handholes, and as approved by Architect.

C. Clear and grub vegetation to be removed, and protect vegetation to remain according to Section 311000 "Site Clearing." Remove and stockpile topsoil for reapplication according to Section 311000 "Site Clearing."

3.2 UNDERGROUND DUCT APPLICATION

A. Duct for Communications: Type EPC-40-PVC RNC, in direct-buried duct bank unless otherwise indicated.

B. Underground Duct Crossing Driveways Roadways and Railroads: Type EPC-40-PVC RNC, encased in reinforced concrete.

C. Stub-Ups for Communications: Concrete-encased GRC.

3.3 UNDERGROUND ENCLOSURE APPLICATION

A. Handholes and Boxes for Communications:

1. Units in Roadways and Other Deliberate Traffic Paths: Precast concrete. AASHTO HB 17, H-20 structural load rating.
2. Units in Driveway, Parking Lot, and Off-Roadway Locations, Subject to Occasional, Nondeliberate Loading by Heavy Vehicles: Precast concrete, AASHTO HB 17, H-20 or Fiberglass enclosures with polymer concrete frame and cover, SCTE 77, Tier 15 structural load rating.
3. Units in Sidewalk and Similar Applications with a Safety Factor for Nondeliberate Loading by Vehicles: Precast concrete, AASHTO HB 17, H-5 Precast concrete, AASHTO HB 17, H-10 or

Heavy-duty fiberglass units with polymer concrete frame and cover, SCTE 77, Tier 8 structural load rating.

4. Units Subject to Light-Duty Pedestrian Traffic Only, structurally tested according to SCTE 77 with 3000-lbf vertical loading.
5. Cover design load shall not exceed the design load of the handhole or box.

3.4 EARTHWORK

A. Excavation and Backfill: Comply with Section 312000 "Earth Moving," but do not use heavy-duty, hydraulic-operated, compaction equipment.

1. Determine exact location of existing underground utilities before excavation.
2. Excavation shall be no longer or deeper than necessary. Backfill material shall be free from rocks and debris.
3. Compact backfill as the excavation is filled.

B. Restoration: Replace area immediately after backfilling is completed or after construction in immediate area is complete.

C. Restore surface features at areas disturbed by excavation, and re-establish original grades unless otherwise indicated.

D. Restore areas disturbed by trenching, storing of dirt, cable laying, and other work. Restore vegetation and include necessary topsoiling, fertilizing, liming, seeding, sodding, sprigging, and mulching. Comply with Section 329200 "Turf and Grasses" and Section 329300 "Plants."

E. Cut and patch existing pavement in the path of underground duct, duct bank, and utility structures according to the "Cutting and Patching" Article in Section 017300 "Execution."

3.5 DUCT AND DUCT-BANK INSTALLATION

A. Where indicated on Drawings, install duct, spacers, and accessories into the duct configuration shown. Duct installation requirements in this Section also apply to duct bank.

B. Install duct and duct bank according to NEMA TCB 2 and TIA-758-C.

C. Slope: Pitch duct and duct bank a minimum slope of 1:100 down toward manholes and handholes and away from buildings and equipment. Slope duct and duct bank from a high point in runs between two manholes, to drain in both directions.

D. Curves and Bends: Use 5-degree angle couplings for small changes in direction. Use manufactured long sweep bends with a minimum radius of 12.5 feet, both horizontally and vertically, at other locations unless otherwise indicated.

1. Duct and duct banks shall have maximum of two 90-degree bends, or the total of all bends shall be no more 180 degrees between pull points.

E. Joints: Use solvent-cemented joints in duct and fittings, and make watertight according to manufacturer's written instructions. Stagger couplings, so those of adjacent ducts do not lie in same plane.

F. Installation Adjacent to High-Temperature Steam Lines: Where duct or duct banks are installed parallel to underground steam lines, perform calculations showing the duct or duct bank will not be subject to environmental temperatures above 40 deg C. Where environmental temperatures are calculated to rise above 40 deg C, and anywhere the duct or duct bank crosses above an underground steam line, install insulation blankets listed for direct burial to isolate the duct bank from the steam line.

G. End-Bell Entrances to Manholes and Concrete and Polymer Concrete Handholes: Use end bells, spaced approximately 6 inches o.c. for 4-inch duct, and vary proportionately for other duct sizes.

1. Begin change from regular spacing to end-bell spacing 10 feet from the end bell without reducing duct slope and without forming a trap in the line.
2. Expansion and Deflection Fittings: Install an expansion and deflection fitting in each duct in the area of disturbed earth adjacent to manhole or handhole. Install an expansion fitting near the center of all straight-line direct-buried duct and duct banks, with calculated expansion of more than 3/4 inch.
3. Grout end bells into structure walls from both sides to provide watertight entrances.

H. Terminator Entrances to Manholes and Concrete and Polymer Concrete Handholes: Use manufactured, cast-in-place duct terminators, with entrances into structure spaced approximately 6 inches o.c. for 4-inch duct, and vary proportionately for other duct sizes.

1. Begin change from regular spacing to terminator spacing 10 feet from the terminator without reducing duct slope and without forming a trap in the line.
2. Expansion and Deflection Fittings: Install an expansion and deflection fitting in each duct in the area of disturbed earth adjacent to manhole or handhole. Install an expansion fitting near the center of all straight-line duct or duct bank, with calculated expansion of more than 3/4 inch.

I. Building Wall Penetrations: Make a transition from underground duct to GRC at least 10 feet outside the building wall, without reducing duct slope away from the building or forming a trap in the duct. Use fittings manufactured for RNC duct-to-GRC conduit transition. Install GRC penetrations of building walls as specified in Section 270544 "Sleeves and Sleeve Seals for Communications Pathways and Cabling."

J. Sealing: Provide temporary closure at terminations of duct that has cables pulled. Seal spare ducts at terminations. Use sealing compound and plugs to withstand at least 15-psig hydrostatic pressure.

K. Innerduct: Install immediately after mandreling duct. Size and type as indicated on Drawings.

L. Pulling Cord: Install 200-lbf- test nylon cord in empty duct and innerduct.

M. Concrete-Encased Duct and Duct Bank:

1. Excavate trench bottom to provide firm and uniform support for duct or duct bank. Prepare trench bottoms as specified in Section 312000 "Earth Moving" for pipes less than 6 inches in nominal diameter.
2. Width: Excavate trench 12 inches wider than duct or duct bank on each side.
3. Width: Excavate trench 3 inches wider than duct or duct bank on each side.
4. Depth: Install top of duct and duct bank at least 24 inches below finished grade in areas not subject to deliberate traffic, and at least 30 inches below finished grade in deliberate traffic paths for vehicles unless otherwise indicated.
5. Support duct and duct bank on duct spacers coordinated with duct size, duct spacing, and outdoor temperature.
6. Minimum Space Between Duct: 3 inches between edge of duct and exterior envelope wall, 2 inches between ducts for like services, and 4 inches between power and communications ducts.
7. Spacer Installation: Place spacers close enough to prevent sagging and deforming of duct, with not less than four spacers per 20 feet of duct. Place spacers within 24 inches of duct ends. Stagger spacers approximately 6 inches between tiers. Secure spacers to earth and duct to prevent floating during concreting. Tie entire assembly together using fabric straps; do not use tie wires or reinforcing steel that may form conductive or magnetic loops around duct or duct bank.
8. Elbows: Use manufactured duct elbows for stub-ups, at building entrances, and at changes of direction in duct run unless otherwise indicated. Extend concrete encasement throughout length of elbow.
9. Elbows: Use manufactured GRC elbows for stub-ups, at building entrances, and at changes of direction in duct run.

a. Couple GRC to duct with adapters designed for this purpose, and encase coupling with 3 inches of concrete.
b. Stub-Ups to Outdoor Equipment: Extend concrete-encased GRC horizontally a minimum of 60 inches from edge of base. Install insulated grounding bushings on terminations at equipment.
   1) Stub-ups shall be finished floor and minimum 3 inches from conduit side to edge of slab
c. Stub-Ups to Indoor Equipment: Extend concrete-encased GRC horizontally a minimum of 60 inches from edge of wall. Install insulated grounding bushings on terminations at equipment.
   1) Stub-ups shall be minimum 4 inches abovefinished floor and no less than 3 inches from conduit side to edge of wall

10. Reinforcement: Reinforce concrete-encased duct and duct bank where they cross disturbed earth and where indicated. Arrange reinforcing rods and ties without forming conductive or magnetic loops around ducts or duct groups.
11. Forms: Use trench walls to form side walls of duct and duct bank where soil is self-supporting and concrete envelope can be poured without soil inclusions; otherwise, use forms.
12. Concrete Cover: Install a minimum of 3 inches of concrete cover between edge of duct to exterior envelope wall, 2 inches between ducts, and 4 inches between power and communications duct.
13. Concreting Sequence: Pour each run of envelope between manholes or other terminations in one continuous operation.
    a. Start at one end and finish at the other, allowing for expansion and contraction of duct as its temperature changes during and after the pour. Use expansion fittings installed according to manufacturer's written recommendations, or use other specific measures to prevent expansion-contraction damage.
    b. If more than one pour is necessary, terminate each pour in a vertical plane and install 3/4-inch reinforcing-rod dowels extending a minimum of 18 inches into concrete on both sides of joint near corners of envelope.
14. Pouring Concrete: Comply with requirements in "Concrete Placement" Article in Section 033000 "Cast-in-Place Concrete." Place concrete carefully during pours to prevent voids under and between ducts and at exterior surface of envelope. Do not allow a heavy mass of concrete to fall directly onto duct. Allow concrete to flow to center of bank and rise up in middle, uniformly filling all open spaces. Do not use power-driven agitating equipment unless specifically designed for duct-bank application.

N. Direct-Buried Duct and Duct Banks:

1. Excavate trench bottom to provide firm and uniform support for duct and duct bank. Comply with requirements in Section 312000 "Earth Moving" for preparation of trench bottoms for duct less than 6 inches in nominal diameter.
2. Install duct with a minimum of 3 inches between duct for like services and 6 inches between power and signal duct.
3. Width: Excavate trench 12 inches wider than duct or duct bank on each side.
4. Width: Excavate trench 3 inches wider than duct or duct bank on each side.
5. Depth: Install top of duct or duct bank at least 36 inches below finished grade unless otherwise indicated.
6. Set elevation of bottom of duct or duct bank below frost line.
7. Support duct on duct spacers coordinated with duct size, duct spacing, and outdoor temperature.
8. Spacer Installation: Place spacers close enough to prevent sagging and deforming of duct, with not less than four spacers per 20 feet of duct. Place spacers within 24 inches of duct ends. Stagger spacers approximately 6 inches between tiers. Secure spacers to earth and duct to prevent floating during concreting. Tie entire assembly together using fabric straps; do not use tie wires or reinforcing steel that may form conductive or magnetic loops around duct or duct bank.

9. Elbows: Install manufactured duct elbows for stub-ups, at building entrances through floor, and at changes of direction in duct unless otherwise indicated. Encase elbows for stub-ups throughout length of elbow. Extend encasement minimum of 36 inches beyond elbow joints.
10. Install manufactured GRC elbows for stub-ups, at building entrances, and at changes of direction in duct.
    a. Couple GRC to duct with adapters designed for this purpose, and encase coupling with 3 inches of concrete.
    b. For equipment mounted on outdoor bases, extend GRC horizontally a minimum of 60 inches from edge of equipment pad or foundation. Install insulated grounding bushings on terminations at equipment.
11. After installing first tier of duct, backfill and compact. Start at tie-in point and work toward end of duct run, leaving duct at end of run free to move with expansion and contraction, as temperature changes during this process. Repeat procedure after placing each tier. After placing last tier, hand place backfill to 4 inches over duct and hand tamp. Firmly tamp backfill around duct to provide maximum supporting strength. Use hand tamper only. After placing controlled backfill over final tier, make final duct connections at end of run and complete backfilling with normal compaction. Comply with requirements in Section 312000 "Earth Moving" for installation of backfill materials.
    a. Place minimum of 3 inches of sand as a bed for duct and duct bank. Place sand to a minimum of 6 inches above top level of duct and duct bank.
    b. Place minimum of 6 inches of engineered fill above concrete encasement of duct bank.

O. Underground-Line Warning Tape: Bury underground-line warning tape specified in Section 270553 "Identification for Communication Systems" no less than 12 inches above all concrete-encased duct and duct bank and approximately 12 inches below grade. Align tape parallel to and within 3 inches of centerline of duct bank. Provide an additional warning tape for each 12-inch increment of duct-bank width over a nominal 18 inches. Space additional tapes 12 inches apart, horizontally.

3.6 INSTALLATION OF CONCRETE MANHOLES, HANDHOLES, AND BOXES

A. Precast Concrete Handhole and Manhole Installation:
1. Comply with ASTM C 891 unless otherwise indicated.
2. Install units level and plumb and with orientation and depth coordinated with connecting duct, to minimize bends and deflections required for proper entrances.
3. Unless otherwise indicated, support units on a level bed of crushed stone or gravel, graded from 1-inch sieve to No. 4 sieve and compacted to same density as adjacent undisturbed earth.

B. Elevations:
1. Manhole Roof: Install with rooftop at least 15 inches below finished grade.
2. Manhole Frame: In paved areas and trafficways, set frames flush with finished grade. Set other manhole frames 1 inch above finished grade.
3. Install handholes with bottom below frost line.
4. Handhole Covers: In paved areas and trafficways, set surface flush with finished grade. Set covers of other handholes 1 inch above finished grade.
5. Where indicated, cast handhole cover frame integrally with handhole structure.

C. Drainage: Install drains in bottom of manholes where indicated. Coordinate with drainage provisions indicated.

D. Waterproofing: Apply waterproofing to exterior surfaces of manholes and handholes after concrete has cured at least three days. After duct has been connected and grouted, and before backfilling, waterproof joints and connections, and touch up abrasions and scars. Waterproof exterior of manhole chimneys after mortar has cured at least three days.

E. Dampproofing: Apply dampproofing to exterior surfaces of manholes and handholes after concrete has cured at least three days. Dampproofing materials and installation are specified in Section 071113 "Bituminous Dampproofing." After duct has been connected and grouted, and before backfilling, dampproof joints and connections, and touch up abrasions and scars. Dampproof exterior of manhole chimneys after mortar has cured at least three days.

F. Hardware: Install removable hardware, including pulling eyes, cable stanchions, and cable arms, and insulators, as required for installation and support of cables and conductors and as indicated.

G. Fixed Manhole Ladders: Arrange to provide for safe entry with maximum clearance from cables and other items in manholes.

H. Field-Installed Bolting Anchors in Manholes and Concrete Handholes: Do not drill deeper than 3-7/8 inches for manholes and 2 inches for handholes, for field-installed anchor bolts installed. Use a minimum of two anchors for each cable stanchion.

3.7 INSTALLATION OF INNERDUCT

A. General:

1. Protect products from the effects of moisture, UV exposure, corrosion and physical damage during construction.
2. Select approved innerduct suitable for specific installation environments.

B. Textile Innerduct Installation:

1. Provide in conduit and wire ways using continuous unspliced lengths between maintenance holes, pull boxes, and/or termination points as indicated on the drawings.
2. Provide suitable textile innerduct slack in the maintenance holes, hand holes, pull boxes, and at turns to ensure there is no kinking or binding of the product.
3. Textile Innerduct Mountings, Hangers and Attachments: When exposed indoors or in maintenance holes, hold firmly in place using independent support.
   a. Design & install hangers and other similar fittings adequate to support loads and so as to not damage innerduct.
   b. Do not fasten textile innerduct to steam, water, or other piping, ductwork, mechanical equipment, electrical equipment, electrical raceways, or wires.
   c. Secure textile innerduct using UV-resistant plastic cable ties.
4. Maintenance Hole and Hand Hole Installation:
   a. At locations where textile innerduct will be continuous through a manhole or hand hole, allow sufficient slack so that the innerduct may be secured to the side of the vault maintaining the minimum bend radius.
   b. At maintenance holes serving as the junction location, pull the exposed end of the innerduct to the far end of the vault, install termination bag, and secure to the vault.

C. Penetrations:

1. Seal all conduit and textile innerduct entering structures at the first box or outlet to prevent gases, liquids or vermin from entering the structure.

3.8 GROUNDING

A. Ground underground duct, duct bank, and utility structures according to Section 270526 "Grounding and Bonding for Communications Systems."

3.9 CLEANING

A. Pull leather-washer-type duct cleaner, with graduated washer sizes, through full length of duct until duct cleaner indicates that duct is clear of dirt and debris.

B. Clean internal surfaces of manholes, including sump.

1. Sweep floor, removing dirt and debris.
2. Remove foreign material.

END OF SECTION 270543

This page intentionally left blank.

SECTION 270544 - SLEEVES AND SLEEVE SEALS FOR COMMUNICATIONS PATHWAYS AND CABLING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Round sleeves.
2. Sleeve Seal Systems.
3. Firestopping
4. Firestopped Sleeve Assemblies

B. Related Requirements:

1. Section 078413 "Penetration Firestopping" for penetration firestopping installed in fire-resistance-rated walls, horizontal assemblies, and smoke barriers, with and without penetrating items.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ROUND SLEEVES

A. Wall Sleeves, Steel:

1. Description: ASTM A53/A53M, Type E, Grade B, Schedule 40, zinc coated, plain ends and integral waterstop.

2.2 SLEEVE SEAL SYSTEMS

A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and pathway or cable or between pathway and cable.

1. Sealing Elements: EPDM rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
2. Pressure Plates: Carbon Steel.
3. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, of length required to secure pressure plates to sealing elements

2.3 FIRESTOPPING

A. Where applicable, refer to section 078413, "Penetration Firestopping."

B. Description: 1. Firestops shall consist of an asbestos-free fill material, forming/backing/damming materials, and accessories needed to complete a UL classified through-penetration firestopping system. Fill material shall not slump or sag and shall be the required thickness in the fully cured state.

C. Firestops shall be designed to seal through-penetrations against flame, heat, smoke, and water in compliance with ASTM E84-2016, ASTM E119-2016a, ASTM E814-2013a, and UL 723-2008.

D. Firestops shall be specifically designed and rated for the individual application, including movement, materials, moisture, penetrating item material, and fire and smoke ratings of the penetrated construction.

2.4 FIRESTOPPED SLEEVE ASSEMBLIES

A. Description: An enclosed fire rated cable management device where cable bundles penetrate rated partitions.

1. The cable management device shall contain integrated intumescent firestop wrap strip materials sufficient to maintain the hourly rating of the barrier being penetrated.
2. The cable management device shall contain a smoke seal fabric membrane or intumescent firestop plugs sufficient to achieve the L-Rating requirements of the barrier type.

B. The firestop system assembly shall be able accessible and re-installed from one side of the wall.

C. UL classified for use in wall and floor systems rated for up to 3 hours

D. Manufacturers: Subject to compliance with requirements, provide products by the following:

1. Specified Technologies, Inc. - EZ-Path
2. Legrand – FlameStopper
3. Hilti Speed Sleeve
4. Abesco Fire Ltd. - Cable Transit System

PART 3 - EXECUTION

3.1 INSTALLATION OF SLEEVES FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

A. Comply with NECA 1.

B. Sleeves for Conduits Penetrating Above-Grade, Non-Fire-Rated, Concrete and Masonry-Unit Floors and Walls:

1. Interior Penetrations of Non-Fire-Rated Walls and Floors:

a. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall or floor so no voids remain. Tool exposed surfaces smooth; protect material while curing.
b. Seal annular space between sleeve and pathway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Section 079200 "Joint Sealants."

2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
3. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and pathway or cable, unless sleeve seal system is to be installed or seismic criteria require different clearance.
4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.

5. Install sleeves for floor penetrations. Extend sleeves installed in floors a minimum of 4 inches above finished floor level unless otherwise noted on project drawings. Install sleeves during erection of floors.
6. Wall sleeves shall extend 4" from each side of the walls.
7. Openings through slabs for communications risers shall be finished with a 4" wide by 2" high curb around the opening.

C. Sleeves for Conduits Penetrating Non-Fire-Rated Wall Assemblies:

1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
2. Seal space outside of sleeves with approved joint compound for wall assemblies.
3. Wall sleeves shall extend 4" from each side of the walls.

D. Roof-Penetration Sleeves: Seal penetration of individual pathways and cables with flexible boot-type flashing units applied in coordination with roofing work.

E. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve seal systems. Size sleeves to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

F. Underground, Exterior-Wall and Floor Penetrations:

1. Install steel pipe sleeves with integral waterstops. Size sleeves to allow for 1-inch annular clear space between pathway or cable and sleeve for installing sleeve seal system. Install sleeve during construction of floor or wall.
2. Install steel pipe sleeves. Size sleeves to allow for 1-inch annular clear space between pathway or cable and sleeve for installing sleeve seal system. Grout sleeve into wall or floor opening.

3.2 INSTALLATION OF SLEEVE SEAL SYSTEMS

A. Install sleeve seal systems in sleeves in exterior concrete walls and slabs-on-grade at pathway entries into building.

B. Install type and number of sealing elements recommended by manufacturer for pathway or cable material and size. Position pathway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pathway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

C. Install in accordance with the manufacturer's published instructions to achieve ratings and classifications specified herein. A copy of these instructions shall be maintained and available on site.

D. Install sleeve-seal fittings in new walls and slabs as they are constructed.

1. Provide where cables pass through walls or elevated floor slabs within communications rooms.
2. Provide where cable trays pass through rated walls or elevated floor slabs. Install 4 sleeves at each penetration, minimum.
3. Install associated rating information decal on both sides of sleeve. Sign and date the decal.
4. Install sleeve systems with flanges and fire-rated caulk as recommended by the manufacturer.

E. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.

3.3 INSTALLATION OF FIRESTOP SYSTEMS

A. Close and firestop abandoned penetrations and penetrations through fire- and smoke-rated construction. Materials used to seal these penetrations shall continue the construction's fire and smoke resistance ratings uninterrupted and shall maintain an effective barrier against the spread of flame, smoke, water and hot gases.

B. Install after installation of raceways.

3.4 INSTALLATION OF SLEEVE ASSEMBLIES

A. Install through-penetration firestop systems in accordance with Performance Criteria and in accordance with the conditions of testing and classification as specified in the published design.

B. Comply with manufacturer's instructions for installation of firestopping products.

END OF SECTION 270544

SECTION 270553 - IDENTIFICATION FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Underground-line warning tape.
2. Signs.
3. Miscellaneous identification products.
4. Labels.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for communications identification products.

B. Samples: For each type of label and sign to illustrate composition, size, colors, lettering style, mounting provisions, and graphic features of identification products.

C. Identification Schedule:

1. Outlets: Scaled drawings indicating location and proposed designation.
2. Backbone Cabling: Riser diagram showing each communications room, backbone cable, and proposed backbone cable designation.
3. Racks: Scaled drawings indicating location and proposed designation.
4. Patch Panels: Enlarged scaled drawings showing rack row, number, and proposed designations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Comply with NFPA 70.

B. The labeling scheme is intended to comply with the ANSI/TIA-606-C and the owner's standard for labeling and administration of a cable plant. It is the responsibility of the contractor to acquire, understand, and utilize the owner's labeling scheme for all components of the voice data communications system. The final labeling scheme and all other label requirements shall be coordinated and confirmed with the Owner and Engineer.

2.2 COLOR AND LEGEND REQUIREMENTS

A. Equipment Identification Labels:

1. Black letters on a white field.

2.3 LABELS

A. Vinyl Wraparound Labels: Preprinted, flexible labels laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing label ends.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Brady Corporation.
   b. HellermannTyton.
   c. Panduit Corp.

B. Self-Adhesive Wraparound Labels: Preprinted, 3-mil- thick, vinyl flexible labels with acrylic pressure-sensitive adhesive.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. Brady Corporation.
   b. Newell Brands (DYMO).
   c. Panduit Corp.

2. Self-Lamination: Clear; UV-, weather- and chemical-resistant; self-laminating protective shields over the legend. Labels sized such that the clear shield overlaps the entire printed legend.
3. Marker for Labels:

   a. Machine-printed, permanent, waterproof black ink recommended by printer manufacturer.

C. Self-Adhesive Labels: Vinyl, thermal, transfer-printed, 3-mil- thick, multicolor, weather- and UV-resistant, pressure-sensitive adhesive labels, configured for intended use and location.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Brady Corporation.
   b. Newell Brands (DYMO).
   c. Panduit Corp.

2. Minimum Nominal Size:

   a. 1-1/2 by 6 inches for raceway and conductors.
   b. 3-1/2 by 5 inches for equipment.
   c. As required by authorities having jurisdiction.

2.4 UNDERGROUND-LINE WARNING TAPE

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Brady Corporation.
2. Ideal Industries, Inc.

B. Tape:

1. Recommended by manufacturer for the method of installation and suitable to identify and locate underground communications utility lines.
2. Printing on tape shall be permanent and shall not be damaged by burial operations.
3. Tape material and ink shall be chemically inert and not subject to degradation when exposed to acids, alkalis, and other destructive substances commonly found in soils.

C. Color and Printing:

1. Comply with ANSI Z535.1, ANSI Z535.2, ANSI Z535.3, and ANSI Z535.4.
2. Inscriptions for Orange-Colored Tapes: "TELEPHONE CABLE, CATV CABLE, COMMUNICATIONS CABLE, OPTICAL-FIBER CABLE".

D. Tag, Detectable, Reinforced:

1. Reinforced, detectable three-layer laminate, consisting of a printed pigmented woven scrim, a solid aluminum-foil core, and a clear protective film that allows inspection of the continuity of the conductive core; bright-colored, continuous-printed on one side with the inscription of the utility, compounded for direct-burial service.
2. Width: 3 inches.
3. Overall Thickness: 8 mils.
4. Foil Core Thickness: 0.35 mil.
5. Weight: 34 lb/1000 sq. ft..
6. Tensile according to ASTM D882: 300 lbf and 12,500 psi.

2.5 SIGNS

A. Laminated-Acrylic or Melamine-Plastic Signs:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. Brady Corporation.
   b. Carlton Industries, LP.
   c. Emedco.
   d. Marking Services Inc.

2. Engraved legend.
3. Thickness:

   a. For signs up to 20 sq. in., minimum 1/16 inch thick.
   b. For signs larger than 20 sq. in., 1/8 inch thick.
   c. Engraved legend with black letters on white face.
   d. Self-adhesive.
   e. Framed with mitered acrylic molding and arranged for attachment at applicable equipment.

4. Engraved signs are to be secured on all equipment racks, cabinets and enclosures per the project requirements.
5. Font size shall be a minimum of 1”

2.6 MISCELLANEOUS IDENTIFICATION PRODUCTS

A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Retain paint system applicable for surface material and location (exterior or interior).

PART 3 - EXECUTION

3.1 PREPARATION

A. Self-Adhesive Identification Products: Before applying communications identification products, clean substrates of substances that could impair bond, using materials and methods recommended by manufacturer of identification product.

3.2 INSTALLATION

A. Verify and coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and operation and maintenance manual. Use consistent designations throughout Project.

B. Install identifying devices before installing acoustical ceilings and similar concealment.

C. Verify identity of each item before installing identification products.

D. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and operation and maintenance manual.

E. Apply identification devices to surfaces that require finish after completing finish work.

F. Install signs with approved legend to facilitate proper identification, operation, and maintenance of communications systems and connected items.

G. Elevated Components: Increase sizes of labels, signs, and letters to those appropriate for viewing from the floor.

H. Vinyl Wraparound Labels:

1. Secure tight to surface of raceway or cable at a location with high visibility and accessibility.
2. Attach labels that are not self-adhesive type with clear vinyl tape, with adhesive appropriate to the location and substrate.
3. Provide label 6 inches from cable end.

I. Self-Adhesive Wraparound Labels:

1. Secure tight to surface at a location with high visibility and accessibility.
2. Provide label 6 inches from cable end.

J. Self-Adhesive Labels:

1. On each item, install unique designation label that is consistent with wiring diagrams, schedules, and operation and maintenance manual.
2. Unless otherwise indicated, provide a single line of text with 1/2-inch- high letters on 1-1/2-inch-high label; where two lines of text are required, use labels 2 inches high.

K. Underground-Line Warning Tape:

1. During backfilling of trenches, install continuous underground-line warning tape directly above cable or raceway at minimum 12 inches below finished grade. Use multiple tapes where width of multiple lines installed in a common trench or concrete envelope exceeds 16 inches overall.
2. Align tape parallel to and within 3 inches of centerline of duct bank.
3. Provide an additional warning tape for each 12-inch increment of duct-bank width over a nominal 18 inches. Space additional tapes 12 inches apart, horizontally.
4. Install underground-line warning tape for direct-buried cables and cables in raceways.

3.3 IDENTIFICATION SCHEDULE

A. Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment. Install access doors or panels to provide view of identifying devices.

B. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, pull points, and locations with high visibility. Identify by system and circuit designation.

C. Faceplates: Label individual faceplates with self-adhesive labels. Place label at top of faceplate. Each faceplate shall be labeled with its individual, sequential designation composed of the following, in the order listed:

1. Wiring closet designation.
2. Colon.
3. Faceplate number.

D. Equipment Room Labeling:

1. Racks, Frames, and Enclosures: Identify front and rear of each with self-adhesive labels containing equipment designation.
2. Patch Panels: Refer to project drawings
3. Data Outlets: Unless otherwise noted on project drawings label each outlet with a self-adhesive label indicating the following, in the order listed:

   a. Room number being served.
   b. Colon.
   c. Faceplate number.

E. Backbone Cables: Label each cable with a self-adhesive wraparound label indicating the location of the far or other end of the backbone cable. Patch panel or punch down block where cable is terminated should be labeled identically.

F. Horizontal Cables: Label each cable with a self-adhesive wraparound label indicating the following, in the order listed:

1. Room number.
2. Colon.
3. Faceplate number.

G. Grounding Equipment: Refer to Section 270526, "Grounding and Bonding for Communications Systems."

H. Termination Hardware: Refer to Section 271513 "Communications Copper Horizontal Cabling."

I. Locations of Underground Lines: Underground-line warning tape for copper, coaxial, hybrid copper/fiber, and optical-fiber cable.

J. Instructional Signs: Self-adhesive labels.

K. Warning Labels for Indoor Cabinets, Boxes, and Enclosures: Self-adhesive labels.

1. Apply to exterior of door, cover, or other access.

L. Equipment and Raceway Identification Labels:

1. Indoor Equipment: Self-adhesive label Laminated-acrylic or melamine-plastic sign.
2. Outdoor Equipment: Laminated-acrylic or melamine-plastic sign.
3. Equipment to Be Labeled:

   a. Communications cabinets.
   b. Equipment Racks

4. Raceway to Be Labeled:

   a. Riser conduit
   b. Service entrance conduit

END OF SECTION 270553

SECTION 270800 - COMMISSIONING OF COMMUNICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes:

1. Copper cable test device
2. Optical fiber cable test device
3. Cable Test Results and testing procedures
4. As-built drawings

B. Related Requirements:

1. Section 271313 "Communications Copper Backbone Cabling" for copper data cabling associated with system panels and devices.
2. Section 271323 "Communications Optical Fiber Backbone Cabling" for optical-fiber data cabling associated with system panels and devices.
3. Section 271513 "Communications Copper Horizontal Cabling" for copper data cabling associated with system panels and devices.

1.3 SCOPE

A. Testing shall be carried out in accordance with this document. This includes testing the attenuation and polarity of the installed cable plant with an optical loss test set (OLTS) and the installed condition of the cabling system and its components with an optical time domain reflectometer (OTDR). The condition of the fiber end faces shall also be verified.

B. Testing shall be performed on each cabling link (connector to connector - 100% testing).

1. Testing shall be performed on each cabling channel (equipment to equipment) that is identified by the owner.

C. Testing shall not include any active devices or passive devices within the link or channel other than cable, connectors, and splices, i.e., link attenuation does not include such devices as optical bypass switches, couplers, repeaters, or optical amplifiers.

D. All tests shall be documented including OLTS dual wavelength attenuation measurements and OTDR traces with event tables as well as OTDR maps.

E. Optionally, documentation shall also include optical length measurements and pictures of the connector end face.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.

1. Installation Supervision: Installation shall be under the direct supervision of an ITS Technician, who shall be present at all times when Work of this Section is performed at Project site.
2. Field Inspector: Currently registered by BICSI as a registered communications distribution designer (RCDD) to perform the on-site inspection.

B. All testing procedures and field-test instruments shall comply with applicable requirements of:

1. ANSI Z136.2, ANS For Safe Use Of Optical Fiber Communication Systems Utilizing Laser Diode And LED Sources
2. ANSI/EIA/TIA 455 50B, Light Launch Conditions For Long-Length Graded-Index Optical Fiber Spectral Attenuation Measurements
3. ANSI/TIA/EIA-455-59A, Measurement of Fiber Point Discontinuities Using an OTDR
4. ANSI/TIA/EIA 455 60A, Measurement of Fiber or Cable Length Using an OTDR
5. ANSI/TIA/EIA 455 61A, Measurement of Fiber or Cable Attenuation Using an OTDR
6. ANSI/TIA/EIA 526 7, Optical Power Loss Measurements of Installed Singlemode Fiber Cable Plant
7. ANSI/TIA 526 14 B, Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant; IEC 61280-4-1 edition 2, Fiber-Optic Communications Subsystem Test Procedure- Part 4-1: Installed cable plant- Multimode attenuation measurement
8. TIA-TSB-4979 Practical Considerations for Implementation of Multimode Launch Conditions in the Field
9. ANSI/TIA-1152, Requirements for Field Test Instruments and Measurements for Balanced Twisted-Pair Cabling
10. ANSI/TIA-568-0.D, Generic Telecommunications Cabling for Customer Premises.
11. ANSI/TIA-568-1.D, Commercial Building Telecommunications Cabling Standard
12. ANSI/TIA 568 C.2, Balanced Twisted-Pair Telecommunications Cabling and Components Standards.
13. ANSI/TIA-606-B, Administration Standard for Commercial Telecommunications Infrastructure, including the requirements specified by the customer, unless the customer specifies their own labeling requirements.

C. Trained technicians who have successfully attended an appropriate training program, which includes testing with an OLTS and an OTDR and have obtained a certificate as proof thereof shall execute the tests. These certificates may have been issued by any of the following organizations or an equivalent organization:

1. Manufacturer of the copper and fiber optic cable and connectors.
2. Manufacturer of the test equipment used for the field certification.
3. Training organizations (e.g., BICSI, A Telecommunications Association headquarters in Tampa, Florida; ACP [Association of Cabling Professionals™] Cabling Business Institute located in Dallas, Texas)

D. The Owner or the Owner's representative shall be invited to witness and/or review field-testing.

1. The Owner or the Owner's representative shall be notified of the start date of the testing phase five (5) business days before testing commences.
2. The Owner or the Owner's representative will select a random sample of five percent of the installed links. The Owner or the Owner's representative shall test these randomly selected links and the results are to be stored in accordance with Part 3 of this document. The results obtained shall be compared to the data provided by the installation contractor. If more than two percent of the sample results differ in terms of the pass/fail determination, the installation contractor under supervision of the representative shall repeat one hundred percent testing at no cost to the Owner.

1.5 SUBMITTALS

A. Manufacturers catalog sheets and specifications for the copper cable test equipment and fiber optic field instruments including optical loss test sets (OLTS; power meter and source), optical time domain reflectometer (OTDR) and video microscope.

B. A schedule (list) of all balanced twisted-pair copper and optical fibers links to be tested.

C. Sample test reports.

1.6 ACCEPTANCE OF TEST RESULTS

A. Unless otherwise specified by the Owner or the Owners representative, each Category 6 cabling link shall be tested for:

1. Wire Map
2. Length
3. Propagation Delay
4. Delay Skew
5. DC Loop Resistance – recorded for information only
6. DC Resistance Unbalance – recorded for information only
7. Insertion Loss
8. NEXT (Near-End Crosstalk)
9. PS NEXT (Power Sum Near-End Crosstalk)
10. ACR-N (Attenuation to Crosstalk Ratio Near-End) – recorded for information only
11. PS ACR-N (Power Sum Attenuation to Crosstalk Ratio Near-End) – recorded for information only
12. ACR-F (Attenuation to Crosstalk Ratio Far-End)
13. PS ACR-F (Power Sum Attenuation to Crosstalk Ratio Far-End)
14. Return Loss
15. TCL (Transverse Conversion Loss) – recorded for information only
16. ELTCTL (Equal Level Transverse Conversion Transfer Loss) – recorded for information only

B. Unless otherwise specified by the Owner or the Owners representative, each Category 6A cabling link shall be tested for:

1. Wire Map
2. Propagation Delay
3. Delay Skew
4. DC Loop Resistance
5. DC Resistance Unbalance within a pair
6. DC Resistance Unbalance between pairs
7. Insertion Loss
8. NEXT (Near-End Crosstalk)
9. PS NEXT (Power Sum Near-End Crosstalk)
10. ACR-N (Attenuation to Crosstalk Ratio Near-End)
11. PS ACR-N (Power Sum Attenuation to Crosstalk Ratio Near-End)
12. ACR-F (Attenuation to Crosstalk Ratio Far-End)
13. PS ACR-F (Power Sum Attenuation to Crosstalk Ratio Far-End)
14. Return Loss
15. TCL (Transverse Conversion Loss)
16. ELTCTL (Equal Level Transverse Conversion Transfer Loss)
17. PS ANEXT (Power Sum Alien Near-End Crosstalk) – sampled per section 3.2.
18. Average PS ANEXT (Average Power Sum Alien Near-End Crosstalk) – sampled per section 3.2.
19. PS AACR-F (Power Sum Alien Attenuation to Crosstalk Ratio Far-End) – sampled per section 3.2.
20. Average PS AACR-F (Average Power Sum Alien Attenuation to Crosstalk Ratio Far-End) – sampled per section 3.2.

C. Unless otherwise specified by the Owner or the Owners representative, each cabling link shall be in compliance with the following test limits:

1. Optical loss testing

a. Multimode and Singlemode links

1) The link attenuation shall be calculated by the following formulas as specified in ANSI/TIA-568-C.0.

a) Link Attenuation (dB) = Cable_Attn (dB) + Connector_Attn (dB) + Splice_Attn (dB)
b) Cable_Attn (dB) = Attenuation_Coefficient (dB/km) * Length (Km)
c) Connector_Attn (dB) = number_of_connector_pairs * connector_loss (dB)
d) Maximum allowable connector_loss = 0.75 dB
Check your application limits, you may need to reduce the allowable connector loss here
e) Splice_Attn (dB) = number_of_splices * splice_loss (dB)
f) Maximum allowable splice_loss = 0.3 dB
Check your application limits, you may need to reduce the allowable connector loss here
g) The values for the Attenuation_Coefficient (dB/km) are listed in the table below: Your cable may perform better than this, check the datasheet from the vendor and insert values here if desired

Type of Optical Fiber	Wavelength (nm)	Attenuation coefficient (dB/km)	Wavelength (nm)	Attenuation coefficient (dB/km)
Multimode 62.5/125 µm	850	3.5	1300	1.5
Multimode 50/125 µm	850	3.5	1300	1.5
Single-mode (Inside plant)	1310	1.0	1550	1.0
Single-mode (Outside plant)	1310	0.5	1550	0.5

2. OTDR testing
a. Reflective events (connections) shall not exceed:
1) 0.75 dB in optical loss when bi-directionally averaged
2) -35 dB Reflectance for multimode connections
3) -40 dB reflectance for UPC singlemode connections
4) -55 dB reflectance for APC singlemode connections
b. Non-reflective events (splices) shall not exceed 0.3 dB for multimode fiber and 0.15dB for Singlemode fiber.
3. Magnified end face inspection
a. Fiber connections shall be visually inspected to IEC 61300-3-35 Edition 1.0 for end face quality.
b. Scratched, pitted or dirty connectors shall be diagnosed and corrected.

D. All installed cabling permanent links and channels shall be field-tested and pass the test requirements and analysis as described in Part 3. Any permanent link or channel that fails these requirements shall be diagnosed and corrected. Any corrective action that must take place shall be documented and followed with a new test to prove that the corrected permanent link or channel meets performance requirements. The final and passing result of the tests for all permanent links and channels shall be provided in the test results documentation in accordance with Part 3.

E. Acceptance of the test results shall be given in writing after the project is fully completed and tested in accordance with Contract Documents and to the satisfaction of the Owner.

Note: High Bandwidth applications such as 1000BASE-SX, 10GBASE-SR, and FC1200 impose stringent channel loss limits. Where practical, certification should consider loss length limits that meet maximum channel (transmitter to receiver) loss. 0.75 dB per connector pair loss may not support the intended application.

F. Performance specification for multimode fiber links at 850 nm.

Fiber Type		Bandwidth	1000BASE-SX		10GBASE-SR	
	µm	(MHz• Km)	Length (m)	Loss (dB)	Length (m)	Loss (dB)
OM1	62.5	200	275	2.38	33	2.5
OM3	50	2000	N/A	N/A	300	2.6
OM4	50	47000	N/A	N/A	400	2.9

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

1. Fluke
2. Ideal Networks
3. Greenlee Communications
4. Viavi Solutions

2.2 BALANCED TWISTED-PAIR CABLE TESTER

A. Must meet or exceed TIA Level IV compliant network cable-testing device certification by an independent laboratory, such as Intertek, for verification of high speed, TIA T568 compliant cables.

B. Copper test equipment must be capable of certifying Category-3, Category-5e, Category 6 and Category 6A UTP/ScTP links or channels independent of termination hardware configuration (RJ45 port or 110-style) for each level of performance.

C. Provide full 2-way Autotest of Category-3, 5e, 6, and 6A twisted pair links.

D. All test equipment shall be capable of storing full frequency sweep data for all tests and printing color graphical reports for all swept measurements.

E. The field-test instrument shall be within a 12-month calibration period.

F. Results Storage

1. Must be capable of storing > 10,000 results for all measurements found in 2.2G below

G. Measurement capabilities

1. Wire Map
2. Length
3. Propagation Delay
4. Delay Skew

5. DC Loop Resistance
6. DC Resistance Unbalance within a pair
7. DC Resistance Unbalance between pairs
8. Insertion Loss
9. NEXT (Near-End Crosstalk)
10. PS NEXT (Power Sum Near-End Crosstalk)
11. ACR-N (Attenuation to Crosstalk Ratio Near-End)
12. PS ACR-N (Power Sum Attenuation to Crosstalk Ratio Near-End)
13. ACR-F (Attenuation to Crosstalk Ratio Far-End)
14. PS ACR-F (Power Sum Attenuation to Crosstalk Ratio Far-End)
15. Return Loss
16. TCL (Transverse Conversion Loss)
17. ELTCTL (Equal Level Transverse Conversion Transfer Loss)
18. Time Domain Reflectometer
19. Time Domain Xtalk Analyzer
20. PS ANEXT (Power Sum Alien Near-End Crosstalk)
21. Average PS ANEXT (Average Power Sum Alien Near-End Crosstalk)
22. PS AACR-F (Power Sum Alien Attenuation to Crosstalk Ratio Far-End)
23. Average PS AACR-F (Average Power Sum Alien Attenuation to Crosstalk Ratio Far-End)

H. Accessory Products:

1. Interface Adapters

a. TIA Category-3, 5e, 6 and 6A: 100 ohm
b. Category/Class E permanent link adapters for TIA Cat 3, 5e 6, and 6A unshielded and shielded cables.

1) RJ45 plug must meet the requirements for NEXT, FEXT and Return Loss in accordance with ANSI/TIA-568-C.2 Annex C
2) Twisted pair Category 5e, 6, 6A, 7 or 7A cords are not permitted as their performance degrades with use and can cause false Return Loss failures

2.3 OPTICAL FIBER CABLE TESTER

A. The field-test instrument shall be within the calibration period recommended by the manufacturer and a copy of the calibration certificate made available.

B. Optical loss test set (OLTS)

1. Multimode optical fiber light source

a. Provide dual LED light sources with central wavelengths of 850 nm (±30 nm) and 1300 nm (±20 nm). VCSEL sources are not permitted per ANSI/TIA-526-14-B.
b. Output power of –20 dBm minimum.
c. The launch shall meet the Encircled Flux launch requirements of ANSI/TIA-526-14-B.
d. The test reference cords must demonstrate an insertion loss ≤ 0.15 dB when mated against each other.

2. Singlemode optical fiber light source

a. Provide dual laser light sources with central wavelengths of 1310 nm (±20 nm) and 1550 nm (±20 nm).
b. Output power of –10 dBm minimum.
c. The test reference cords must demonstrate an insertion loss ≤ 0.25 dB when mated against each other.

3. Power Meter

   a. Provide 850 nm, 1300 nm, 1310 nm, and 1550 nm wavelength test capability.
   b. Power measurement uncertainty of ± 0.25 dB.
   c. Store reference power measurements.
   d. Save at least 10,000 results to internal memory.
   e. PC interface (USB).

4. Optional length measurement

   a. It is preferable to use an OLTS that is capable of measuring the optical length of the fiber using time-of-flight techniques. In the case of MPO/MTP trunk cables, this is not possible.

C. Optical Time Domain Reflectometer (OTDR)

1. Shall have a bright, color LCD display with backlight.
2. Shall have rechargeable Li-Ion battery for 8 hours of normal operation.
3. Weight with battery and module of not more than 4.5 lb and volume of not more 200 in^3.
4. Internal non-volatile memory with capacity for storing at least 2,000 OTDR bi-directionally tested fiber links.
5. USB port to transfer data to a PC or thumb drive/memory stick.
6. Multimode OTDR

   a. Wavelengths of 850 nm (± 10 nm) and 1300 nm (+ 35 nm / - 15 nm).
   b. Event dead zones not to exceed 0.7 m at 850 nm and 1300 nm.
   c. Attenuation dead zones not to exceed 2.5 m at 850 nm and 4.5 m at 1300 nm.
   d. Distance range not less than 9,000 m.
   e. Dynamic range at least 28 dB for 850 nm and 30 dB at 1300 nm.
   f. Allow bi-directional testing without moving the OTDR to the far end.

7. Singlemode OTDR

   a. Wavelengths of 1310 nm (± 25 nm) and 1550 nm (± 30 nm).
   b. Event dead zones not to exceed 0.6 m at 1310 nm and 1550 nm.
   c. Attenuation dead zones not to exceed 3.7 m at 1310 nm and 1550 nm.
   d. Distance range not less than 80 km at 1310 nm and 130 km at 1550 nm.
   e. Dynamic range at least 32 dB for 1310 nm and 30 dB at 1550 nm.
   f. Allow bi-directional testing without moving the OTDR to the far end.

D. Fiber Microscope

1. Field of view 420 µm x 320 µm

   a. Video camera systems are preferred.
   b. Camera probe tips that permit inspection through adapters are required.
   c. Test equipment shall be capable of saving and reporting the end face image to IEC 613003-3-35.
   d. FiberInspector Mini Video Microscope – Fluke Model No. FT500; the DSX-5000Qi is preferred since it allows the images to be saved.

E. Integrated OLTS, OTDR and fiber microscope

1. Test equipment that combines into one instrument an OLTS, an OTDR and a fiber microscope may be used.

F. Accessory Products:

1. Interface Adapters

   a. DTX Fiber Module for Multimode cable @ 850 and 1300 nm – Fluke Model No. DTX-EFM2 or DSX-5000Qi/CertiFiber Pro for EF (encircled flux) Compliance.

b. DTX Fiber Module for Singlemode cable @ 1310 and 1500 nm – Fluke Model No. DTX-SFM2
c. EF Test reference cords.

2.4 ADMINISTRATION

A. Administration of the documentation shall include test results of each copper and optical fiber Permanent Link and channel.

B. The test result information for each link shall be recorded in the memory of the field-test instrument upon completion of the test.

C. The test result records saved within the field-test instrument shall be transferred into a Windows® -based database utility that allows for the maintenance, inspection and archiving of these test records.

D. Alien Crosstalk measurements shall be stored to a PC upon completion of the test.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Check actual site conditions prior to start of any work. Ensure all preceding trade work associated with the telecommunications system is accurate and complete before proceeding with installation or use of products specified in this section.

B. Verify telecommunications cabling is installed and supported, terminated, mounted in an appropriate housing or terminated on the applicable component and labeled prior to certification testing and documentation.

C. Verify certification tester universal interface adapters and manufacturer patch cords that enable permanent link verification are in new condition not indicating any twisting or kinking resulting from incorrect storage of the tester interface adapters.

D. All outlets, cables, patch panels and associated components shall be fully assembled and labeled prior to field-testing. Any testing performed on incomplete systems shall be redone on completion of the work.

E. All tests performed on optical fiber cabling that use a laser or LED in a test set shall be carried out with safety precautions in accordance with ANSI Z136.2.

F. Optical fiber patch cords shall be inspected to ensure connector surfaces are clean and free of defects that may affect testing results.

3.2 BALANCED TWISTED PAIR CABLE TESTING

A. Field-test instruments shall have the latest firmware installed.

B. Permanent Link test results, including the individual frequency measurements from the tester, shall be recorded in the test instrument upon completion of each test for subsequent uploading to a PC in which the administrative documentation (reports) may be generated.

C. Permanent Link testing shall be performed on each cabling segment (connector to connector). Sampling is not acceptable.

D. Alien Crosstalk testing shall be performed using a sampling plan. An acceptance quality level (AQL) of 0,4 %, normal inspection, general inspection level I as defined in ISO 2859-1 for populations of up to 500,000 links shall be used. The following table represents this sampling level.

Total number of links (N)	Sample size (No. of links to test)
3 – 33	3 or 0.1 x N (whichever is greatest)
34 – 3,200	33
3,201 – 35,000	126
35,001 – 150,000	201
150,001 – 500,000	315

E. Disturbed (Victim) links chosen for Alien Crosstalk testing shall be an equal combination of short, medium and long links.

F. Permanent Link adapters made from twisted pair Category 5e, 6, 6A, 7 or 7_A cords are not permitted as their performance degrades with use and can cause false Return Loss failures.

G. The installer shall build a reference link. All components shall be anchored so it is not possible to disturb them. The technician is to conduct a Category 6 and 6A Permanent Link test each day to ensure no degradation of the tester or its Permanent Link adapters.

H. Wire Map Measurement

1. The wire map test is intended to verify pin-to-pin termination at each end and check for installation connectivity errors.
2. For each of the eight conductors in the cabling, the wire map indicates:
   a. Continuity to the remote end
   b. Shorts between any two or more conductors
   c. Reversed pairs
   d. Split pairs
   e. Transposed pairs
   f. Distance to open on shield
   g. Any other miss-wiring
3. The correct connectivity of telecommunications outlets/connectors is defined in ANSI/TIA-568-C.2. Two color schemes are permitted. The user shall define which scheme is to be used. The field tester shall document which color scheme was used. Examples are given below:





I. Length Measurement

1. The length of each balanced twisted pair shall be recorded.
2. Since physical length is determined from electrical length, the physical length of the link calculated using the pair with the shortest electrical delay shall be reported and used for making the pass or fail determination.
3. The pass or fail criteria is based on the maximum length allowed for the Permanent Link as specified in ANSI/TIA-568-C.2 plus the nominal velocity of propagation (NVP) uncertainty of 10%. For a Permanent Link, the length measurement can be 325 ft. (99 m) before a fail is reported.

J. Propagation Delay measurement

1. Is the time it takes for a signal to reach the end of the link.
2. The measurement shall be made at 10 MHz per ANSI/TIA-1152.
3. The propagation delay of each balanced twisted pair shall be recorded.
4. Is not to exceed 498 ns per ANSI/TIA-568-C.2 Section 6.3.18.

K. Delay Skew measurement

1. Is the difference in propagation delay @ 10 MHz between the shortest delay and the delays of the other wire pairs.
2. The delay skew of each balanced twisted pair shall be recorded.
3. Is not to exceed 44 ns per ANSI/TIA-568-C.2 Section 6.3.19.

L. DC Loop Resistance

1. Often reported as Resistance, is the DC loop resistance of both conductors in the pair.
2. The DC Resistance shall be reported for all four pairs.
3. Is not to exceed 21 Ω for all four pairs per ANSI/TIA-568-C.2 Section 6.3.1.

M. DC Resistance Unbalance within a pair

1. Is the difference in DC resistance of the two wires within the same pair.
2. The DC Resistance Unbalance within a pair shall be reported for all four pairs.
3. Is not to exceed 200 mΩ or 3%, whichever is the greatest per ANSI/TIA-568-C.2 Section 6.2.2.

N. DC Resistance Unbalance between pairs

1. Is the difference in DC parallel resistance of the conductors of a pair compared to the DC parallel resistance of another pair, given in the formula below:

$$Resistance_Unbalance_{Between_pairs} = \left(\frac{|R_{P1} - R_{P2}|}{R_{P1} + R_{P2}} \right) 100\%$$

Where:

R_{P1} is the DC parallel resistance of the conductors of a pair.

R_{P2} is the DC parallel resistance of the conductors of another pair.

2. The DC Resistance Unbalance shall be reported for the following pairs

   a. 1,2-3,6
   b. 1,2-4,5
   c. 1,2-7,8
   d. 3,6-4,5
   e. 3,6-7,8
   f. 4,5-7,8

   is not to exceed 200 mΩ or 7.5%, whichever is the greatest.

O. Insertion Loss

1. Is the loss of signal strength over the cabling (in dB).
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in one direction for all four pairs.
4. Reported margins found to be within the accuracy of the field tester shall be marked with an asterisk (*).
5. Is not to exceed the Category 6 and 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.7.

P. NEXT (Near-End Crosstalk)

1. Is the difference in amplitude (in dB) between a transmitted signal and the crosstalk received on other wire pairs at the same end of the cabling.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for the following pair combinations

   a. 1,2-3,6
   b. 1,2-4,5
   c. 1,2-7,8
   d. 3,6-4,5
   e. 3,6-7,8
   f. 4,5-7,8

4. Is not to exceed the Category 6 and 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.8.
5. Reported margins found to be within the accuracy of the field tester shall be marked with an asterisk (*).
6. The Time Domain Xtalk data shall be stored for any marginal or failing NEXT results.

Q. PS NEXT (Power Sum Near-End Crosstalk)

1. Is the difference (in dB) between the test signal and the crosstalk from the other pairs received at the same end of the cabling.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for all four pairs.
4. Is not to exceed the Category 6 and 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.9.
5. Reported margins found to be within the accuracy of the field tester shall be marked with an asterisk (*).
6. The Time Domain Xtalk data shall be stored for any marginal or failing PS NEXT results.

R. ACR-N (Attenuation Crosstalk Ratio Near-End)

1. Is a calculation of NEXT minus Insertion Loss of the disturbed pair in dB.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for the following pairs

   a. 1,2-3,6
   b. 1,2-4,5
   c. 1,2-7,8
   d. 3,6-4,5
   e. 3,6-7,8
   f. 4,5-7,8

4. Although not specified in ANSI/TIA-568-C.2, it shall be recorded for all twelve possible combinations.

S. PS ACR-N (Power Sum Attenuation Crosstalk Ratio Near-End)

1. Is a calculation of PS NEXT minus Insertion Loss of the disturbed pair in dB.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for all four pairs.
4. Although not specified in ANSI/TIA-568-C.2, it shall be recorded for all eight possible combinations.

T. ACR-F (Attenuation Crosstalk Ratio Far-End)

1. Is a calculation of FEXT minus Insertion Loss of the disturbed pair in dB.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for the following pairs

   a. 1,2-3,6
   b. 1,2-4,5
   c. 1,2-7,8
   d. 3,6-1,2
   e. 3,6-4,5
   f. 3,6-7,8
   g. 4,5-1,2
   h. 4,5-3,6
   i. 4,5-7,8
   j. 7,8-1,2
   k. 7,8-3,6
   l. 7,8-4,5

4. Is not to exceed the Category 6 and 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.11.
5. Reported margins found to be within the accuracy of the field tester shall be marked with an asterisk (*).

U. PS ACR-F (Power Sum Attenuation to Crosstalk Ratio Far-End)

1. Is a calculation of PS FEXT minus Insertion Loss of the disturbed pair in dB.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz

3. Both worst case and worst margins shall be reported in both directions for all four pairs.
4. Is not to exceed the Category 6 and 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.13.
5. Reported margins found to be within the accuracy of the field tester shall be marked with an asterisk (*).

V. Return Loss

1. Is the difference (in dB) between the power of a transmitted signal and the power of the signals reflected back.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for all four pairs.
4. Shall be ignored at all frequencies where the Insertion Loss is less than 3 dB for that pair.
5. Is not to exceed the Category 6 and 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.6.
6. Reported margins found to be within the accuracy of the field tester shall be marked with an asterisk (*).
7. The Time Domain Reflectometer data shall be stored for any marginal or failing Return Loss results.

W. TCL (Transverse Conversion Loss)

1. Is the ratio (in dB) between a differential mode signal inject at the near-end and the common-mode signal measured at the near-end on the same wire pair.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for all four pairs.
4. Is not to exceed the Category 6 and 6A limits found ANSI/TIA-568-C.2 Section 6.2.14.

X. ELTCTL (Equal Level Transverse Conversion Transfer Loss)

1. Is the ratio (in dB) between a differential mode signal inject at the near-end and the common-mode signal measured at the far end on the same wire pair minus the Insertion Loss of that pair.
2. The frequency resolution shall be:

   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz

c. 100 – 250 MHz: 500 kHz
d. 250 – 500 MHz: 1000 kHz

3. Both worst case and worst margins shall be reported in both directions for all four pairs.
4. Is not to exceed the Category 6 and 6A limits found in ANSI/TIA-568-C.2 section 6.2.16.

Y. PS ANEXT (Power Sum Alien Near-End Crosstalk)

1. Takes into account the combined alien crosstalk (statistical) on a receive pair from all external near-end disturbers operating simultaneously.
2. The frequency resolution shall be:

a. 1 – 31.25 MHz: 150 kHz
b. 31.25 – 100 MHz: 250 kHz
c. 100 – 250 MHz: 500 kHz
d. 250 – 500 MHz: 1000 kHz

3. The disturbed (victim) link shall have disturber links to the left and right of it and if present, links above and below it.
4. Disturber cables shall include all links within the same bundle as the disturbed (victim) link and adjacent links
5. Should be measured in both directions if the link is patch panel to patch panel. If the link is patch panel to telecommunications outlet, then it shall be measured from the patch panel end only.
6. Is not to exceed the Category 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.21.

Z. Average PS ANEXT (Power Sum Alien Near-End Crosstalk)

1. Is calculated by averaging the individual PSANEXT loss values, in dB, for all four pairs in the disturbed (victim) link.
2. The frequency resolution shall be:

a. 1 – 31.25 MHz: 150 kHz
b. 31.25 – 100 MHz: 250 kHz
c. 100 – 250 MHz: 500 kHz
d. 250 – 500 MHz: 1000 kHz

3. Is not to exceed the Category 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.22.

AA. PS AACR-F (Power Sum Alien Attenuation to Crosstalk Ratio Far-End)

1. AFEXT loss is the coupling of crosstalk at the far-end from external link pairs into a disturbed (victim) pair of the 4-pair link under test. PS AACR-F is the calculated power sum from all external pairs into the disturbed (victim) pair.
2. The frequency resolution shall be:

a. 1 – 31.25 MHz: 150 kHz
b. 31.25 – 100 MHz: 250 kHz
c. 100 – 250 MHz: 500 kHz
d. 250 – 500 MHz: 1000 kHz

3. The disturbed (victim) link shall have disturber links to the left and right of it and if present, links above and below it.
4. Disturber cables shall include all links within the same bundle as the disturbed (victim) link and adjacent links
5. Should be measured in both directions if the link is patch panel to patch panel. If the link is patch panel to telecommunications outlet, then it shall be measured from the patch panel end only.
6. Is not to exceed the Category 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.25.

BB. Average PS AACR-F (Power Sum Alien Attenuation to Crosstalk Ratio Far-End)

1. Is calculated by averaging the individual PS AACR-F values, in dB, for all four pairs in the disturbed (victim) link.
2. The frequency resolution shall be:
   a. 1 – 31.25 MHz: 150 kHz
   b. 31.25 – 100 MHz: 250 kHz
   c. 100 – 250 MHz: 500 kHz
   d. 250 – 500 MHz: 1000 kHz
3. The disturbed (victim) link shall have disturber links to the left and right of it and if present, links above and below it.
4. Disturber cables shall include all links within the same bundle as the disturbed (victim) link and adjacent links
5. Should be measured in both directions if the link is patch panel to patch panel. If the link is patch panel to telecommunications outlet, then it shall be measured from the patch panel end only.
6. Is not to exceed the Category 6A Permanent Link limits found in ANSI/TIA-568-C.2 Section 6.3.26.

3.3 Administration - Copper Cabling

A. Test results documentation

1. Test results saved within the field-test instrument shall be transferred into a Windows™-based database utility that allows for the maintenance, inspection and archiving of the test records. These test records shall be uploaded to the PC unaltered, i.e., “as saved in the field-test instrument”. The file format, CSV (comma separated value), does not provide adequate protection of these records and shall not be used.
2. The test results documentation shall be available for inspection by the Owner or the Owner’s representative during the installation period and shall be passed to the Owner's representative within 5 working days of completion of tests on cabling served by a telecommunications room or of backbone cabling. The installer shall retain a copy to aid preparation of as-built information.
3. The database for the complete project, including twisted-pair copper cabling and fiber links, if applicable, shall be stored and delivered on CD or DVD prior to Owner acceptance of the building. This CD or DVD shall include the software tools required to view, inspect, and print any selection of the test reports.
4. Circuit IDs reported by the test instrument should match the specified label ID.
5. For Permanent Link testing, the detailed test results documentation data is to be provided in an electronic database for each tested balance twisted-pair and shall contain the following information
   a. The overall Pass/Fail evaluation of the link-under-test
   b. The date and time the test results were saved in the memory of the tester
   c. The identification of the customer site as specified by the end-user
   d. The name of the test limit selected to execute the stored test results
   e. The name of the personnel performing the test
   f. The version of the test firmware and the version of the test limit database held within the test instrument
   g. The manufacturer, model and serial number of the field-test instrument
   h. The adapters used
   i. The factory calibration date
   j. Wire Map
   k. Propagation Delay values, for all four pairs
   l. Delay Skew values, for all four pairs
   m. DC Resistance values, for all four pairs
   n. DC Resistance Unbalance within a pair, values for all four pairs
   o. DC Resistance Unbalance between pairs, values for all four pairs
   p. Insertion Loss, worst case values for all four pairs

q. NEXT, worst case margin and worst case values, both directions
r. PS NEXT, worst case margin and worst case values, both directions
s. ACR-N, worst case margin and worst case values, both directions
t. PS ACR-N, worst case margin and worst case values, both directions
u. ACR-F, worst case margin and worst case values, both directions
v. PS ACR-F, worst case margin and worst case values, both directions
w. Return Loss, worst case margin and worst case values, both directions
x. TCL, worst case margin and worst case values, both directions
y. ELTCTL, worst case margin and worst case values, both directions.
z. Time Domain Crosstalk data if the link is marginal or fails
aa. Time Domain Reflectometer data if the link is marginal or fails

6. For Alien Crosstalk testing, the detailed test results documentation data is to be provided in AxTalk Analyzer for each tested balance twisted-pair and shall contain the following information

a. The overall Pass/Fail evaluation of the link-under-test
b. The date and time the measurements were made
c. The identification of the customer site as specified by the end-user
d. The name of the test limit selected to execute the stored test results
e. The name of the personnel performing the test
f. The version of the test software
g. PS ANEXT, worst case margin for all four pairs
h. Average PS ANEXT, worst case margin
i. PS AACR-F, worst case margin for all four pairs
j. Average PS AACR-F, worst case margin

B. Record copy and as-built drawings - Copper Cabling

1. Provide record copy drawings periodically throughout the project as requested by the Construction Manager or Owner, and at end of the project on a CD or DVD. Record copy drawings at the end of the project shall be in CAD format and include notations reflecting the as built conditions of any additions to or variation from the drawings provided such as, but not limited to cable paths and termination point. The as-built drawings shall include, but are not limited to block diagrams, frame and cable labeling, cable termination points, equipment room layouts and frame installation details. The as-builts shall include all field changes made up to construction completion:

a. Field directed changes to pull schedule.
b. Horizontal cable routing changes.
c. Associated detail drawings.

3.4 OPTICAL FIBER CABLE TESTING

A. Field-test instruments shall have the latest software and firmware installed.

B. Link and channel test results from the OLTS and OTDR shall be recorded in the test instrument upon completion of each test for subsequent uploading to a PC in which the administrative documentation (reports) may be generated.

C. Fiber end faces shall be inspected using a video scope with a field of view not less than 425 µm x 320 µm.
1. It is preferable that the end face images be recorded in the memory of the test instrument for subsequent uploading to a PC and reporting.

D. Testing shall be performed on each cabling segment (connector to connector).

E. Testing shall be performed on each cabling channel (equipment to equipment) that is planned for use per the owner’s instructions.

F. Testing of the cabling shall be performed using high-quality test reference cords of the same core size as the cabling under test, terminated with reference grade connectors. Reference grade connectors are defined as having a loss not exceeding 0.1 dB for multimode and 0.2 dB for singlemode. The test reference cords for OLTS testing shall be between 2 m and 5 m in length. The length of the launch and tail fibers for multimode OTDR testing shall be at a least 100 m (328 ft.). For singlemode, the length of the launch and tail fibers will depend on the link under test. As a guide, the following table can be used for determining the length of the launch and tail fibers.

Maximum Length of Link (km)		Typical Pulse Width (ns)	Minimum Launch and Tail Cord Length (m)
1310 nm	1550 nm only		
0 to 35	0 to 50	≤ 1,000	130
35 to 45	50 to 65	3,000	400
45 to 50	65 to 75	10,000	1,000
≥ 50	≥ 75	20,000	2400

G. Optical loss testing

1. Horizontal/Backbone link

   a. Multimode links shall be tested in one direction at 850 nm and 1300 nm in accordance with ANSI/TIA-526-14-B, one-cord reference method, with an Encircled Flux compliant launch.
   b. Singlemode backbone links shall be tested in one direction at 1310 nm and 1550 nm in accordance with ANSI/TIA/EIA-526-7, Method A.1 (One-cord reference method).
   c. Link attenuation does not include any active devices or passive devices other than cable, connectors, and splices, i.e. link attenuation does not include such devices as optical bypass switches, couplers, repeaters, or optical amplifiers.

H. OTDR Testing

1. Fiber links shall be tested at these wavelengths for anomalies and to ensure uniformity of cable attenuation, connector insertion loss and reflectance.

   a. Multimode: 850 nm and 1300 nm.
   b. Singlemode: 1310 nm and 1550 nm.

2. Each fiber link and channel shall be tested in both directions.

   a. The launch and tail fibers shall remain in place for the measurement in the opposite direction – failing to do so will result in an increase in measurement uncertainty.
   b. The use of a loop back fiber at the far end with a tail fiber at the near end on the adjacent fiber is permitted for bi-directional testing, so long as the OTDR is able to split the trace automatically into two traces for the two fibers under test.

3. A launch cable shall be installed between the OTDR and the first link connection.
4. A tail cable shall be installed after the last link connection.

I. Magnified End face Inspection

1. Fibers shall be inspected using a video scope with a minimum field of view 425 µm x 320 µm to IEC 61300-3-35 Edition 1.0. The following test limits shall be used:

   a. Multimode connectors; Table 6 of IEC 61300-3-35 Edition 1.0
   b. Singlemode field polished connectors; Table 5 of IEC 61300-3-35 Edition 1.0
   c. Singlemode factory polished connectors; Table 3 of IEC 61300-3-35 Edition 1.0
   d. Angled Physical Contact (APC) connectors; Table 4 of IEC 61300-3-35 Edition 1.0

J. Length Measurement

1. The length of each fiber shall be recorded.

2. It is preferable that the optical length be measured using an OLTS or OTDR.

K. Polarity Testing

1. Paired duplex fibers in multi-fiber cables shall be tested to verify polarity in accordance with Clause E.5.3 of ANSI/TIA-568.0-D. The polarity of the paired duplex fibers shall be verified using an OLTS.

3.5 ADMINISTRATION – OPTICAL FIBER

A. Test results documentation

1. Test results saved within the field-test instrument shall be transferred into a Windows™-based database utility that allows for the maintenance, inspection and archiving of the test records. These test records shall be uploaded to the PC unaltered, i.e., "as saved in the field-test instrument". The following formats do not provide adequate protection of these records and shall not be used.

   a. Portable document format (PDF)
   b. Word (.doc & .docx)
   c. Comma separated values (.csv)
   d. Excel separated values (.xls & .xlsx)
   e. Text (.txt)

2. The test results documentation shall be available for inspection by the Owner or the Owner's representative during the installation period and shall be passed to the Owner's representative within 5 working days of completion of tests on cabling served by a telecommunications room or of backbone cabling. The installer shall retain a copy to aid preparation of as-built information.
3. The database for the complete project, including twisted-pair copper cabling links, if applicable, shall be stored and delivered on CD/DVD prior to Owner acceptance of the building in the original format used by the cabling vendors' software.
4. Circuit IDs reported by the test instrument should match the specified label ID (see C of this Section).
5. The detailed test results documentation data is to be provided in an electronic database for each tested optical fiber and shall contain the following information

   a. The identification of the customer site as specified by the end-user.
   b. The name of the test limit selected to execute the stored test results.
   c. The name of the personnel performing the test.
   d. The date and time the test results were saved in the memory of the tester.
   e. The manufacturer, model and serial number of the field-test instrument.
   f. The version of the test software and the version of the test limit database held within the test instrument.
   g. The fiber identification number.
   h. The length for each optical fiber.
   i. The index of refraction used for length calculation when using length capable OLTS.
   j. The backscatter coefficient of the fiber under test when using an OTDR.
   k. Test results to include OLTS attenuation link and channel measurements at the appropriate wavelength(s) and the margin (difference between the measured attenuation and the test limit value).
   l. Test results to include OTDR link and channel traces, event tables at the appropriate wavelength(s) and a map of the link tested.
   m. The length for each optical fiber as calculated by the OTDR.
   n. The overall Pass/Fail evaluation of the link-under-test for OLTS and OTDR measurements
   o. Optional

      1) A picture or image of each fiber end-face
      2) A pass/fail status of the end-face using IEC 61300-3-35 Edition 1.0

B. Record Copy and As-built drawings – Optical Fiber

1. Provide record copy drawings periodically throughout the project as requested by the Construction Manager or Owner, and at end of the project on CD/DVD. Record copy drawings at the end of the project shall be in CAD format and include notations reflecting the as built conditions of any additions to or variation from the drawings provided such as, but not limited to cable paths and termination point. CAD drawings are to incorporate test data imported from the test instruments.
2. The as-built drawings shall include, but are not limited to block diagrams, frame and cable labeling, cable termination points, equipment room layouts and frame installation details. The as-built shall include all field changes made up to construction completion:

   a. Field directed changes to pull schedule.
   b. Field directed changes to cross connect and patching schedule.
   c. Horizontal cable routing changes.
   d. Backbone cable routing or location changes.
   e. Associated detail drawings.

C. Identification

D. Labeling

1. Labeling shall conform to the requirements specified within ANSI/TIA-606-B or to the requirements specified by the Owner or the Owner's representative.

3.6 REPAIR

A. Any connections failing to meet referenced standards or more stringent performance requirements stated above, must be removed and replaced with connections that prove, in additional testing, to meet or exceed the performance standards set forth.

3.7 RE-INSTALLATION

A. No additional burden to the owner regarding costs, network down-time and/or end user interruption shall result from the re-installation of specified components. Scheduling for re-installation work shall be coordinated, in writing, with the owner prior to beginning the work.

3.8 CLOSEOUT ACTIVITIES

A. Contractor to submit all test results and any test documentation required prior to acceptance by the Owner.

B. Record copy and as-built drawings

C. Provide record copy drawings periodically throughout the project as requested by the Construction Manager or Owner, and at end of the project on CD-ROM. Record copy drawings at the end of the project shall be in CAD format and include notations reflecting the as built conditions of any additions to or variation from the drawings provided such as, but not limited to cable paths and termination point. CAD drawings are to incorporate test data imported from the test instruments.

D. The as-built drawings shall include, but are not limited to block diagrams, frame and cable labeling, cable termination points, equipment room layouts and frame installation details. The as-builts shall include all field changes made up to construction completion:

1. Field directed changes to pull schedule.
2. Field directed changes to cross connect and patching schedule.
3. Horizontal cable routing changes.
4. Backbone cable routing or location changes.

5. Associated detail drawings.

END OF SECTION 270800

SECTION 271100 - COMMUNICATIONS EQUIPMENT ROOM FITTINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Backboards.
2. Boxes, enclosures, and cabinets.

B. Related Requirements:

1. Section 270536 "Cable Trays for Communications Systems" for cable trays and accessories.
2. Section 271313 "Communications Copper Backbone Cabling" for copper data cabling associated with system panels and devices.
3. Section 271323 "Communications Optical Fiber Backbone Cabling" for optical-fiber data cabling associated with system panels and devices.
4. Section 271513 "Communications Copper Horizontal Cabling" for copper data cabling associated with system panels and devices.

1.3 DEFINITIONS

A. Access Provider: An operator that provides a circuit path or facility between the service provider and user. An access provider can also be a service provider.

B. BICSI: Building Industry Consulting Service International.

C. RCDD: Registered communications distribution designer.

D. Service Provider: The operator of a telecommunications transmission service delivered through access provider facilities.

E. TGB: Telecommunications grounding bus bar.

F. TMGB: Telecommunications main grounding bus bar.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for equipment racks and cabinets.
2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

B. Shop Drawings: For communications equipment room fittings. Include plans, elevations, sections, details, and attachments to other work.

1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
2. Equipment Racks and Cabinets: Include workspace requirements and access for cable connections.
3. Grounding: Indicate location of grounding bus bar and its mounting detail showing standoff insulators and wall mounting brackets.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer, qualified layout technician, installation supervisor, and field inspector.

B. Seismic Qualification Data: Certificates, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions. Base certification on the maximum number of components capable of being mounted in each rack type. Identify components on which certification is based.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: Cabling installer must have personnel certified by BICSI on staff.

1. Layout Responsibility: Preparation of Shop Drawings shall be under direct supervision of RCDD .
2. Installation Supervision: Installation shall be under direct supervision of Technician , who shall be present at all times when Work of this Section is performed at Project site.
3. Field Inspector: Currently registered by BICSI as RCDD to perform the on-site inspection.

PART 2 - PRODUCTS

2.1 BACKBOARDS

A. Backboards: Plywood, fire-retardant treated, 3/4 by 48 by 96 inches, AC grade void-free.

B. Backboard Paint: Light-colored fire-retardant paint . Paint plywood face and all sides with two coats of paint, do not paint over fire rated stamp.

C. Mounting: Anchor with 3/8" toggle bolts or concrete expansion anchors, where applicable, and 2" washers on each corner and 4' on center as required on all walls and above door frame of each communications room/space. Install at 6" AFF to 8' 6" AFF with fire rating stamp facing outwards and visible.

2.2 BOXES, ENCLOSURES, AND CABINETS

A. Comply with requirements in Section 271116 "Communications Racks, Frames, and Enclosures."

2.3 POWER STRIPS

A. Comply with requirements in Section 271116 "Communications Racks, Frames, and Enclosures."

PART 3 - EXECUTION

3.1 ENTRANCE FACILITIES

A. Contact telecommunications service provider and arrange for installation of demarcation point, protected entrance terminals, and a housing when so directed by service provider.

B. Comply with requirements in Section 270543 "Underground Pathways and Structures for Communications Systems" for materials and installation requirements for underground pathways.

3.2 INSTALLATION

A. Comply with NECA 1.

B. Comply with the latest edition of BICSI's "Telecommunications Distribution Methods Manual" for layout of communications equipment spaces.

C. Comply with the latest edition of BICSI's "Information Technology Systems Installation Methods Manual" for installation of equipment in communications equipment spaces.

D. Bundle, lace, and train conductors and cables to terminal points without exceeding manufacturer's limitations on bending radii. Install lacing bars and distribution spools.

E. Coordinate layout and installation of communications equipment in tracks and in room. Coordinate service entrance configuration with service provider.

1. Meet jointly with systems providers, equipment suppliers, and Owner to exchange information and agree on details of equipment configurations and installation interfaces.
2. Record agreements reached in meetings and distribute them to other participants.
3. Adjust configurations and locations of distribution frames, cross-connects, and patch panels in equipment rooms to accommodate and optimize configurations and space requirements of communications equipment.
4. Adjust configurations and locations of equipment with distribution frames, cross-connects, and patch panels of cabling systems of other communications, electronic safety and security, and related systems that share space in equipment room.

F. Coordinate location of power raceways and receptacles with locations of communications equipment requiring electrical power to operate.

G. Backboards:

1. Install from 6 inches to 8 feet, 6 inches above finished floor. If plywood is fire rated, ensure that fire-rating stamp is visible after installation.
2. Paint all sides of backboard with two coats of paint , leaving fire rating stamp visible.

   a. If the stamp is painted-over, the contractor shall be required to replace and properly repaint the plywood.

3. Comply with requirements for backboard installation in BICSI's "Information Technology Systems Installation Methods Manual" and TIA-569-D.

3.3 SLEEVE AND SLEEVE SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 270544 "Sleeves and Sleeve Seals for Communications Pathways and Cabling."

3.4 FIRESTOPPING

A. Comply with requirements in Section 078413 "Penetration Firestopping."

B. Comply with TIA-569-D, Annex A, "Firestopping."

C. Comply with BICSI's "Information Technology Systems Installation Methods Manual," "Firestopping Practices" Ch.

3.5 CLEANING

A. Remove dust, dirt, rust, stains, and temporary covers.

B. Foreign matter shall be blown, vacuumed, or cleaned out of and from new equipment, devices, switches, controls, and panels.

C. Clean and polish identification plates.

D. In equipment rooms, clean equipment, conduit and room surfaces from dust and dirt and maintain in a clean condition from date of substantial completion until final completion of work and corrective work.

E. Remove all excess material from the Project site.

END OF SECTION 271100

SECTION 271116 - COMMUNICATIONS RACKS, FRAMES, AND ENCLOSURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. 19-inch equipment racks.
2. Power strips.
3. Grounding.
4. Labeling.

B. Related Requirements:

1. Section 271110 "Communications Equipment Room Fittings" for backboards and accessories.
2. Section 270526 "Grounding and Bonding for Telecommunications Equipment" for TMGBs and TGBs.
3. Section 270536 "Cable Trays for Communications Systems" for cable trays and cable tray accessories.
4. Section 271313 "Communications Copper Backbone Cabling" for copper data cabling associated with system panels and devices.
5. Section 271323 "Communications Optical Fiber Backbone Cabling" for optical-fiber data cabling associated with system panels and devices.
6. Section 271513 "Communications Copper Horizontal Cabling" for copper data cabling associated with system panels and devices.

1.3 DEFINITIONS

A. Access Provider: An operator that provides a circuit path or facility between the service provider and user. An access provider can also be a service provider.

B. BICSI: Building Industry Consulting Service International.

C. LAN: Local area network.

D. RCDD: Registered communications distribution designer.

E. Service Provider: The operator of a telecommunications transmission service delivered through access provider facilities.

F. TGB: Telecommunications grounding bus bar.

G. TMGB: Telecommunications main grounding bus bar.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for equipment racks and cabinets.
2. Include rated capacities, operating characteristics, electrical characteristics, certifications, standards compliance, and furnished specialties and accessories.

B. Shop Drawings: For communications racks, frames, and enclosures. Include plans, elevations, sections, details, and attachments to other work.

1. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
2. Equipment Racks and Cabinets: Include workspace requirements and access for cable connections.
3. Grounding: Indicate location of TGB and its mounting detail showing standoff insulators and wall-mounting brackets.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer, qualified layout technician, installation supervisor, and field inspector.

B. Seismic Qualification Data: Certificates, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions. Base certification on the maximum number of components capable of being mounted in each rack type. Identify components on which certification is based.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: Cabling installer must have personnel certified by BICSI on staff.

1. Layout Responsibility: Preparation of Shop Drawings shall be under direct supervision of RCDD.
2. Installation Supervision: Installation shall be under direct supervision of Technician who shall be present at all times when Work of this Section is performed at Project site.
3. Field Inspector: Currently registered by BICSI as RCDD to perform on-site inspection.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. UL listed.

B. RoHS compliant.

2.2 19-INCH EQUIPMENT RACKS

A. Description: Two- and four- post racks with threaded rails designed for mounting telecommunications equipment. Width is compatible with EIA/ECIA 310-E, 19-inch equipment mounting with an opening of 17.72-inches between rails.

B. Manufacturers: Subject to compliance with requirements, undefined:

1. CPI Chatsworth Products.
2. Great Lakes Case and Cabinet.
3. Leviton Manufacturing Co., Inc.
4. Middle Atlantic Products; Legrand North America, LLC.
5. nVent (Hoffman).
6. Ortronics, Inc.
7. Panduit Corp.
8. Siemon Co. (The).

C. General Requirements:

1. Frames: Modular units designed for telecommunications terminal support and coordinated with dimensions of units to be supported.
2. Material: Extruded aluminum.
3. Finish: Manufacturer's standard, baked-polyester powder coat.
4. Color: Black.

D. Floor-Mounted Racks:

1. Overall Height: 84 inches.
2. Upright Depth: 3 inches.
3. Two-Post Load Rating: 1000 lbs
4. Number of Rack Units per Rack: 45.
   a. Numbering: Every rack units, on interior of rack.
5. Threads: 10-32.
6. Vertical and horizontal cable management channels, top and bottom cable troughs, grounding lug.
7. Base shall have a minimum of four mounting holes for permanent attachment to floor.
8. Top shall have provisions for attaching to cable tray or ceiling.
9. Self-leveling.

E. Cable Management:

1. Metal, with integral wire retaining fingers.
2. Baked-polyester powder coat finish.
3. Vertical cable management panels shall have front and rear channels, with covers.
4. Provide horizontal crossover cable manager at the top of each relay rack, with a minimum height of two rack units each.

2.3 UNINTERUPPTIBLE POWER SUPPLY (UPS)

A. System shall be a self-contained unit designed for the support of IT equipment.

B. Integral lightning and surge protection complying with IEEE C62.41.1-2002 (R2008), IEEE C62.41.2-2002 (COR 1-2012), and UL 1449-2014.

C. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Schneider Electric (APC)
2. Vertiv
3. Eaton
4. Cyber Power.
5. Tripp Lite.

D. Single-Phase UPS

1. Architecture: Single-conversion.
2. Load: 4 kVA
3. Input Voltage: 208V
4. Input Plug: NEMA L6-30P
5. Output Voltage: 120V
6. Output Receptacles: (6) 5-20R
7. Runtime at Full Load: 30 minutes.
8. Form Factor: Rack-Mount
9. Network Management Card
10. Environmental Monitoring Card
11. Rack-Mount Step Down Transformer as required for output receptacle requirements.

2.4 POWER STRIPS

A. Power Strips: Comply with UL 1363.

1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
2. Rack mounting.
3. LED indicator lights for power and protection status.
4. LED indicator lights for reverse polarity and open outlet ground.
5. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

   a. Chatsworth Products, Inc. (CPI)
   b. Geist Manufacturing
   c. Schneider Electric (APC)

6. Vertical Surge-Protected Power Strips

   a. Input Plug: NEMA 5-20P
   b. Input Cord Length: 10
   c. Output: NEMA (20) 5-20R
   d. Metered: LED Display indicating Voltage and Amps.
   e. Provide one vertical power strip for each 2-post and 4-post rack.
   f. Provide all mounting hardware and standoff brackets as required.

2.5 GROUNDING

A. Comply with requirements in Section 270526 "Grounding and Bonding for Communications Systems" for grounding conductors and connectors.

B. Rack and Cabinet TGBs: Rectangular bars of hard-drawn solid copper, accepting conductors ranging from No. 14 to No. 2/0 AWG, NRTL listed as complying with UL 467, and complying with TIA-606-B. Predrilling shall be with holes for use with lugs specified in this Section.

1. Cabinet-Mounted TGB: Terminal block, with stainless-steel or copper-plated hardware for attachment to cabinet.
2. Rack-Mounted Horizontal TGB: Designed for mounting in 19- or 23-inch equipment racks. Include a copper splice bar for transitioning to an adjoining rack, and stainless-steel or copper-plated hardware for attachment to the rack.
3. Rack-Mounted Vertical TGB: 72 or 36 inches long, with stainless-steel or copper-plated hardware for attachment to rack.

2.6 LABELING

A. Comply with TIA-606-B and UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

B. Comply with requirements in Section 270533 "Identification for Communications Systems."

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with NECA 1.

B. Comply with BICSI TDMM for layout of communications equipment spaces.

C. Comply with BICSI ITSIMM for installation of communications equipment spaces.

D. Bundle, lace, and train conductors and cables to terminal points without exceeding manufacturer's limitations on bending radii. Install lacing bars and distribution spools.

E. Coordinate layout and installation of communications equipment in racks and room. Coordinate service entrance configuration with service provider.
   1. Meet jointly with system providers, equipment suppliers, and Owner to exchange information and agree on details of equipment configurations and installation interfaces.
   2. Record agreements reached in meetings and distribute them to other participants.
   3. Adjust configurations and locations of distribution frames, cross-connects, and patch panels in equipment spaces to accommodate and optimize configuration and space requirements of telecommunications equipment.
   4. Adjust configurations and locations of equipment with distribution frames, cross-connects, and patch panels of cabling systems of other communications, electronic safety and security, and related systems that share space in equipment room.

F. Coordinate location of power raceways and receptacles with locations of communications equipment requiring electrical power to operate.

G. Furnish and install a horizontal cable manager below each patch panel in the Rack. Refer to Project Drawings for size of Wire Managers. Horizontal cable managers are not required below angled patch panels.

H. Outdoor enclosures to be provided with ventilation according to equipment manufacturer's recommendations.

3.2 GROUNDING

A. Comply with NECA/BICSI 607.

B. Install grounding according to BICSI ITSIMM, "Bonding, Grounding (Earthing) and Electrical Protection" Ch.

C. Locate TGB to minimize length of bonding conductors. Fasten to wall, allowing at least 2 inches of clearance behind TGB. Connect TGB with a minimum No. 4 AWG grounding electrode conductor from TGB to suitable electrical building ground. Connect rack TGB to near TGB or the TMGB.
   1. Bond the shield of shielded cable to patch panel, and bond patch panel to TGB or TMGB.

3.3 IDENTIFICATION

A. Comply with requirements in Section 099123 "Interior Painting" for painting backboards. For fire-resistant plywood, do not paint over manufacturer's label.

B. Comply with requirements in Section 270553 "Identification for Communications Systems."

END OF SECTION 271116

SECTION 271313 - COMMUNICATIONS COPPER BACKBONE CABLING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. High-count Category 3 twisted pair cable.
2. Twisted pair cable hardware, including plugs, jacks, patch panels, and cross-connects.
3. Cabling identification.
4. Source quality control requirements for twisted pair cable.

1.3 DEFINITIONS

A. Cross-Connect: A facility enabling the termination of cable elements and their interconnection or cross-connection.

B. EMI: Electromagnetic interference.

C. F/FTP: Overall foil screened cable with foil screened twisted pair.

D. FTP: Shielded twisted pair.

E. F/UTP: Overall foil screened cable with unscreened twisted pair.

F. IDC: Insulation displacement connector.

G. Jack: Also commonly called an "outlet," it is the fixed, female connector.

H. LAN: Local area network.

I. Plug: Also commonly called a "connector," it is the removable, male telecommunications connector.

J. RCDD: Registered Communications Distribution Designer.

K. Screen: A metallic layer, either a foil or braid, placed around a pair or group of conductors.

L. S/FTP: Overall braid screened cable with foil screened twisted pair.

M. Shield: A metallic layer, either a foil or braid, placed around a pair or group of conductors.

N. S/UTP: Overall braid screened cable with unscreened twisted pairs.

O. UTP: Unscreened (unshielded) twisted pair.

1.4 COPPER BACKBONE CABLING DESCRIPTION

A. Copper backbone cabling system shall provide interconnections between communications equipment rooms, main terminal space, and entrance facilities in the telecommunications cabling system structure. Cabling system consists of backbone cables, intermediate and main cross-connects, mechanical terminations, and patch cords or jumpers used for backbone-to-backbone cross-connection.

B. Backbone cabling cross-connects may be located in communications equipment rooms or at entrance facilities. Bridged taps and splitters shall not be used as part of backbone cabling.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Reviewed and stamped by RCDD.

1. System Labeling Schedules: Electronic copy of labeling schedules, in software and format selected by Owner.
2. Cabling administration Drawings and printouts.
3. Wiring diagrams to show typical wiring schematics, including the following:

a. Telecommunications rooms plans and elevations.
b. Telecommunications pathways.
c. Telecommunications system access points.
d. Telecommunications grounding system
e. Cross-connects.
f. Patch panels.
g. Patch cords.

4. Cross-Connects and Patch Panels: Detail mounting assemblies, and show elevations and physical relationship between the installed components.

C. Twisted pair cable testing plan.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For RCDD, Installer, installation supervisor, and field inspector.

B. Source quality-control reports.

C. Field quality-control reports.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For splices and connectors to include in maintenance manuals.

B. Contractor to submit all cable test results and any test documentation required prior to acceptance by the Owner.

C. Subsequent to the installation, and prior to acceptance of the work, the contractor shall prepare and issue record (as-built) drawings, in Adobe PDF and AutoCAD and BIM format, that reflect the lengths of cables installed, the actual manner and conditions of installation, including all deletions from, additions to or departures from the contract documents. These documents are to include the information outlet station numbers and cable routing where it varies from the original plan.

D. Provide cable termination schedules for all cables installed under the Work. Schedules shall be in printed form and on CD in Microsoft Excel format.

E. Provide Operation and Maintenance Manuals including wiring diagrams, parts list, shop drawings and manufacturers' information on all equipment and cables provided under this Work. Provide manuals within fifteen days of systems acceptance.

F. Upon completion of the work, the contractor shall coordinate with the manufacturer the issuance of a full warranty on the entire copper and fiber optic cable plant including the horizontal cabling for both parts and labor. The cabling contractor at his sole expense will correct any deficiencies determined by the manufacturer.

1.8 QUALITY ASSURANCE

A. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.

1. Layout Responsibility: Preparation of Shop Drawings, cabling administration Drawings, and field testing program development by an RCDD.
2. Installation Supervision: Installation shall be under the direct supervision of Technician, who shall be present at all times when Work of this Section is performed at Project site.
3. Testing Supervisor: Currently certified by BICSI as an RCDD to supervise on-site testing.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Test cables upon receipt at Project site.

1. Test each pair of twisted pair cable for open and short circuits.

1.10 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install cables and connecting materials until wet work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

1.11 COORDINATION

A. Coordinate layout and installation of telecommunications pathways and cabling with Owner's telecommunications and LAN equipment and service suppliers.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General Performance: Backbone cabling system shall comply with transmission standards in TIA-568-C.1, when tested according to test procedures of this standard.

B. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 25 or less.
2. Smoke-Developed Index: 50 or less.

C. Telecommunications Pathways and Spaces: Comply with TIA-569-D.

D. Grounding: Comply with TIA-607-C.

2.2 BUILDING ENTRANCE TERMINALS

A. 16 AWG powder coated steel building entrance terminals.

B. Industry standard 110-Style Connector for both input and output terminals.

C. Connectors shall accept up to 22 AWG wire terminations.

D. Multiple external and internal ground lugs.

E. Stackable to allow for future expansion

F. Equipped with internal fuse link

G. UL497 approved.

H. Accommodates industry standard 5 Pin Protection Modules.

I. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Circa Telecom
2. ITW Linx
3. CommScope
4. Vertiv

2.3 GENERAL OUTDOOR CABLE CHARACTERISTICS

A. Copper cables (multipair) shall consist of solid copper conductors complying to RUS Specification PE-89 for use in underground conduit.

B. Conductors: solid, annealed copper, 24 AWG unless noted on design documents.

C. Insulation: Dual insulated with inner layer of foamed natural polyolefin covered by an outer layer of solid color polyolefin, color coded to industry standards.

D. Twisted Pairs: Insulated conductors twisted into pairs with varying lay lengths to minimize crosstalk. Standard capacitance of 83 to 87 Nano farads per mile and a staggered twist design.

E. Core Assembly: cables of 25 pairs and less formed by assembling pairs together in a single group. Cables of more than 25 pairs formed by twisted pairs arranged in groups with each group having a color coded unit binder.

F. Filling Compound: core assembly completely filled with an 80 degree Celsius rated ETPR compound, filling the interstices between the pairs and under the core tape.

G. Shield:

1. Inner shield: corrugated, copolymer coated, 8 mil aluminum tape applied longitudinally without an overlap. The sheath interfaces contain an adhesive water blocking compound.
2. Outer shield: corrugated, copolymer coated, 6 mil steel tape applied directly over the aluminum and overlays. The shield interfaces contain an adhesive compound to provide a moisture barrier.

H. Jacket: black, linear low density polyethylene.

2.4 HIGH-COUNT CATEGORY 3 TWISTED PAIR CABLE

A. Description: Balanced-twisted pair cable, certified to meet transmission characteristics of Category 3 cable at frequencies up to 16MHz.

B. Cables shall be provided in the form of 25-pair, 50-pair, 100-pair, 150-pair, 200-pair, 300-pair, 400-pair, 600-pair, 900-pair, 1200-pair, 1500-pair, and/or 1800-pair as indicated on the project drawings.

C. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Belden, Inc.
2. General Cable Technologies Corporation.
3. Superior Essex International LP.

D. Standard: Comply with ICEA S-90-661, NEMA WC 63.1, and TIA-568-C.2 for Category 3 cables.

E. Conductors: 100-ohm, 24 AWG solid copper.

F. Shielding/Screening: Unshielded balanced twisted pairs (UTP).

G. Cable Rating: Riser.

2.5 TWISTED PAIR CABLE HARDWARE

A. Description: Hardware designed to connect, splice, and terminate twisted pair copper communications cable.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. CommScope, Inc.
2. Panduit Corp.
3. Siemon Co. (The).

C. General Requirements for Cable Connecting Hardware:

1. Twisted pair cable hardware shall meet the performance requirements of Category 3.
2. Comply with TIA-568-C.2, IDC type, with modules designed for punch-down caps or tools.
3. Cables shall be terminated with connecting hardware of same category or higher.

D. Patch Panel: Modular panels housing numbered jack units with IDC-type connectors at each jack for permanent termination of pair groups of installed cables.

1. Features:

a. Universal T568A and T568B wiring labels.
b. Labeling areas adjacent to conductors.
c. Replaceable connectors.
d. 24 or 48 ports, as indicated on the project drawings.
e. Style: Flat
f. Strain-relief bar.

2. Construction: 16-gauge steel and mountable on 19-inch equipment racks.

3. Number of Jacks per Field: One for each four-pair conductor group of indicated cables, plus spares and blank positions adequate to suit specified expansion criteria.

2.6 CABLING IDENTIFICATION

A. Comply with TIA-606-C and UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

B. Comply with requirements in Section 270553 "Identification for Communications Systems."

2.7 SOURCE QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to evaluate cables.

B. Factory test cables on reels according to TIA-568-C.1.

C. Factory test cables according to TIA-568-C.2.

D. Cable will be considered defective if it does not pass tests and inspections.

E. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 ENTRANCE FACILITIES

A. Coordinate backbone cabling with the protectors and demarcation point provided by communications service provider.

B. Provide lightning protectors and grounding conductors for the equipment and exposed incoming cable. Exposed cable shall be as defined in the BICSI Telecommunications Distribution Methods Manual.

C. For small pair count applications, provide electrical protection devices consisting of mounting panel for a series of balanced solid-state protector units and a wiring block and the protector units. Wiring blocks shall be used for input and output cable terminations. Insertion of the protector units into the mounting block shall complete the circuit. For 50-pair count and greater, provide protector panels and circuit protector modules.

3.2 WIRING METHODS

A. Wiring within Enclosures: Bundle, lace, and train cables within enclosures. Connect to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Provide and use lacing bars and distribution spools. Install cables parallel with or at right angles to sides and back of enclosure.

3.3 INSTALLATION OF PATHWAYS

A. Comply with requirements for demarcation point, cabinets, and racks specified in Section 271100 "Communications Equipment Room Fittings."

B. Comply with Section 270528 "Pathways for Communications Systems."

C. Comply with Section 270536 "Cable Trays for Communications Systems."

D. Drawings indicate general arrangement of pathways and fittings.

3.4 INSTALLATION OF COPPER BACKBONE CABLES

A. Comply with NECA 1 and NECA/BICSI 568.

B. General Requirements for Cabling:

1. Comply with TIA-568-C.0, TIA-568-C.1, and TIA-568-C.2.
2. Comply with BICSI's "Information Transport Systems Installation Methods Manual (ITSIMM)," Ch. 5, "Copper Structured Cabling Systems," "Cable Termination Practices" Section.
3. Install 110-style IDC termination hardware unless otherwise indicated.
4. Do not untwist twisted pair cables more than 1/2 inch from the point of termination to maintain cable geometry.
5. Terminate all conductors; no cable shall contain unterminated elements. Make terminations only at indicated outlets, terminals, cross-connects, and patch panels.
6. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches and not more than 6 inches from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
7. Install lacing bars to restrain cables, prevent straining connections, and prevent bending cables to smaller radii than minimums recommended by manufacturer.
8. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIMM, Ch. 5, "Copper Structured Cabling Systems," "Cable Termination Practices" Section Use lacing bars and distribution spools.
9. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation, and replace it with new cable.
10. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
11. Pulling Cable: Comply with BICSI ITSIMM, Ch. 5, "Copper Structured Cabling Systems," "Pulling and Installing Cable" Section. Monitor cable pull tensions.
12. Run riser cables in a star topology, terminated in the main equipment room at one end and in the communications room at the other end unless otherwise indicated on the Drawings.
13. Observe the bending radius and pulling strength requirements of backbone cables during handling and installation.
14. At a minimum, provide a 15’ maintenance coil at the origin and destination of each copper backbone cable. Each maintenance loops shall be neatly organized, mounted and labeled on the plywood backboard.
15. Install cable runway vertically from floor to ceiling in communications closets to support vertical cables. Strap cables to runways 3' on center.
16. Provide distribution rings to support cable vertically and horizontally on plywood backboards. Install D-rings 12" on center.
17. Provide Velcro around cables to manage and support cable located 12" on center.
18. If terminating a 25 or 50-pair cable (or 25-pair binder group of a larger pair-count cable) to a 24 or 48 port patch panel, the last pair (violet/slate) shall be coiled unterminated at the rear of the patch panel.

C. Open-Cable Installation:

1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
2. Suspend twisted pair cabling, not in a wireway or pathway, a minimum of 8 inches above ceilings by cable supports not more than 60 inches apart.
3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.

D. Group connecting hardware for cables into separate logical fields.

E. Separation from EMI Sources:

1. Comply with recommendations from BICSI's "Telecommunications Distribution Methods Manual" and TIA-569-D for separating unshielded copper communication cable from potential EMI sources, including electrical power lines and equipment.
2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:

   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches.
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches.

3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:

   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches.
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches.

4. Separation between communications cables in grounded metallic raceways, power lines, and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:

   a. Electrical Equipment Rating Less Than 2 kVA: No requirement.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches.
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches.

5. Separation between Communications Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches.
6. Separation between Communications Cables and Fluorescent Fixtures: A minimum of 5 inches.

3.5 FIRESTOPPING

A. Comply with requirements in Section 078413 "Penetration Firestopping."

B. Comply with TIA-569-D, Annex A, "Firestopping."

C. Comply with "Firestopping Systems" Article in BISCI's "Telecommunications Distribution Methods Manual."

3.6 IDENTIFICATION

A. Identify system components, wiring, and cabling complying with TIA-606-C. Comply with requirements for identification specified in Section 270553 "Identification for Communications Systems."

B. Cabling Administration Drawings: Show building floor plans with cabling administration-point labeling. Identify labeling convention and show labels for telecommunications closets, backbone pathways and cables, entrance pathways and cables, terminal hardware and positions, horizontal cables, work areas and workstation terminal positions, grounding buses and pathways, and equipment grounding conductors.

C. Cable and Wire Identification:

1. Label each cable within 4 inches of each termination and tap, where it is accessible in a cabinet or junction or outlet box, and elsewhere as indicated.
2. Each wire connected to building-mounted devices is not required to be numbered at the device if wire color is consistent with associated wire connected and numbered within panel or cabinet.

3. Label each terminal strip, and screw terminal in each cabinet, rack, or panel.
   a. Individually number wiring conductors connected to terminal strips, and identify each cable or wiring group, extended from a panel or cabinet to a building-mounted device, with the name and number of a particular device.
   b. Label each unit and field within distribution racks and frames.
4. Identification within Connector Fields in Equipment Rooms and Wiring Closets: Label each connector and each discrete unit of cable-terminating and -connecting hardware. Where similar jacks and plugs are used for both voice and data communication cabling, use a different color for jacks and plugs of each service.

D. Labels shall be preprinted or computer-printed type, with a printing area and font color that contrast with cable jacket color but still comply with TIA-606-C requirements for the following:
   1. Cables use flexible vinyl or polyester that flexes as cables are bent.

3.7 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:
   1. Visually inspect jacket materials for NRTL certification markings. Inspect cabling terminations in communications equipment rooms for compliance with color-coding for pin assignments, and inspect cabling connections for compliance with TIA-568-C.1.
   2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
   3. Test cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross-connection.
      a. Test instruments shall meet or exceed applicable requirements in TIA-568-C.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.

C. Data for each measurement shall be documented.
   1. The test results/measurements shall be submitted in both the test equipment manufacturer’s raw data file and searchable PDF format files.
   2. The database for the complete project, including twisted-pair copper cabling links, if applicable, shall be stored and delivered in digital format prior to Owner acceptance of the building. This digital format shall include the software tools required to view, inspect, and print any selection of the test reports.

D. Remove and replace cabling where test results indicate that they do not comply with specified requirements.

E. End-to-end cabling will be considered defective if it does not pass tests and inspections.

F. A representative of the Owner may elect to test 5% of the installed cables. The test results will be compared with the submitted results. In the event that more than 2% of the compared results differ from the submitted results, the Owner may contract with a third-party testing firm to retest 100% of the installation and the cost shall be borne by the Contractor.

G. Prepare test and inspection reports.

END OF SECTION 271313

SECTION 271323 - COMMUNICATIONS OPTICAL FIBER BACKBONE CABLING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:
1. 9/125 micrometer single-mode, outside plant optical fiber cable (OS2).
2. Optical fiber cable connecting hardware, patch panels, and cross-connects.
3. Cabling identification products.

1.3 DEFINITIONS

A. BICSI: Building Industry Consulting Service International.

B. Cross-Connect: A facility enabling the termination of cable elements and their interconnection or cross-connection.

C. RCDD: Registered Communications Distribution Designer.

1.4 OPTICAL FIBER BACKBONE CABLING DESCRIPTION

A. Optical fiber backbone cabling system shall provide interconnections between communications equipment rooms, main terminal space, and entrance facilities in the telecommunications cabling system structure. Cabling system consists of backbone cables, intermediate and main cross-connects, mechanical terminations, and patch cords or jumpers used for backbone-to-backbone cross-connection.

B. Backbone cabling cross-connects may be located in communications equipment rooms or at entrance facilities. Bridged taps and splitters shall not be used as part of backbone cabling.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Reviewed and stamped by RCDD.
1. System Labeling Schedules: Electronic copy of labeling schedules, in software and format selected by Owner.
2. System Labeling Schedules: Electronic copy of labeling schedules that are part of the cabling and asset identification system of the software.
3. Cabling administration drawings and printouts.
4. Wiring diagrams to show typical wiring schematics including the following:
   a. Telecommunications rooms plans and elevations.
   b. Telecommunications pathways.
   c. Telecommunications system access points.
   d. Telecommunications grounding system.
   e. Cross-connects.

f. Patch panels.
g. Patch cords.

5. Cross-connects and patch panels. Detail mounting assemblies, and show elevations and physical relationship between the installed components.

C. Optical fiber cable testing plan.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For RCDD, Installer, installation supervisor, and field inspector.

B. Source quality-control reports.

C. Product Certificates: For each type of product.

D. Field quality-control reports.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For optical fiber cable, splices, and connectors to include in maintenance manuals.

B. Contractor to submit all cable test results and any test documentation required prior to acceptance by the Owner.

C. Subsequent to the installation, and prior to acceptance of the work, the contractor shall prepare and issue record (as-built) drawings, in Adobe PDF and AutoCAD and BIM format, that reflect the lengths of cables installed, the actual manner and conditions of installation, including all deletions from, additions to or departures from the contract documents. These documents are to include the information outlet station numbers and cable routing where it varies from the original plan.

D. Provide cable termination schedules for all cables installed under the Work. Schedules shall be in printed form and on CD in Microsoft Excel format.

E. Provide Operation and Maintenance Manuals including wiring diagrams, parts list, shop drawings and manufacturers' information on all equipment and cables provided under this Work. Provide manuals within fifteen days of systems acceptance.

F. Upon completion of the work, the contractor shall coordinate with the manufacturer the issuance of a full warranty on the entire copper and fiber optic cable plant including the horizontal cabling for both parts and labor. The cabling contractor at his sole expense will correct any deficiencies determined by the manufacturer.

1.8 QUALITY ASSURANCE

A. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.

1. Layout Responsibility: Preparation of Shop Drawings, Cabling Administration Drawings, and field testing program development by an RCDD.
2. Installation Supervision: Installation shall be under the direct supervision of Technician, who shall be present at all times when Work of this Section is performed at Project site.
3. Testing Supervisor: Currently certified by BICSI as an RCDD to supervise on-site testing.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Test cables upon receipt at Project site.

1. Test optical fiber cable to determine the continuity of the strand end to end. Use optical loss test set.
2. Test optical fiber cable while on reels. Use an optical time domain reflectometer to verify the cable length and locate cable defects, splices, and connector, including the loss value of each. Retain test data and include the record in maintenance data.

1.10 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install cables and connecting materials until wet work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

1.11 COORDINATION

A. Coordinate layout and installation of telecommunications pathways and cabling with Owner's telecommunications and LAN equipment and service suppliers.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General Performance: Backbone cabling system shall comply with transmission standards in TIA-568-C.1, when tested according to test procedures of this standard.

B. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 25 or less.
2. Smoke-Developed Index: 50 or less.

C. Telecommunications Pathways and Spaces: Comply with TIA-569-D.

D. Grounding: Comply with TIA-607-C.

2.2 9/125 MICROMETER SINGLE-MODE, OUTSIDE PLANT OPTICAL FIBER CABLE (OS2)

A. Description: Single mode, 9/125-micrometer, stranded loose tube, optical fiber cable. Number of strands as indicated on project drawings. Cable shall be all-dielectric, stranded loose-tube design with dry wayer-blocking for outdoor duct and aerial installations in fiber counts from 2 to 288 as indicated on project drawings.

B. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Ber-Tek Leviton.
2. CommScope, Inc.
3. Corning Cable Systems.
4. General Cable; General Cable Corporation.
5. Optical Cable Corporation.
6. Superior Essex.

C. Standards:

1. Comply with TIA-492CAAB for detailed specifications.
2. Comply with TIA-568-C.3 for performance specifications.
3. Comply with ICEA S-87-640 for mechanical properties.

D. Maximum Attenuation: 0.4 dB/km at 1310 nm; 0.3 dB/km at 1550 nm.

E. Jacket:

1. Jacket Color: Black.
2. Cable cordage jacket, fiber, unit, and group color shall be according to TIA-598-D.
3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches.

2.3 OPTICAL FIBER CABLE HARDWARE

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Berk-Tek, a Leviton Company.
2. CommScope, Inc.
3. Corning Optical Communications; Corning Incorporated.
4. Optical Cable Corporation (OCC).
5. Panduit Corporation.

B. Standards:

1. Comply with Fiber Optic Connector Intermateability Standard (FOCIS) specifications of the TIA-604 series.
2. Comply with TIA-568-C.3.

C. Fiber Optic Enclosure

1. Shall provide cross connect, interconnect, and splicing capabilities and contain troughs for supporting and routing of the fiber cables and jumpers.
2. Shall consist of a modular enclosure with retainer rings in the slack storage section to limit the bending radius of fibers.
3. Shall have a window section to insert connector panels for mounting of connectorized fibers.
4. Shall provide capacity to accommodate quantity of terminations as indicated on the project drawings, plus 25% spare capacity for future growth.
5. Refer to Project Drawings for Wall-Mount and Rack-Mount requirements.

D. Fiber Connector Panels

1. Modular, quick-fastening steel plate, powder-coated to match the fiber enclosure finish.
2. Shall have a pre-installed array of fiber adapters of a specific connector type, available in low- or high-density versions.
3. Pre-installed, push-pull type quick-release fasteners for quick snap-in installation.
4. Suitable for mounting either vertically or horizontally.
5. Panels with SC or LC adapters shall have precision phosphor-bronze alignment sleeves that are suitable for either singlemode or multimode transmission. SC/APC adapters shall have precision ceramic alignment sleeves.
6. All fiber panels shall have dust caps installed.

E. Fiber Optic Connectors

1. Field Polish Connectors

a. LC small form factor (SFF) field polish connectors with rear pivot latch are TIA-604 FOCIS-10 compatible. LC simplex and duplex connectors are field terminable. The fibers shall terminate in 1.25mm ceramic ferrules with non-optical disconnect functionality and an average insertion loss of 0.1dB per mated pair for multimode and singlemode fiber.

b. SC field polish connectors are TIA-604 FOCIS-3 compliant. SC simplex and duplex connectors are field terminable. The fibers shall terminate in 2.5mm ceramic ferrules with non-optical disconnect functionality and an average insertion loss of.1dB (multimode) and.15dB (singlemode) per mated pair.

2. Connector Pigtails

a. Optical fiber pigtails shall be constructed with a fiber connector, factory terminated onto a cut length of 900 micron buffered fiber cable of specific color.

b. Connector pigtail terminations shall be heat-cured epoxy type with a machine polish, inspected 100% for polish quality and mated-pair insertion loss.

c. Epoxy volume within each connector shall be sufficient to properly surround and strain relieve the buffer layer at the buffer/fiber transition inside the connector body.

d. Pigtails shall be available in standard lengths of 3 meters.

e. Connector shall be LC-Style complying with TIA-604-10-B.

f. Factory terminated connectors shall comply with the applicable ANSI/TIA-604 Intermateability standard.

F. Splices and Closures

1. The fiber splice module shall be utilized for all outside plant terminations. The link shall consist of the fiber cable, the splice, the splice tray holder/closure, the fiber panel/coupler, a pre-manufactured fiber pigtail with pre-polished fiber connector, and a fiber jumper to connect the pigtail-coupled link to the appropriate electronic switch. The fiber splice module shall meet the following specifications:

a. Fusion: Optical fiber splices shall not exceed a maximum optical attenuation of 0.3 dB when measured in accordance with ANSI/TIA-455-34, Method A (factory testing) or ANSI/TIA-455-59 (field testing). Optical fiber splices shall have a minimum return loss of 20 dB for multimode, 26 dB for single mode, when measured in accordance with ANSI/TIA-455-107. The minimum single mode return loss for broadband analog video (CATV) applications is 55 dB.

b. All fusion splices shall be mounted in protective trays within the closure.

c. Joins single mode or multi-mode fibers.

d. Establishes a permanent fusion splice.

e. May be used in OSP and/or premises applications.

f. Accept 250 and 900 micron fibers.

g. Re-enterable, portable and reusable.

h. Require no polishing.

i. Require no adhesives.

j. No loose parts.

k. Unlimited shelf life.

G. Patch Cords: Factory-made, dual-fiber cables in lengths as requested by Owner or indicated on project drawings unless specified otherwise.

1. The fiber optic patch cords shall be consistent with termination type and fiber optic cable type. (i.e. singlemode or multimode).

2. Field terminated patch cords are not acceptable.

2.4 GROUNDING

A. Comply with requirements in Section 270526 "Grounding and Bonding for Communications Systems" for grounding conductors and connectors.

B. Comply with TIA-607-C.

2.5 IDENTIFICATION PRODUCTS

A. Comply with TIA-606-C and UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

B. Comply with requirements in Section 270553 "Identification for Communication Systems."

2.6 SOURCE QUALITY CONTROL

A. Factory test multimode optical fiber cables according to TIA-526-14-B and TIA-568-C.3.

B. Factory test pre-terminated optical fiber cable assemblies according to TIA-526-14-B and TIA-568-C.3.

C. Cable will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 ENTRANCE FACILITIES

A. Coordinate backbone cabling with the protectors and demarcation point provided by communications service provider.

3.2 WIRING METHODS

A. Wiring within Enclosures: Bundle, lace, and train cables within enclosures. Connect to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Provide and use lacing bars and distribution spools.

3.3 INSTALLATION OF OPTICAL FIBER BACKBONE CABLES

A. Comply with NECA 1, NECA 301, and NECA/BICSI 568.

B. General Requirements for Optical Fiber Cabling Installation:

1. Comply with TIA-568-C.1 and TIA-568-C.3.
2. Comply with BICSI ITSIMM, Ch. 6, "Cable Termination Practices."
3. Terminate all cables; no cable shall contain unterminated elements. Make terminations only at indicated outlets, terminals, cross-connects, and patch panels.
4. Ensure that the maximum pulling tensions of the specified distribution cables are not exceeded and cable bends maintain the proper radius during the placement of the facilities.
5. Install plenum rated cables where cables are not installed in conduits or enclosed wireways.

6. Install cables designed for the installation environment.
   a. For each cable distribution application, install fiber optic cables UL listed for the application.
   b. For cable distribution applications including enclosures or raceways underground or in slabs on grade, install fiber optic cables designed for use in wet locations.
7. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches and not more than 6 inches from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
8. Install lacing bars to restrain cables, to prevent straining connections, and to prevent bending cables to smaller radii than minimums recommended by manufacturer.
9. Bundle, lace, and train cable to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIMM, "Cabling Termination Practices" Chapter. Use lacing bars and distribution spools.
10. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation and replace it with new cable.
11. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
12. In the communications equipment room, provide a 10-foot- long service loop on each end of cable.
13. Pulling Cable: Comply with BICSI ITSIMM, Ch. 4, "Pulling Cable." Monitor cable pull tensions.
14. Cable may be terminated on connecting hardware that is rack or cabinet mounted.
15. Place fiber-optic cable so as to maintain the minimum cable bend radius limits specified by the selected manufacturer.
16. Place fiber-optic cables transitioning between the cable trays and cabinets or racks in a neat and orderly manner per NEC 318.11(b) requirements and pathway requirements of TIA 569-A. Velcro transitioning bundles.
17. Secure the cables in the Communication Rooms with velcro cable ties or straps as needed to prevent cables from sagging or becoming disorderly.
18. Follow selected manufacturer’s installation instructions for connector installation.
19. Bring fiber optic cables into patch panels or cabinets at one location. Secure cables inside patch panels or cabinets at entrance points by securing fiber jackets. Break out individual fiber cables inside of panel or cabinet.
20. Fusion splices shall be located in attached splice trays.
21. Follow guidance of ANSI/TIA-568-C.3 regarding polarity management of fiber elements in the permanent link. Mate terminated fiber-optic cables on adapter panel housings, in standard color code order.
22. Use connector manufacturer’s recommended tools.
23. Fiber-optic connecting hardware and material including patch panels, connectors, cross-connect cables, patch cords, and other components used to connect fiber-optic cable shall be sourced from the same manufacturer.
24. Unarmored Fiber cables shall be installed in innerducts rated for the installation environment.

C. Open-Cable Installation:
   1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
   2. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.

D. Installation of Cable Routed Exposed under Raised Floors:
   1. Install plenum-rated cable only.
   2. Install cabling after the flooring system has been installed in raised floor areas.
   3. Coil cable 6 feet long not less than 12 inches in diameter below each feed point.

E. Group connecting hardware for cables into separate logical fields.

3.4 FIRESTOPPING

A. Comply with requirements in Section 078413 "Penetration Firestopping."

B. Comply with TIA-569-D, Annex A, "Firestopping."

C. Comply with BICSI ITSIMM, "Firestopping" Chapter.

3.5 GROUNDING

A. Install grounding according to BICSI ITSIMM, "Grounding (Earthing), Bonding, and Electrical Protection" Chapter.

B. Comply with TIA-607-B and NECA/BICSI-607.

C. Locate grounding bus bar to minimize the length of bonding conductors. Fasten to wall allowing at least 2-inch clearance behind the grounding bus bar. Connect grounding bus bar with a minimum No. 4 AWG grounding electrode conductor from grounding bus bar to suitable electrical building ground.

D. Bond metallic equipment to the grounding bus bar, using not smaller than No. 6 AWG equipment grounding conductor.

3.6 IDENTIFICATION

A. Cable Schedule: Install in a prominent location in each equipment room and wiring closet. List incoming and outgoing cables and their designations, origins, and destinations. Protect with rigid frame and clear plastic cover. Furnish an electronic copy of final comprehensive schedules for Project.

B. Cabling Administration Drawings: Show building floor plans with cabling administration-point labeling. Identify labeling convention and show labels for telecommunications closets, backbone pathways and cables, entrance pathways and cables, terminal hardware and positions, horizontal cables, work areas and workstation terminal positions, grounding buses and pathways, and equipment grounding conductors.

C. Cable and Wire Identification:

1. Label each cable within 4 inches of each termination and tap, where it is accessible in a cabinet or junction or outlet box, and elsewhere as indicated.
2. Each wire connected to building-mounted devices is not required to be numbered at device if color of wire is consistent with associated wire connected and numbered within panel or cabinet.
3. Exposed Cables and Cables in Cable Trays and Wire Troughs: Label each cable at intervals not exceeding 15 feet.
4. Label each unit and field within distribution racks and frames.
5. Identification within Connector Fields in Equipment Rooms and Wiring Closets: Label each connector and each discrete unit of cable-terminating and connecting hardware. Where similar jacks and plugs are used for both voice and data communication cabling, use a different color for jacks and plugs of each service.

D. Labels shall be preprinted or computer-printed type with printing area and font color that contrasts with cable jacket color but still complies with requirements in TIA 606-B, for the following:

1. Flexible vinyl or polyester that flexes as cables are bent.

3.7 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. Visually inspect optical fiber jacket materials for NRTL certification markings. Inspect cabling terminations in communications equipment rooms for compliance with color-coding for pin assignments, and inspect cabling connections for compliance with TIA-568-C.1.
2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
3. Optical Fiber Cable Tests:
    a. Test instruments shall meet or exceed applicable requirements in TIA-568-C.1. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
    b. Test equipment shall be of the quality and accuracy required to test and/or measure system performance with the tolerances specified and shall have been calibrated by the manufacturer within the last 12 months, or as specified herein. Equipment shall be calibrated according to the manufacturer's recommended intervals and when dropped or damaged. Calibration tags shall be affixed or certificates available on request.
    c. Test equipment and modules shall be within the calibration period recommended by the manufacturer of the test equipment in order to achieve the manufacturer-specified measurement accuracy, and shall be within 1 year of the test date.
    d. Link End-to-End Attenuation Tests:
        1) Horizontal and multimode backbone link measurements: Test at 850 or 1300 nm in one direction according to TIA-526-14-B, Method B, One Reference Jumper.
        2) Single-mode backbone links shall be tested bidirectionally at both 1310 nm and 1550 nm in accordance with TIA 526-7A-2015, Method A.1, One Reference Jumper. Single-mode links shall be certified with test tools using laser light sources at 1310 nm and 1550 nm.
        3) Attenuation test results for backbone links shall be less than 2.0 dB. Attenuation test results shall be less than those calculated according to equation in TIA-568-C.1.
    e. Cable test results with negative loss values shall be deemed invalid. Fiber terminations shall be cleaned, evaluated, and retested until the results contain no negative loss values at no additional cost to the Owner. Verify that the cable test results are valid.
4. Optical Time Domain Reflectometer (OTDR) Tests:
    a. Perform OTDR testing on outside-plant fiber.
    b. OTDR testing shall meet the following requirements for both single-mode and multimode fiber cabling:
        1) Reflective events (connections) shall not exceed 0.5 dB.
        2) Non-reflective events (splices) shall not exceed 0.15 dB.
        3) Fiber links shall be tested at the appropriate operating wavelengths for anomalies and to ensure uniformity of cable attenuation and connector insertion loss.
        4) Each fiber link and channel shall be tested in both directions.
            a) Multimode: 850 nm and 1300 nm.
            b) Single-mode: 1310 nm and 1550 nm.
        5) A launch cable shall be installed between the OTDR and the first link in the channel.
        6) A receive cable shall be installed between the last link connection.
        7) The length if each fiber shall be recorded.

C. Data for each measurement shall be documented.
1. The test results/measurements shall be submitted in both the test equipment manufacturer's raw data file and searchable PDF format files.
2. The database for the complete project shall be stored and delivered in digital format prior to Owner acceptance of the building. This digital format shall include the software tools required to view, inspect, and print any selection of the test reports.

D. Remove and replace cabling where test results indicate that it does not comply with specified requirements.

E. End-to-end cabling will be considered defective if it does not pass tests and inspections.

F. A representative of the Owner may elect to test 5% of the installed cables. The test results will be compared with the submitted results. In the event that more than 2% of the compared results differ from the submitted results, the Owner may contract with a third-party testing firm to retest 100% of the installation and the cost shall be borne by the Contractor.

G. Prepare test and inspection reports.

END OF SECTION 271323

SECTION 271513 - COMMUNICATIONS COPPER HORIZONTAL CABLING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Category 6 twisted pair cable.
2. Category 6a twisted pair cable.
3. Twisted pair cable hardware, including plugs and jacks.
4. Cabling identification products.
5. Grounding provisions for twisted pair cable.
6. Source quality control requirements for twisted pair cable.

1.2 DEFINITIONS

A. Cross-Connect: A facility enabling the termination of cable elements and their interconnection or cross-connection.

B. EMI: Electromagnetic interference.

C. FTP: Shielded twisted pair.

D. F/FTP: Overall foil screened cable with foil screened twisted pair.

E. F/UTP: Overall foil screened cable with unscreened twisted pair.

F. IDC: Insulation displacement connector.

G. LAN: Local area network.

H. Jack: Also commonly called an "outlet," it is the fixed, female connector.

I. Plug: Also commonly called a "connector," it is the removable, male telecommunications connector.

J. RCDD: Registered Communications Distribution Designer.

K. Screen: A metallic layer, either a foil or braid, placed around a pair or group of conductors.

L. Shield: A metallic layer, either a foil or braid, placed around a pair or group of conductors.

M. S/FTP: Overall braid screened cable with foil screened twisted pair.

N. S/UTP: Overall braid screened cable with unscreened twisted pairs.

O. UTP: Unscreened (unshielded) twisted pair.

1.3 COPPER HORIZONTAL CABLING DESCRIPTION

A. Horizontal cable cabling system shall provide interconnections between Distributor A, Distributor B, or Distributor C, and the equipment outlet, otherwise known as "Cabling Subsystem 1," in the telecommunications cabling system structure. Cabling system consists of horizontal cables, intermediate

and main cross-connects, mechanical terminations, and patch cords or jumpers used for horizontal-to-horizontal cross-connection.

1. TIA-568-C.1 requires that a minimum of two equipment outlets be installed for each work area.
2. Horizontal cabling shall contain no more than one transition point or consolidation point between the horizontal cross-connect and the telecommunications equipment outlet.
3. Bridged taps and splices shall not be installed in the horizontal cabling.

B. A work area is approximately 100 sq. ft., and includes the components that extend from the equipment outlets to the station equipment.

C. The maximum allowable horizontal cable length is 295 feet. This maximum allowable length does not include an allowance for the length of 16 feet to the workstation equipment or in the horizontal cross-connect.

1.4 ACTION SUBMITTALS

A. General Requirements for submittals:

1. Within 14 days after notice to proceed, submit an anticipated Project Schedule, and a schedule indicating the proposed submission date of each submittal specified herein. Schedule shall anticipate the submittal review time, the possible need for resubmittals, and the time required for fabrication, shipping and integration into the construction sequence. Architect and/or Engineer will advise of any conflicts in reviewing submittals that the proposed schedule presents.
2. Submittals shall be prepared in a line-by-line format corresponding to these Specifications and shall indicate compliance with each requirement specified herein and indicated in the Drawings.
3. Submittals shall be prepared with a table of contents and hyperlinks to the headers of each submitted item.
4. Resubmittals that are required to address review comments shall include a cover transmittal with a written explanation of how each review comment has been addressed.
5. Submittal data for each Specification Section shall be submitted as a single package.
6. Submittals not specifically required, or not complying with the format requirements, will be returned unreviewed.
7. All submittals shall be submitted electronically in PDF format unless stated otherwise.
8. Submittals are required before installation begins. Equipment shall not be ordered, and pay requests will not be approved prior to receipt and approval of submittals.

B. Product Data: For each type of product.

1. Product submittals shall include all equipment, materials and cables being utilized on the project.
2. Data sheets shall clearly indicate the specific model or part number being submitted for review including sizes, color, finishes, and other attributes to adequately allow submitted product to be reviewed.
3. All related system components shall be submitted as part of the same submission (i.e. patch panels, jacks, faceplates, cable, etc.).
4. Indicate manufacturer's installation instructions, where applicable, including any deviations required due to project conditions.
5. Furnish sample products as required for review by Engineer and/or Architect including any assembly mockups.

C. Shop Drawings: Reviewed and stamped by RCDD.

1. Reproductions or electronic versions of design drawings shall not be used in the preparation of shop drawings.
2. Wiring diagrams indicating proposed connections of equip-ment, equipment types, model numbers, and designations for cables and termination points.

3. Floor plans indicating equipment locations including equipment identification and references to wiring details.
4. Major, coordinated conduit and cable tray pathways.
5. Shop drawings of fabricated or modified units, if any.
6. System Labeling Schedules:
    a. Electronic copy of labeling schedules, in software and format selected by Owner.
7. Cabling administration Drawings and printouts.
8. Wiring diagrams and installation details of telecommunications equipment, to show location and layout of telecommunications equipment, including the following:
    a. Telecommunications rooms plans and elevations.
    b. Telecommunications pathways.
    c. Telecommunications system access points.
    d. Telecommunications grounding system.
    e. Telecommunications conductor drop locations.
    f. Typical telecommunications details.
    g. Mechanical, electrical, and plumbing systems.

D. Twisted pair cable testing plan.

E. Samples: For telecommunications jacks and plugs, in specified finish, one for each type and configuration and cover plates for color selection and evaluation of technical features.

F. Field Quality-Control Submittals:
    1. Field quality-control reports.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For RCDD, Installer, installation supervisor, and field inspector.

B. Product Certificates: For each type of product.

C. Source quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For splices and connectors to include in maintenance manuals.

B. Contractor shall submit all cable test results and any test documentation required prior to acceptance by owner.

C. Subsequent to the installation, and prior to acceptance of the work, the contractor shall prepare and issue record (as-built) drawings, in Adobe PDF and AutoCAD and BIM format, that reflect the lengths of cables installed, the actual manner and conditions of installation, including all deletions from, additions to or departures from the contract documents. These documents are to include the information outlet station numbers and cable routing where it varies from the original plan.

D. Provide cable termination schedules for all cables installed under the Work. Schedules shall be in printed form and on CD in Microsoft Excel format.

E. Provide Operation and Maintenance Manuals including wiring diagrams, parts list, shop drawings and manufacturers' information on all equipment and cables provided under this Work. Provide manuals within fifteen days of systems acceptance.

F. Upon completion of the work, the contractor shall coordinate with the manufacturer the issuance of a full warranty on the entire copper and fiber optic cable plant including the horizontal cabling for both parts and labor. The cabling contractor at his sole expense will correct any deficiencies determined by the manufacturer.

1.7 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Cover Plates: One of each type.
2. Jacks: Ten of each type.
3. Multiuser Telecommunications Outlet Assemblies: One of each type.
4. Patch-Panel Units: One of each type.
5. Plugs: Ten of each type.

1.8 QUALITY ASSURANCE

A. Installer Qualifications: Cabling Installer must have personnel certified by BICSI on staff.

1. Layout Responsibility: Preparation of Shop Drawings, cabling administration Drawings, and field testing program development by an RCDD.
2. Installation Supervision: Installation shall be under the direct supervision of Technician, who shall be present at all times when Work of this Section is performed at Project site.
3. Testing Supervisor: Currently certified by BICSI as an RCDD to supervise on-site testing.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Test cables upon receipt at Project site.

1. Test each pair of twisted pair cable for open and short circuits.

1.10 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install cables and connecting materials until wet work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

1.11 COORDINATION

A. Coordinate layout and installation of telecommunications pathways and cabling with Owner's telecommunications and LAN equipment and service suppliers.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General Performance: Horizontal cabling system shall comply with transmission standards in TIA-568-C.1, when tested according to test procedures of this standard.

B. Telecommunications Pathways and Spaces: Comply with TIA-569-D.

C. Grounding: Comply with TIA-607-C.

2.2 GENERAL CABLE CHARACTERISTICS

A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with the applicable standard and NFPA 70 for the following types:

1. Communications, Plenum Rated:

   a. Type CMP complying with UL 1685 or Type CMP in listed cable routing assembly.

B. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 25 or less.
2. Smoke-Developed Index: 50 or less.

C. RoHS compliant.

D. Cable Construction

1. Listed CMP cable: Solid copper conductors with fluorinated ethylene propylene (FEP)/polyolefin insulation and an overall low smoke PVC jacket to achieve plenum rating by applicable NEC requirements.
2. Indoor/Outdoor CMP cable: Rated for wet locations with solid copper conductors covered in fluorinated ethylene propylene (FEP)/polyolefin insulation and an overall low smoke PVC jacket to achieve plenum rating by applicable NEC requirements.
3. OSP outdoor cable rated for wet locations: Solid copper conductors with polyolefin insulation, polyolefin fluted center member with flooding compound, and black polyethylene jacket.

E. Minimum compliant cables are not acceptable.

F. Copper Clad Aluminum cables are not acceptable.

2.3 CATEGORY 6 TWISTED PAIR CABLE

A. Description: Four-pair, balanced-twisted pair cable, with internal spline, certified to meet transmission characteristics of Category 6 cable at frequencies up to 250 MHz.

B. <u>Manufacturers:</u> Subject to compliance with requirements, provide products by one of the following:

1. Belden Inc.
2. Berk-Tek, a Leviton Company.
3. General Cable; Prysmian Group North America.
4. Hitachi Cable America Inc.
5. Mohawk; a division of Belden Networking, Inc.
6. Siemon Co.
7. Superior Essex Inc.; subsidiary of LS Corp.

C. Standard: Comply with NEMA WC 66/ICEA S-116-732 and TIA-568-C.2 for Category 6 cables.

D. Conductors: 100-ohm, 23 AWG solid copper.

E. Shielding/Screening: Unshielded twisted pairs (UTP).

F. Cable Rating: Plenum.

G. Jacket: Color shall be as indicated on project drawings; thermoplastic.

2.4 CATEGORY 6a TWISTED PAIR CABLE

A. Description: Four-pair, balanced-twisted pair cable, with internal spline, certified to meet transmission characteristics of Category 6a cable at frequencies up to 500 MHz.

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Belden Inc.
2. Berk-Tek, a Leviton Company.
3. General Cable; Prysmian Group North America.
4. Hitachi Cable America Inc.
5. Mohawk; a division of Belden Networking, Inc.
6. Panduit Corp.
7. Siemon Co.
8. Superior Essex Inc.; subsidiary of LS Corp.

C. Standard: Comply with TIA-568-C.2 for Category 6a cables.

D. Conductors: 100-ohm, 23 AWG solid copper.

E. Shielding/Screening: Unshielded twisted pairs (UTP).

F. Cable Rating: Plenum.

G. Jacket: Color shall be as indicated on project drawings; thermoplastic.

2.5 TWISTED PAIR CABLE HARDWARE

A. Description: Hardware designed to connect, splice, and terminate twisted pair copper communications cable.

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Belden Inc.
2. Leviton Manufacturing Co., Inc.
3. Ortronics, Inc.
4. Panduit Corp.
5. Siemon Co. (The).

C. General Requirements for Twisted Pair Cable Hardware:

1. Comply with the performance requirements of Category 5e Category 6 Category 6a.
2. Comply with TIA-568-C.2, IDC type, with modules designed for punch-down caps or tools.
3. Cables shall be terminated with connecting hardware of same category or higher.

D. Source Limitations: Obtain twisted pair cable hardware from single source from single manufacturer.

E. Patch Panel: Modular panels housing numbered jack units with IDC-type connectors at each jack location for permanent termination of pair groups of installed cables.

1. Features:

a. Style: Flat
b. Universal T568A and T568B wiring labels.

c. Labeling areas adjacent to conductors.
d. Replaceable connectors.
e. 24 or 48 ports as indicated on the project drawings.
f. Rear strain-relief bar.

2. Construction: 16-gauge steel and mountable on 19-inch equipment racks.

F. Patch Cords: Factory-made, four-pair cables in 7’ lengths; terminated with an eight-position modular plug at each end.

1. Patch cords shall have color-coded boots for circuit identification.
2. Modular data patch cords shall meet channel performance requirements specified herein, and shall be 24 AWG, stranded conductors insulated with solid polyolefin, tightly twisted into individual pairs and jacketed with flame retardant PVC.
3. Patch cords shall have latch guards to protect against snagging.
4. Field terminated patch cords are not acceptable.
5. Patch cords shall be provided as part of the warranted channel solution.

G. Plugs and Plug Assemblies:

1. Male; eight position; color-coded modular telecommunications connector designed for termination of a single four-pair, 100-ohm, unshielded or shielded twisted pair cable.
2. Standard: Comply with TIA-568-C.2.
3. Marked to indicate transmission performance.

H. Modular Plug Terminated Link (MPTL) (Direct Connect)

1. Standard: Conform to TIA-568.2-D, Annex F
2. Uses: Termination at end device including Wireless Access Points, CCTV Cameras, TV Displays, Projectors, and other devices as indicated on the project drawings.
3. Use only where specifically indicated on the Project Drawings.

I. Jacks and Jack Assemblies:

1. Female; eight position; modular; fixed telecommunications connector designed for termination of a single four-pair, 100-ohm, unshielded or shielded twisted pair cable.
2. Designed to snap-in to a patch panel or cover plate.
3. Standard: Comply with TIA-568-C.2.
4. Marked to indicate transmission performance.
5. Refer to project drawings for exact quantities and configurations.
6. Keystone-Style jacks shall be provided in floor boxes, poke-thru's, modular furniture adapter plates, etc. where required on project drawings.

J. Faceplates / Cover Plates:

1. Four port, vertical single gang cover plates designed to mount to single gang wall boxes or as indicated on project drawings.
2. Plastic Cover Plate: High-impact plastic. Coordinate color with Section 260533 "Raceway and Boxes for Electrical Systems" and with Architect.
3. For use with snap-in jacks accommodating any combination of twisted pair, optical fiber, and coaxial work area cords.
4. Faceplates shall be designed with angled port openings to accept jacks and other configurations indicated on the Drawings.
5. Faceplates shall not extend more that 0.25" from face of wall.
6. Faceplates shall have an integrated label holder with clear plastic cover. Single gang faceplates shall have 2 integrated label holders with clear plastic covers; one shall be above the jacks and one shall be below the jacks. Double gang faceplates shall have 4 integrated label holders with clear plastic covers; two shall be above the jacks and two shall be below the jacks.

K. Modular Furniture Adapter Faceplates

1. Faceplates shall be designed for use within modular furniture.
2. Faceplates shall have an integrated label holder with clear plastic cover.
3. Confirm dimension of furniture knockout with proposed modular furniture adapter to ensure compatibility.
4. Color: black for dark furniture; ivory for light colored furniture; as directed by architect.

L. Floor Box / Poke-Thru Adapter Plates

1. Coordinate with requirements of Division 26 as applicable.
2. Adapter Plates shall accept 8P8C Jack assemblies, A/V Inserts/Connectors and other connectivity as required by project documents.

M. Surface Mount Boxes

1. 1-Port and 2-Port surface mount boxes as indicated on the project drawings.
2. Plenum rated as required.
3. Shall accept jacks from the same manufacturer as other components used throughout the project.

N. Legend:

1. Machine printed, in the field, using adhesive-tape label.
2. Snap-in, clear-label covers and machine-printed paper inserts.

2.6 IDENTIFICATION PRODUCTS

A. Comply with TIA-606-C and UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

2.7 SOURCE QUALITY CONTROL

A. Factory test cables on reels according to TIA-568-C.1.

B. Factory test twisted pair cables according to TIA-568-C.2.

C. Cable will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 WIRING METHODS

A. Routing:

1. Install cables in raceways and cable trays, except within consoles, cabinets, desks, and counters. Conceal raceway and cables, except in unfinished spaces.

   a. Install plenum cable in environmental air spaces, including plenum ceilings.
   b. Comply with requirements for raceways and boxes specified in Section 270528 "Pathways for Communications Systems."

B. Wiring within Enclosures: Bundle, lace, and train cables within enclosures. Connect to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Provide and use lacing bars and distribution spools. Install conductors parallel with or at right angles to sides and back of enclosure.

3.2 INSTALLATION OF PATHWAYS

A. Comply with requirements for demarcation point, cabinets, and racks specified in Section 271100 "Communications Equipment Room Fittings."

B. Comply with Section 270528 "Pathways for Communications Systems."

C. Comply with Section 270536 "Cable Trays for Communications Systems."

D. Drawings indicate general arrangement of pathways and fittings.

3.3 INSTALLATION OF TWISTED-PAIR HORIZONTAL CABLES

A. Comply with NECA 1 and NECA/BICSI 568.

B. 8P8C Jack assemblies shall be wired per the pin/pair assignments indicated in ANSI/TIA-568.1D-2015 designated T568B configuration.

C. General Requirements for Cabling:

1. Comply with TIA-568-C.0, TIA-568-C.1, and TIA-568-C.2.
2. Comply with BICSI's "Information Transport Systems Installation Methods Manual (ITSIMM), Ch. 5, "Copper Structured Cabling Systems," "Cable Termination Practices" Section.
3. Horizontal cables shall be installed in a star topology from each communications outlet to the Telecommunications room serving that area.
4. The length of each horizontal cable from the Telecommunications room to the communications outlet shall not exceed 295'. Coordinate with the conduit and cable tray installation and modify as necessary to ensure distance requirements are not exceeded.
5. Install 110-style IDC termination hardware unless otherwise indicated.
6. Do not untwist twisted pair cables more than 1/2 inch from the point of termination to maintain cable geometry.
7. Terminate all conductors; no cable shall contain unterminated elements. Make terminations only at indicated outlets, terminals, cross-connects, and patch panels.
8. MUTOA shall not be used as a cross-connect point.
9. Consolidation points may be used only for making a direct connection to equipment outlets:
    a. Do not use consolidation point as a cross-connect point, as a patch connection, or for direct connection to workstation equipment.
    b. Locate consolidation points for twisted-pair cables at least 49 feet from communications equipment room.
10. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches and not more than 6 inches from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
11. Install lacing bars to restrain cables, prevent straining connections, and prevent bending cables to smaller radii than minimums recommended by manufacturer.
12. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI Information Transport Systems Installation Methods Manual, Ch. 5, "Copper Structured Cabling Systems," "Cable Termination Practices" Section. Use lacing bars and distribution spools.
13. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation, and replace it with new cable.
14. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
15. In the communications equipment room, install a 10-foot- long service loop on each end of cable.

16. Pulling Cable: Comply with BICSI Information Transport Systems Installation Methods Manual, Ch. 5, "Copper Structured Cabling Systems," "Pulling and Installing Cable" Section. Monitor cable pull tensions.
17. Observe the bending radius and pulling strength requirements of the cables during handling and installation.
18. Provide clutch or shear pin protection for cables during cable pulling to ensure cable pulling tension is not exceeded.
19. Conceal horizontal cables within ceilings and walls.
20. Cables, when not installed in conduit or cable tray, shall be bundled in groups of no more than 48 cables for Category 5e and 6, and no more than 24 cables for Category-6A. Cable bundle quantities exceeding these limits may cause deformation of the bottom cables within the bundle and degrade cable performance. Cable raceways shall not be filled greater than the ANSI TIA-569-A maximum fill for the particular raceway type or 40%.
21. Cable shall be installed above fire-sprinkler systems and shall not be attached to the system or any ancillary equipment or hardware. The cable system and support hardware shall be installed so that it does not obscure any valves, fire alarm conduit, boxes, or other control devices.
22. Provide temporary protection of cables before termination. Cables shall not be left lying on the floor. Bundle and use Velcro or hook and loop tape to provide protection.
23. Provide a 3’ service loop at the entrance of conduits that terminate at communications wall outlets.
24. Provide a 10' service loop at the entrance of conduits that terminate at poke-thru's and floor boxes.
25. Provide a 20' service loop above accessible ceiling at all Wireless Access Point locations.

D. Open-Cable Installation:
1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
2. Complete work actions requiring above ceiling access prior to ceiling tile installation.
3. Suspend twisted pair cabling, not in a wireway or pathway, a minimum of 8 inches above ceilings by cable supports not more than 60 inches apart.
4. Cabling routed above ceilings shall be supported with the following methods:
    a. In cable tray above accessible ceiling, where indicated on drawings.
    b. In conduit where indicated on drawings. A pull cord (Polyolefin; minimum 210lb Tensile Strength) shall be installed alongside all cables in enclosed raceways, conduits and areas where access is limited.
    c. On J-hooks and/or Cable Slings, unless otherwise indicated on the Drawings. Cables shall be supported at a maximum of 48 to 60 inch intervals. At no point shall cable(s) rest on acoustic ceiling grids or panels.
    d. Cables shall not be attached to ceiling grid, lighting fixture wires or any other MEP system supports.
5. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.

E. Installation of Communications Outlets
1. Communications outlets shall be formed from an assembly of faceplates and jacks as indicated on the Drawings.
2. Communications outlets installed in walls shall be installed in a double-gang box, with a single-gang plaster ring, terminating cables from the Telecommunications room as indicated on project drawings.
3. Install outlets straight and perpendicular to walls and ceilings.
4. Secure faceplates with machine screws provided with the faceplate.
5. Label appropriately and cover each label with the clear plastic cover provided with the faceplate.

F. Group connecting hardware for cables into separate logical fields.

G. Separation from EMI Sources:

1. Comply with recommendations from BICSI's "Telecommunications Distribution Methods Manual" and TIA-569-D for separating unshielded copper communication cable from potential EMI sources, including electrical power lines and equipment.
2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches.
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches.
3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches.
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches.
4. Separation between communications cables in grounded metallic raceways, power lines, and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: No requirement.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches.
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches.
5. Separation between Communications Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches.
6. Separation between Communications Cables and Fluorescent Fixtures: A minimum of 5 inches.

3.4 FIRESTOPPING

A. Comply with requirements in Section 078413 "Penetration Firestopping."

B. Comply with TIA-569-D, Annex A, "Firestopping."

C. Comply with "Firestopping Systems" Article in BISCI's "Telecommunications Distribution Methods Manual."

3.5 GROUNDING

A. Comply with requirements in Section 270526 "Grounding and Bonding for Communications Systems" for grounding conductors and connectors.

B. Install grounding according to the "Grounding, Bonding, and Electrical Protection" chapter in BICSI's "Telecommunications Distribution Methods Manual."

C. Comply with TIA-607-B and NECA/BICSI-607.

D. Locate grounding bus bar to minimize the length of bonding conductors. Fasten to wall, allowing at least a 2-inch clearance behind the grounding bus bar. Connect grounding bus bar to suitable electrical building ground, using a minimum No. 4 AWG grounding electrode conductor.

E. Bond metallic equipment to the grounding bus bar, using not smaller than a No. 6 AWG equipment grounding conductor.

3.6 IDENTIFICATION

A. Identify system components, wiring, and cabling complying with TIA-606-B. Comply with requirements for identification specified in Section 270553 "Identification for Communications Systems."

B. Cable Schedule: Install in a prominent location in each equipment room and wiring closet. List incoming and outgoing cables and their designations, origins, and destinations. Protect with rigid frame and clear plastic cover. Furnish an electronic copy of final comprehensive schedules for Project.

C. Cabling Administration Drawings: Show building floor plans with cabling administration-point labeling. Identify labeling convention and show labels for telecommunications closets, terminal hardware and positions, horizontal cables, work areas and workstation terminal positions, grounding buses and pathways, and equipment grounding conductors.

D. Cable and Wire Identification:

1. Label each cable within 4 inches of each termination and tap, where it is accessible in a cabinet or junction or outlet box, and elsewhere as indicated.
2. Each wire connected to building-mounted devices is not required to be numbered at the device if wire color is consistent with associated wire connected and numbered within panel or cabinet.
3. Cables labeled within the bundle, where label is obscured from view shall not be accepted.
4. Label each terminal strip, and screw terminal in each cabinet, rack, or panel.

   a. Individually number wiring conductors connected to terminal strips, and identify each cable or wiring group, extended from a panel or cabinet to a building-mounted device, with the name and number of a particular device.
   b. Label each unit and field within distribution racks and frames.

5. Identification within Connector Fields in Equipment Rooms and Wiring Closets: Label each connector and each discrete unit of cable-terminating and -connecting hardware. Where similar jacks and plugs are used for both voice and data communication cabling, use a different color for jacks and plugs of each service.

E. Labels shall be preprinted or computer-printed type, with a printing area and font color that contrast with cable jacket color but still comply with TIA-606-C requirements for the following:

1. Cables use flexible vinyl or polyester that flexes as cables are bent.

3.7 FIELD QUALITY CONTROL

A. Perform Tests and Inspections:

1. Visually inspect jacket materials for NRTL certification markings. Inspect cabling terminations in communications equipment rooms for compliance with color-coding for pin assignments, and inspect cabling connections for compliance with TIA-568-C.1.
2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
3. Test twisted pair cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross-connection, Channel Performance Tests will not be accepted.

   a. Test instruments shall meet or exceed applicable requirements in TIA-568-C.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
   b. Test equipment shall be of the quality and accuracy required to test and/or measure system performance with the tolerances specified and shall have been calibrated by the manufacturer within the last 12 months, or as specified herein. Equipment shall be calibrated according to

the manufacturer's recommended intervals and when dropped or damaged. Calibration tags shall be affixed or certificates available on request.

B. Data for each measurement shall be documented.

1. The test results/measurements shall be submitted in both the test equipment manufacturer's raw data file and searchable PDF format files.
2. The database for the complete project, including twisted-pair copper cabling links, if applicable, shall be stored and delivered in digital format prior to Owner acceptance of the building. This digital format shall include the software tools required to view, inspect, and print any selection of the test reports.

C. Nonconforming Work:

1. End-to-end cabling will be considered defective if it does not pass tests and inspections.
2. Remove and replace cabling where test results indicate that they do not comply with specified requirements.
3. Any cable damaged or exceeding recommended installation parameters during installation shall be replaced by the contractor prior to final acceptance at no cost to the Owner

D. Collect, assemble, and submit test and inspection reports.

E. A representative of the Owner may elect to test 5% of the installed cables. The test results will be compared with the submitted results. In the event that more than 2% of the compared results differ from the submitted results, the Owner may contract with a third-party testing firm to retest 100% of the installation and the cost shall be borne by the Contractor.

F. Prepare test and inspection reports. Contractor shall furnish test reports in both PDF and source data files.

END OF SECTION 271513

This page intentionally left blank.

SECTION 284621.11 - ADDRESSABLE FIRE-ALARM SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Addressable fire-alarm system.
2. Fire-alarm control unit (FACU).
3. Manual fire-alarm boxes.
4. System smoke detectors.
5. Duct smoke detectors.
6. Heat detectors.
7. Fire-alarm notification appliances.
8. Fire-alarm remote annunciators.
9. Fire-alarm addressable interface devices.
10. Digital alarm communicator transmitters (DACTs).

B. Related Requirements:

1. Section 087100 "Door Hardware" for magnetic door holders that release in response to fire-alarm outputs.
2. Section 260519 "Low-Voltage Electrical Power Conductors and Cables" or Section 260523 "Control Voltage Electrical Power Cables" for cables and conductors for fire-alarm systems.

1.3 DEFINITIONS

A. DACT: Digital alarm communicator transmitter.

B. EMT: Electrical metallic tubing.

C. FACU: Fire-alarm control unit.

D. Mode: The terms "Active Mode," "Off Mode," and "Standby Mode" are used as defined in the 2007 Energy Independence and Security Act (EISA).

E. NICET: National Institute for Certification in Engineering Technologies.

F. PC: Personal computer.

G. Voltage Class: For specified circuits and equipment, voltage classes are defined as follows:

1. Control Voltage: Listed and labeled for use in remote-control, signaling, and power-limited circuits supplied by a Class 2 or Class 3 power supply having rated output not greater than 150 V and 5 A, allowing use of alternate wiring methods complying with NFPA 70, Article 725.
2. Low Voltage: Listed and labeled for use in circuits supplied by a Class 1 or other power supply having rated output not greater than 1000 V, requiring use of wiring methods complying with NFPA 70, Article 300, Part I.

1.4 SEQUENCING AND SCHEDULING

A. Equipment Removal: After acceptance of new fire-alarm system, remove existing disconnected fire-alarm equipment and wiring.

1.5 ACTION SUBMITTALS

A. Approved Permit Submittal: Submittals must be approved by authorities having jurisdiction prior to submitting them to Architect.

B. Product Data: For each type of product, including furnished options and accessories.

1. Include construction details, material descriptions, dimensions, profiles, and finishes.
2. Include rated capacities, operating characteristics, and electrical characteristics.

C. Shop Drawings: For fire-alarm system.

1. Comply with recommendations and requirements in "Documentation" section of "Fundamentals" chapter in NFPA 72.
2. Include plans, elevations, sections, and details, including details of attachments to other Work.
3. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and locations. Indicate conductor sizes, indicate termination locations and requirements, and distinguish between factory and field wiring.
4. Annunciator panel details as required by authorities having jurisdiction.
5. Detail assembly and support requirements.
6. Include voltage drop calculations for notification-appliance circuits.
7. Include battery-size calculations.
8. Include input/output matrix.
9. Include written statement from manufacturer that equipment and components have been tested as a system and comply with requirements in this Section and in NFPA 72.
10. Include performance parameters and installation details for each detector.
11. Verify that each duct detector is listed for complete range of air velocity, temperature, and humidity possible when air-handling system is operating.
12. Provide program report showing that air-sampling detector pipe layout balances pneumatically within airflow range of air-sampling detector.
13. Provide control wiring diagrams for fire-alarm interface to HVAC; coordinate location of duct smoke detectors and access to them.

    a. Show critical dimensions that relate to placement and support of sampling tubes, detector housing, and remote status and alarm indicators.
    b. Show field wiring and equipment required for HVAC unit shutdown on alarm.
    c. Locate detectors in accordance with manufacturer's written instructions.

14. Include floor plans to indicate final outlet locations showing address of each addressable device. Show size and route of cable and conduits and point-to-point wiring diagrams.

1.6 INFORMATIONAL SUBMITTALS

A. Certificates:

1. Seismic Performance Certificates: For FACU, accessories, and components, from manufacturer. Include the following information:

    a. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
    b. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.

c. Detailed description of equipment anchorage devices on which certification is based and their installation requirements.

B. Qualification Statements: For Installer.

1.7 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For fire-alarm systems and components to include in emergency, operation, and maintenance manuals.

1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:

a. Comply with "Records" section of "Inspection, Testing and Maintenance" chapter in NFPA 72.
b. Provide "Fire-Alarm and Emergency Communications System Record of Completion Documents" in accordance with "Completion Documents" Article in "Documentation" section of "Fundamentals" chapter in NFPA 72.
c. Complete wiring diagrams showing connections between devices and equipment. Each conductor must be numbered at every junction point with indication of origination and termination points.
d. Riser diagram.
e. Device addresses.
f. Record copy of site-specific software.
g. Provide "Inspection and Testing Form" in accordance with "Inspection, Testing and Maintenance" chapter in NFPA 72, and include the following:

1) Equipment tested.
2) Frequency of testing of installed components.
3) Frequency of inspection of installed components.
4) Requirements and recommendations related to results of maintenance.
5) Manufacturer's user training manuals.

h. Manufacturer's required maintenance related to system warranty requirements.
i. Abbreviated operating instructions for mounting at FACU and each annunciator unit.

B. Software and Firmware Operational Documentation:

1. Software operating and upgrade manuals.
2. Program Software Backup: On USB media and approved online or cloud solution.
3. Device address list.
4. Printout of software application and graphic screens.

1.8 QUALITY ASSURANCE

A. Installer Qualifications:

1. Personnel must be trained and certified by manufacturer for installation of units required for this Project.
2. Installation must be by personnel certified by NICET as fire-alarm Level III technician.
3. Obtain certification by NRTL in accordance with NFPA 72.
4. Licensed or certified by authorities having jurisdiction.

1.9 FIELD CONDITIONS

A. Seismic Conditions: Unless otherwise indicated on Contract Documents, specified Work in this Section must withstand the seismic hazard design loads determined in accordance with ASCE/SEI 7 for installed elevation above or below grade.

1. The term "withstand" means "unit must remain in place without separation of parts from unit when subjected to specified seismic design loads and unit must be fully operational after seismic event."

1.10 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace fire-alarm system equipment and components that fail because of defects in materials or workmanship within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 ADDRESSABLE FIRE-ALARM SYSTEM

A. Description:

1. Noncoded, UL-certified addressable system, with multiplexed signal transmission and horn-and-strobe notification for evacuation.

B. Performance Criteria:

1. Regulatory Requirements:

a. Fire-Alarm Components, Devices, and Accessories: Listed and labeled by a NRTL in accordance with NFPA 70 for use with selected fire-alarm system and marked for intended location and application.

2. General Characteristics:

a. Automatic sensitivity control of certain smoke detectors.
b. Fire-alarm signal initiation must be by one or more of the following devices:

1) Manual stations.
2) Heat detectors.
3) Smoke detectors.
4) Duct smoke detectors.
5) Automatic sprinkler system water flow.

c. Fire-alarm signal must initiate the following actions:

1) Continuously operate alarm notification appliances.
2) Identify alarm and specific initiating device at FACU and remote annunciators.
3) Transmit alarm signal to remote alarm receiving station.
4) Switch HVAC equipment controls to fire-alarm mode.
5) Record events in system memory.
6) Indicate device in alarm on graphic annunciator.

d. Supervisory signal initiation must be by one or more of the following devices and actions:

1) Valve supervisory switch.
2) Zones or individual devices have been disabled.
3) FACU has lost communication with network.

e. System trouble signal initiation must be by one or more of the following devices and actions:

1) Open circuits, shorts, and grounds in designated circuits.
2) Opening, tampering with, or removing alarm-initiating and supervisory signal-initiating devices.
3) Loss of communication with addressable sensor, input module, relay, control module, remote annunciator, printer interface, or Ethernet module.
4) Loss of primary power at FACU.
5) Ground or single break in internal circuits of FACU.
6) Abnormal ac voltage at FACU.
7) Break in standby battery circuitry.
8) Failure of battery charging.
9) Abnormal position of switch at FACU or annunciator.

f. System Supervisory Signal Actions:

1) Initiate notification appliances.
2) Identify specific device initiating event at FACU and remote annunciators.
3) After time delay of 60 seconds , transmit trouble or supervisory signal to remote alarm receiving station.
4) Display system status on graphic annunciator.

g. Document Storage Box:

1) Description: Enclosure to accommodate standard 8-1/2-by-11 inch manuals and loose document records. Legend sheet will be permanently attached to door for system required documentation, key contacts, and system information. Provide two key ring holders with location to mount standard business cards for key contact personnel.
2) Material and Finish: 18-gauge cold-rolled steel; four mounting holes.
3) Color: Red powder-coat epoxy finish.
4) Labeling: Permanently screened with 1 inch high lettering "SYSTEM RECORD DOCUMENTS" with white indelible ink.
5) Security: Locked with 3/4 inch barrel lock. Provide solid 12 inch stainless steel piano hinge.

2.2 FIRE-ALARM CONTROL UNIT (FACU)

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Edwards; Carrier Global Corporation.
2. Fire-Lite Alarms; Honeywell International, Inc.
3. Gamewell-FCI; Honeywell International, Inc.
4. Notifier; Honeywell International, Inc.
5. Siemens Industry, Inc., Building Technologies Division.
6. Silent Knight; Honeywell International, Inc.
7. Simplex; brand of Johnson Controls International plc, Building Solutions North America.

B. Description: Field-programmable, microprocessor-based, modular, power-limited design with electronic modules.

C. Performance Criteria:

1. Regulatory Requirements: Comply with NFPA 72 and UL 864.
2. General Characteristics:

a. System software and programs must be held in nonvolatile flash, electrically erasable, programmable, read-only memory, retaining information through failure of primary and secondary power supplies.
b. Include real-time clock for time annotation of events on event recorder and printer.

c. Provide communication between FACU and remote circuit interface panels, annunciators, and displays.
d. FACU must be listed for connection to central-station signaling system service.
e. Provide nonvolatile memory for system database, logic, and operating system and event history. System must require no manual input to initialize in the event of complete power down condition. FACU must provide minimum 500-event history log.
f. Addressable Initiation Device Circuits: FACU must indicate which communication zones have been silenced and must provide selective silencing of alarm notification appliance by building communication zone.

    1) Addressable Control Circuits for Operation of Notification Appliances and Mechanical Equipment: FACU must be listed for releasing service.

g. Alphanumeric Display and System Controls: Arranged for interface between human operator at FACU and addressable system components including annunciation and supervision. Display alarm, supervisory, and component status messages and programming and control menu.

    1) Annunciator and Display: LCD, three line(s) of 40 characters, minimum.
    2) Keypad: Arranged to permit entry and execution of programming, display, and control commands.

h. Initiating-Device, Notification-Appliance, and Signaling-Line Circuits:

    1) Pathway Class Designations: NFPA 72, Class A.
    2) Pathway Survivability: Level 0.
    3) Install no more than 50 addressable devices on each signaling-line circuit.
    4) Install fault circuit isolators to comply with circuit performance requirements of NFPA 72 or with manufacturer's written instructions, whichever is more conservative.

i. Serial Interfaces:

    1) One dedicated RS 485 port for remote station operation using point ID DACT.
    2) One RS 485 port for remote annunciators, Ethernet module, or multi-interface module (printer port).
    3) One USB port for PC configuration.

j. Notification-Appliance Circuit:

    1) Audible appliances must sound in three-pulse temporal pattern, as defined in NFPA 72.
    2) Where notification appliances provide signals to sleeping areas, alarm signal must be 520 Hz square wave with intensity 15 dB above average ambient sound level or 5 dB above maximum sound level, or at least 75 dB(A-weighted), whichever is greater, measured at pillow.
    3) Visual alarm appliances must flash in synchronization where multiple appliances are in same field of view, as defined in NFPA 72.

k. Water-flow alarm connected to sprinkler in elevator shaft and elevator machine room must shut down elevators associated with location without time delay.

    1) Water-flow switch associated with sprinkler in elevator pit may have delay to allow elevators to move to designated floor.

l. Transmission to Remote Alarm Receiving Station: Automatically transmit alarm, supervisory, and trouble signals to remote alarm station.

m. Indicate number of alarm channels for automatic, simultaneous transmission of different announcements to different zones or for manual transmission of announcements by use of central-control microphone. Amplifiers must comply with UL 1711.

1) Allow application of, and evacuation signal to, indicated number of zones and simultaneously allow voice paging to other zones selectively or in combination.
2) Programmable tone and message sequence selection.
3) Standard digitally recorded messages for "Evacuation" and "All Clear."
4) Generate tones to be sequenced with audio messages of type recommended by NFPA 72 and that are compatible with tone patterns of notification-appliance circuits of FACU.

n. Status Annunciator: Indicate status of various voice/alarm speaker zones and status of firefighters' two-way telephone communication zones.
o. Primary Power: 24 V(dc) obtained from 120 V(ac) service and power-supply module. Initiating devices, notification appliances, signaling lines, trouble signals, and supervisory and DACT must be powered by 24 V(dc) source.
p. Alarm current draw of entire fire-alarm system must not exceed 80 percent of power-supply module rating.
q. Secondary Power: 24 V(dc) supply system with batteries, automatic battery charger, and automatic transfer switch.
r. Batteries: Sealed lead calcium.

D. Accessories:

1. Instructions: Computer printout or typewritten instruction card mounted behind plastic or glass cover in stainless steel or aluminum frame. Include interpretation and describe appropriate response for displays and signals. Briefly describe functional operation of system under normal, alarm, and trouble conditions.
2. Preaction System Functionality:

a. Initiate Presignal Alarm: This function must cause audible and visual alarm and indication to be provided at FACU. Activation of initiation device connected as part of preaction system must be annunciated at FACU only, without activation of general evacuation alarm.

2.3 MANUAL FIRE-ALARM BOXES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Edwards; Carrier Global Corporation.
2. Fire-Lite Alarms; Honeywell International, Inc.
3. Gamewell-FCI; Honeywell International, Inc.
4. Notifier; Honeywell International, Inc.
5. Siemens Industry, Inc., Building Technologies Division.
6. Silent Knight; Honeywell International, Inc.
7. Simplex; brand of Johnson Controls International plc, Building Solutions North America.
8. Wheelock, Life Safety and Mass Notification; Eaton, Electrical Sector.

B. General Requirements for Manual Fire-Alarm Boxes: Comply with UL 38. Boxes must be finished in red with molded, raised-letter operating instructions in contrasting color; must show visible indication of operation; and must be mounted on recessed outlet box. If indicated as surface mounted, provide manufacturer's surface back box.

1. Double-action mechanism requiring two actions to initiate alarm, pull-lever type; with integral addressable module arranged to communicate manual-station status (normal, alarm, or trouble) to FACU.
2. Station Reset: Key- or wrench-operated switch.

3. Weatherproof Protective Shield: Factory-fabricated, clear plastic enclosure hinged at top to permit lifting for access to initiate alarm.
4. Able to perform at up to 90 percent relative humidity at 90 deg F.
5. Material: Manual stations made of Lexan polycarbonate.
6. Able to be used in indoor areas.

2.4 SYSTEM SMOKE DETECTORS

A. Photoelectric Smoke Detectors:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
   a. Edwards; Carrier Global Corporation.
   b. Fire-Lite Alarms; Honeywell International, Inc.
   c. Gamewell-FCI; Honeywell International, Inc.
   d. Notifier; Honeywell International, Inc.
   e. Siemens Industry, Inc., Building Technologies Division.
   f. Silent Knight; Honeywell International, Inc.
   g. Simplex; brand of Johnson Controls International plc, Building Solutions North America.

2. Performance Criteria:

   a. Regulatory Requirements:

      1) NFPA 72.
      2) UL 268.

   b. General Characteristics:

      1) Detectors must be two-wire type.
      2) Integral Addressable Module: Arranged to communicate detector status (normal, alarm, or trouble) to FACU.
      3) Base Mounting: Detector and associated electronic components must be mounted in twist-lock module that connects to fixed base. Provide terminals in fixed base for connection to building wiring.
      4) Self-Restoring: Detectors do not require resetting or readjustment after actuation to restore them to normal operation.
      5) Integral Visual-Indicating Light: LED type, indicating detector has operated and power-on status.
      6) Detector address must be accessible from FACU and must be able to identify detector's location within system and its sensitivity setting.
      7) Operator at FACU, having designated access level, must be able to manually access the following for each detector:

         a) Primary status.
         b) Device type.
         c) Present average value.
         d) Present sensitivity selected.
         e) Sensor range (normal, dirty, etc.).

      8) Detector must have functional humidity range within 10 to 90 percent relative humidity.
      9) Color: White.
      10) Remote Control: Unless otherwise indicated, detectors must be digital-addressable type, individually monitored at FACU for calibration, sensitivity, and alarm condition and individually adjustable for sensitivity by FACU.
      11) Fixed-temperature sensing characteristic of combination smoke- and heat-detection units must be independent of rate-of-rise sensing and must be settable at FACU to operate at 135 or 155 deg F.
      12) Multiple levels of detection sensitivity for each sensor.

13) Sensitivity levels based on time of day.

2.5 DUCT SMOKE DETECTORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Edwards; Carrier Global Corporation.
2. Fire-Lite Alarms; Honeywell International, Inc.
3. Gamewell-FCI; Honeywell International, Inc.
4. Notifier; Honeywell International, Inc.
5. Siemens Industry, Inc., Building Technologies Division.
6. Silent Knight; Honeywell International, Inc.
7. Simplex; brand of Johnson Controls International plc, Building Solutions North America.

B. Description: Photoelectric-type, duct-mounted smoke detector.

C. Performance Criteria:

1. Regulatory Requirements:

a. NFPA 72.
b. UL 268A.

2. General Characteristics:

a. Detectors must be four -wire type.
b. Integral Addressable Module: Arranged to communicate detector status (normal, alarm, or trouble) to FACU.
c. Self-Restoring: Detectors do not require resetting or readjustment after actuation to restore them to normal operation.
d. Integral Visual-Indicating Light: LED type, indicating detector has operated and power-on status.
e. Detector address must be accessible from FACU and must be able to identify detector's location within system and its sensitivity setting.
f. Operator at FACU, having designated access level, must be able to manually access the following for each detector:

1) Primary status.
2) Device type.
3) Present average value.
4) Present sensitivity selected.
5) Sensor range (normal, dirty, etc.).

g. Weatherproof Duct Housing Enclosure: NEMA 250, Type 4X; NRTL listed for use with supplied detector for smoke detection in HVAC system ducts.
h. Each sensor must have multiple levels of detection sensitivity.
i. Sampling Tubes: Design and dimensions as recommended by manufacturer for specific duct size, air velocity, and installation conditions where applied.
j. Relay Fan Shutdown: Fully programmable relay rated to interrupt fan motor-control circuit.

2.6 HEAT DETECTORS

A. Fixed-Temperature-Type Heat Detectors:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Edwards; Carrier Global Corporation.
b. Fire-Lite Alarms; Honeywell International, Inc.
c. Gamewell-FCI; Honeywell International, Inc.

d. Notifier; Honeywell International, Inc.
e. Siemens Industry, Inc., Building Technologies Division.
f. Silent Knight; Honeywell International, Inc.
g. Simplex; brand of Johnson Controls International plc, Building Solutions North America.

2. Performance Criteria:

a. Regulatory Requirements:

1) NFPA 72.
2) UL 521.

b. General Characteristics:

1) Actuated by temperature that exceeds fixed temperature of 135 deg F.
2) Mounting: Twist-lock base interchangeable with smoke-detector bases.
3) Integral Addressable Module: Arranged to communicate detector status (normal, alarm, or trouble) to FACU.
4) Detector must have functional humidity range of 10 to 90 percent.
5) Color: White.

2.7 FIRE-ALARM NOTIFICATION APPLIANCES

A. Fire-Alarm Audible Notification Appliances:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Edwards; Carrier Global Corporation.
b. Gamewell-FCI; Honeywell International, Inc.
c. Notifier; Honeywell International, Inc.
d. Potter Electric Signal Company, LLC.
e. Siemens Industry, Inc., Building Technologies Division.
f. Simplex; brand of Johnson Controls International plc, Building Solutions North America.
g. Wheelock, Life Safety and Mass Notification; Eaton, Electrical Sector.

2. Description: Horns.
3. Performance Criteria:

a. Regulatory Requirements:

1) NFPA 72.

b. General Characteristics:

1) Connected to notification-appliance signal circuits, zoned as indicated, equipped for mounting as indicated, and with screw terminals for system connections.
2) ISO Temporal 3 Evacuation Tone: 90 plus or minus 4 dB(A-weighted) at 24 V.
3) Horns: Electric-vibrating-polarized type, 24 V(dc); with provision for housing operating mechanism behind grille. Comply with UL 464. Horns must produce sound-pressure level of 90 dB(A-weighted), measured 10 ft. from horn, using coded signal prescribed in UL 464 test protocol.
4) Combination Devices: Factory-integrated audible and visible devices in single-mounting assembly, equipped for mounting as indicated, and with screw terminals for system connections.

B. Fire-Alarm Visible Notification Appliances:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Edwards; Carrier Global Corporation.
b. Gamewell-FCI; Honeywell International, Inc.
c. Notifier; Honeywell International, Inc.

d. Siemens Industry, Inc., Building Technologies Division.
e. Simplex; brand of Johnson Controls International plc, Building Solutions North America.
f. Wheelock, Life Safety and Mass Notification; Eaton, Electrical Sector.

2. Performance Criteria:

a. Regulatory Requirements:

1) NFPA 72.
2) UL 1971.

b. General Characteristics:

1) Rated Light Output:

a) 15/30/75/110 cd, selectable in field.

2) Clear or nominal white polycarbonate lens mounted on aluminum faceplate.
3) Mounting: Wall mounted unless otherwise indicated.
4) For units with guards to prevent physical damage, light output ratings must be determined with guards in place.
5) Flashing must be in temporal pattern, synchronized with other units.
6) Strobe Leads: Factory connected to screw terminals.
7) Mounting Faceplate: Factory finished, white.

2.8 FIRE-ALARM REMOTE ANNUNCIATORS

A. Performance Criteria:

1. Regulatory Requirements:

a. NFPA 72.

2. General Characteristics:

a. Annunciator functions must match those of FACU for alarm, supervisory, and trouble indications. Manual switching functions must match those of FACU, including acknowledging, silencing, resetting, and testing.

1) Mounting: Flush cabinet, NEMA 250, Type 1.

b. Display Type and Functional Performance: Alphanumeric display and LED indicating lights must match those of FACU. Provide controls to acknowledge, silence, reset, and test functions for alarm, supervisory, and trouble signals.

2.9 FIRE-ALARM ADDRESSABLE INTERFACE DEVICES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Bosch Security Systems, Inc.
2. Gamewell-FCI; Honeywell International, Inc.
3. Notifier; Honeywell International, Inc.

B. Performance Criteria:

1. Regulatory Requirements:

a. NFPA 72.

2. General Characteristics:

a. Include address-setting means on module.
b. Store internal identifying code for control panel use to identify module type.

c. Listed for controlling HVAC fan motor controllers.
d. Monitor Module: Microelectronic module providing system address for alarm-initiating devices for wired applications with normally open contacts.
e. Integral Relay: Capable of providing direct signal.

1) Allow control panel to switch relay contacts on command.
2) Have minimum of two normally open and two normally closed contacts available for field wiring.

f. Control Module:

1) Operate notification devices.
2) Operate solenoids for use in sprinkler service.

2.10 DIGITAL ALARM COMMUNICATOR TRANSMITTERS (DACTs)

A. Manufacturers: Subject to compliance with requirements, provide products by the following:

1. Bosch Security Systems, Inc.
2. Edwards; Carrier Global Corporation.
3. Gamewell-FCI; Honeywell International, Inc.
4. Potter Electric Signal Company, LLC.

B. Performance Criteria:

1. Regulatory Requirements:

a. NFPA 72.

2. General Characteristics:

a. DACT must be acceptable to remote central station and must be listed for fire-alarm use.
b. Functional Performance: Unit must receive alarm, supervisory, or trouble signal from FACU and automatically capture two telephone line(s) and dial preset number for remote central station. When contact is made with central station(s), signals must be transmitted. If service on either line is interrupted for longer than 45 seconds, transmitter must initiate local trouble signal and transmit signal indicating loss of telephone line to remote alarm receiving station over remaining line. Transmitter must automatically report telephone service restoration to central station. If service is lost on both telephone lines, transmitter must initiate local trouble signal.
c. Local functions and display at DACT must include the following:

1) Verification that both telephone lines are available.
2) Programming device.
3) LED display.
4) Manual test report function and manual transmission clear indication.
5) Communications failure with central station or FACU.

d. Digital data transmission must include the following:

1) Address of alarm-initiating device.
2) Address of supervisory signal.
3) Address of trouble-initiating device.
4) Loss of ac supply.
5) Loss of power.
6) Low battery.
7) Abnormal test signal.
8) Communication bus failure.

e. Secondary Power: Integral rechargeable battery and automatic charger.
f. Self-Test: Conducted automatically every 24 hours with report transmitted to central station.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions for compliance with requirements for ventilation, temperature, humidity, and other conditions affecting performance of the Work.

1. Verify that manufacturer's written instructions for environmental conditions have been permanently established in spaces where equipment and wiring are installed before installation begins.

B. Examine roughing-in for electrical connections to verify actual locations of connections before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF EQUIPMENT

A. Comply with NECA 305, NFPA 72, NFPA 101, and requirements of authorities having jurisdiction for installation and testing of fire-alarm equipment. Install electrical wiring to comply with requirements in NFPA 70 including, but not limited to, Article 760, "Fire Alarm Systems."

1. Devices placed in service before other trades have completed cleanup must be replaced.
2. Devices installed, but not yet placed, in service must be protected from construction dust, debris, dirt, moisture, and damage in accordance with manufacturer's written storage instructions.

B. Install wall-mounted equipment, with tops of cabinets not more than 78 inch above finished floor.

1. Comply with requirements for seismic-restraint devices specified in Section 270548.16 "Seismic Controls for Communications Systems."

C. Manual Fire-Alarm Boxes:

1. Install manual fire-alarm box in normal path of egress within 60 inch of exit doorway.
2. Mount manual fire-alarm box on background of contrasting color.
3. Operable part of manual fire-alarm box must be between 42 and 48 inch above floor level. Devices must be mounted at same height unless otherwise indicated.

D. Smoke- and Heat-Detector Spacing:

1. Comply with "Smoke-Sensing Fire Detectors" section in "Initiating Devices" chapter in NFPA 72, for smoke-detector spacing.
2. Comply with "Heat-Sensing Fire Detectors" section in "Initiating Devices" chapter in NFPA 72, for heat-detector spacing.
3. Smooth ceiling spacing must not exceed 30 ft.
4. Spacing of detectors for irregular areas, for irregular ceiling construction, and for high ceiling areas must be determined in accordance with Annex A or Annex B in NFPA 72.
5. HVAC: Locate detectors not closer than 36 inch from air-supply diffuser or return-air opening.
6. Lighting Fixtures: Locate detectors not closer than 12 inch from lighting fixture and not directly above pendant mounted or indirect lighting.

E. Install cover on each smoke detector that is not placed in service during construction. Cover must remain in place except during system testing. Remove cover prior to system turnover.

F. Duct Smoke Detectors: Comply with NFPA 72 and NFPA 90A. Install sampling tubes so they extend full width of duct. Tubes more than 36 inch long must be supported at both ends.

1. Do not install smoke detector in duct smoke-detector housing during construction. Install detector only during system testing and prior to system turnover.

G. Remote Status and Alarm Indicators: Install in visible location near each smoke detector, sprinkler water-flow switch, and valve-tamper switch that is not readily visible from normal viewing position.

H. Audible Alarm-Indicating Devices: Install not less than 6 inch below ceiling. Install bells and horns on flush-mounted back boxes with device-operating mechanism concealed behind grille. Install devices at same height unless otherwise indicated.

I. Visible Alarm-Indicating Devices: Install adjacent to each alarm bell or alarm horn and at least 6 inch below ceiling. Install devices at same height unless otherwise indicated.

J. Device Location-Indicating Lights: Locate in public space near device they monitor.

3.3 ELECTRICAL CONNECTIONS

A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate must be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate must be laminated acrylic or melamine plastic signs with black background and engraved white letters at least 1/2 inch high.

3.4 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring in accordance with Section 260523 "Control-Voltage Electrical Power Cables."

C. Install nameplate for each control connection, indicating field control panel designation and I/O control designation feeding connection.

3.5 PATHWAYS

A. Pathways above recessed ceilings and in inaccessible locations may be routed exposed.

1. Exposed pathways located less than 96 inch above floor must be installed in EMT.

B. Pathways must be installed in EMT.

C. Exposed EMT must be painted red enamel.

3.6 CONNECTIONS

A. For fire-protection systems related to doors in fire-rated walls and partitions and to doors in smoke partitions, comply with requirements in Section 087100 "Door Hardware." Connect hardware and devices to fire-alarm system.

1. Verify that hardware and devices are listed for use with installed fire-alarm system before making connections.

B. Make addressable connections with supervised interface device to the following devices and systems. Install interface device less than 36 inch from device controlled. Make addressable confirmation connection when such feedback is available at device or system being controlled.

1. Alarm-initiating connection to activate emergency lighting control.
2. Supervisory connections at valve supervisory switches.
3. Data communication circuits for connection to building management system.

3.7 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 270553 "Identification for Communications Systems."

B. Install framed instructions in location visible from FACU.

3.8 GROUNDING

A. Ground FACU and associated circuits in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

B. Ground shielded cables at control panel location only. Insulate shield at device location.

3.9 FIELD QUALITY CONTROL

A. Field tests must be witnessed by Architect.

B. Administrant for Tests and Inspections:

1. Administer and perform tests and inspections.

C. Tests and Inspections:

1. Visual Inspection: Conduct visual inspection prior to testing.

a. Inspection must be based on completed record Drawings and system documentation that is required by "Completion Documents, Preparation" table in "Documentation" section of "Fundamentals" chapter in NFPA 72.
b. Comply with "Visual Inspection Frequencies" table in "Inspection" section of "Inspection, Testing and Maintenance" chapter in NFPA 72; retain "Initial/Reacceptance" column and list only installed components.

2. System Testing: Comply with "Test Methods" table in "Testing" section of "Inspection, Testing and Maintenance" chapter in NFPA 72.
3. Test audible appliances for public operating mode in accordance with manufacturer's written instructions. Perform test using portable sound-level meter complying with Type 2 requirements in ASA S1.4 Part 1/IEC 61672-1.
4. Test audible appliances for private operating mode in accordance with manufacturer's written instructions.

5. Test visible appliances for public operating mode in accordance with manufacturer's written instructions.
6. Factory-authorized service representative must prepare "Fire Alarm System Record of Completion" in "Documentation" section of "Fundamentals" chapter in NFPA 72 and "Inspection and Testing Form" in "Records" section of "Inspection, Testing and Maintenance" chapter in NFPA 72.

D. Reacceptance Testing: Perform reacceptance testing to verify proper operation of added or replaced devices and appliances.

E. Fire-alarm system will be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

G. Maintenance Test and Inspection: Perform tests and inspections listed for weekly, monthly, quarterly, and semiannual periods. Use forms developed for initial tests and inspections.

H. Annual Test and Inspection: One year after date of Substantial Completion, test fire-alarm system complying with visual and testing inspection requirements in NFPA 72. Use forms developed for initial tests and inspections.

3.10 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain fire-alarm system. Provide video recording of training to Owner.

3.11 MAINTENANCE

A. Maintenance Service: Beginning at Substantial Completion, maintenance service must include 12 months' full maintenance by skilled employees of manufacturer's designated service organization. Include preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper operation. Parts and supplies must be manufacturer's authorized replacement parts and supplies.

1. Include visual inspections in accordance with "Visual Inspection Frequencies" table in "Testing" paragraph of "Inspection, Testing and Maintenance" chapter in NFPA 72.
2. Perform tests in "Test Methods" table in "Testing" paragraph of "Inspection, Testing and Maintenance" chapter in NFPA 72.
3. Perform tests per "Testing Frequencies" table in "Testing" paragraph of "Inspection, Testing and Maintenance" chapter in NFPA 72.

3.12 SOFTWARE SERVICE AGREEMENT

A. Comply with UL 864.

B. Technical Support: Beginning at Substantial Completion, service agreement must include software support for two years.

C. Upgrade Service: At Substantial Completion, update software to latest version. Install and program software upgrades that become available within two years from date of Substantial Completion. Upgrading software must include operating system and new or revised licenses for using software.

1. Upgrade Notice: At least 30 days to allow Owner to schedule access to system and to upgrade computer equipment if necessary.

END OF SECTION 284621.11

SECTION 313116 - TERMITE CONTROL

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Soil treatment.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include the EPA-Registered Label for termiticide products.
2. Include certificate of registration with North Carolina Department of Agriculture and Consumer Services Structural Pest Control Division (NCDOA).

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified Installer.

B. Product Certificates: For each type of termite control product.

C. Soil Treatment Application Report: After application of termiticide is completed, submit report for Owner's records and include the following:

1. Date and time of application.
2. Moisture content of soil before application.
3. Termiticide brand name and manufacturer.
4. Quantity of undiluted termiticide used.
5. Dilutions, methods, volumes used, and rates of application.
6. Areas of application.
7. Water source for application.

D. Sample Warranties: For special warranties.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: A specialist who is licensed according to regulations of authorities having jurisdiction to apply termite control treatment and products in jurisdiction where Project is located and who employs workers trained and approved by manufacturer to install manufacturer's products.

1. Installer shall be licensed as a Pest Control Operator (PCO) by NCDOA.

1.5 FIELD CONDITIONS

A. Soil Treatment:

1. Environmental Limitations: To ensure penetration, do not treat soil that is water saturated or frozen. Do not treat soil while precipitation is occurring. Comply with requirements of the EPA-Registered Label and requirements of authorities having jurisdiction.

2. Related Work: Coordinate soil treatment application with excavating, filling, grading, and concreting operations. Treat soil under footings, grade beams, and ground-supported slabs before construction.

1.6 WARRANTY

A. Soil Treatment Special Warranty: Manufacturer's standard form, signed by Applicator and Contractor, certifying that termite control work consisting of applied soil termiticide treatment will prevent infestation of subterranean termites. If subterranean termite activity or damage is discovered during warranty period, re-treat soil and repair or replace damage caused by termite infestation.

1. Warranty Period: Three years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain termite control products from single source from single manufacturer.

2.2 SOIL TREATMENT

A. Termiticide: EPA-Registered termiticide acceptable to authorities having jurisdiction, in an aqueous solution formulated to prevent termite infestation. Provide quantity required for application at the label volume and rate for the maximum termiticide concentration allowed for each specific use, according to product's EPA-Registered Label. Use compatible dye in termiticide to provide visible evidence of treatment.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. BASF; Termidor.
b. Bayer Environmental Science.
c. FMC Specialty Products.
d. Syngenta.

2. Service Life of Treatment: Soil treatment termiticide that is effective for not less than three years against infestation of subterranean termites.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Applicator present, for compliance with requirements for moisture content of soil per termiticide label, interfaces with earthwork, slab and foundation work, landscaping, utility installation, and other conditions affecting performance of termite control.

B. Proceed with application only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. General: Prepare work areas according to the requirements of authorities having jurisdiction and according to manufacturer's written instructions before beginning application and installation of termite control treatment(s). Remove extraneous sources of wood cellulose and other edible materials, such as

wood debris, tree stumps and roots, stakes, formwork, and construction waste wood from soil within and around foundations.

B. Soil Treatment Preparation: Remove foreign matter and impermeable soil materials that could decrease treatment effectiveness on areas to be treated. Loosen, rake, and level soil to be treated, except previously compacted areas under slabs and footings. Termiticides may be applied before placing compacted fill under slabs if recommended in writing by termiticide manufacturer.

1. Fit filling hose connected to water source at the site with a backflow preventer, according to requirements of authorities having jurisdiction.

3.3 APPLYING SOIL TREATMENT

A. Application: Mix soil treatment termiticide solution to a uniform consistency. Distribute treatment uniformly. Apply treatment at the product's EPA-Registered Label volume and rate for maximum specified concentration of termiticide to the following so that a continuous horizontal and vertical termiticidal barrier or treated zone is established around and under building construction.

1. Slabs-on-Grade: Underground-supported slab construction, including footings, building slabs, and attached slabs as an overall treatment. Treat soil materials before concrete footings and slabs are placed.
2. Foundations: Soil adjacent to and along the entire inside perimeter of foundation walls; along both sides of interior partition walls; around plumbing pipes and electric conduit penetrating the slab; around interior column footers, piers, and chimney bases; and along the entire outside perimeter, from grade to bottom of footing.
3. Masonry: Treat voids.
4. Penetrations: At expansion joints, control joints, and areas where slabs and below-grade walls will be penetrated.

B. Post warning signs in areas of application.

C. Reapply soil treatment solution to areas disturbed by subsequent excavation, grading, landscaping, or other construction activities following application.

3.4 PROTECTION

A. Avoid disturbance of treated soil after application. Keep off treated areas until completely dry.

B. Protect termiticide solution dispersed in treated soils and fills from being diluted by exposure to water spillage or weather until ground-supported slabs are installed. Use waterproof barrier according to EPA-Registered Label instructions.

3.5 MAINTENANCE SERVICE

A. Continuing Maintenance Proposal: Provide from termite-control-treatment Installer to Owner, in the form of a standard yearly (or other period) maintenance agreement, starting on date initial maintenance service is concluded. State services, obligations, conditions, and terms for agreement period and for future renewal options.

1. Include annual inspection for termite activity and effectiveness of termite treatment according to manufacturer's written instructions.

END OF SECTION 313116

This page intentionally left blank.