










4/12/2019 2:11:48 PM  
C:\new\Project\172\_UNCW\Parking Deck II E17\_Bentley.Dwg@clarknexus.com.vt


### TRANSFORMER PAD INSTALLATION GENERAL NOTES

1. TRANSFORMER PADS SHALL BE INSTALLED IN A LOCATION TO REMAIN READILY ACCESSIBLE FOR LINE TRUCKS.
2. SOIL UNDERNEATH PADS SHALL BE FREE OF ROOTS AND OTHER ORGANIC MATERIALS AND BE THOROUGHLY TAMPED TO PREVENT WASHING. EXERCISE CARE IN BACKFILLING AND GRADING AROUND PAD.
3. SERVICE CONDUIT SHALL BE LOCATED IN THE EXTREME RIGHT SIDE OF THE SECONDARY COMPARTMENT.
4. ACTUAL PAD DIMENSIONS VARY. CONTRACTOR SHALL COORDINATE REQUIRED PAD DIMENSIONS WITH UTILITY COMPANY.

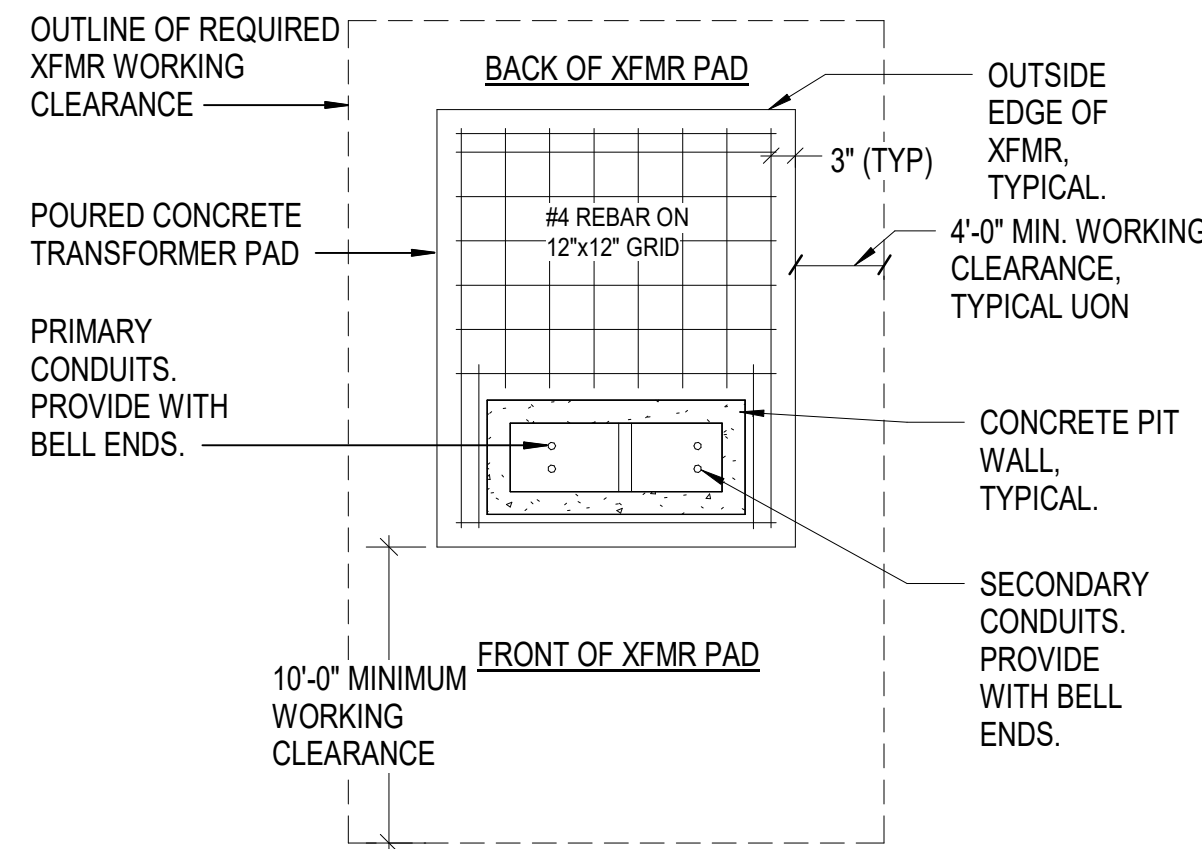


### 7 SERVICE TRANSFORMER PAD DETAIL PLAN (BY UTILITY COMPANY)

NO SCALE

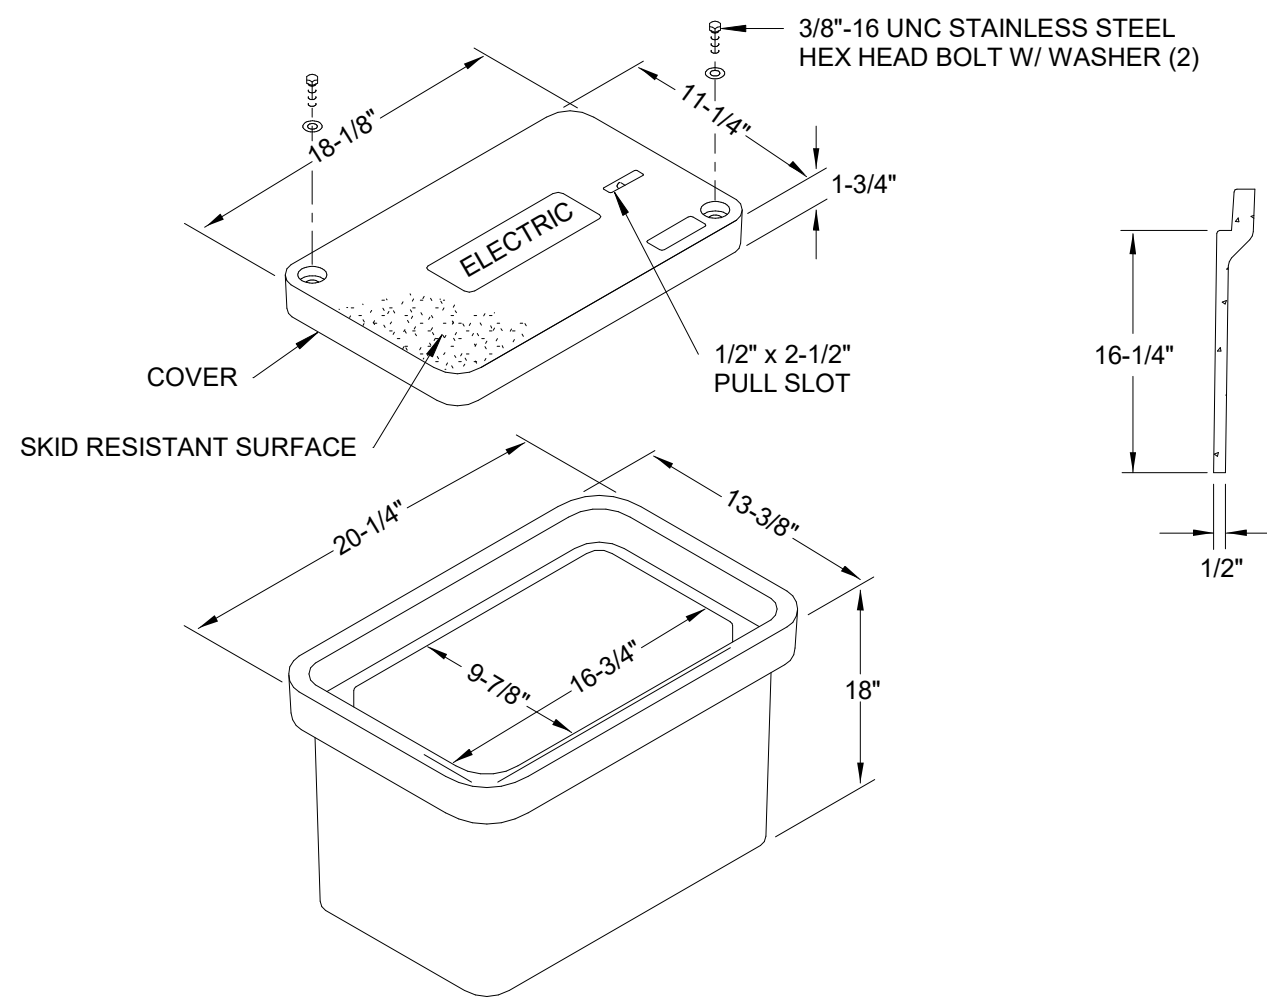

### 5 HANDHOLE DETAIL


NO SCALE

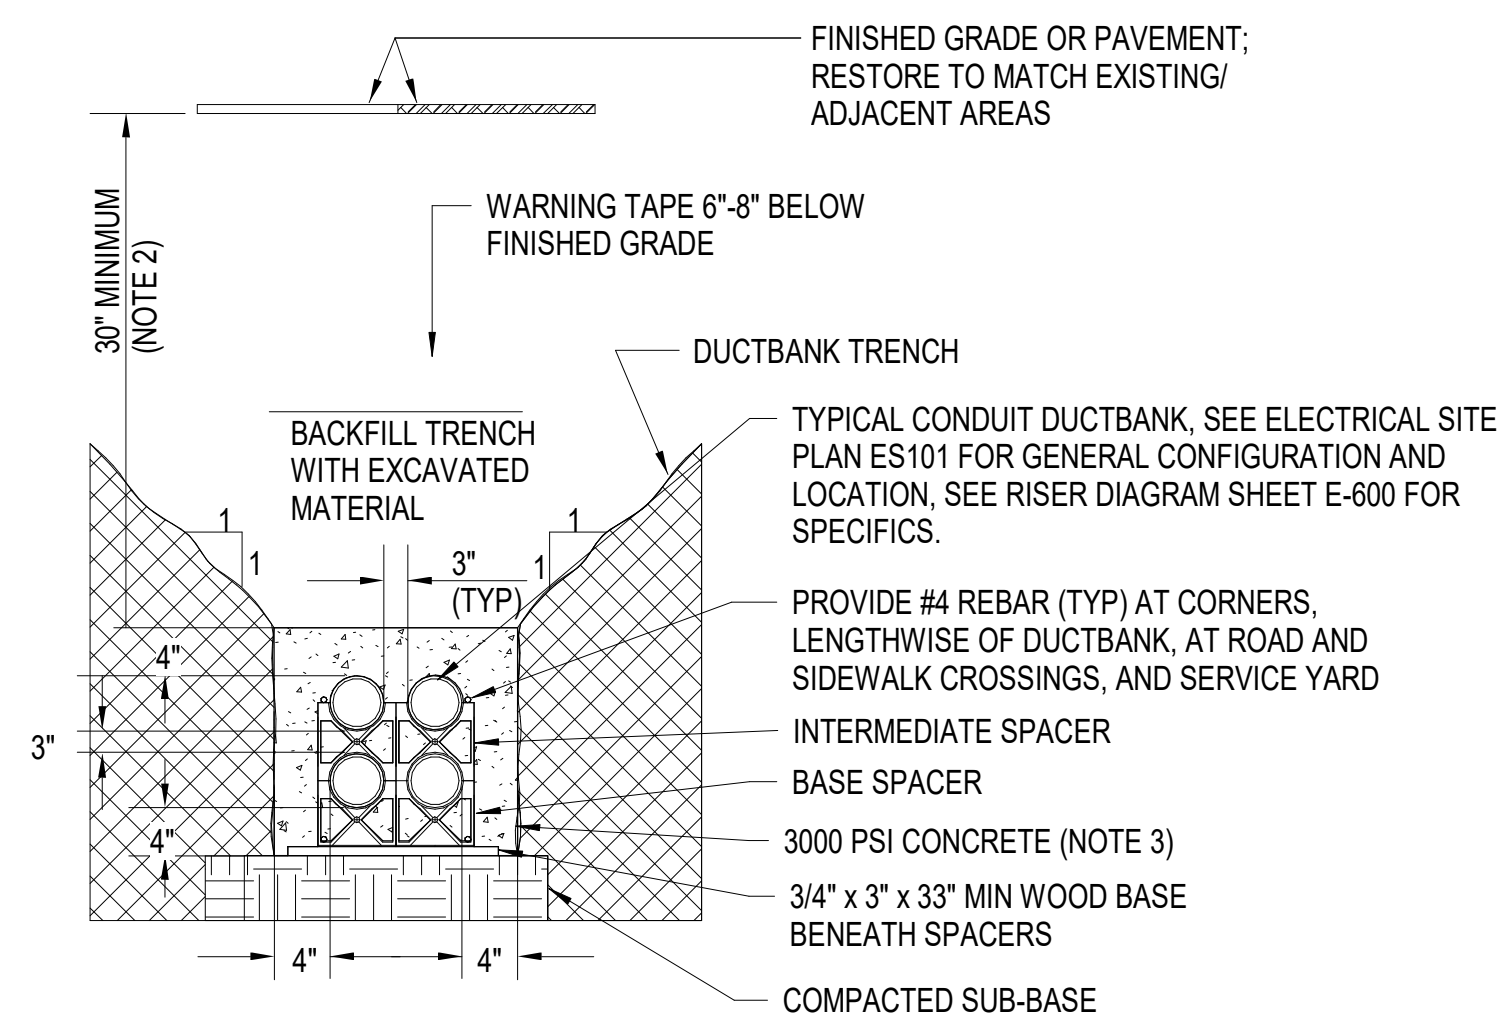

- NOTES:
1. DIMENSIONS ARE TYPICAL. SEE DETAIL 2 THIS SHEET, FOR CONDUIT ARRANGEMENT REQUIREMENTS WITHIN DUCTBANK
  2. MINIMUM EARTH COVERAGE SHALL BE 18-INCHES FOR DUCTBANKS CARRYING CIRCUITS 600V OR LESS.
  3. CONDUIT SHALL BE MINIMUM 4" SCHEDULE 40 PVC, UON. USE SCHEDULE 80 PVC FOR INSTALLATION UNDER ROADS AND HEAVY TRAFFIC AREAS.


### 1 TYPICAL CONCRETE ENCASED DUCTBANK DETAIL

NO SCALE

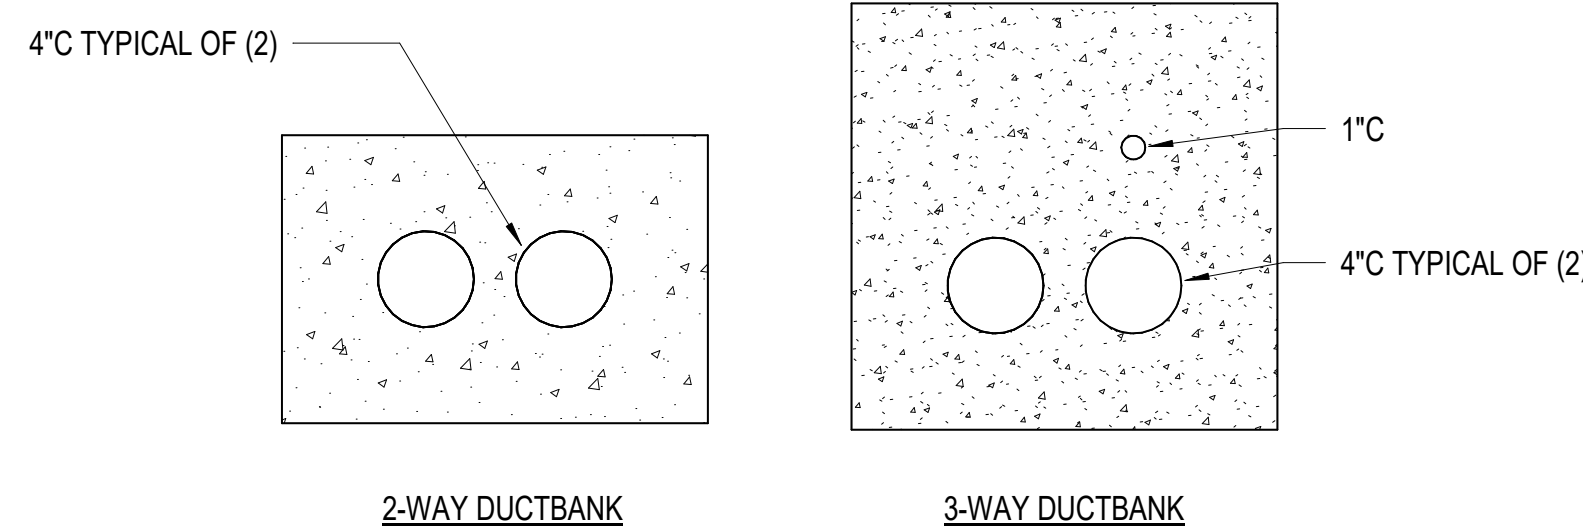


### 2 DUCTBANK CONFIGURATION DETAILS

NO SCALE

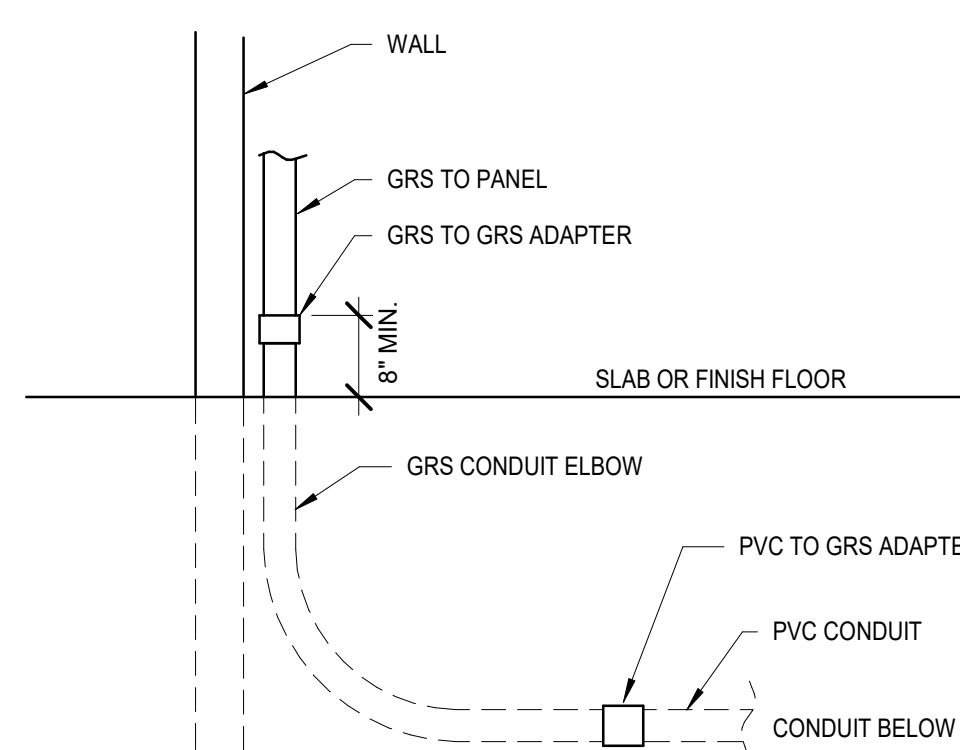


### 3 CONDUIT TRANSITION DETAIL (THROUGH SLAB)

NO SCALE

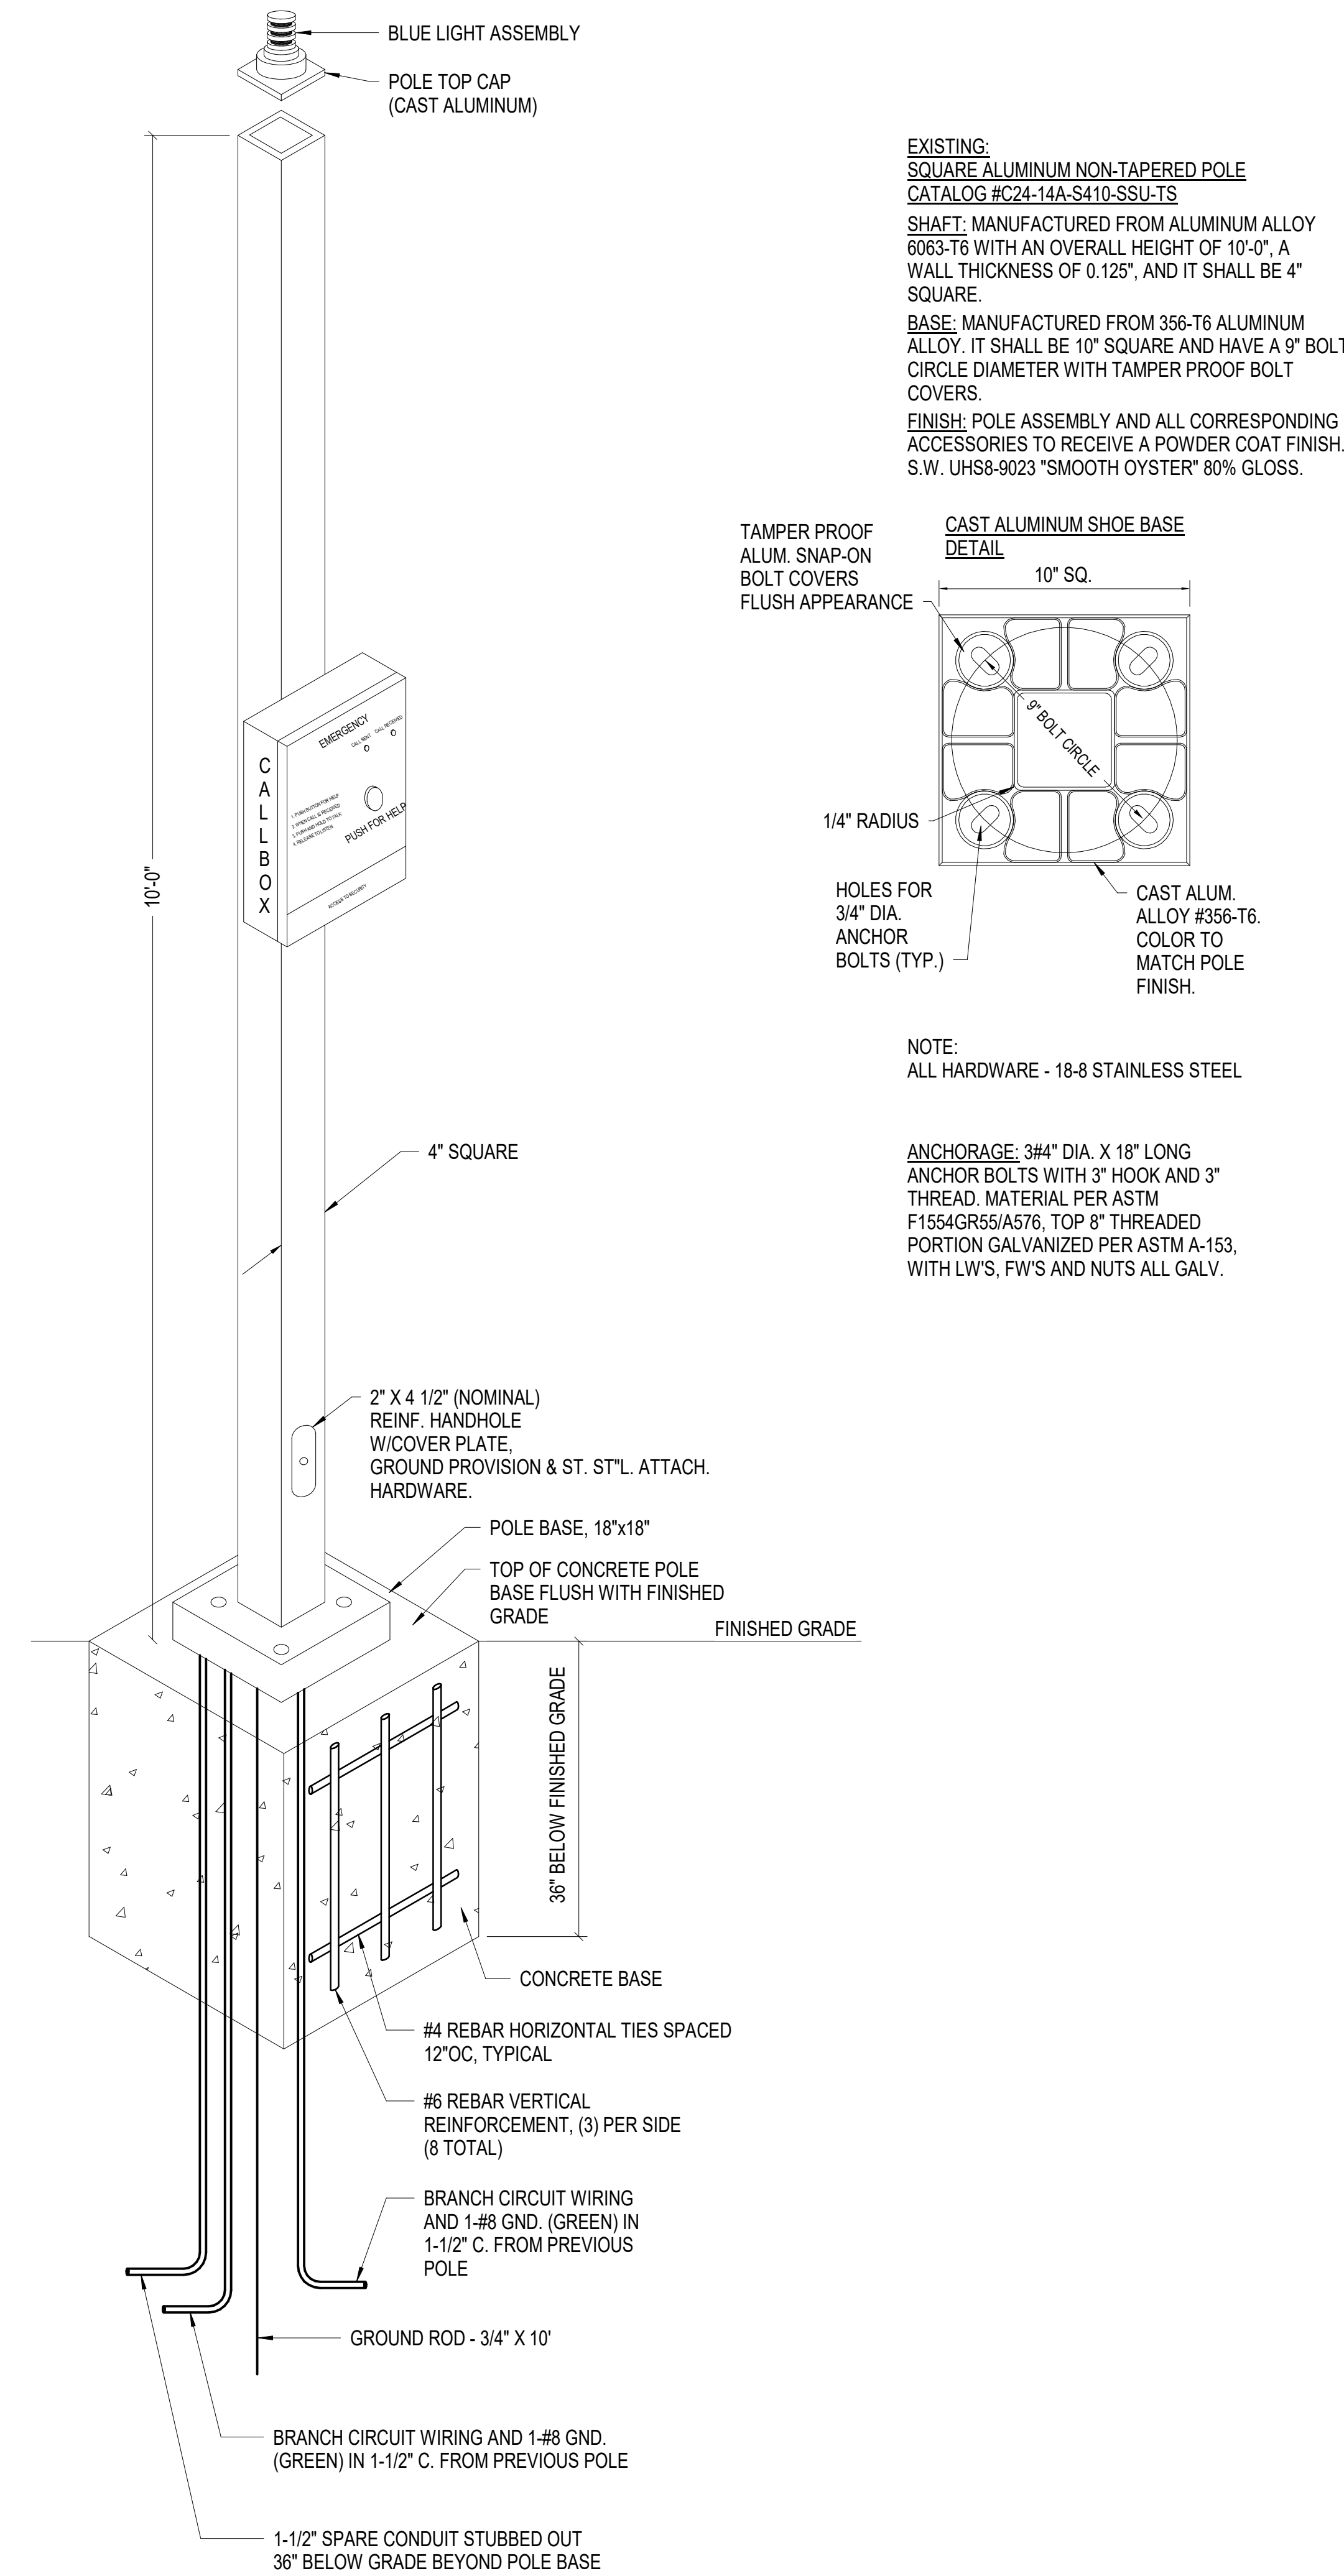


### 6 EMERGENCY PHONE DETAIL (FOR EXISTING RELOCATED PHONES)

NO SCALE

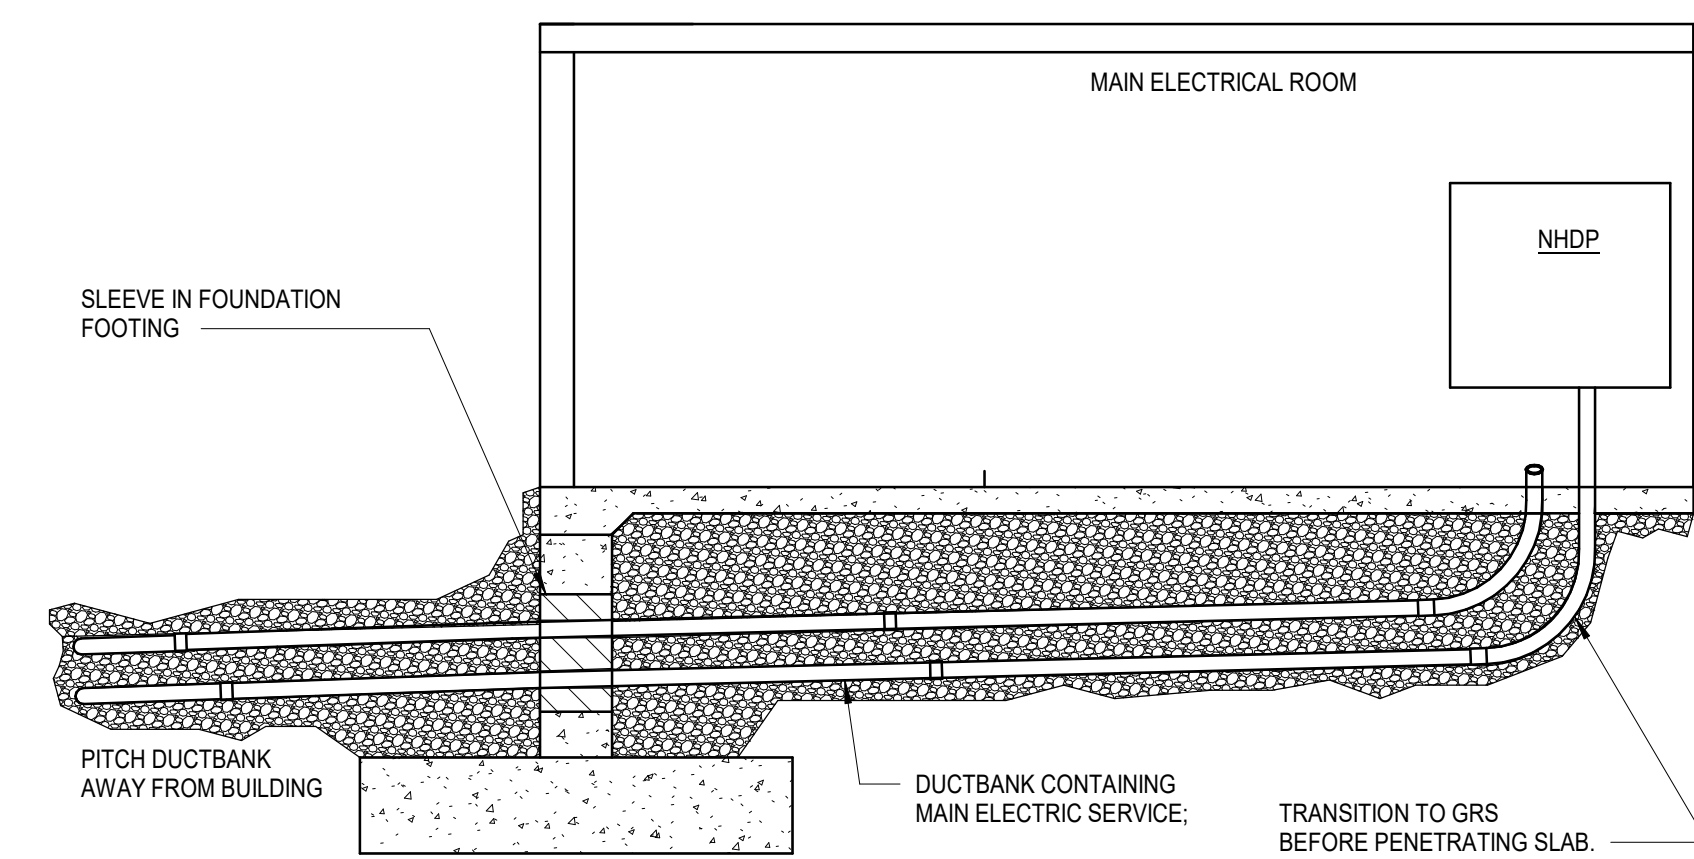

### 4 SECONDARY DUCTBANK ENTRY INTO GARAGE

NO SCALE

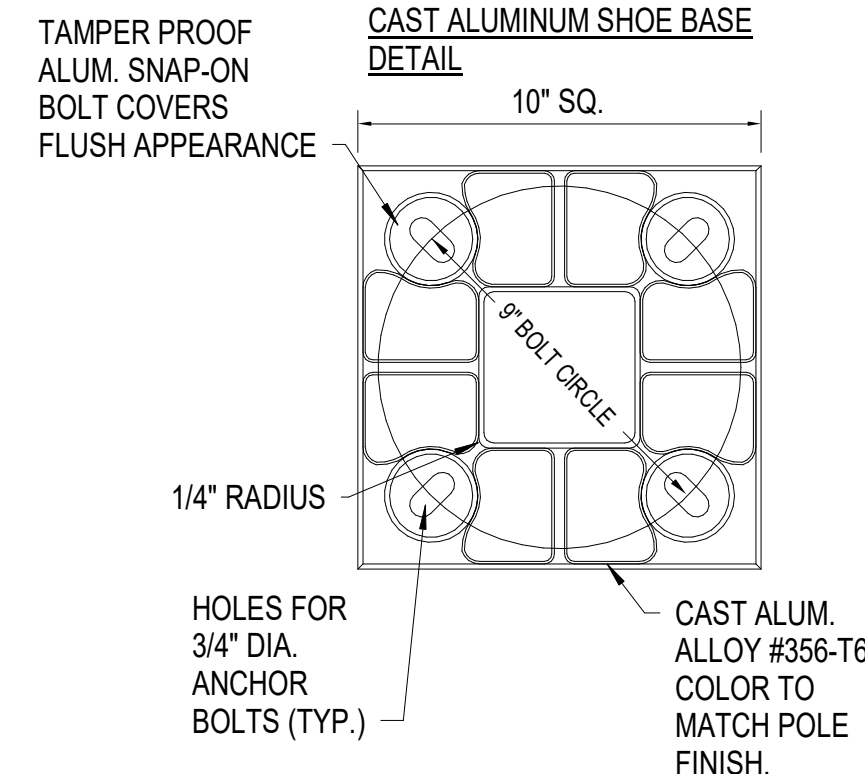

NOTE:  
ALL HARDWARE - 18-8 STAINLESS STEEL

ANCHORAGE: 3/4" DIA. X 18" LONG  
ANCHOR BOLTS WITH 3" HOOK AND 3" THREAD. MATERIAL PER ASTM F1554GR5/A576. TOP 8" THREADED PORTION GALVANIZED PER ASTM A-153, WITH LWS, FWS AND NUTS ALL GALV.

SCO ID NUMBER: 18-19226-01A  
CODE: 41828  
ITEM: 301

CONTRACTOR  
**Balfour Beatty**  
Construction

DESIGNER

**CLARK NEXSEN**  
1523 ELIZABETH AVENUE, SUITE 300  
CHARLOTTE, NORTH CAROLINA 28204  
704-377-8800

CLARK NEXSEN LICENSE NUMBER: C-1028

**WALKER**  
CONSULTANTS

13860 Ballantyne Corporate Place  
Suite 140  
Charlotte, NC 28277  
T: 704.247.6230  
[www.walkerconsultants.com](http://www.walkerconsultants.com)  
NC License No. F-0518

**MCKIM & CREED**

CIVIL ENGINEER  
243 NORTH FRONT STREET  
WILMINGTON, NORTH CAROLINA  
28401  
910.343.1048

PROFESSIONAL SEAL



NC CORPORATE ENGINEERING LICENSE #C-1028

SUBMITTAL

04/15/2019

CONSTRUCTION DOCUMENT  
SUBMITTAL 01

REVISIONS


KEY PLAN

SHEET

ELECTRICAL SITE DETAILS

**ES501**

DESIGN: WAZ  
DRAWN: KAW  
REVIEW: WAZ

CN 8112








# NOTES

- 1 ELEVATION MOTOR FUSE DISCONNECT. FUSE PER MANUFACTURER'S  
RECOMMENDATION. REFER TO RISER DIAGRAM E-600 FOR ADDITIONAL  
INFORMATION. DISCONNECT SHALL BE LOCABLE IN THE OPEN  
POSITION.
- 2 ELEVATOR CAB LIGHT AND CONTROL. FUSE DISCONNECT. PROVIDE  
120V, 30A, 20A FUSE LOCABLE IN THE OPEN POSITION.
- 3 PROVIDE (1) VOICE LINE FOR EACH ELEVATOR. FIELD COORDINATE  
SPECIFICS AND FINAL LOCATION WITH ELEVATOR SUPPLIER.
- 4 SUMP PUMP CONTROLLER. COORDINATE LOCATION WITH SUMP PUMP  
SUPPLIER.
- 5 PROVIDE NEMA 16-208V, 208V, TWIST-LOCK STYLE RECEPTACLE.  
LOCATE BELOW THE PROPOSED TELECOMMUNICATIONS CABINET.  
REFER TO DRAWING E-600 FOR CABINET REQUIREMENTS.
- 6 PROVIDE NEMA-5-208V, 120V, 20A RECEPTACLE. LOCATE BELOW THE  
PROPOSED WALL MOUNT TELECOMMUNICATIONS CABINET. REFER TO  
DRAWING E-600 FOR CABINET REQUIREMENTS.
- 7 VOICE LINE FOR FIRE ALARM DIGITAL COMMUNICATOR. COORDINATE  
SPECIFICS WITH FIRE ALARM SYSTEM SUPPLIER.
- 8 CONNECT TO STAIR LUMINAIRE ON TIER ABOVE.
- 9 CONNECT TO STAIR LUMINAIRE ON TIER ABOVE AND TIER BELOW.
- 10 CONNECT TO STAIR LUMINAIRE ON TIER BELOW.
- 11 (2) 4" INCOMING TELECOM CONDUITS FROM MANHOLE MH-14AS. REFER  
TO DRAWING E101 FOR CONTINUATION.
- 12 REFER TO LUMINAIRE SCHEDULE FOR MOUNTING SPECIFICS OF  
LUMINAIRE LOCATED AT TOP OF ELEVATOR SHAFT.
- 13 PROVIDE CONNECTION TO EMERGENCY PHONE. EXTEND #12,  
#12 3/4" FROM RECEPTACLE JUNCTION BOX TO BUTTON OF CALL  
BOX.
- 14 DAYLIGHT SENSOR FOR DAYLIGHT HARVESTING. PROVIDE ONE  
SENSOR PER STAIR TOWER AND CONNECT TO FOUR (3) TYPE C2 AND  
(1) TYPE C1 LUMINAIRES ON EACH TIER AND (2) TYPE C2 AND (2) TYPE C  
LUMINAIRES ON THE TOP TIER FIFTH LEVEL. LOCATE SENSOR ON  
GROUND TIER LEVEL. PER MANUFACTURER RECOMMENDATIONS. DO  
NOT CONNECT LUMINAIRE TYPE C2 AT THE STAIR LOWER LEVEL TO  
THE DAYLIGHT SENSOR.
- 15 COORDINATE ANCHOR BOLT PATTERN OF POLE WITH DECK  
MANUFACTURER PRIOR TO ORDERING POLE. COORDINATE DRILL  
PATTERN AND BOLT PATTERN OF LUMINAIRE MOUNT WITH POLE  
MANUFACTURER PRIOR TO ORDERING POLE.
- 16 BOND LIGHT POLE WITH #4 BARE COPPER WIRE TO BASE OF COLUMN'S  
VERTICAL REINFORCING BARS (IF NOT LESS THAN 1/2" IN DIAMETER),  
INSTALLED IN MULTIPLE PIECES AND CONNECTED TOGETHER BY THE  
USUAL STEEL TIE WIRES, WELDING, EXOTHERMIC WELDING, OR OTHER  
EFFECTIVE MEANS TO CREATE A CONTINUOUS PATH TO EARTH.
- 17 COORDINATE STEEL VERTICAL REINFORCING BAR CONNECTION TO  
ENSURE CONTINUOUS PATH TO EARTH WITH CONTRACTOR PRIOR TO  
CONCRETE IS POURED FOR EACH LIGHT POLE LOCATION.
- 18 PROVIDE CONNECTION TO HEATED BACKFLOW AND IRRIGATION  
ENCLOSURE, IRRIGATION CONTROLLER, AND ASSOCIATED HEAT  
TRACING. COORDINATE CONNECTION REQUIREMENT WITH EQUIPMENT  
INSTALLER. REFER TO SITE DRAWING CG100 AND PLUMBING  
DRAWINGS P101 AND P201 FOR LOCATION.
- 19 CONNECT LUMINAIRE A HEAD OF LOCAL CONTROL.
- 20 GROUND TRIAD, LOCATE MINIMUM 5' FROM BUILDING. EXTEND 1-1/4"  
FROM TRIAD TEST WELL TO MAIN GROUND ROD LOCATED IN THE  
ELECTRICAL ROOM 1104 (MGB). INSTALL CONDUIT MINIMUM 30" BELOW  
FINISHED GRADE. REFER TO DETAILS 1 AND 2 DRAWING E-500 FOR  
ADDITIONAL REQUIREMENT.
- 21 PHOTOCELL FOR BRANCH CIRCUITS VIA LIGHTING CONTACTOR LC1.  
MOUNT PHOTOCELL UNDER ROOF EAVE OF STAIR TOWER. ORIENT  
FACING NORTH.
- 22 MOUNT A COPY OF THE ELECTRICAL POWER RISER DIAGRAM, UNDER  
CLEAR PROTECTIVE MATERIAL AT THIS LOCATION.
- 23 PROVIDE NEMA1 SCREW-OVER WIREWAY, 8" WIDE X 8" HIGH X 36"  
LONG FOR SITE LIGHTING UNDERGROUND CONDUIT TERMINATIONS.  
MOUNT 24" AFF.
- 24 TYPE J1 AND J2 CONNECTED VIA LIGHTING CONTACTOR LC1  
LUMINAIRES SHALL NOT BE PROVIDED WITH INTEGRAL PHOTOCELL.  
REFER TO LUMINAIRE SCHEDULE'S NOTES.
- 25 MOUNT LUMINAIRE AT 17' AFF TO CENTER. COORDINATE LOCATION  
WITH ARCHITECTURAL DRAWINGS. REFER TO LUMINAIRE SCHEDULE  
FOR ADDITIONAL INFORMATION.
- 26 JUNCTION BOXES FOR FUTURE ELECTRIC VEHICLE CHARGER. REFER  
TO SYMBOL LEGEND FOR ADDITIONAL INFORMATION. TYPICAL FOR  
SECOND AND THIRD LEVELS.
- 27 PROVIDE TWO-GANG JUNCTION BOX FOR CONNECTION TO VEHICLE  
CHARGER SENSORS. EXTEND LOW VOLTAGE CABLE 1" CONDUIT TO  
EACH SENSOR AND MAKE CONNECTIONS. COORDINATE LOCATION  
WITH STRUCTURAL DRAWINGS AG401 AND AG402 AND SYSTEM  
VENDOR.
- 28 PROVIDE TWO-GANG JUNCTION BOX FOR CONNECTION TO LIGHTED  
SIGNS HANGING FROM BOTTOM OF DOUBLE TEES OVER EACH LANE  
(GREEN ARROW / X) AND EXTERIOR LIGHTED SIGNS, (ENTER/EXIT)  
OVER EACH LANE. COORDINATE SIGNAGE LOCATION WITH  
STRUCTURAL DRAWINGS, AG401 AND AG402 AND SYSTEM VENDOR.  
EXTEND LOW VOLTAGE CABLE IN 1" CONDUIT TO EACH SIGN.
- 29 PROVIDE TWO-GANG JUNCTION BOX FOR CONNECTION TO LIGHTED  
SIGNS HANGING FROM BOTTOM OF DOUBLE TEES OVER EACH LANE  
(GREEN ARROW / X) COORDINATE SIGNAGE LOCATION WITH  
STRUCTURAL DRAWINGS, AG401 AND AG402 AND SYSTEM VENDOR.  
EXTEND LOW VOLTAGE CABLE IN 1" CONDUIT TO EACH SIGN.
- 30 REFER TO DETAIL 9 DRAWING E-500 FOR POWER AND DATA  
REQUIREMENTS.
- 31 EXTEND (1) 1" CONDUIT UNDERGROUND FROM WEATHERPROOF  
JUNCTION BOX TO ELECTRICAL ROOM PANEL 1N1 SECTION II FOR  
FUTURE GATE AND TERMINATE AT BOTH ENDS. MOUNT JUNCTION BOX  
12" AFF PROVIDE WEATHERPROOF COVER PLATE AND LABEL.
- 32 EXTEND (1) 1-1/2" CONDUIT UNDERGROUND FROM WEATHERPROOF  
JUNCTION BOX TO TELECOM ROOM EAST WALL FOR FUTURE GATE.  
MOUNT JUNCTION BOX 10" AFF. PROVIDE WEATHERPROOF COVER  
PLATE AND LABEL. STUB-UP CONDUIT IN TELECOM ROOM 10" AFF.
- 33 REFER TO ARCHITECTURAL CURTAIN WALL DETAIL DRAWING FOR EXIT  
SIGN MOUNTING LOCATION.
- 34 EXTEND (1) 1" CONDUIT FOR POWER AND (1) 1" CONDUIT FOR DATA,  
SAME AS NOTES 31 AND 32 EXCEPT FOR FUTURE PAY BY SPACE  
MACHINE. COORDINATE FINAL LOCATION WITH UNCW PRIOR TO  
INSTALLATION.
- 35 PROVIDE HEAVY DUTY NEMA 4X, 240 V, 30 AMP NON-FUSED  
DISCONNECT FOR BOOSTER PUMP. EXTEND 38", 18" G, 1" CONDUIT  
UNDERGROUND FROM DISCONNECT TO PANEL 1N1 SECTION II TO  
CIRCUIT INDICATED, AND EXTEND 3/12", #12 G, 3/4" CONDUIT FROM  
DISCONNECT TO PUMP AND MAKE CONNECTIONS. PUMP HEATED  
ENCLOSURE SHALL BE CONNECTED TO THE BACKFLOW HEATED  
ENCLOSURE CIRCUIT 1N1-12 AT THIS LOCATION. REFER TO KEY NOTE  
18 FOR ADDITIONAL INFORMATION.
- 36 MOUNT RECEPTACLE 12" AFF IN REAR WALL.
- 37 PROVIDE SUPPORT STRUCTURE FOR THE STROBE / LORATOR LIGHT  
TO BE MOUNTED 96" AFF.


$1/4" = 1' - 0"$   
 $1/16" = 1' - 0"$

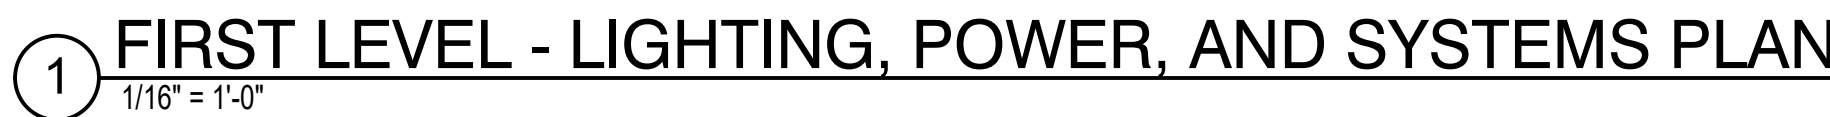









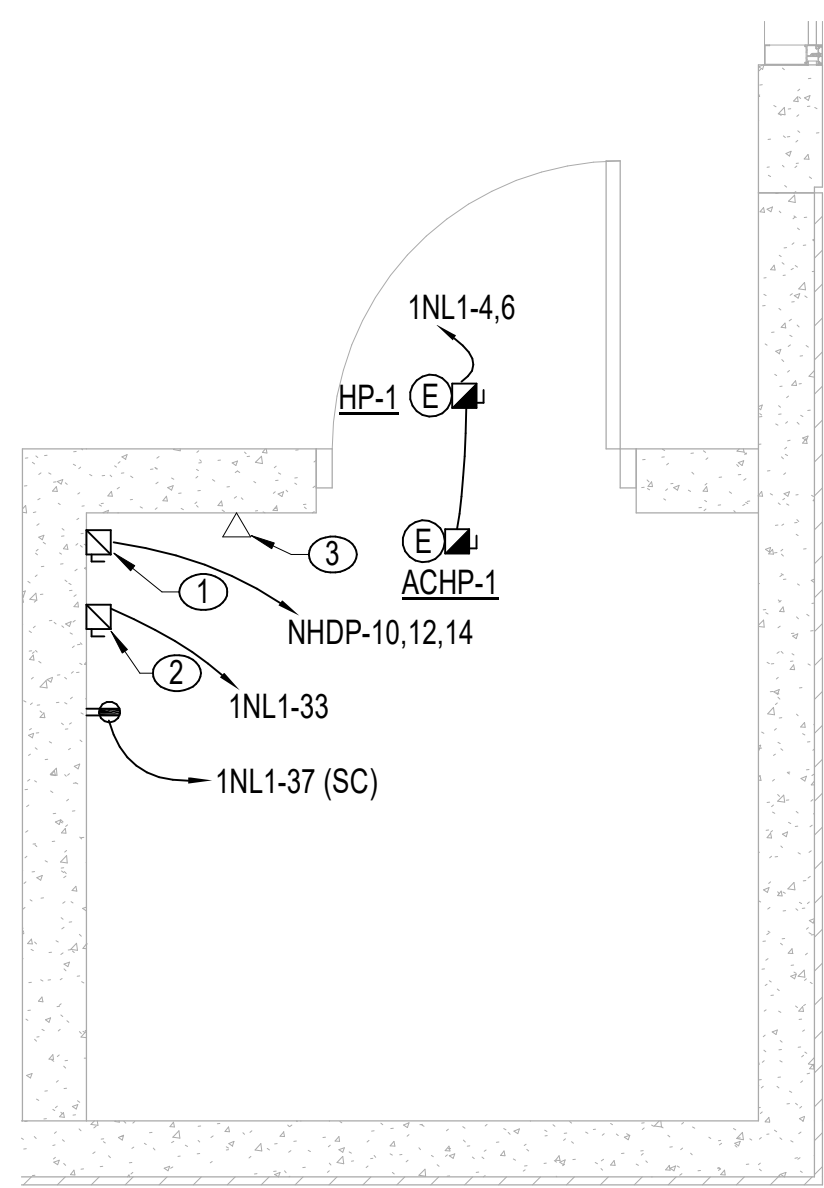

2 ENLARGED SOUTHWEST ELEVATOR CLOSET POWER PLAN  
1/2" = 1'-0"

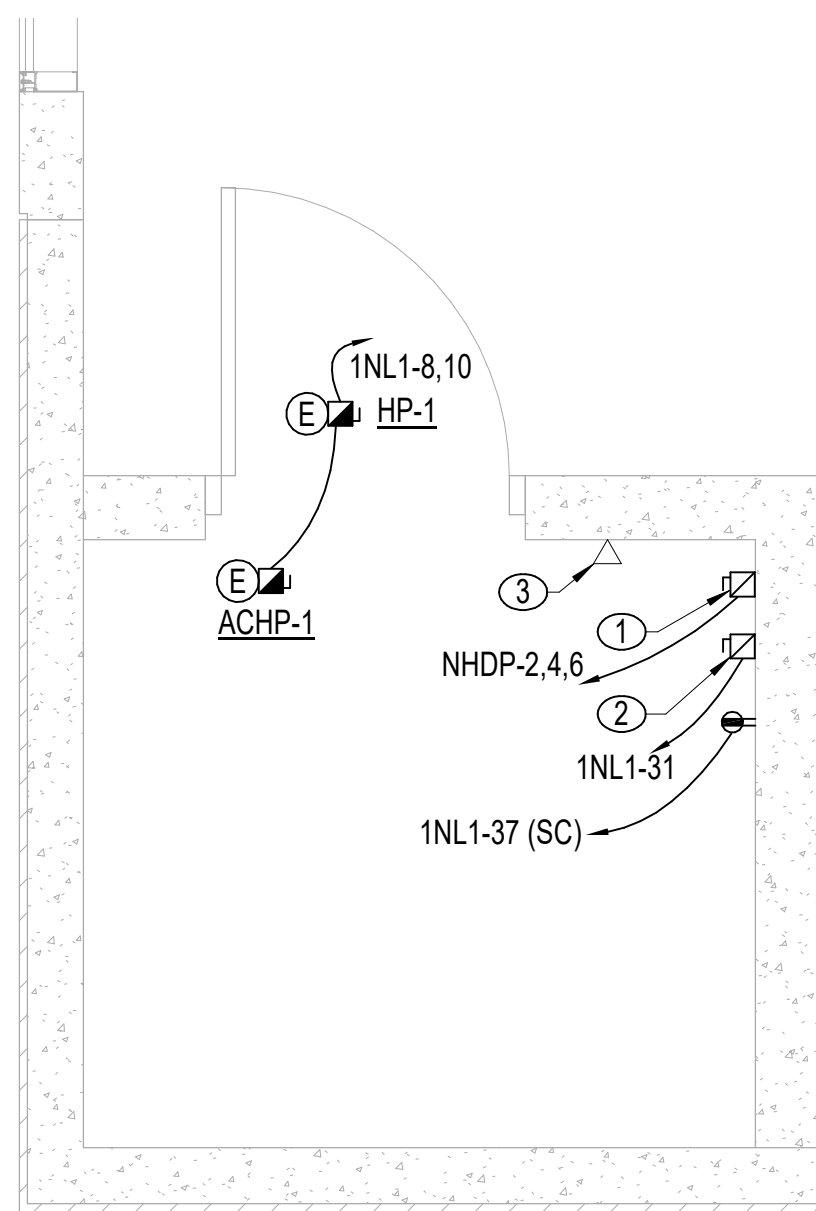

### 3 ENLARGED SOUTHEAST ELEVATOR CLOSET POWER PLAN

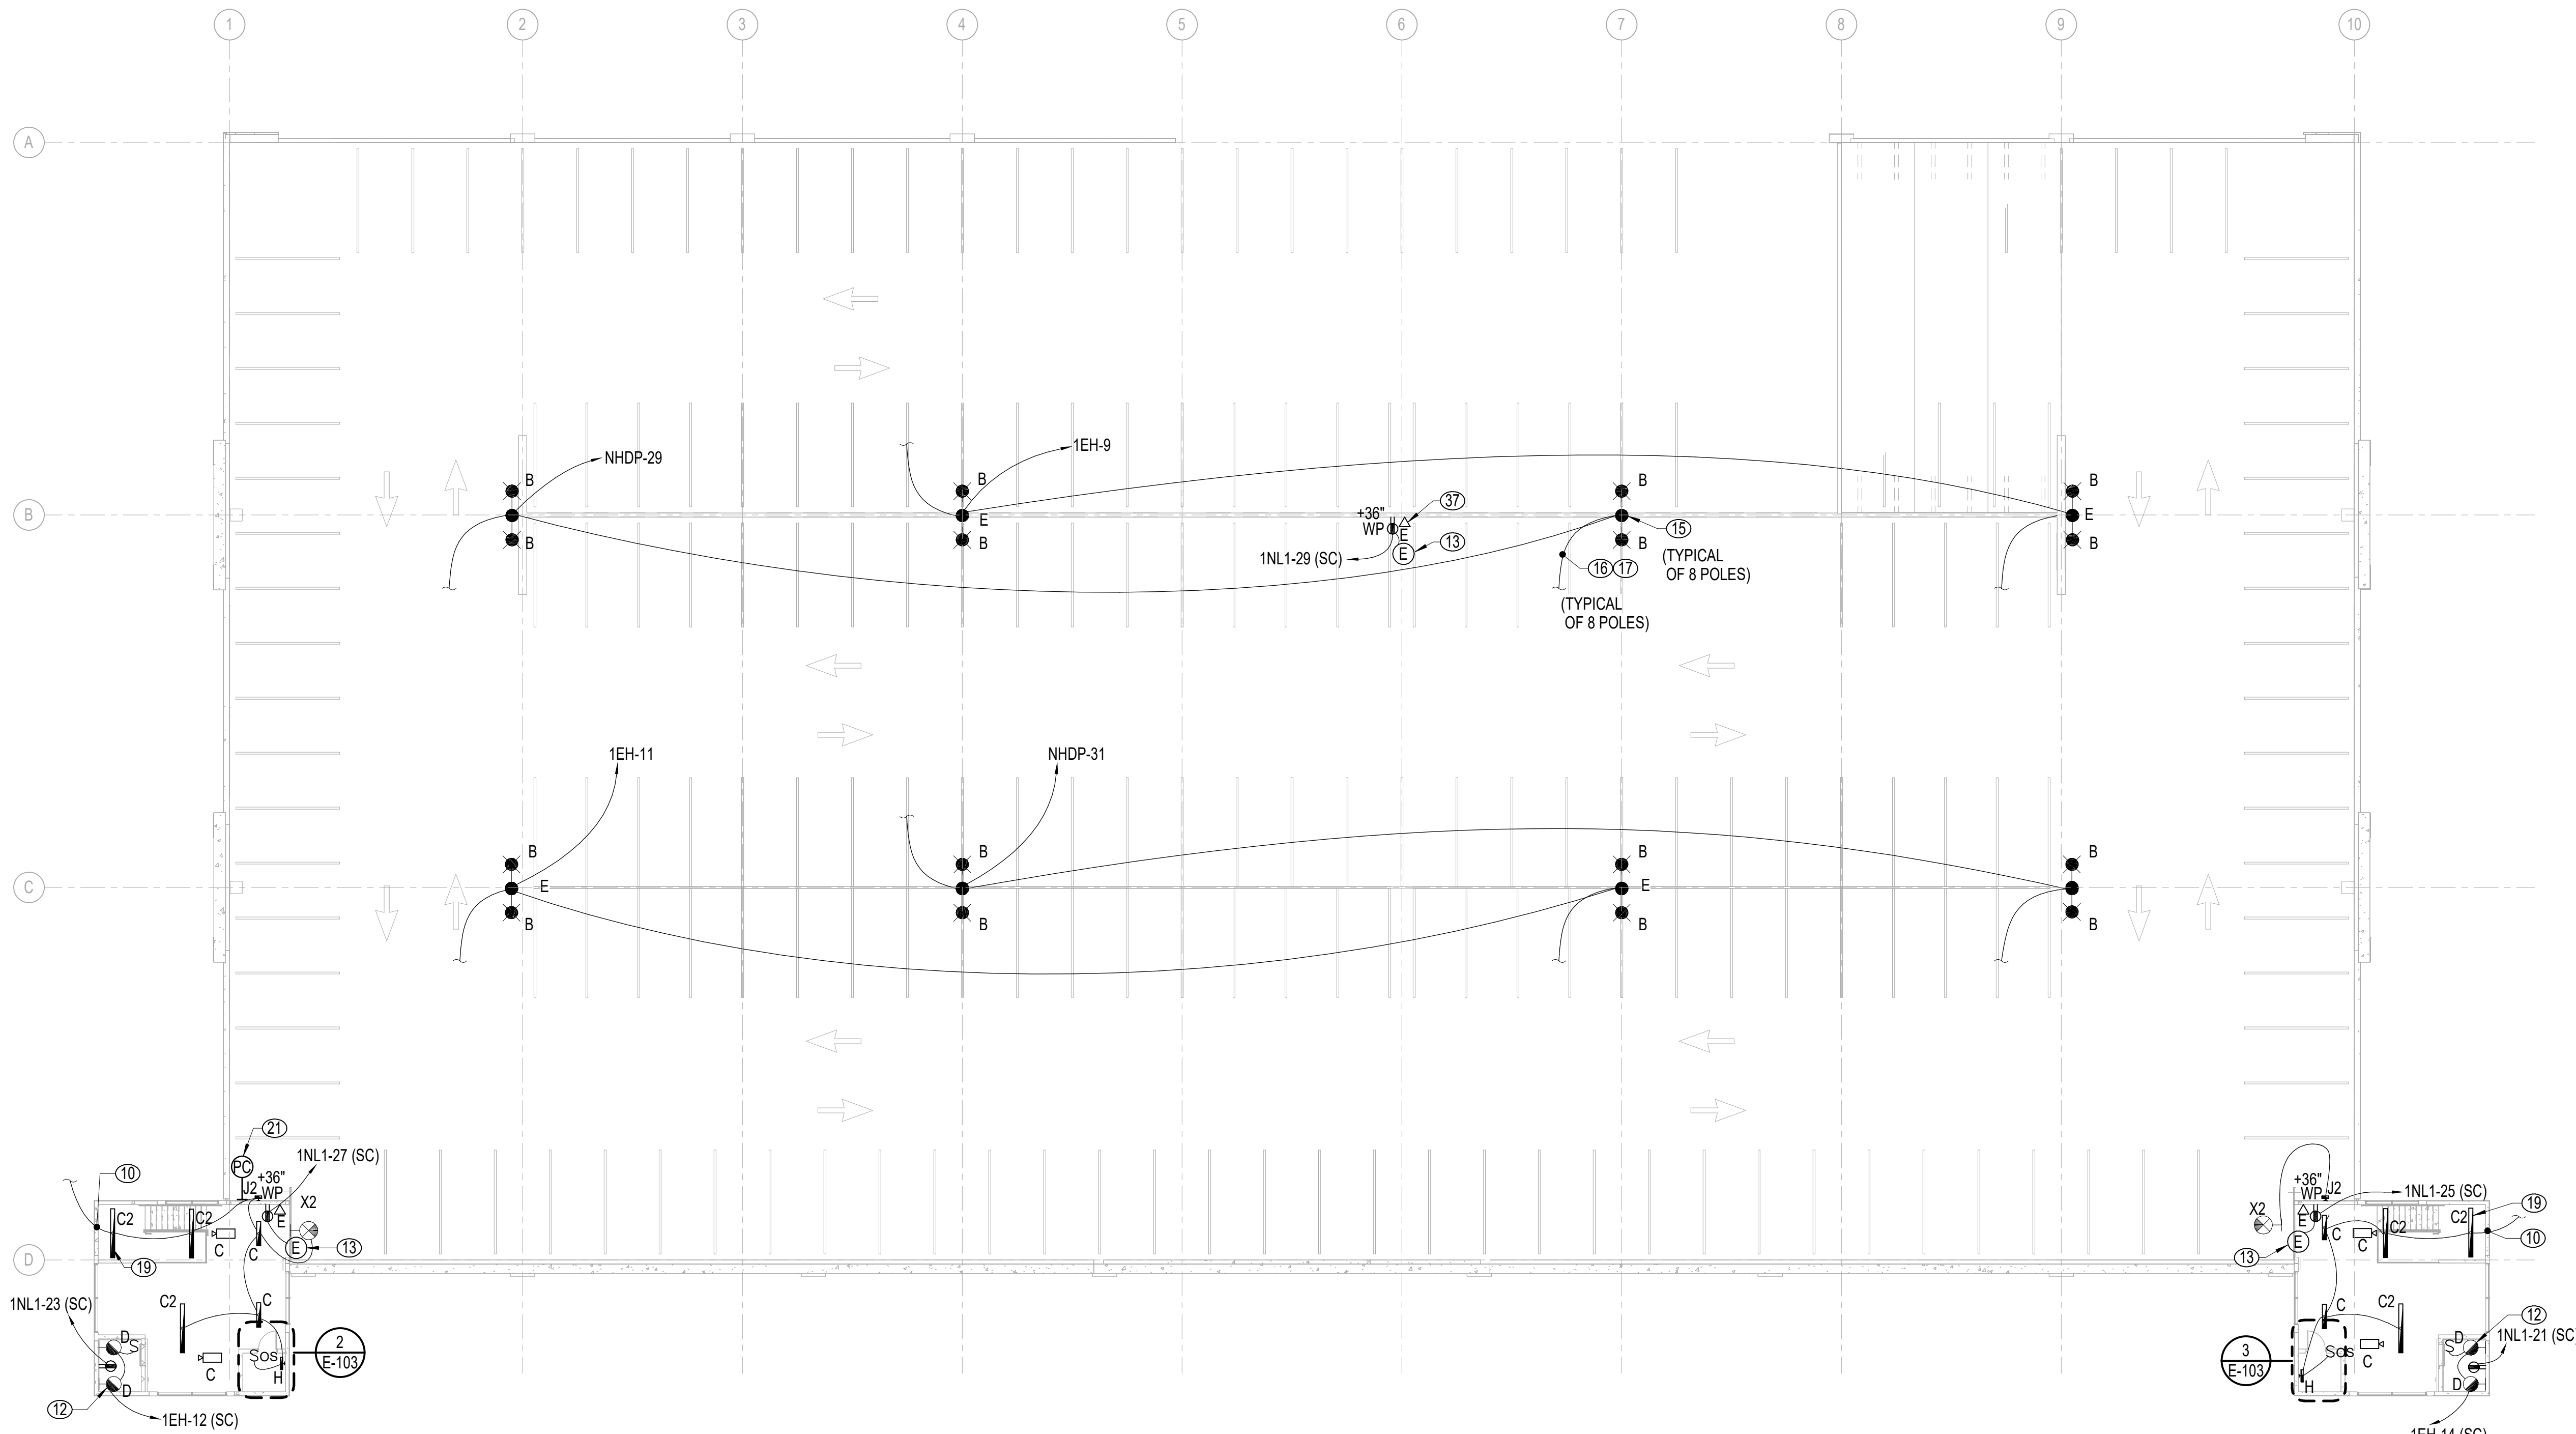

**1 FIFTH LEVEL - LIGHTING, POWER, AND SYSTEMS PLAN**  
1/16" = 1'-0"


## GENERAL NOTES

1. PROVIDE EMERGENCY LIGHTING AND SIGNAGE AS REQUIRED BY LOCAL CODES TO ILLUMINATE AND IDENTIFY EGRESS PATHS UTILIZING THE CENTRAL LIGHTING INVERTER. WIRING FROM EMERGENCY SOURCE DISTRIBUTION OVERCURRENT PROTECTION TO EMERGENCY LOADS SHALL BE KEPT ENTIRELY INDEPENDENT OF ALL OTHER WIRING AND EQUIPMENT AND SHALL NOT ENTER THE SAME RACEWAY, CABLE BOX OR CABINET WITH OTHER WIRING.
2. CONDUITS ARE TO BE LOCATED IN THE GARAGE INTERIOR TO MINIMIZE VISUAL IMPACT. DO NOT ROUTE CONDUITS ON THE EXTERIOR OF ANY PART OF THE STRUCTURE. FIXTURES LOCATED ON THE EXTERIOR OF THE STRUCTURE ARE TO BE FED FROM BEHIND WITH NO CONDUIT VISIBLE FROM THE OUTSIDE.
3. ALL RECEPTACLES SHALL BE GFI TYPE, UNLESS OTHERWISE NOTED. ALL RECEPTACLES EXCEPT THOSE IN ENCLOSED ROOMS SHALL HAVE WEATHERPROOF WHILE-IN-USE COVERS.

# NOTES

- 1 ELEVATOR MOTOR FUSED DISCONNECT. FUSE PER MANUFACTURER'S  
RECOMMENDATION. REFER TO RISER DIAGRAM E-600 FOR ADDITIONAL  
INFORMATION. DISCONNECT SHALL BE LOCKABLE IN THE OPEN  
POSITION.
- 2 ELEVATOR CAB LIGHT AND CONTROL FUSED DISCONNECT. PROVIDE  
120V, 30A, 20A FUSE LOCKABLE IN THE OPEN POSITION.
- 3 PROVIDE (1) VOICE LINE FOR EACH ELEVATOR. FIELD COORDINATE  
SPECIFICS AND FINAL LOCATION WITH ELEVATOR SUPPLIER.
- 4 SUMP PUMP CONTROLLER. COORDINATE LOCATION WITH SUMP PUMP  
SUPPLIER.
- 5 PROVIDE NEMA 16-20R, 208V, TWIST-LOCK STYLE RECEPTACLE.  
LOCATE BELOW THE PROPOSED TELECOMMUNICATIONS CABINET.  
REFER TO DRAWING E-600 FOR CABINET REQUIREMENTS.
- 6 PROVIDE NEMA 5-20R, 120V, 20A RECEPTACLE. LOCATE BELOW THE  
PROPOSED WALL-MOUNT TELECOMMUNICATIONS CABINET. REFER TO  
DRAWING E-600 FOR CABINET REQUIREMENTS.
- 7 VOICE LINE FOR FIRE ALARM DIGITAL COMMUNICATOR. COORDINATE  
SPECIFICS WITH FIRE ALARM SYSTEM SUPPLIER.
- 8 CONNECT TO STAIR LUMINAIRE ON TIER ABOVE.
- 9 CONNECT TO STAIR LUMINAIRE ON TIER ABOVE AND TIER BELOW.
- 10 CONNECT TO STAIR LUMINAIRE ON TIER BELOW.
- 11 (2) " INCOMING TELECOM CONDUITS FROM MANHOLE MH-14A5. REFER  
TO DRAWING ES101 FOR CONTINUATION.
- 12 REFER TO LUMINAIRE SCHEDULE FOR MOUNTING SPECIFICS OF  
LUMINAIRE LOCATED AT TOP OF ELEVATOR SHAFT.
- 13 PROVIDE CONNECTION TO EMERGENCY PHONE. EXTEND 2#12,  
1#12,3/4"C FROM RECEPTACLE JUNCTION BOX TO BUTTON OF CALL  
BOX.
- 14 DAYLIGHT SENSOR FOR DAYLIGHT HARVESTING. PROVIDE ONE  
SENSOR PER STAIR TOWER AND CONNECT TO FOUR (3) TYPE C2 AND  
(1) TYPE C LUMINAIRES ON EACH TIER AND (2) TYPE C2 AND (2) TYPE C  
LUMINAIRES ON THE TOP FIFTH LEVEL. LOCATE SENSOR ON  
SECOND TIER LEVEL. PROVIDE ELECTRICAL MOUNTING HARDWARES. DO  
NOT CONNECT LAMINAR TYPE C2 AT THE STAIR LOWER LANDING TO  
THE DAYLIGHT SENSOR.
- 15 COORDINATE ANCHOR BOLT PATTERN OF POLE WITH DECK  
MANUFACTURER PRIOR TO ORDERING POLE. COORDINATE DRILL  
PATTERN AND BOLT PATTERN OF LUMINAIRE MOUNT WITH POLE  
MANUFACTURER PRIOR TO ORDERING POLE.
- 16 BOND LIGHT POLE WITH #4 BARE COPPER WIRE TO BASE OF COLUMN'S  
VERTICAL REINFORCING BARS (IF NOT LESS THAN 1/2" IN DIAMETER).  
INSTALLED IN MULTIPLE PIECES AND CONNECTED TOGETHER BY THE  
USUAL STEEL TIE WIRES, WELDING, EXOTHERMIC WELDING, OR OTHER  
EFFECTIVE MEANS TO CREATE A CONTINUOUS PATH TO EARTH.
- 17 COORDINATE STEEL VERTICAL REINFORCING BAR CONNECTION TO  
BOND CONTINUOUS PATH TO EARTH WITH CONTRACTOR PRIOR TO  
CONCRETE IS POURED FOR EACH LIGHT POLE LOCATION.
- 18 PROVIDE CONNECTION TO HEATED BACKFLOW AND IRRIGATION  
ENCLOSURE, IRRIGATION CONTROLLER, AND ASSOCIATED HEAT  
TRACING. COORDINATE CONNECTION REQUIREMENT WITH EQUIPMENT  
INSTALLER. REFER TO SITE DRAWING CG100 AND PLUMBING  
DRAWINGS P101 AND P201 FOR LOCATION.
- 19 CONNECT LUMINAIRE A HEAD OF LOCAL CONTROL.
- 20 GROUND TRIAD, LOCATE MINIMUM 5' FROM BUILDING. EXTEND 1-1/4"C  
FROM GROUND TEST WELL TO MAIN GROUND ROD LOCATED IN THE  
ELECTRICAL ROOM 1104 (MGB). INSTALL CONDUIT MINIMUM 30" BELOW  
FINISHED GRADE. REFER TO DETAILS 1 AND 2 DRAWING E-500 FOR  
ADDITIONAL REQUIREMENT.
- 21 PHOTOCELL FOR BRANCH CIRCUITS VIA LIGHTING CONTACTOR LC1.  
MOUNT PHOTOCELL UNDER ROOF EAVE OF STAIR TOWER. ORIENT  
FACING NORTH.
- 22 MOUNT A COPY OF THE ELECTRICAL POWER RISER DIAGRAM, UNDER  
CLEAR PROTECTIVE MATERIAL AT THIS LOCATION.
- 23 PROVIDE NEMA1 SCREW-OVER WIREWAY, 8" WIDE X 8" HIGH X 36"  
LONG FOR SITE LIGHTING UNDERGROUND CONDUIT TERMINATIONS.  
MOUNT 24" AFF.
- 24 TYPE J1 AND J2 CONNECTED VIA LIGHTING CONTACTOR LC1  
LUMINAIRES SHALL NOT BE PROVIDED WITH INTEGRAL PHOTOCELL.  
REFER TO LUMINAIRE SCHEDULE'S NOTES.
- 25 MOUNT LUMINAIRE AT 17" AFF TO CENTER. COORDINATE LOCATION  
WITH ARCHITECTURAL DRAWINGS. REFER TO LUMINAIRE SCHEDULE  
FOR ADDITIONAL INFORMATION.
- 26 JUNCTION BOXES FOR FUTURE ELECTRIC VEHICLE CHARGER. REFER  
TO SYMBOL LEGEND FOR ADDITIONAL INFORMATION. TYPICAL FOR  
SECOND AND THIRD LEVELS.
- 27 PROVIDE TWO-GANG JUNCTION BOX FOR CONNECTION TO VEHICLE  
COUNTING SENSORS. EXTEND LOW VOLTAGE CABLE 1" CONDUIT TO  
EACH SENSOR AND MAKE CONNECTIONS. COORDINATE LOCATION  
WITH STRUCTURAL DRAWINGS AG401 AND AG402 AND SYSTEM  
VENDOR.
- 28 PROVIDE TWO-GANG JUNCTION BOX FOR CONNECTION TO LIGHTED  
SIGNS HANGING FROM BOTTOM OF DOUBLE TEES OVER EACH LANE  
(GREEN ARROW \X) AND EXTERIOR LIGHTED SIGNS, (ENTER EXIT)  
OVER EACH LANE. COORDINATE SIGNAGE LOCATION WITH  
STRUCTURAL DRAWINGS, AG401 AND AG402 AND SYSTEM VENDOR.  
EXTEND LOW VOLTAGE CABLE IN 1" CONDUIT TO EACH SIGN.
- 29 PROVIDE TWO-GANG JUNCTION BOX FOR CONNECTION TO LIGHTED  
SIGNS HANGING FROM BOTTOM OF DOUBLE TEES OVER EACH LANE  
(GREEN ARROW \X). COORDINATE SIGNAGE LOCATION WITH  
STRUCTURAL DRAWINGS, AG401 AND AG402 AND SYSTEM VENDOR.  
EXTEND LOW VOLTAGE CABLE IN 1" CONDUIT TO EACH SIGN.
- 30 REFER TO DETAIL 9 DRAWING E-500 FOR POWER AND DATA  
REQUIREMENTS.
- 31 EXTEND (1) 1" CONDUIT UNDERGROUND FROM WEATHERPROOF  
JUNCTION BOX TO ELECTRICAL ROOM PANEL. IN1 SECTION II FOR  
FUTURE GATE AND TERMINATE AT BOTH ENDS. MOUNT JUNCTION BOX  
12" AFF PROVIDE WEATHERPROOF COVER PLATE AND LABEL.
- 32 EXTEND (1) 1-1/2" CONDUIT UNDERGROUND FROM WEATHERPROOF  
JUNCTION BOX TO TELECOM ROOM EAST WALL FOR FUTURE GATE.  
MOUNT JUNCTION BOX 12" AFF PROVIDE WEATHERPROOF COVER  
PLATE AND LABEL. STUB-UP CONDUIT IN TELECOM ROOM 10" AFF.
- 33 REFER TO ARCHITECTURAL CURTAIN WALL DETAIL DRAWING FOR EXIT  
SIGN MOUNTING LOCATION.
- 34 EXTEND (1) CONDUIT FOR POWER AND (1) CONDUIT FOR DATA.  
SAME AS NOTES 31 AND 32 EXCEPT FOR FUTURE PAY BY SPACE  
MACHINE. COORDINATE FINAL LOCATION WITH UNOW PRIOR TO  
INSTALLATION.
- 35 PROVIDE HEAVY DUTY NEMA 4X, 240 V, 30 AMP NON-FUSED  
DISCONNECT FOR BOOSTER PUMP. EXTEND 3#8, 1#8 G, 1" CONDUIT  
UNDERGROUND FROM DISCONNECT TO PANEL IN1 SECTION II TO  
CIRCUIT INDICATED, AND EXTEND 2#12, 1#12 G, 3/4" CONDUIT FROM  
DISCONNECT TO PUMP AND MAKE CONNECTIONS. PUMP HEATED  
ENCLOSURE SHALL BE CONNECTED TO THE BACKFLOW KEATED  
ENCLOSURE CIRCUIT IN1-12 AT THIS LOCATION. REFER TO KEY NOTE  
18 FOR ADDITIONAL INFORMATION.
- 36 MOUNT RECEPTACLE 12" AFF IN REAR WALL.
- 37 PROVIDE SUPPORT STRUCTURE FOR THE STROBE / LOCATOR LIGHT TO  
BE MOUNTED 96" AFF.

GRAPHIC SCALE(S)

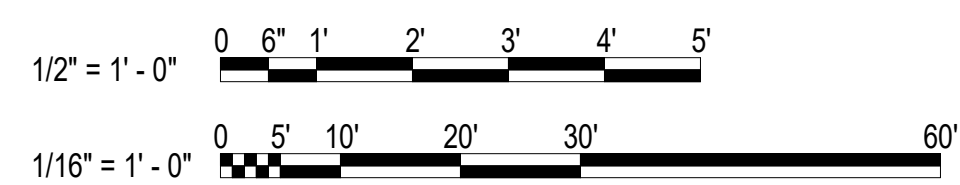

UNIVERSITY of NORTH CAROLINA WILMINGTON  
601 S COLLEGE ROAD  
WILMINGTON, NORTH CAROLINA 28403  
PARKING DECK II AND SURFACE  
PARKING (DESIGN-BUILD)  
SOUTH CAMPUS - 4965 RIEGEL ROAD

SCO ID NUMBER: 18-19226-01A  
CODE: 41828  
ITEM: 301

CONTRACT

**Balfour Beatty**  
Construction

DESIGNER

CLARK NEXSEN

1523 ELIZABETH AVENUE, SUITE 300  
CHARLOTTE, NORTH CAROLINA 28204  
704-377-8800

CLARK NEXSEN LICENSE NUMBER: C-1028



13860 Ballantyne Corporate Place  
Suite 140  
Charlotte, NC 28277  
T: 704.247.6230  
[www.walkerconsultants.com](http://www.walkerconsultants.com)  
NC License No. F-0518



CIVIL ENGINEER  
243 NORTH FRONT STREET  
WILMINGTON, NORTH CAROLINA  
28401  
910.343.1048

PROFESSIONAL SEA



NC CORPORATE ENGINEERING LICENSE #C-1028

SUBMITTA

04/15/2019

CONSTRUCTION DOCUMENT  
SUBMITTAL 01

## REVISIONS

## KEY PLAN

**SHEE**

## FIFTH LEVEL - LIGHTING, POWER AND SYSTEMS PLAN

E-103

DESIGN: JE  
DRAWN: KAW  
REVIEW: WAZ

CN 8112



## 8 RECEPTACLE GROUNDING DETAIL

9 ENLARGED ENTRANCE GATE WIRING DETAIL (SOUTHEAST AND SOUTHWEST)  
NO SCALE

1. PROVIDE CAT 6 SURGE PROTECTOR (DTK-RMJPOE) IN AN ENCLOSURE LOCATED WITHIN 6 FEET OF EACH CAMERA.
2. PROVIDE RACK MOUNTED DITEK DTK-RM12POE 12 PORT SURGE PROTECTION PATCH PANEL. SURGE PROTECTION PATCH PANEL SHALL BE GROUNDED USING #8 AWG WIRE TO SGB.
3. PROVIDE GROUND BAR IN ENCLOSURE TO PROVIDE A CONNECTION TO GROUND FOR CAMERA SURGE PROTECTORS. THE DISTANCE BETWEEN THE DITEK RMJPOE MODULES AND GROUND SHOULD BE LESS THAN THE CABLE DISTANCE BETWEEN THE MODULE AND THE CAMERA IT PROTECTS. PROVIDE #6 AWG, GREEN, INSULATED, AND STRANDED GROUND CONDUCTOR FROM SGB IN THE SECURITY ROOM TO GROUND BAR. PROVIDE #8 AWG, GREEN, INSULATED, AND STRANDED GROUND CONDUCTOR FROM GROUND BAR TO EACH CAMERA SURGE PROTECTOR.
4. PROVIDE HINGED ENCLOSURE LOCATED WITHIN 6 FEET OF EACH CAMERA TO HOUSE DTK-RMJPOEB AND GROUND BAR. HINGED ENCLOSURE SHALL BE 8" SQUARE AND 6" DEEP.
5. PROVIDE 18" x 18" x 6" DEEP HINGED ENCLOSURE FOR POE EXTENDER (AXIS MODEL# T8129-E). INSTALL ENCLOSURE AT MAXIMUM 250 FEET FROM SECURITY ROOM TO EACH HOME RUN. PROVIDE ONE POE EXTENDER PER EACH CAT6 CABLE AND LABEL.

**10 CAMERA STANDARDS DETAIL**  
NO SCALE

NOTES:

1. COPPER GROUND BAR, DOUBLE LUG CONFIGURATION; TMGB 1/4 X 4" X 24". UL LISTED WITH PRE-DRILLED HOLES IN BICSI PATTERN.
2. STANDOFF BRACKET ASSEMBLY WITH INSULATORS, TYPICAL FOR TWO.

- (A) COPPER GROUND BAR
- (B) INSULATORS
- (C) 3/8" LOCKWASHERS
- (D) WALL MOUNTING BRACKET
- (E) 3/8 = 11x1" HEX CAP SCREW BOLT
- (F) PROVIDE APPROPRIATE EXPANSION SHIELDS & BOLTS FOR MOUNTING ON CONCRETE STRUCTURE

FRONT VIEW

GENERAL NOTES

1. PROVIDE THREE HOLES SUITABLE FOR NEMA SPACING FOR #1/0 THROUGH 500 KCMIL 2 HOLE COMPRESSION CONNECTORS.
2. PROVIDE 1/4" LEXAN COVER WITH GROUND BAR ID'S "CAUTION POSSIBLE HIGH VOLTAGE PRESENT" SIGN.
3. PROVIDE 50% SPARE HOLES FOR EACH GROUND BAR.

NOTES:

1. WIRES TO BE NEATLY LACED.
2. AT THE POINT OF ATTACHMENT OF THE GROUNDING LUG TO THE CABINET, THE SURFACES SHALL BE SCRAPED FREE OF PAINT AND THOROUGHLY CLEANED TO INSURE PROPER BONDING.
3. NEUTRAL CONDUCTOR NOT SHOWN FOR CLARITY.

5 TELECOMMUNICATIONS GROUNDING BUSBAR DETAILS  
NO SCALE

## 1 GROUNDING SYSTEM DETAIL

## 2 GROUNDING TRIAD

### 3 GROUNDING TEST WELL

## 4 GROUND CABLE CONNECTION TO WATER PIPE



UNIVERSITY of NORTH CAROLINA WILMINGTON  
601 S COLLEGE ROAD  
WILMINGTON, NORTH CAROLINA 28403  
PARKING DECK II AND SURFACE  
PARKING (DESIGN-BUILD)  
SOUTH CAMPUS - 4965 RIEGEL ROAD

SCO ID NUMBER: 18-19226-01A  
CODE: 41828  
ITEM: 301

CONTRACTOR  
**Balfour Beatty**  
Construction

DESIGNER

CLARKNEXSEN

1523 ELIZABETH AVENUE, SUITE 300  
CHARLOTTE, NORTH CAROLINA 28204  
704-377-8800

CLARK NEXSEN LICENSE NUMBER: C-1028




**WALKER**  
CONSULTANTS

13860 Ballantyne Corporate Place  
Suite 140  
Charlotte, NC 28277  
T: 704.247.6230  
[www.walkerconsultants.com](http://www.walkerconsultants.com)  
NC License No. F-0518



CIVIL ENGINEER  
243 NORTH FRONT STREET  
WILMINGTON, NORTH CAROLINA  
28401  
910.343.1048

PROFESSIONAL SEA

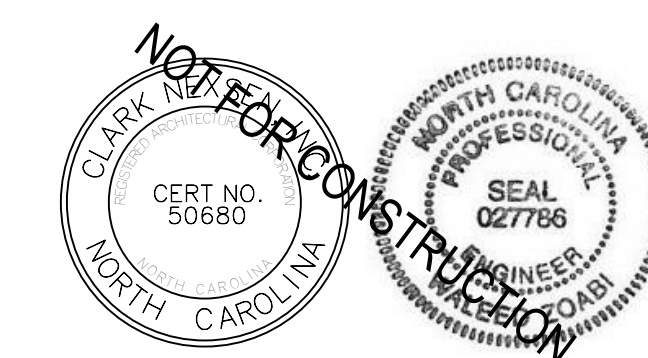

NC CORPORATE ENGINEERING LICENSE #C-1028

SUBMITTAL

04/15/2019

CONSTRUCTION DOCUMENT  
SUBMITTAL 01

## REVISIONS


## KEY PLAN

SHEET

## ELECTRICAL DETAILS


# E-500

DESIGN: WAZ  
DRAWN: KAW  
REVIEW: WAZ

CN 8112







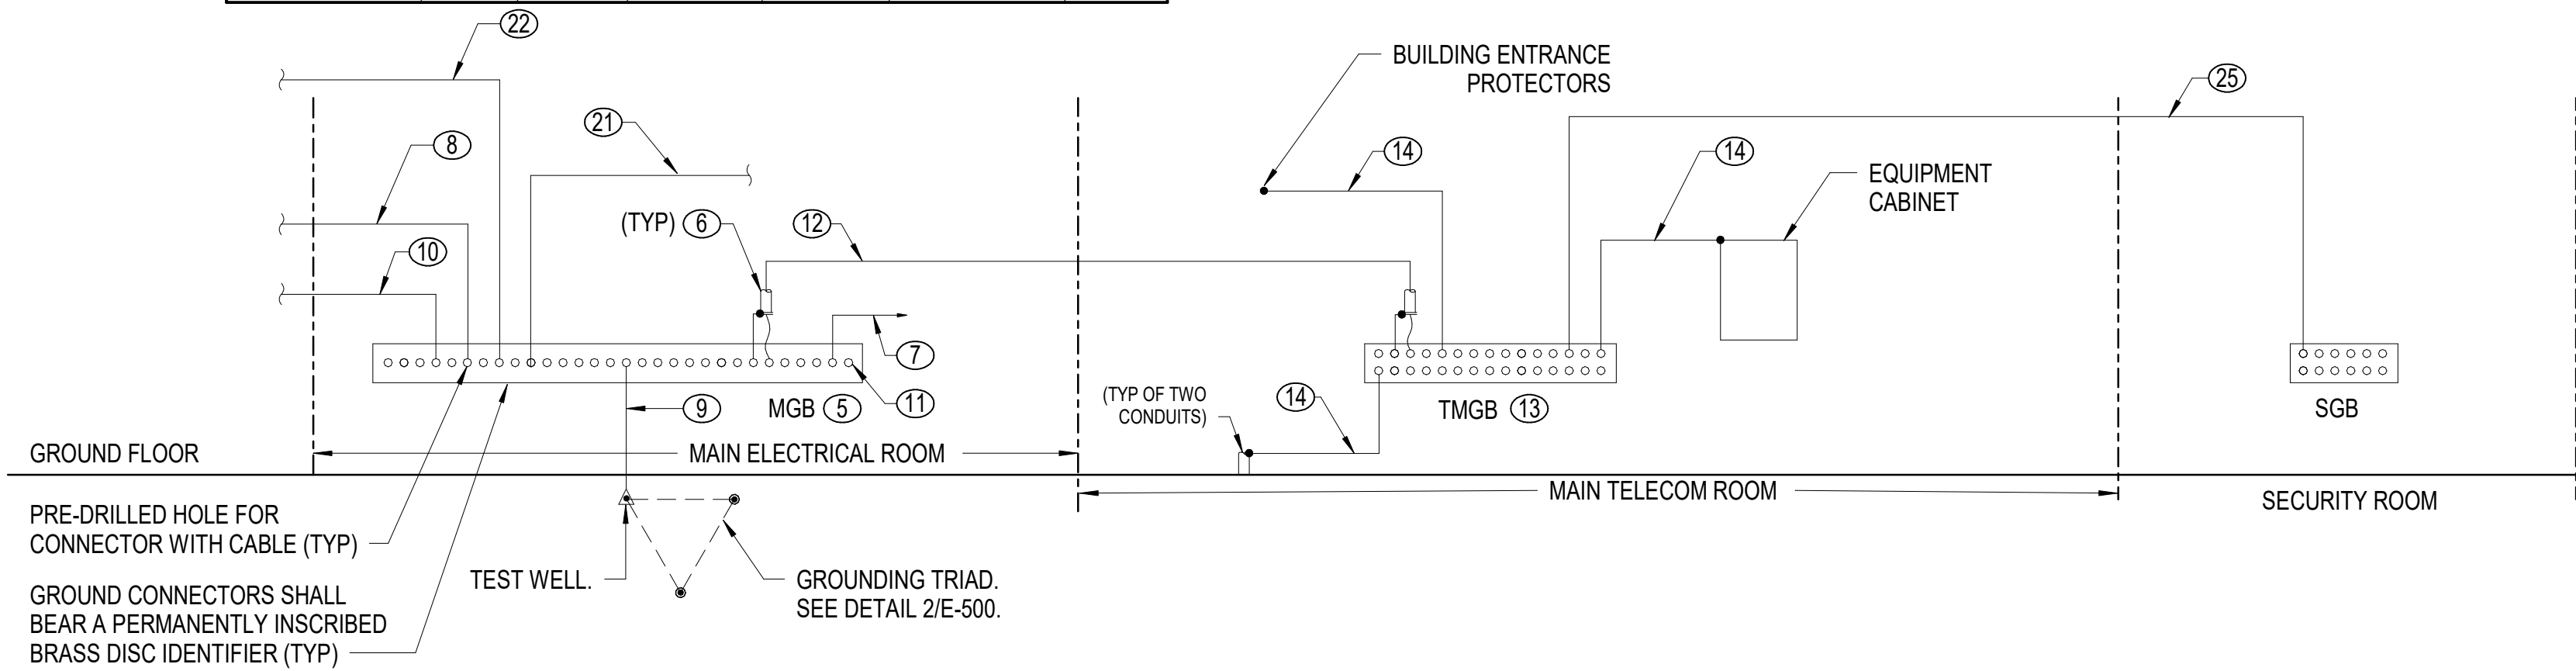

FEEDER SCHEDULE						
DESIGNATION	NO. OF SETS	CONDUCTORS			CONDUIT	NOTES
		PHASE	NEUTRAL	GROUND		
40	1	3#8	1#8	#8	1"	COPPER
40BS	1	3#6	1#6	#8	1"	COPPER
40VD	1	3#6	1#6	#8	1"	COPPER
50B	1	3#4	1#4	#8	1-1/4"	COPPER
110D	1	3#1	-	1#6	1-1/4"	COPPER
150Y	1	3#10	1#10	1#6	1-1/2"	COPPER
250TS	1	3-250 KCMIL	1-250 KCMIL	1#2	3"	COPPER
250US	1	3-300 KCMIL	1-300 KCMIL	-	4" (1-4" SPARE)	COPPER

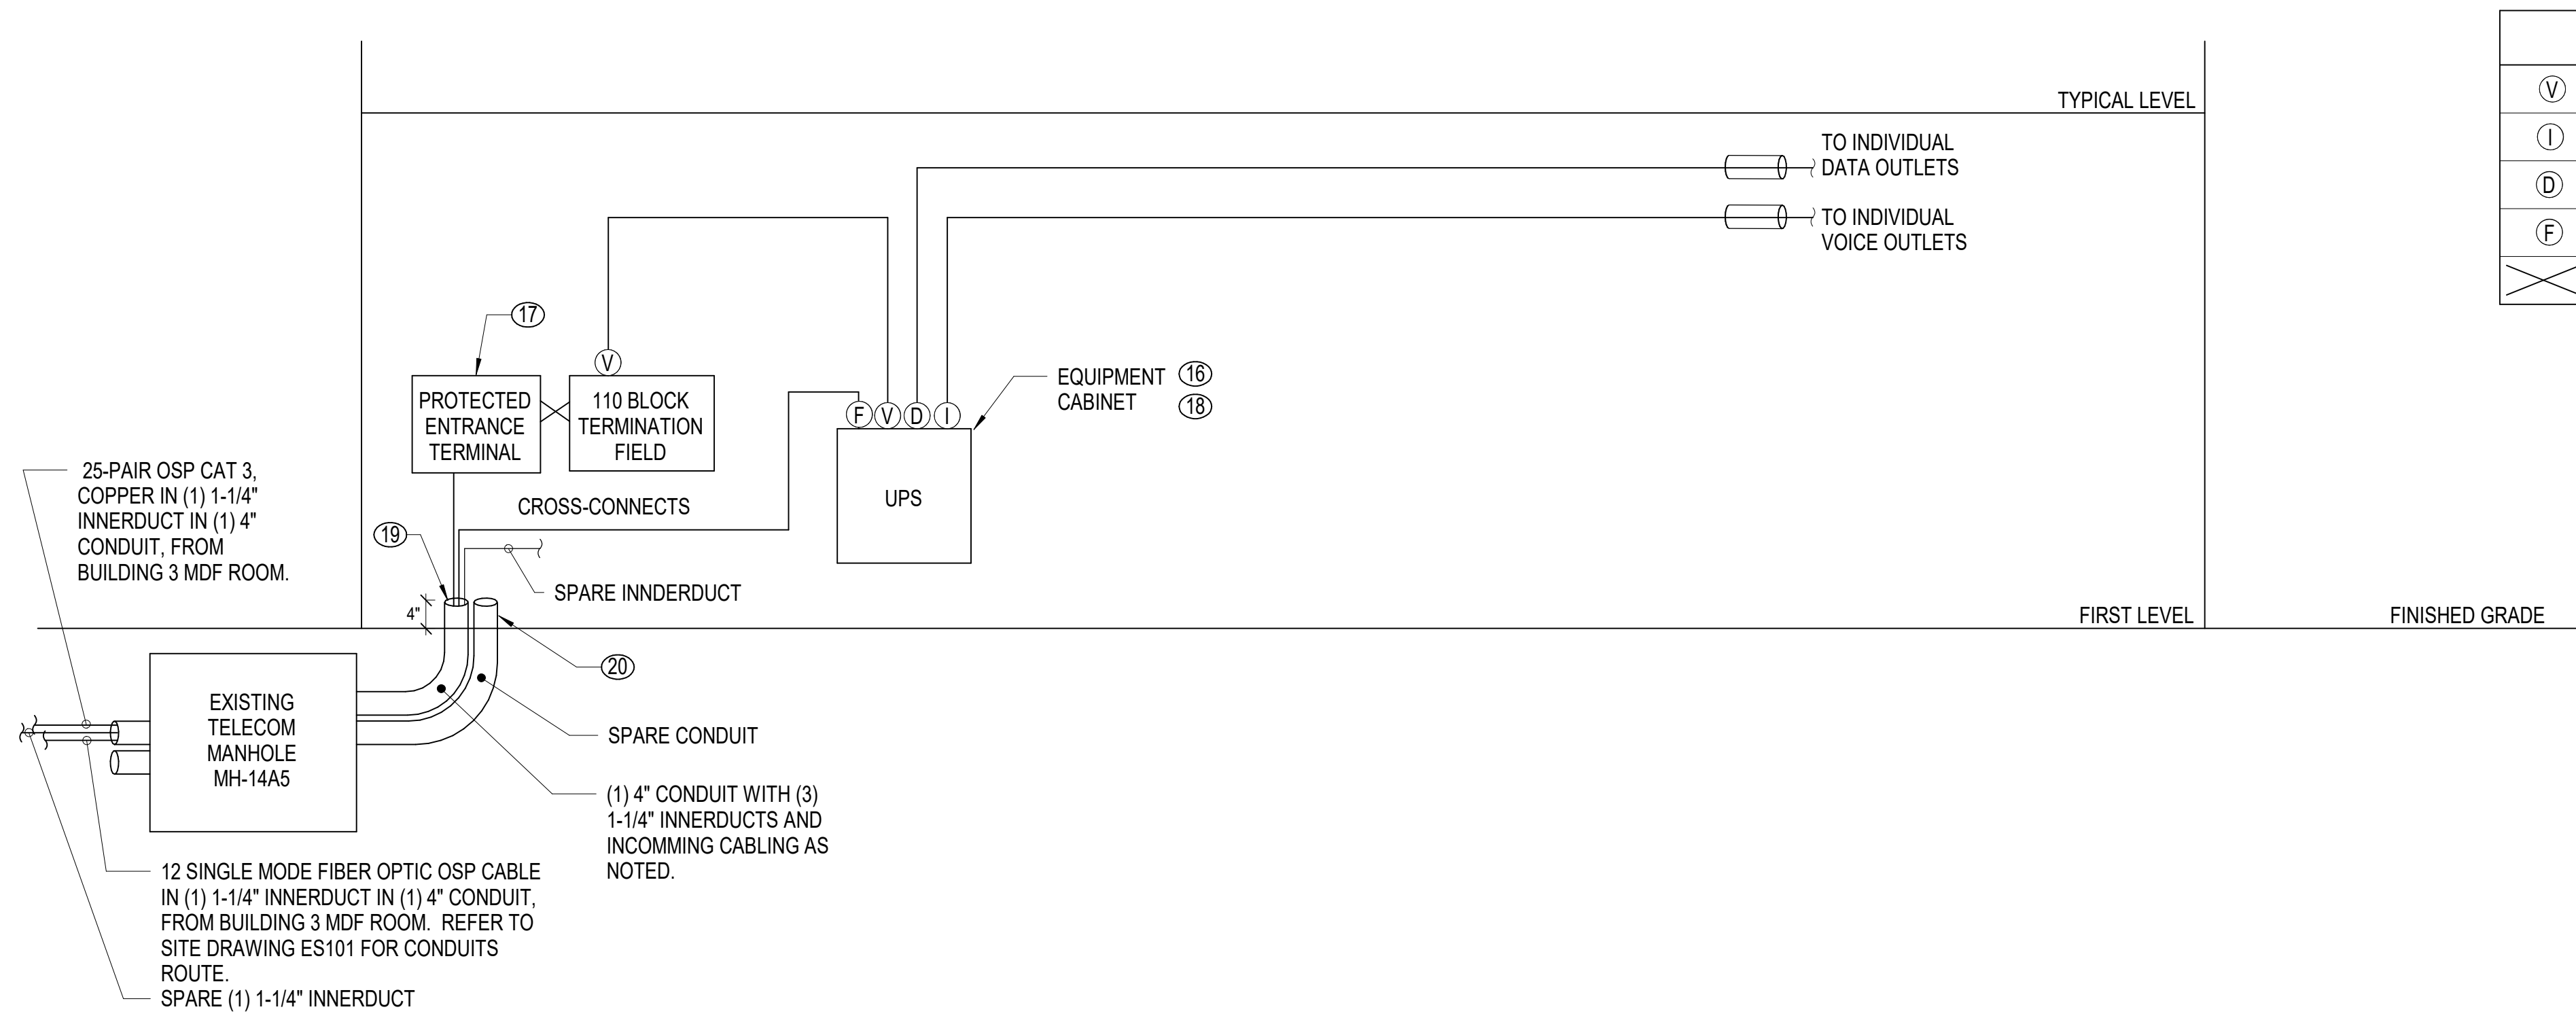

### 3 POWER & TELECOM GROUNDING RISER


NO SCALE



CABLE LEGEND	
	PUNCH-DOWN TERMINATION FOR VOICE, CATEGORY 6
	PATCH PANEL TERMINATION FOR VOICE (VOIP), CATEGORY 6
	PATCH PANEL TERMINATION FOR DATA, CATEGORY 6
	LC TERMINATIONS FOR FIBER OPTIC CABLE AT FIBER ENCLOSURE
	CROSS CONNECT CABLING, CATEGORY 6

## 2 TELECOM RISER DIAGRAM

NO SCALE

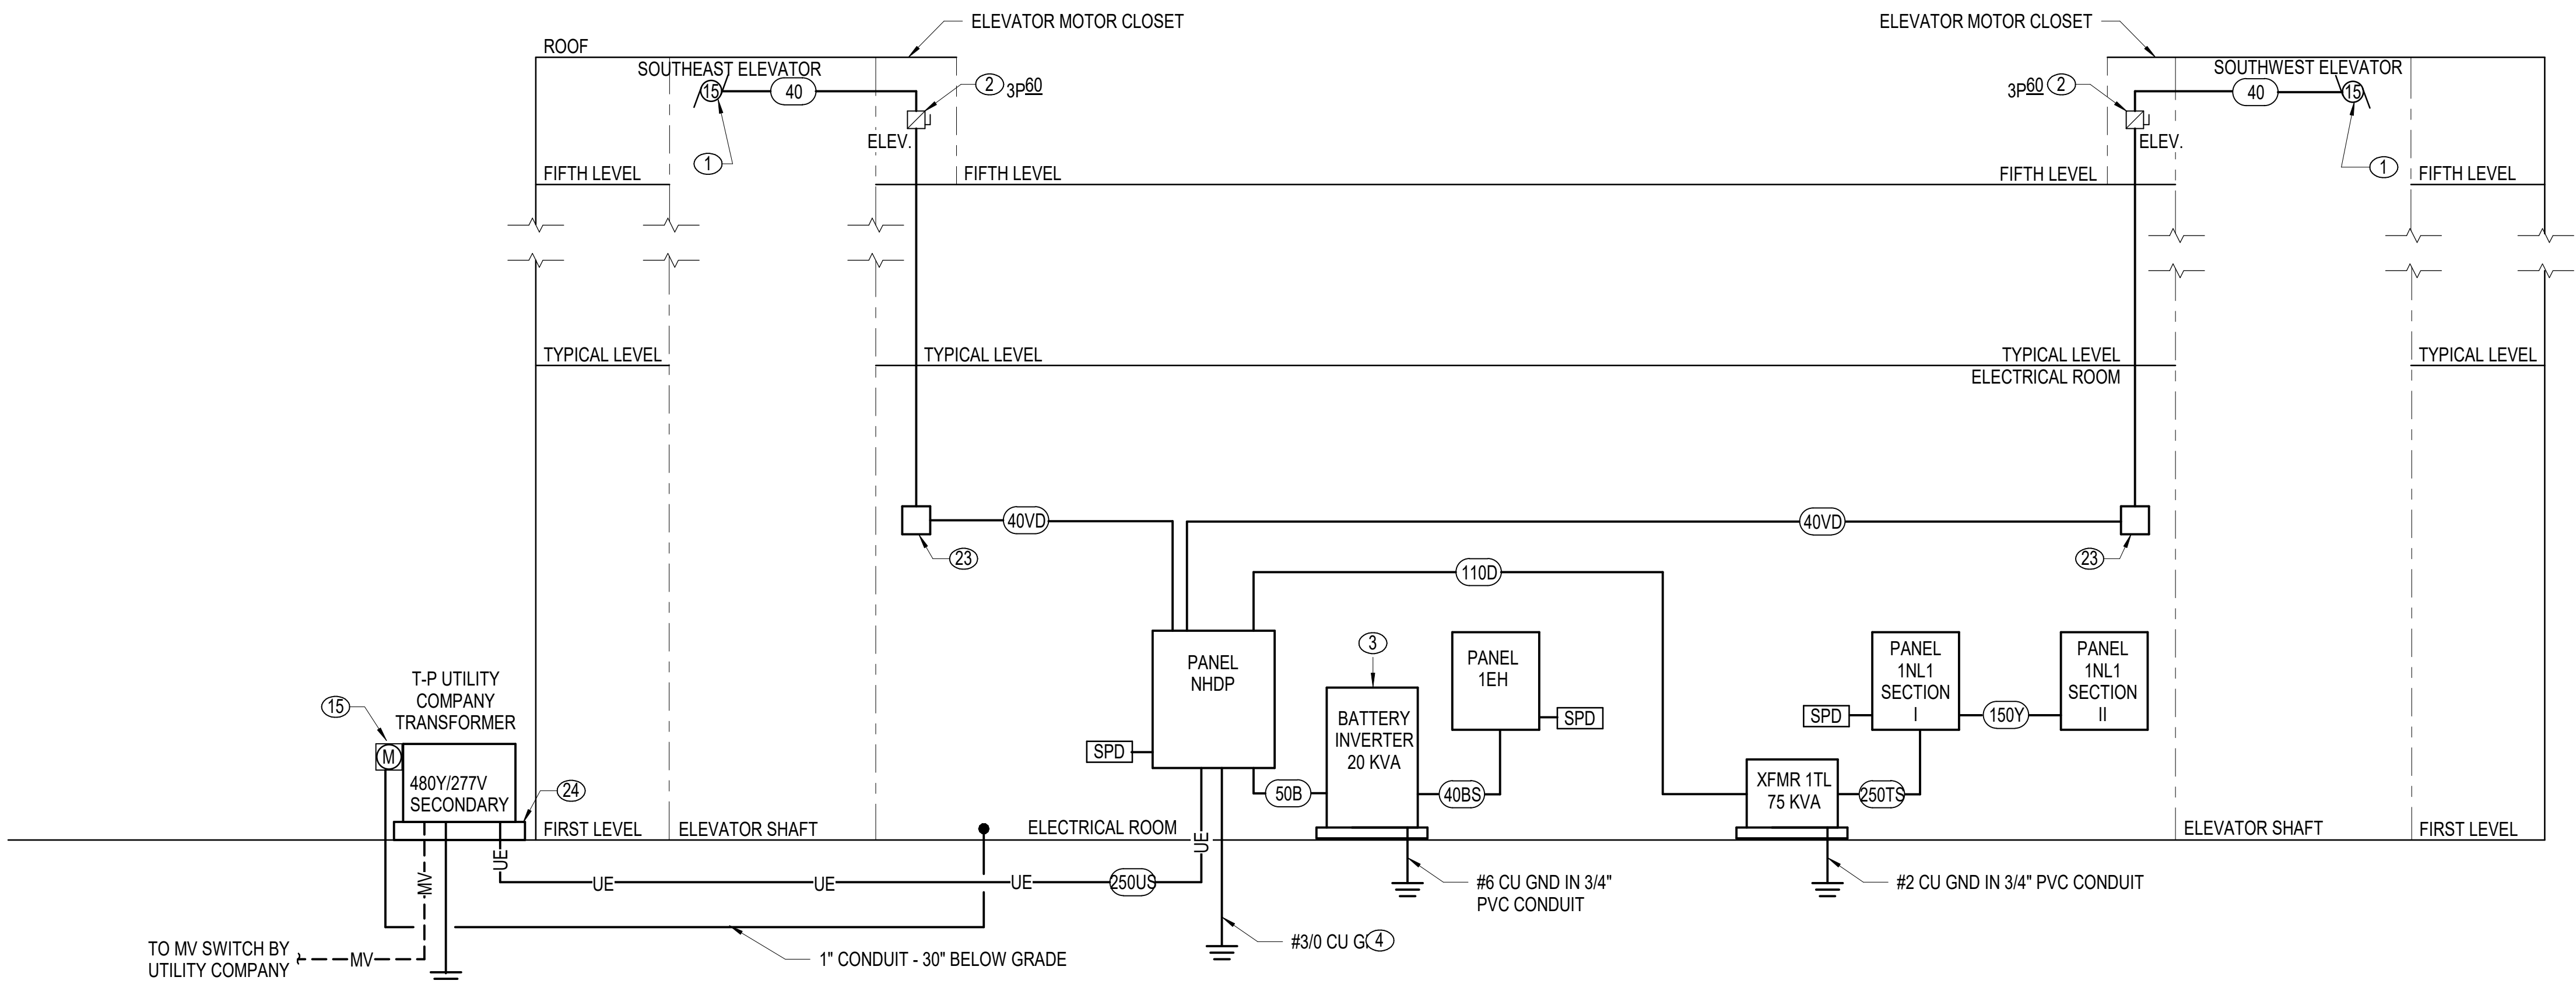

## 1 POWER RISER DIAGRAM


NO SCALE

## GENERAL NOTES

1. FOR SITE PLAN AND DETAILS REFER TO DRAWING ES101, ES501 AND ES502
2. FOR ELECTRICAL DETAILS REFER TO DRAWING E-500.

Ⓝ NOTES

- COORDINATE ELEVATOR REQUIREMENTS WITH SPECIFICATION SECTION 142100 AND ELEVATOR SUPPLIER.
- 2 HEAVY DUTY FUSE DISCONNECT. PROVIDE WITH CURRENT LIMITING CLASS RK1 FUSES, AND RATING PER MANUFACTURER RECOMMENDATION. DISCONNECT SHALL BE EQUIPPED WITH TWO AUXILIARY CONTACTS THAT ARE POSITIVELY OPENED WHEN POWER IS REMOVED FROM THE ELEVATOR SYSTEM.
- 3 THREE-PHASE CENTRAL LIGHTING INVERTER, DOUBLE CONVERSION, 24 KW, 480V/ 277V INPUT, 480V/277V OUTPUT. PROVIDE WITH SEISMIC FLOOR MOUNT. PROVIDE FULL SELECTIVE COORDINATION OF THE EMERGENCY SYSTEM PER NEC 700-25 REQUIREMENT. EMERGENCY SYSTEM OVERCURRENT DEVICES SHALL BE SELECTIVELY COORDINATED WITH ALL SUPPLY SIDE OVERCURRENT PROTECTIVE DEVICES. INVERTER INPUT AND OUTPUT BREAKERS SHALL BE LSI TYPE. PROVIDE BREAKER FRAMES AND SENSOR UNITS PER THE COORDINATION STUDY RESULTS, AND TRIP UNIT AS INDICATED ON THE DRAWING. INVERTER INPUT BREAKER AND OUTPUT BREAKER SHALL BE MINIMUM 180VAC. SEE SPECIFICATION SECTION 2873 FOR SELECTIVE COORDINATION REQUIREMENT. INVERTER SHALL COMPLY WITH UL 924, NEMA 101 AND NPPA 70. CRUCIAL POWER PRODUCTS MODEL# WR0300H3LTS-V3A (OR APPROVED EQUAL).
- 4 REFER TO GROUNDING SYSTEM DETAIL 1/E-500 FOR GROUNDING REQUIREMENTS.
- 5 MAIN GROUNDING BUSBAR (MGB) 24". (SEE DETAIL 6 ON DRAWING E-500)
- 6 RUN GROUNDING ELECTRODE CONDUIT BETWEEN THE MAIN AND LOCAL GROUND BUS BARS IN CONDUIT. BOND THE METAL CONDUIT AT EACH END TO THE GROUND BUS BARS.
- 7 RUN ONE #10 AWG IN 3/4" C TO FIRE ALARM PANELS. (REFER TO FA DRAWINGS FOR LOCATION OF FIRE ALARM PANELS)
- 8 RUN ONE #30 AWG IN 1-1/4" TO MAIN WATER PIPE. (REFER TO PUMBBING DRAWINGS FOR LOCATION OF MAIN WATER PIPE)
- 9 RUN ONE #30 IN 1-1/4" TO GROUNDING TRIAD.
- 10 BOND THE INTERIOR METALLIC PIPING TO THE GROUNDING SYSTEM PROVIDE A BONDING JUMPER ACROSS THE WATER METER. (SEE PLUMBING DRAWINGS FOR LOCATION OF WATER METER)
- 11 PROVIDE 50% SPARE HOLES. (TYP FOR ALL GROUND BUS BARS)
- 12 GROUNDING CONDUCTORS BETWEEN THE MGB AND THE TMGB SHALL BE #30 AWG, UNB. CONNECT GROUNDING CONDUCTORS USING COMPRESSION CONNECTORS.
- 13 TELECOMMUNICATIONS MAIN GROUNDING BUSBAR (TMGB). (SEE DETAIL 5 ON DRAWING E-500)
- 14 #6 AWG BONDING JUMPER.
- 15 NEW PAD MOUNTED TRANSFORMER, METER BASE, CURRENT TRANSFORMERS (CTS) AND REQUIRED METER SHALL BE PROVIDED AND INSTALLED BY UTILITY COMPANY. CONTRACTOR SHALL INSTALL ONE 1" EMPTY CONDUIT FROM METER BASE TO ELECTRICAL ROOM FOR INTERFERENCE WITH FLOOD MANAGEMENT SYSTEM. WIRING FROM METER BASE BY UNCW-IT. TERMINATE CONDUIT 12" AFF NEAR PANEL. NHD. REFER TO SITE DRAWINGS FOR ADDITIONAL INFORMATION.
- 16 WALL MOUNT TELECOMMUNICATIONS ENCLOSURE "CUBE-IT PLUS" CABINET, 24" WIDHTH X 24" DEPTH X 36" HEIGHT, STEEL, PART #11840-736, 24" EQUVAL TO CAT5 WITH RJ 45 PORT. (CPI) PART BLACK, WITH 19" EIA MOUNTING RAIL. PROVIDE A PUSHBUTTON LOCK BOX FOR ENCLOSURE'S KEYS STORAGE, AND MOUNT TO THE OUTSIDE OF THE WALL MOUNT ENCLOSURE.
- 17 MOUNT PROTECTED ENTRANCE TERMINAL IN THE BACK OF THE WALL MOUNT ENCLOSURE AND LINK TO THE TERMINATION POINT.
- 18 CABINET UPS WILL BE PROVIDED BY UNCW-IT.
- 19 PROVIDE HOLE PULL DESIGNED TO SEAL AROUND EACH INDIVIDUAL INRDUCT AND SEALED TO PREVENT LEAKAGE INTO THE BUILDING
- 20 SEAL ALL DUCTS AT TERMINATIONS OR ALL CONDUIT ENTRY POINTS WITH EXPANDABLE REUSABLE CONDUIT PLUGS CAPABLE OF WITHSTANDING 15-PSI MINIMUM HYDRO STATIC PRESSURE IN MANHOLE AND BUILDING.
- 21 TO ELECTRICAL EQUIPMENT, TRANSFORMER, BATTERY INVERTER, REFER TO POWER RISER DIAGRAM FOR CONDUCTOR SIZES AND QUANTITY.
- 22 BOND EXPOSED METAL FRAME WORK AT EACH STAR WITH MINIMUM #2 AWG 34" UNB.
- 23 PROVIDE 6" SQUARE PULL BOX BETWEEN THE HORIZONTAL AND VERTICAL CONDUIT RUN AND AS REQUIRED PER CODE.
- 24 REFER TO DETAIL 7 DRAWING ESS01 FOR TRANSFORMER CONCRETE PAD WORKING CLEARANCE REQUIREMENTS AND SECONDARY CONDUIT TERMINATION.
- 25 GROUNDING CONDUCTOR BETWEEN THE TMGB AND SGB SHALL BE MINIMUM #4 AWG, UNB. CONNECT GROUNDING CONDUCTORS USING COMPRESSION CONNECTORS.

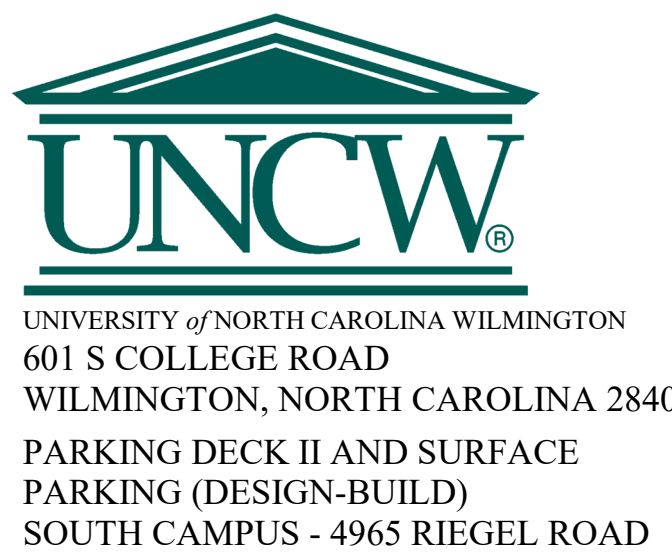

SCO ID NUMBER: 18-19226-01A  
CODE: 41828  
ITEM: 301

CONTRACTOR  
**Balfour Beatty**  
Construction

DESIGNER

CLARK NEXSEN

1523 ELIZABETH AVENUE, SUITE 300  
CHARLOTTE, NORTH CAROLINA 28204  
704-377-8800

CLARK NEXSEN LICENSE NUMBER: C-1028



13860 Ballantyne Corporate Place  
Suite 140  
Charlotte, NC 28277  
T: 704.247.6230  
[www.walkerconsultants.com](http://www.walkerconsultants.com)  
NC License No. F-0518



CIVIL ENGINEER  
243 NORTH FRONT STREET  
WILMINGTON, NORTH CAROLINA  
28401  
910.343.1048

PROFESSIONAL SEA



NC CORPORATE ENGINEERING LICENSE #C-1028

SUBMITTA

04/15/2015

CONSTRUCTION DOCUMENT  
SUBMITTAL 01

[illegible]

## KEY PLAN

SHEE

## RISER DIAGRAMS

# E-600

DESIGN: WAZ  
DRAWN: KAW  
REVIEW: WAZ

CN 8112



## LUMINAIRE SCHEDULE

TYPE	DESCRIPTION	MANUFACTURER	MODEL NO.	LAMPS TYPE	VOLTAGE	POWER	MOUNTING	NOTES
A	17" DIAMETER LED LUMINAIRE WITH TYPE V DISTRIBUTION, TEXTURED POLYCARBONATE LENS, LIGHT GRAY FINISH, INTEGRAL DRIVER, FUSING, INTEGRAL OCCUPANCY SENSOR AND PHOTOCELL (SUFFIX "TL50").	KENALL OR EQUIVALENT	TD17-QM-5S-TP-LG-72L-40K8-DCC-DV-FS-TL50	LED	277 V	78 VA	SURFACE	
B	23" DIAMETER LED LUMINAIRE WITH TYPE V DISTRIBUTION, WIDE, TEXTURED CLEAR POLYCARBONATE LENS, LIGHT GRAY FINISH, INTEGRAL DRIVER, FUSING, INTEGRAL OCCUPANCY SENSOR AND PHOTOCELL (SUFFIX "TL50"). MOUNTED ON A 25'-0" HINGED POLE. POLE TO BE PROVIDED WITH A DAMPER PER MANUFACTURER RECOMMENDATIONS.	KENALL OR EQUIVALENT POLE: KW INDUSTRIES OR EQUIVALENT	TPD23-5S-TP-LG-295L40K-DCC-DV-FS-TMA-TW180-TL50 POLE: THSP25-7.15-T-K841-DM2180-WPRP-BC- WITH THSP-LW-7.15 LOWERING WINCH	LED	277 V	325 VA	POLE MOUNTED	
C	8" X 4" LINEAR 0-10 VOLT DIMMABLE LED LUMINAIRE WITH MATTE WHITE FINISH, CLEAR POLYCARBONATE LENS, INTEGRAL DRIVER AND FUSING. LUMINAIRE STEMS ARE NOT PROVIDED WITH FIXTURE, CONTRACTOR TO PROVIDE.	KENALL OR EQUIVALENT	MLHA8-48-F-MW-CP-45L40K-DCC-1-DV-FS-PM	LED	277 V	49 VA	PENDANT MTD 10'-0" FROM BOTTOM OF FIXTURE TO AFF	
C2	8" X 8" LINEAR (TWO 4'-0" LUMINAIRES FACTORY CONNECTED) LED LUMINAIRE WITH MATTE WHITE FINISH, CLEAR POLYCARBONATE LENS, INTEGRAL DRIVER AND FUSING. LUMINAIRE STEMS ARE NOT PROVIDED WITH FIXTURE, CONTRACTOR TO PROVIDE.	KENALL OR EQUIVALENT	MLHA96-F-MW-CP-45L40K-DCC-1-DV-FS-PM	LED	277 V	98 VA	PENDANT MTD 10'-0" FROM BOTTOM OF FIXTURE TO AFF.	
D	VAPORTITE LED LUMINAIRE WITH SILVER FINISH, WALL MOUNTED 36" ABOVE ELEVATOR PIT FLOOR AND AT TOP OF ELEVATOR SHAFT 4'-0" ABOVE MOTOR MAINTENANCE DECK HEIGHT. FIELD COORDINATE SPECIFICS WITH ELEVATOR SUPPLIER.	SPECTRUM OR EQUIVALENT	WJ1LW-20L-40K-EX-FJ1-CP104KO-PT	LED	277 V	16 VA	WALL	
H	2'-0" LINEAR LED STRIPLIGHT, WALL MOUNTED AND CENTERED ABOVE DOOR WITH WHITE STEEL FINISH, FROSTED ACRYLIC LENS AND ON/OFF DRIVER FUNCTION.	COLUMBIA OR EQUIVALENT	LCL2-40ML-EU	LED	277 V	24 VA	WALL	
J1	18" ARCHITECTURAL STYLE WALL PACK WITH SINGLE FUSE, TYPE IV FORWARD THROW DISTRIBUTION, GRAY FINISH AND INTEGRAL PHOTOCELL UCN. CENTER OF FIXTURE WALL MOUNTED 10'-8" AFG.	KIM LIGHTING OR EQUIVALENT	WDM-D-48L-55-4K8-4F-UNV-LG-PC-SF	LED	277 V	55 VA	WALL MTD	DO NOT PROVIDE INTEGRAL PHOTO CELL FOR LUMINAIRES CONTROLLED VIA LIGHTING CONTACTOR
J2	13" ARCHITECTURAL STYLE WALL PACK WITH SINGLE FUSE, FORWARD THROW DISTRIBUTION, DIFFUSE LENS, GRAY FINISH AND INTEGRAL PHOTOCELL UCN. CENTER OF FIXTURE WALL MOUNTED 10'-8" AFG.	KIM LIGHTING OR EQUIVALENT	WDS-D-24L-40-4K8-FTD-UNV-LG-PC-SF	LED	277 V	42 VA	WALL MTD	DO NOT PROVIDE INTEGRAL PHOTO CELL FOR LUMINAIRES CONTROLLED VIA LIGHTING CONTACTOR
J3	18" ARCHITECTURAL STYLE UP MOUNTING WALL PACK WITH SINGLE FUSE, TYPE SPOT/COLUMN DISTRIBUTION, GREY FINISH. MOUNT CENTER OF FIXTURE AT 17'-0" AFG.	KIM LIGHTING OR EQUIVALENT	WDM-U-48L-65-4K8-SP-UNV-LG-SF	LED	277 V	68 VA	WALL MTD	
P1	POST TOP LIGHT WITH TYPE V DISTRIBUTION, 6000 LUMEN OUTPUT, 5000K CCT, FROSTED GLASS AND BLACK FINISH. MOUNTED ON 14' BLACK POLE.	YAORONG POLE: GE LIGHTING SOLUTION OR EQUIVALENT	YR-TP300-W060 POLE: ARTA-14-3S-5.0-B-BL-T	LED	277 V	60 VA	MOUNTED ON 14' POLE	POLE SHALL BE UL LISTED. REFER TO DETAIL 1 / ES502.
P2	13 5/8" X 4" STREET LIGHT WITH TYPE III DISTRIBUTION, 24,600 LUMEN OUTPUT, 5000K CCT, AND BLACK FINISH. REUSE EXISTING POLE AND LIGHT.	FINTRONX	PLK-240-48-50K-A3M112-BL	LED	480 V	240 VA	POLE MOUNTED	REUSE EXISTING/ RELOCATED POLES. REFER TO DETAIL 2 / ES502.
X1	SINGLE FACE WET LABEL EXIT SIGN WITH RED LETTERS AND WHITE DIE-CAST ALUMINUM HOUSING. PROVIDE WITH PENDANT MOUNT KIT. SIGN TO BE MOUNTED A MINIMUM OF 8'-2" ABOVE FINISHED FLOOR TO BOTTOM OF EXIT SIGN WITH WORDING IN COMPLETE VIEW BELOW BEAMS.	DUAL-LITE OR EQUIVALENT	SEWL-SRW	LED	277 V	5 VA	PENDANT MTD 8'-2" TO BOTTOM OF SIGN MINIMUM	
X2	SINGLE FACE WET LABEL EXIT SIGN WITH RED LETTERS AND WHITE DIE-CAST HOUSING, FLAT WALL MOUNTED AND CENTERED ABOVE DOORS.	DUAL-LITE OR EQUIVALENT	SEWL-SRW	LED	277 V	5 VA	FLAT WALL	
X3	DOUBLED FACED EXIT SIGN WITH RED LETTERS AND WHITE DIE-CAST ALUMINUM HOUSING. PROVIDE WITH PENDANT MOUNT KIT AND CHEVRONS AS NOTED ON FLOOR PLANS. BE MOUNTED A MINIMUM OF 8'-2" ABOVE FINISHED FLOOR TO BOTTOM OF EXIT SIGN WITH WORDING IN COMPLETE VIEW BELOW BEAMS.	DUAL-LITE OR EQUIVALENT	SEWL-DRW	LED	277 V	5 VA	PENDANT MTD 8'-2" TO BOTTOM OF SIGN MINIMUM	

## EQUIPMENT CONNECTION SCHEDULE

EQUIPMENT DESIGNATION			EQUIPMENT RATINGS							STARTER	DISCONNECT DATA		
EQUIPMENT DESIGNATION	LOCATION	DESCRIPTION	HP / WATTS	VOLT	PH	FLA	KVA	OCPD		TYPE	TYPE	RATING	OCPD
CU-1/AC-1	TELECOM AND SECURITY ROOMS	SPLIT SYSTEM	2300W	208	1	11.2	2.33	15			MAG	30	MANUF
CU-2/AC-2	ELECTRICAL ROOM	SPLIT SYSTEM	2300W	208	1	11.2	2.33	20			MAG	30	MANUF
UH-1	ELECTRICAL ROOM	UNIT HEATER	5000W	208	3	13.9	5.01	20			MAG	30	MANUF
SP-1	SOUTHEAST ELEVATOR SHAFT	SUMP PUMP	.5 HP	120	1	9.8	1.18	20			MRS	20	----
SP-2	SOUTHWEST ELEVATOR SHAFT	SUMP PUMP	.5 HP	120	1	9.8	1.18	20			MRS	20	----
FACP	ELECTRICAL ROOM	FIRE ALARM CONTROL UNIT	720W	120	1	6.0	0.72	20			----	----	----
HP-1/ACHP-1	ELEVATOR CLOSET	HEAT PUMP	3000W	208	1	14.4	3.00	30			MAG	30	MANUF
P-1	EXTERIOR	BOOSTER PUMP	2HP	208	3			20			NF	30	
ABBREVIATIONS													
NF	NON-FUSED		MAG										
MANUF.	PROVIDE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATION		MAGNETIC STARTER										
MRS	MOTOR RATED SWITCH												
----	INDICATES NOT APPLICABLE												
MCCB	MOLDED CASE CIRCUIT BREAKER												
NOTE 1: CONDUIT SIZES BASED OF 40% FILL OF EMT. CONTRACTOR SHALL SIZE CONDUIT PER NEC IF CONDUIT OTHER THAN EMT IS USED.													

## PANEL NHDP SCHEDULE

		200 AMP MCB		480V/277 VOLTS		3PH, 4W, 5N		MIN. 18 KVAIC		SURFACE MOUNTED					
CKT. NO.	LOAD DESCRIPTION	COND. SIZE	WIRE SIZE	BKR TRIP	AMPS	KVA	PH	KVA	AMPS	BKR TRIP	WIRE SIZE	COND. SIZE	LOAD DESCRIPTION	CKT. NO.	
1	PANEL 1EH	1-1/4	4	50	28.2	7.8	A	5.8	21.0	40	1	1	SOUTHEAST ELEVATOR MOTOR	2	
3	VIA BATTERY INVERTER				23.5	6.5	B	5.8	21.0					4	
5	LSI TYPE 100 A FRAME 50 A TRIP				14.0	3.9	A	5.8	21.0					6	
7	EXTERIOR PEDESTAL LIGHTING	1-1/2	6	20	0.7	0.2	A	5.8	21.0	40	1	1	SPARE	8	
9					0.7	0.2	B	5.8	21.0	40	*	*	SOUTHWEST ELEVATOR MOTOR	10	
11					0.7	0.2	A	5.8	21.0					12	
13	EXTERIOR BUILDING LIGHTING	3/4	10	20	2.2	0.6	A	5.8	21.0					14	
15	EXTERIOR WALL WASH STAR LIGHTING	3/4	10	20	3.3	0.8	B			3.1	20	10	SPARE	16	
17	FIRST TIER LIGHTING	3/4	10	20	2.8	0.8	C	0.9	3.1	20	10	3/4	SECOND TIER LIGHTING	18	
19	FIRST TIER LIGHTING	3/4	10	20	4.2	1.2	A	0.9	3.1	20	10	3/4	SECOND TIER LIGHTING	20	
21	FIRST TIER LIGHTING	3/4	10	20	3.1	0.9	B	0.9	3.1	20	10	3/4	SECOND TIER LIGHTING	22	
23	THIRD TIER LIGHTING	3/4	10	20	3.1	0.9	C	0.9	3.1	20	10	3/4	FOURTH TIER LIGHTING	24	
25	THIRD TIER LIGHTING	3/4	10	20	3.1	0.9	A	0.9	3.1	20	10	3/4	FOURTH TIER LIGHTING	26	
27	THIRD TIER LIGHTING	3/4	10	20	3.1	0.9	B	0.9	3.1	20	10	3/4	FOURTH TIER LIGHTING	28	
29	FIFTH TIER LIGHTING	3/4	10	20	4.7	1.3	C	0.6	2.0	20	6	1-1/2	FOURTH TIER LIGHTING	30	
31	FIFTH TIER LIGHTING	3/4	10	20	4.7	1.3	A	0.8	2.9	20	6	1-1/2	EXTERIOR PARKING LIGHTING	32	
33	LC1 LIGHTING CONTACTOR COIL	3/4	12	20	0.7	0.2	B	0.8	2.9					34	
35	SPARE						C	0.8	2.9					36	
37	PANEL 1NL1 SECTION I	*	*	110	104.2	28.8	A			30	10	3/4	SPD (NOTE 1)	38	
39	FED VIA XMR 1TL (75 KVA)				101.6	28.1	B							40	
					109.5	30.4	C							42	
TOTAL AMPS (CONN. LOAD)							B	186.6		C	188.2				
TOTAL AMPS (FEEDTHRU)							A			B					
TOTAL AMPS (CONN. LOAD + FEED-THRU)							A	186.6		B	186.6		C	188.2	
PANEL BOARD OPTIONS		PANEL BOARD NOTES:													

## PANEL 1NL1 SECTION I SCHEDULE

1. REFER TO RISER DIAGRAM SHEET #600 FOR FEEDER AND CONSULT SIZES.
2. BREAKER RATING AND WIRE SIZE MAY VARY BY MANUFACTURER.  
PROVIDE BREAKER AND WIRE SIZE IN ACCORDANCE WITH MANUFACTURER RECOMMENDATIONS.
3. PROVIDE WITH LOCKABLE HANDLE FOR THE FIRE ALARM EQUIPMENT AND LOCK IN THE "ON" POSITION.  
PROVIDE "GFP" BREAKER FOR EQUIPMENT.

## PANEL 1N1L SECTION II SCHEDULE

		225 MPO MLO		208Y1120 VOLTS		3PH 4W, 5N		MIN. 10 KAC		SURFACE MOUNTED					
CKT NO.	LOAD DESCRIPTION	COND SIZE	WIRE SIZE	BKR TRIP	AMPS	KVA	PH	KVA	AMPS	BKR TRIP	WIRE SIZE	COND SIZE	LOAD DESCRIPTION	CKT NO.	
43	CHARGING STATION FUTURE			40	30.0	3.1	A	3.1	30.0	40	8	3/4	CHARGING STATION	44	
45	SECOND TIER			40	30.0	3.1	B	3.1	30.0	40	8	3/4	FIRST TIER	46	
47	CHARGING STATION FUTURE			40	30.0	3.1	A	3.1	30.0	40	8	3/4	CHARGING STATION	48	
49	SECOND TIER			40	30.0	3.1	A	3.1	30.0	40			FIRST TIER	50	
51	CHARGING STATION FUTURE			40	30.0	3.1	A	3.1	30.0	40			CHARGING STATION FUTURE	52	
53	THIRD TIER			40	30.0	3.1	C	3.1	30.0	40			THIRD TIER	54	
55	PARKING SYSTEM - SERVER POWER	3/4	10	20	16.0	1.9	A	1.4	11.3	20	10	3/4	PKG ASSIST SYSTEM - GROUND TIER	56	
57	PKG ASSIST SYSTEM - SECOND TIER	3/4	10	20	11.3	1.4	B	1.4	11.3	20	10	3/4	PKG ASSIST SYSTEM - THIRD TIER	58	
59	PKG ASSIST SYSTEM - FOURTH TIER	3/4	10	20	11.3	1.4	C	1.2	10.5	20	10	1	SOUTHEAST GATE	60	
61	ELECTRICAL ROOM UH1	3/4	12	20	14.2	1.7	A	1.2	10.5	20	10	1	SOUTHWEST GATE	62	
63					14.2	1.7	B	1.2	10.5	20	10	1	SOUTHWEST GATE	64	
65					14.2	1.7	C	1.2	10.5	20	10	1	SOUTHWEST GATE	66	
67	BOOSTER PUMP EXTERIOR P-1		1	8	20	7.5	0.9	A	1.2	10.0	20	10	1	SPARE	68
69					7.5	0.9	B			20			BUSSED SPACE	70	
71					7.5	0.9	C			20			BUSSED SPACE	72	
73	BUSSED SPACE						A						BUSSED SPACE	74	
75	BUSSED SPACE						B						BUSSED SPACE	76	
77	BUSSED SPACE						C						BUSSED SPACE	78	
79	BUSSED SPACE						A						BUSSED SPACE	80	
81	BUSSED SPACE						B						BUSSED SPACE	82	
83	BUSSED SPACE						C						BUSSED SPACE	84	
TOTAL AMPS (CONN. LOAD)					A	163.0		B	158.3			C	157.0		
TOTAL AMPS (FEEDTHRU)					A			B							
TOTAL AMPS (CONN. LOAD + FEED-THRU)					A	163.0		B	158.3			C	157.0		

PANELBOARD OPTIONS:

PANELBOARD NOTES:











## PANEL 1NL1 SECTION II SCHEDULE

225 AMP MLO				28BY120 VOLTS				3PH, 4W, 5N				MIN. 10 KAC				SURFACE MOUNTED			
CKT. NO.	LOAD DESCRIPTION	COND. SIZE	WIRE SIZE	BKR TRIP	AMPS	KVA	PH	KVA	AMPS	BKR TRIP	WIRE SIZE	COND. SIZE	LOAD DESCRIPTION	CKT. NO.					
43	CHARGING STATION FUTURE				30.0	3.1	A	3.1	30.0	40	8	3/4	CHARGING STATION	44					
45	SECOND TIER				30.0	3.1	B	3.1	30.0	40	8	3/4	CHARGING STATION	46					
47	CHARGING STATION FUTURE				30.0	3.1	C	3.1	30.0	40	8	3/4	CHARGING STATION	48					
49	SECOND TIER				30.0	3.1	A	3.1	30.0	40	8	3/4	CHARGING STATION	50					
51	CHARGING STATION FUTURE				30.0	3.1	B	3.1	30.0	40	8	3/4	CHARGING STATION	52					
53	THIRD TIER				30.0	3.1	C	3.1	30.0	40	8	3/4	CHARGING STATION	54					
55	PARKING SYSTEM - SERVER POWER	3/4	10	20	16.0	1.9	A	1.4	11.3	20	10	3/4	PKG ASSIST SYSTEM - GROUND TIER	56					
57	PKG ASSIST SYSTEM - SECOND TIER	3/4	10	20	11.3	1.4	B	1.4	11.3	20	10	3/4	PKG ASSIST SYSTEM - THIRD TIER	58					
59	PKG ASSIST SYSTEM - FOURTH TIER	3/4	10	20	11.3	1.4	C	1.2	10.0	20	10	1	SOUTHWEST GATE	60					
61	ELECTRICAL ROOM UH-1	3/4	12	20	14.2	1.7	A	1.2	10.0	20	10	1	SOUTHWEST GATE	62					
63	BOOSTER PUMP EXTERIOR P-1				14.2	1.7	B	1.2	10.0	20	10	1	SOUTHWEST GATE	64					
65	BOOSTER PUMP EXTERIOR P-1				7.5	0.9	A	1.2	10.0	20	10	1	SOUTHWEST GATE	66					
67					7.5	0.9	B			20			SPARE	68					
69					7.5	0.9	C			20			SPARE	70					
71	BUSSED SPACE						A						BUSSED SPACE	72					
73	BUSSED SPACE						B						BUSSED SPACE	74					
75	BUSSED SPACE						C						BUSSED SPACE	76					
77	BUSSED SPACE						A						BUSSED SPACE	78					
79	BUSSED SPACE						B						BUSSED SPACE	80					
81	BUSSED SPACE						C						BUSSED SPACE	82					
83	BUSSED SPACE						A						BUSSED SPACE	84					
TOTAL AMPS (CONN LOAD)					A 163.0		B 158.3		C 157.0										
TOTAL AMPS (FEED-THRU)					A 163.0		B 158.3		C 157.0										
TOTAL AMPS (CONN LOAD + FEED-THRU)					A 163.0		B 158.3		C 157.0										
PANELBOARD OPTIONS:										PANELBOARD NOTES:									









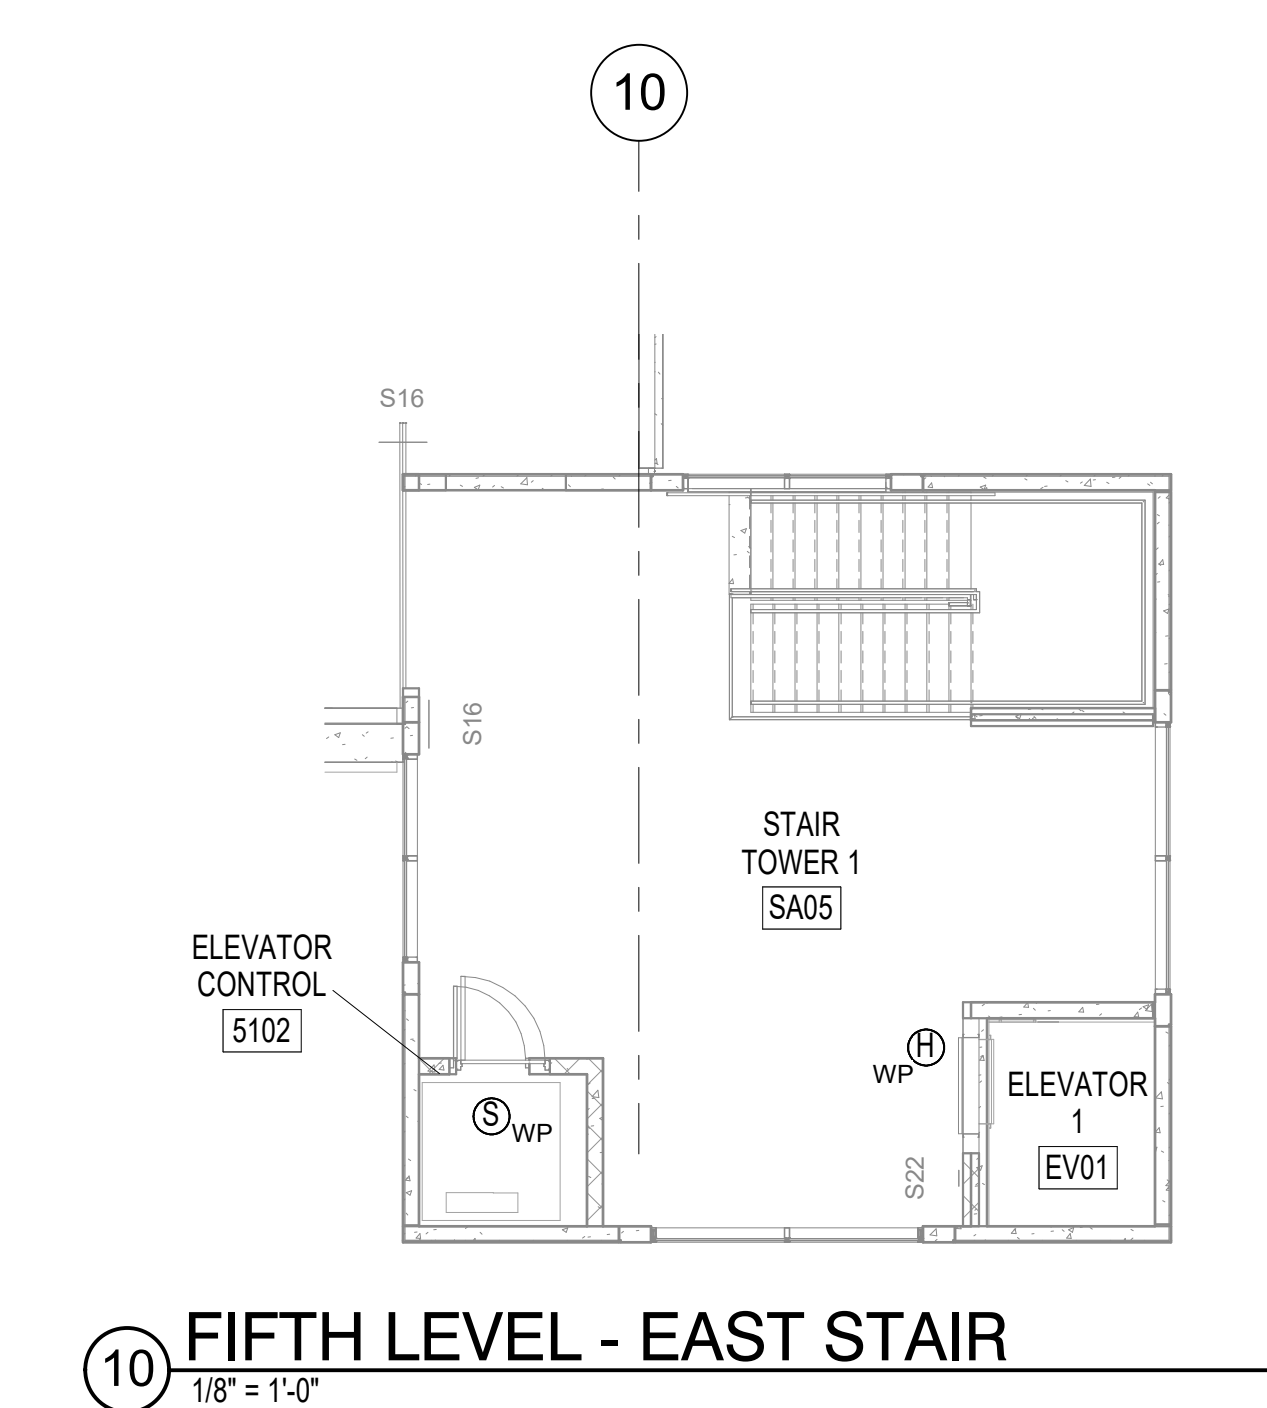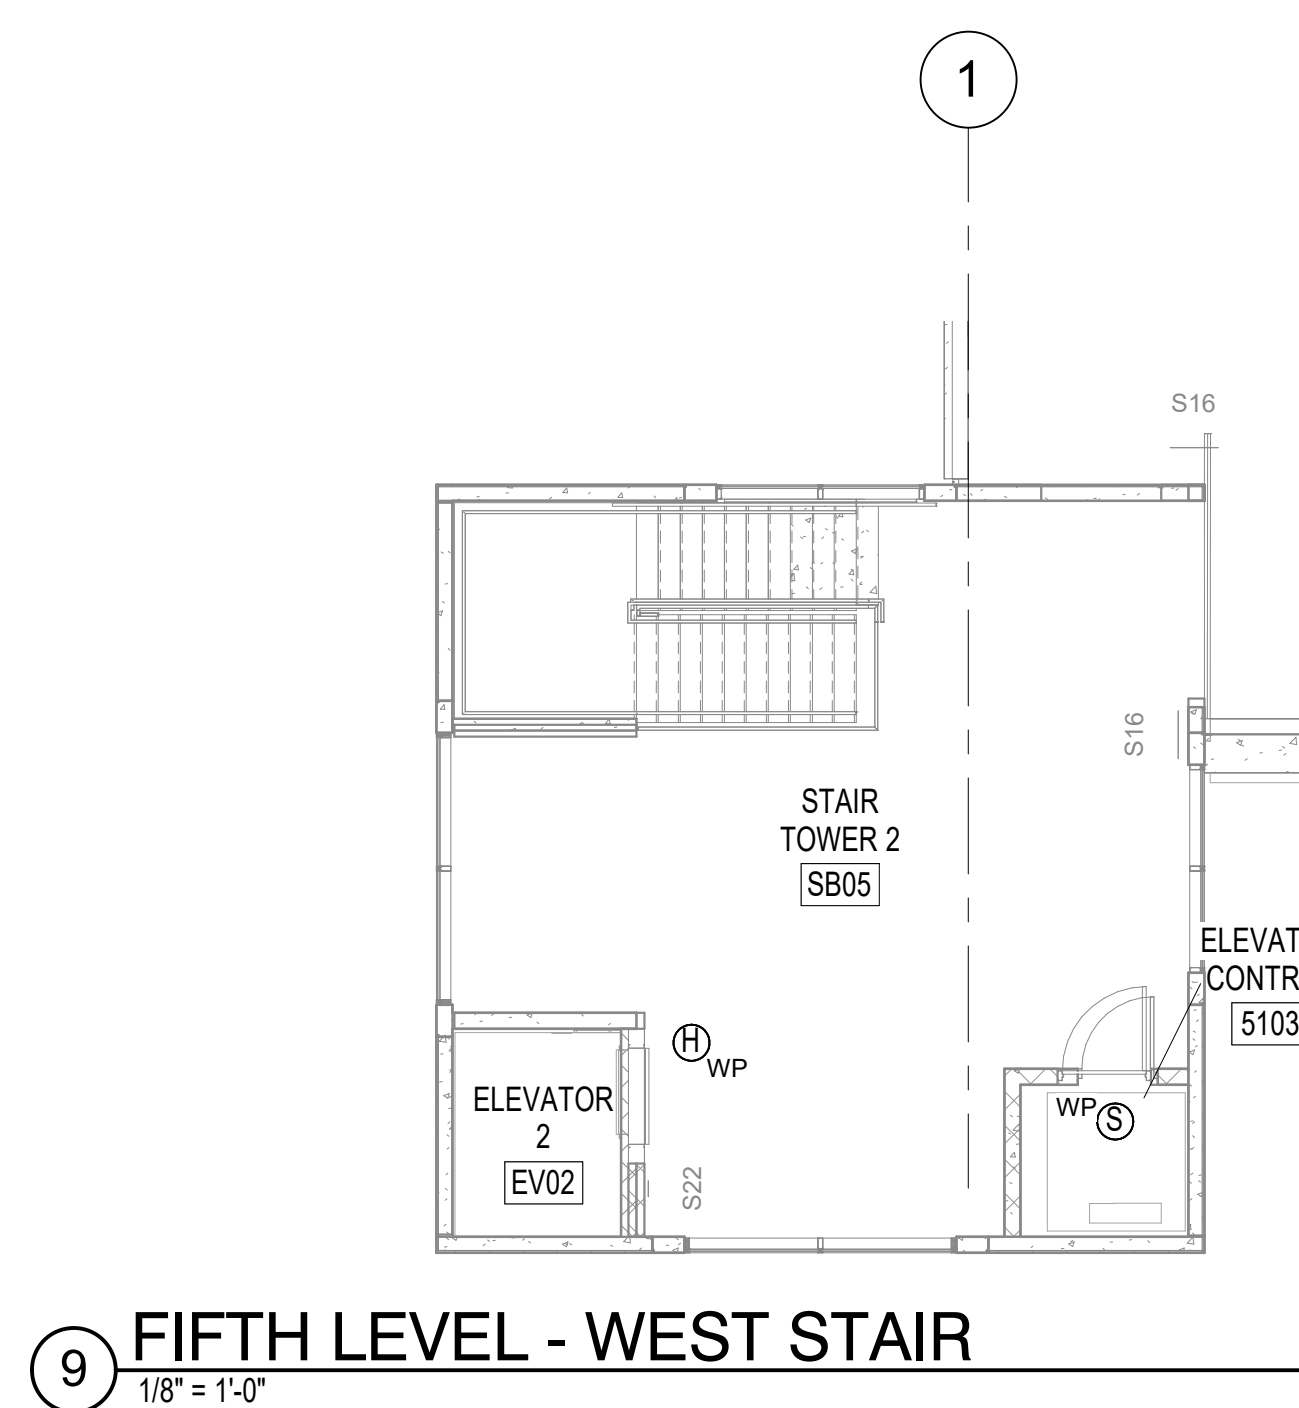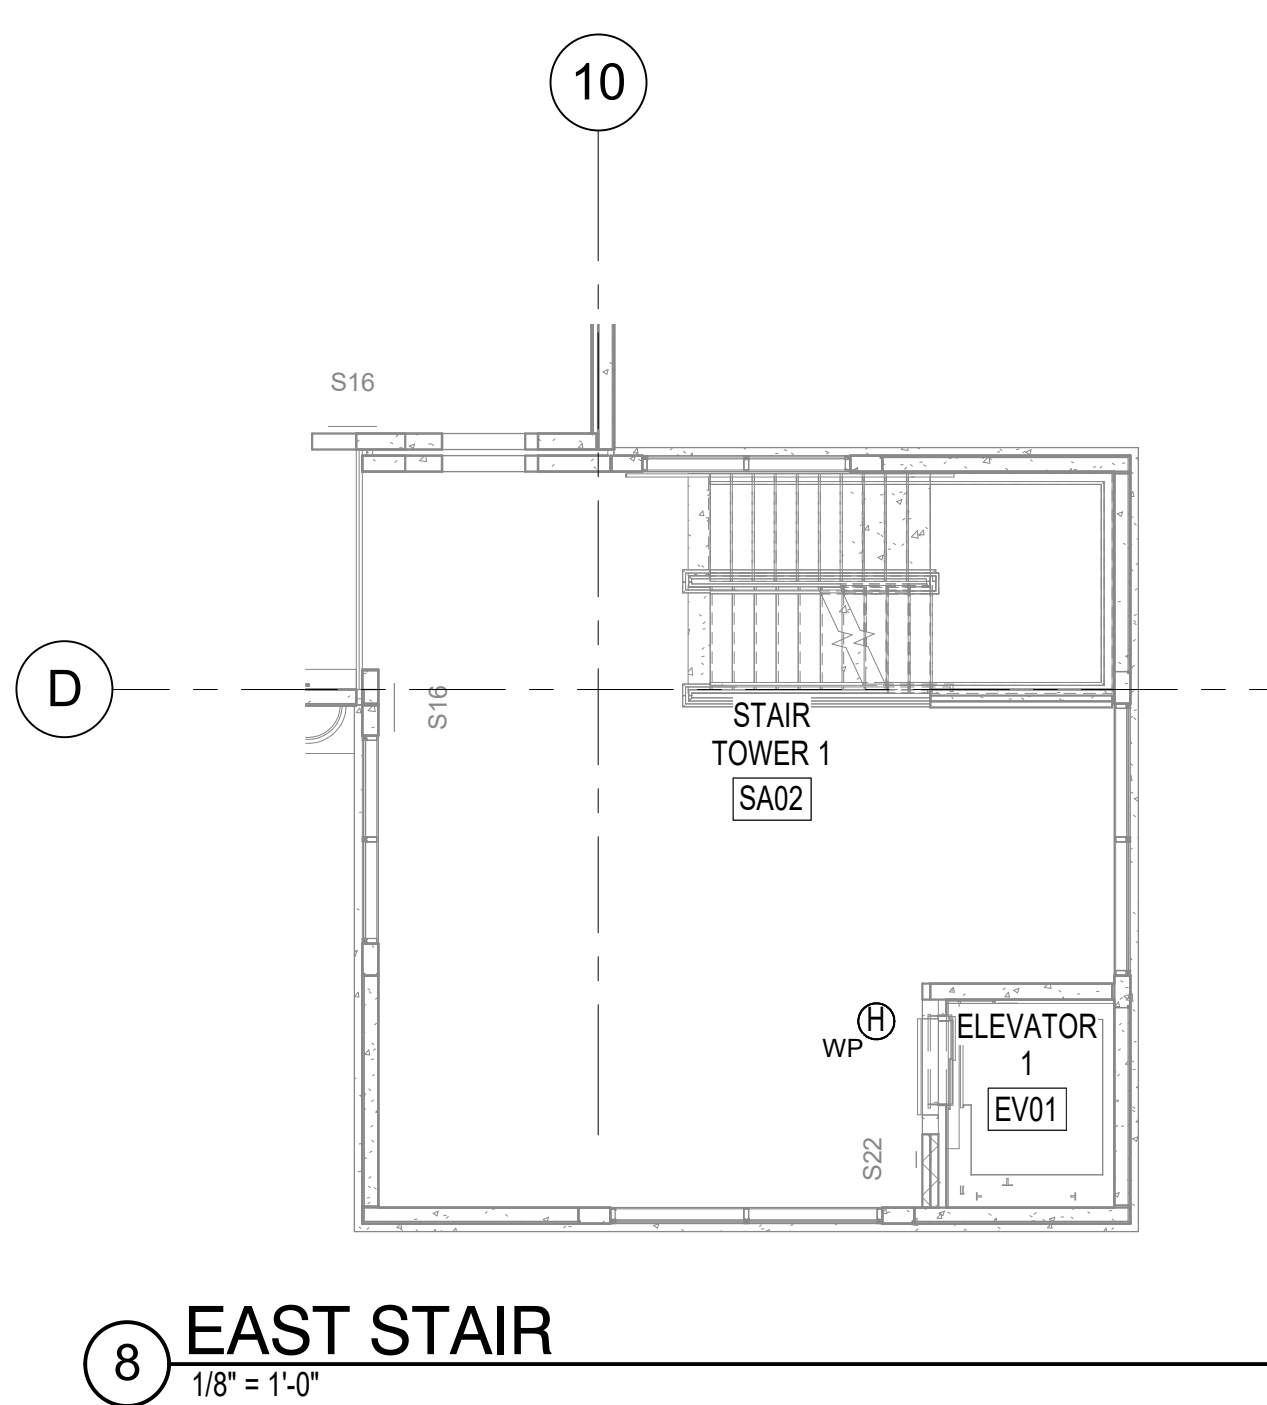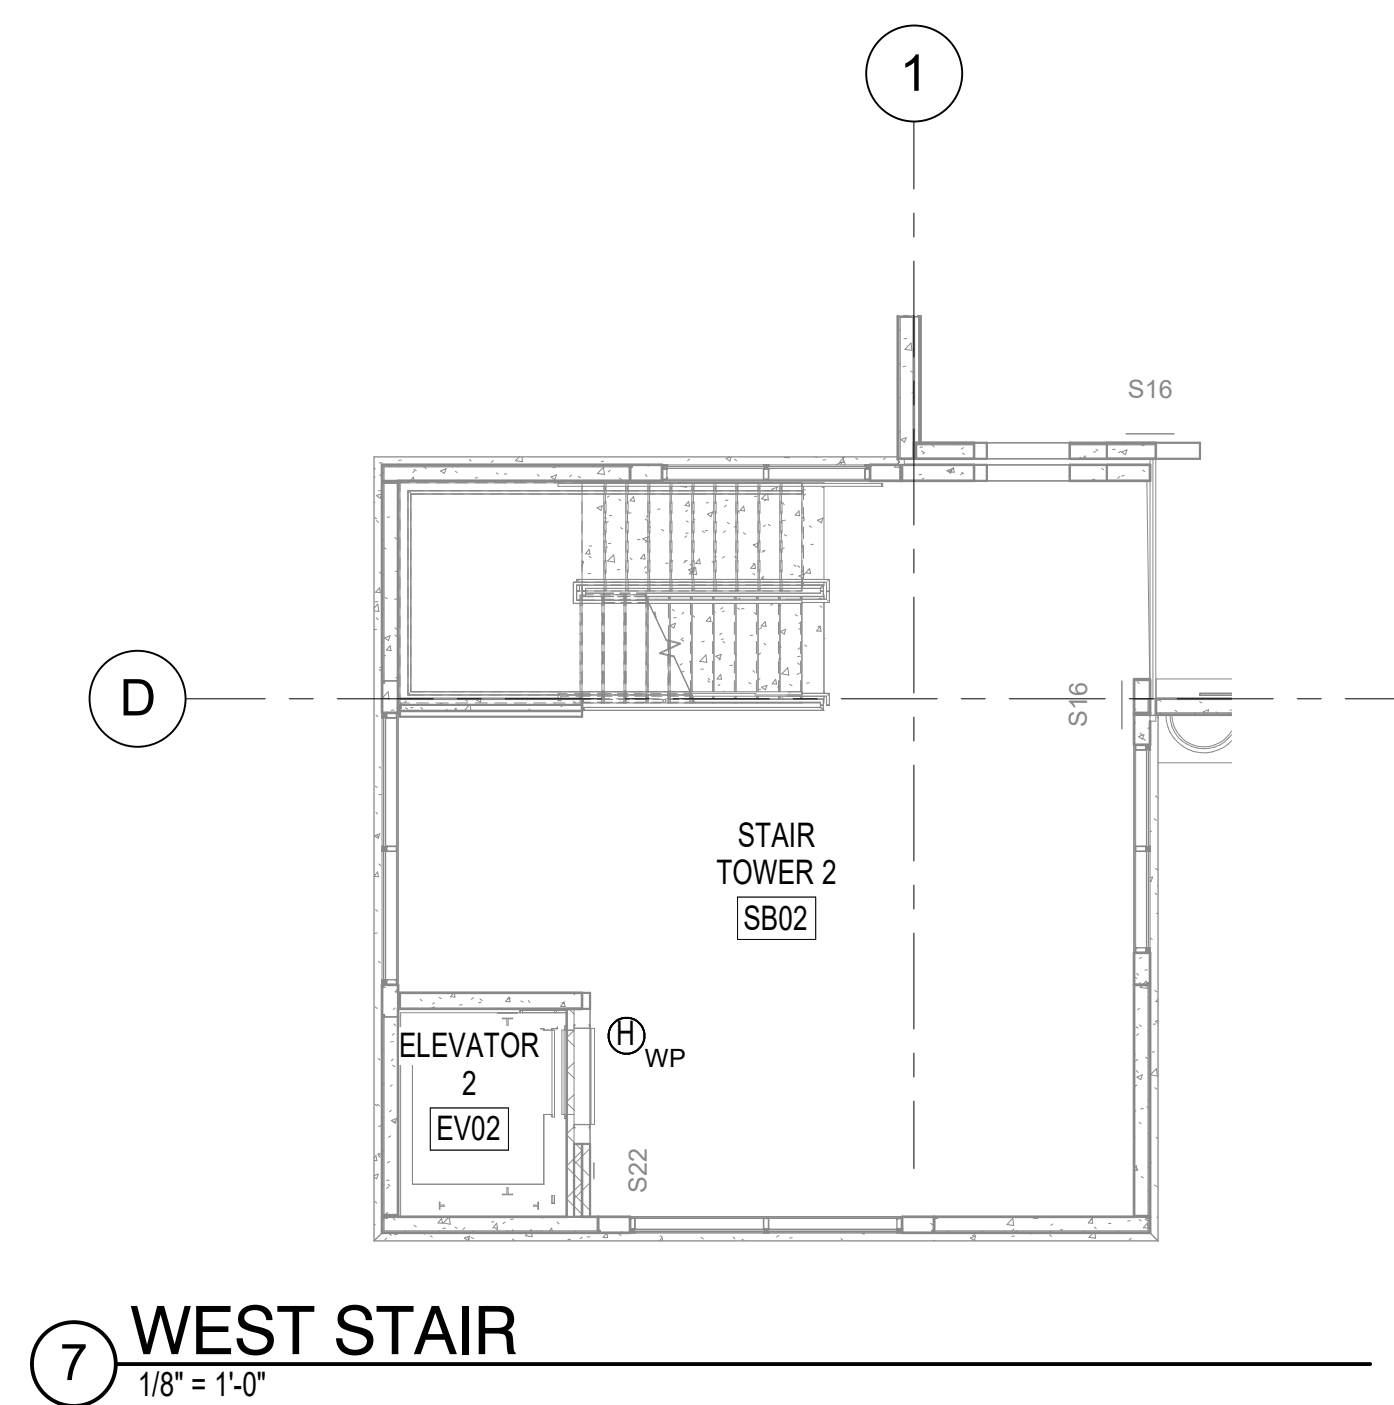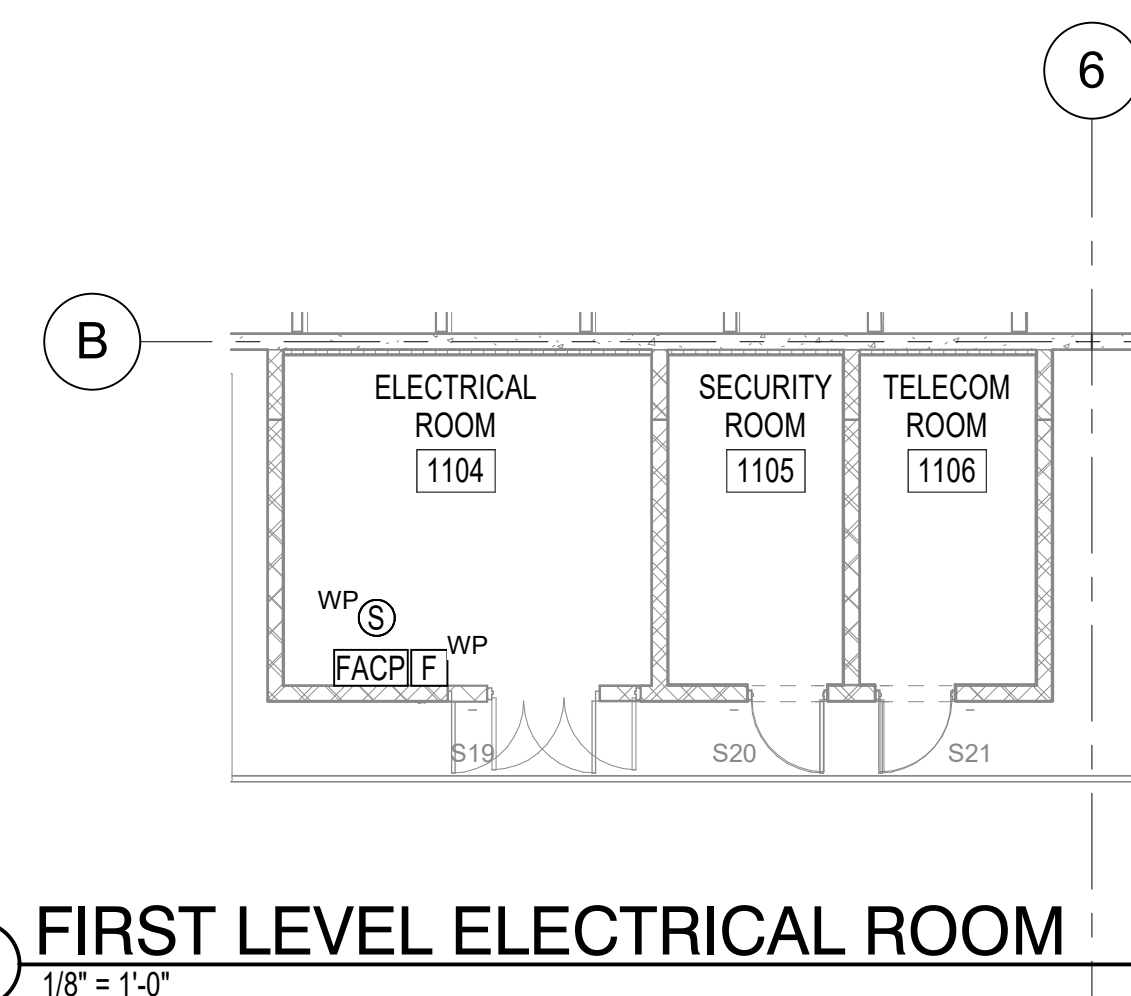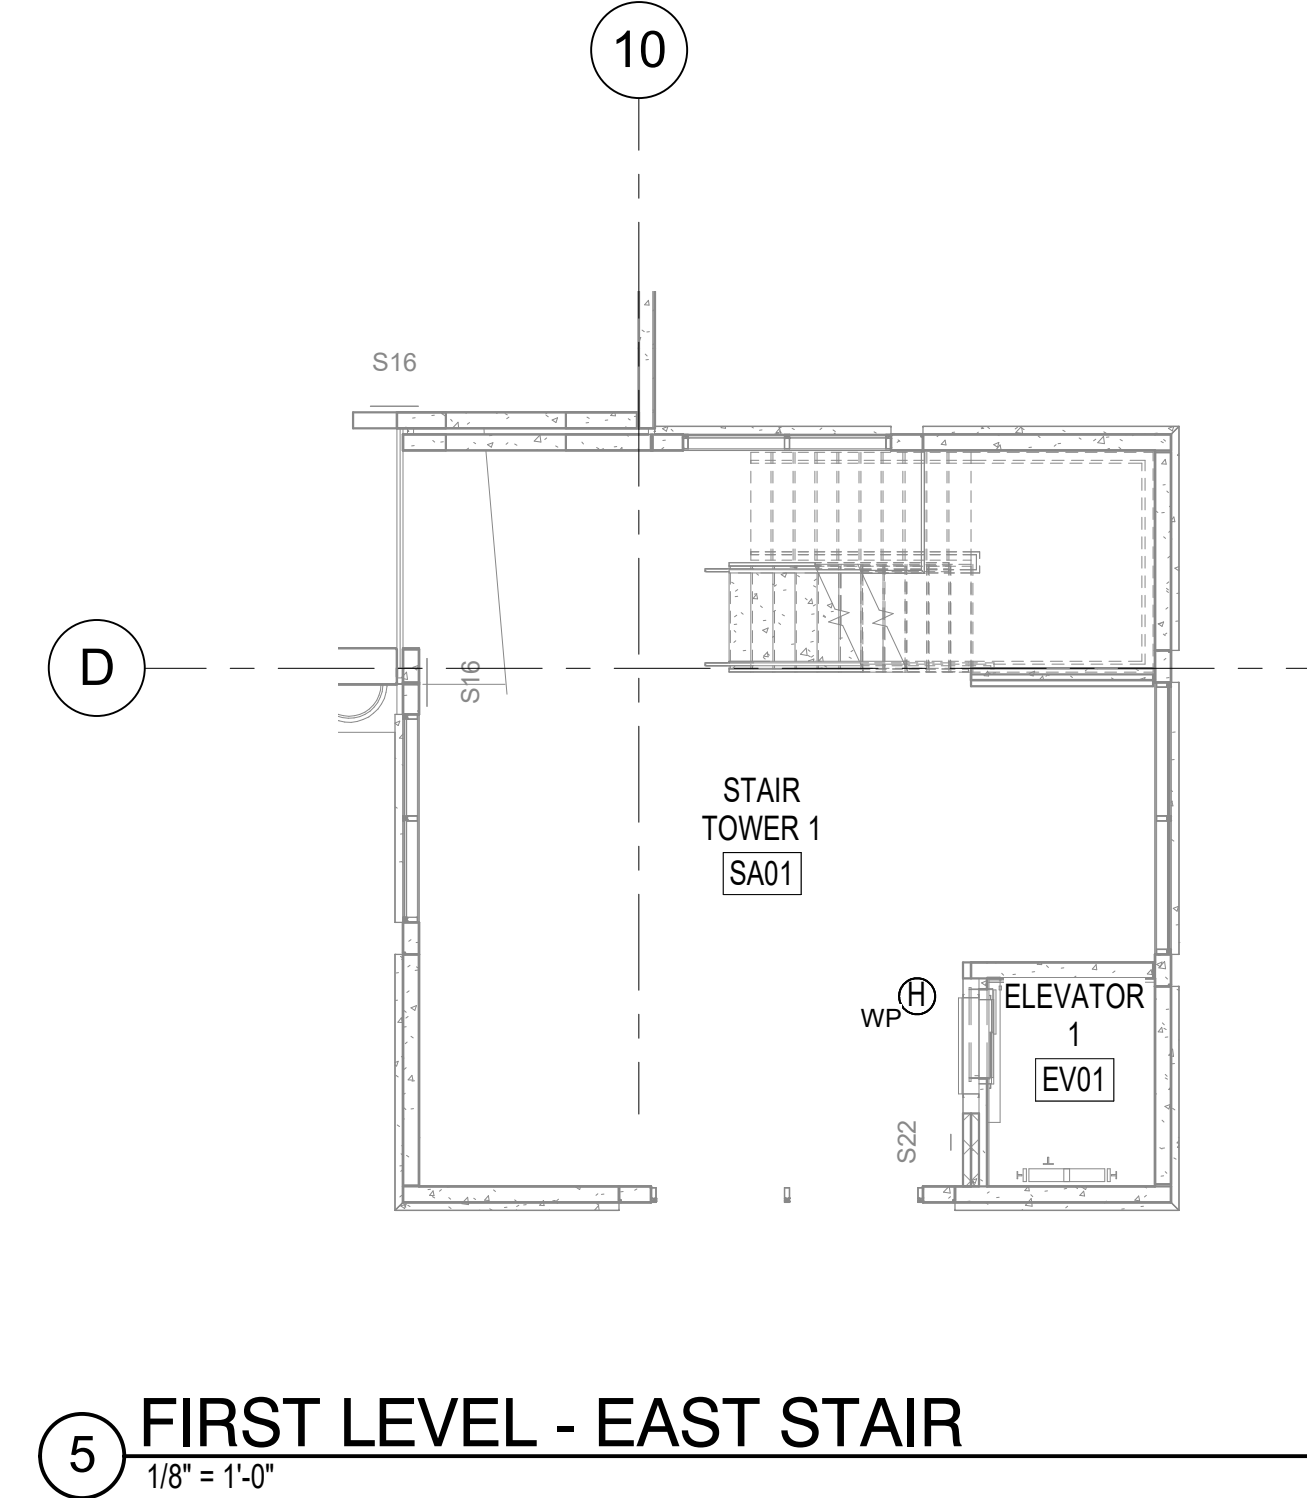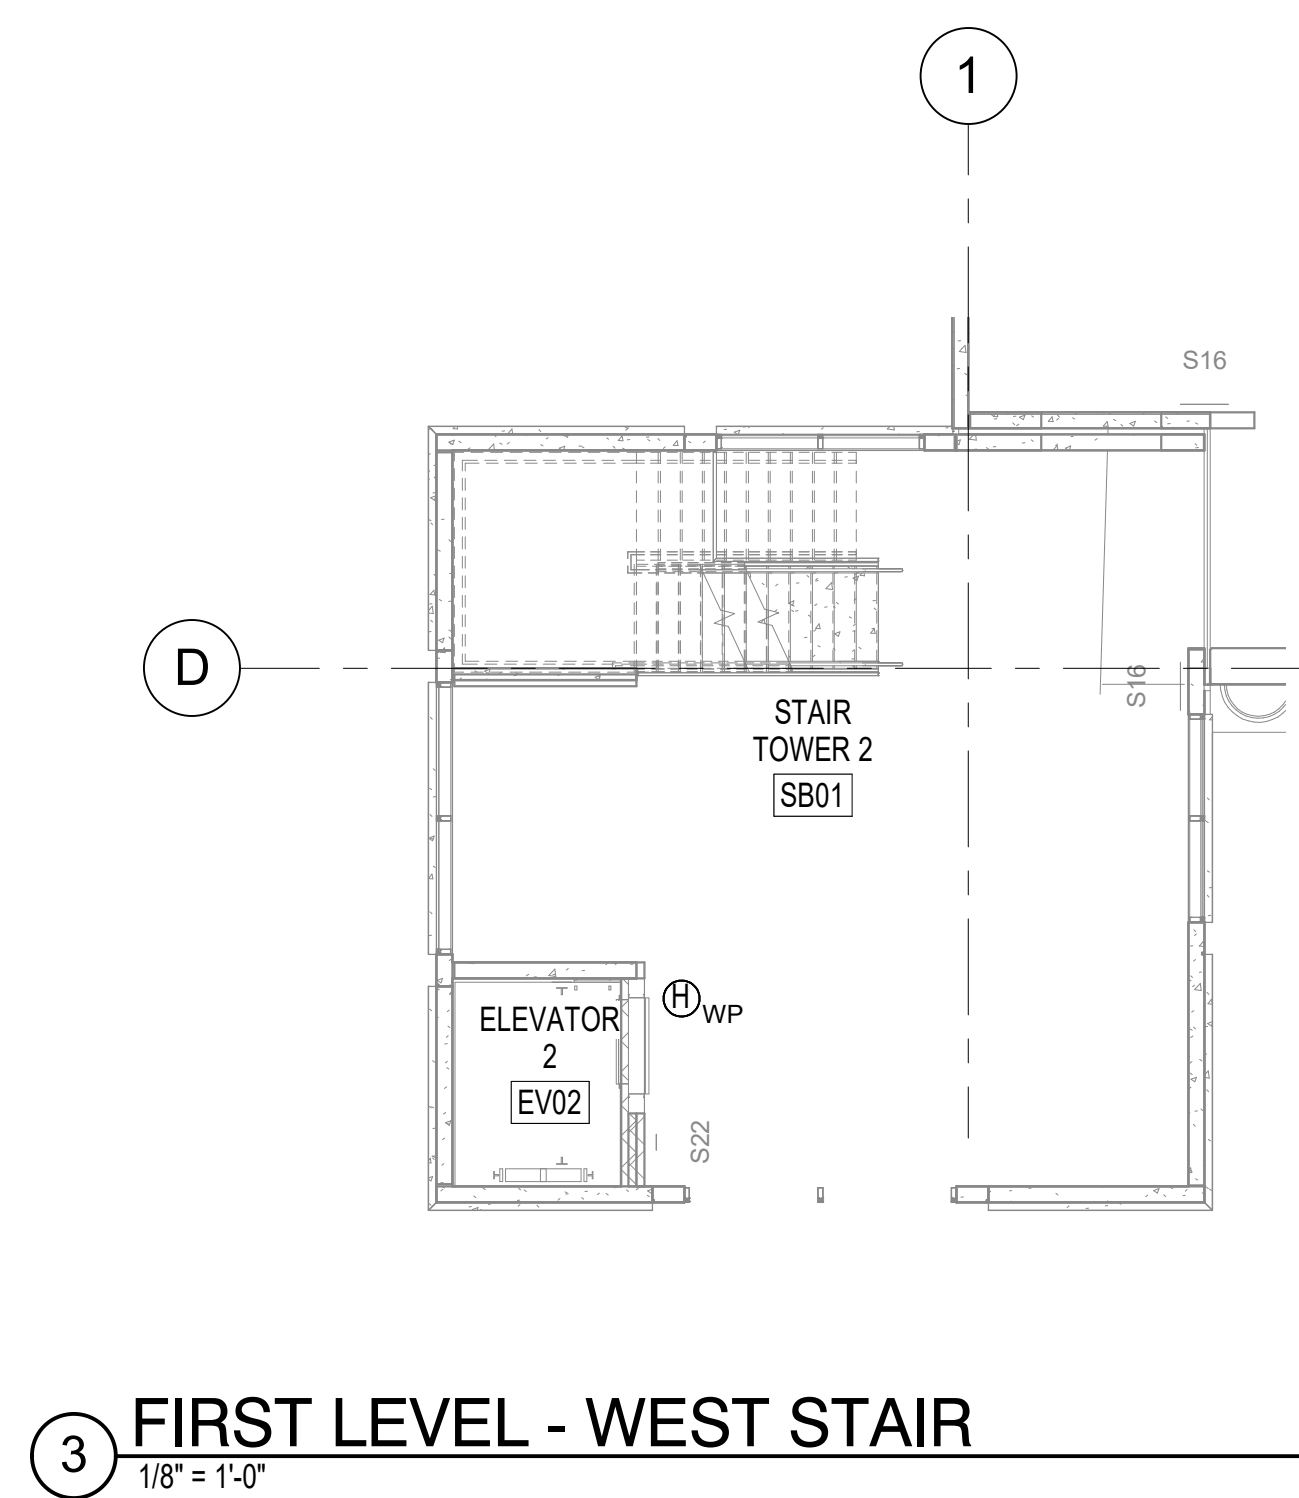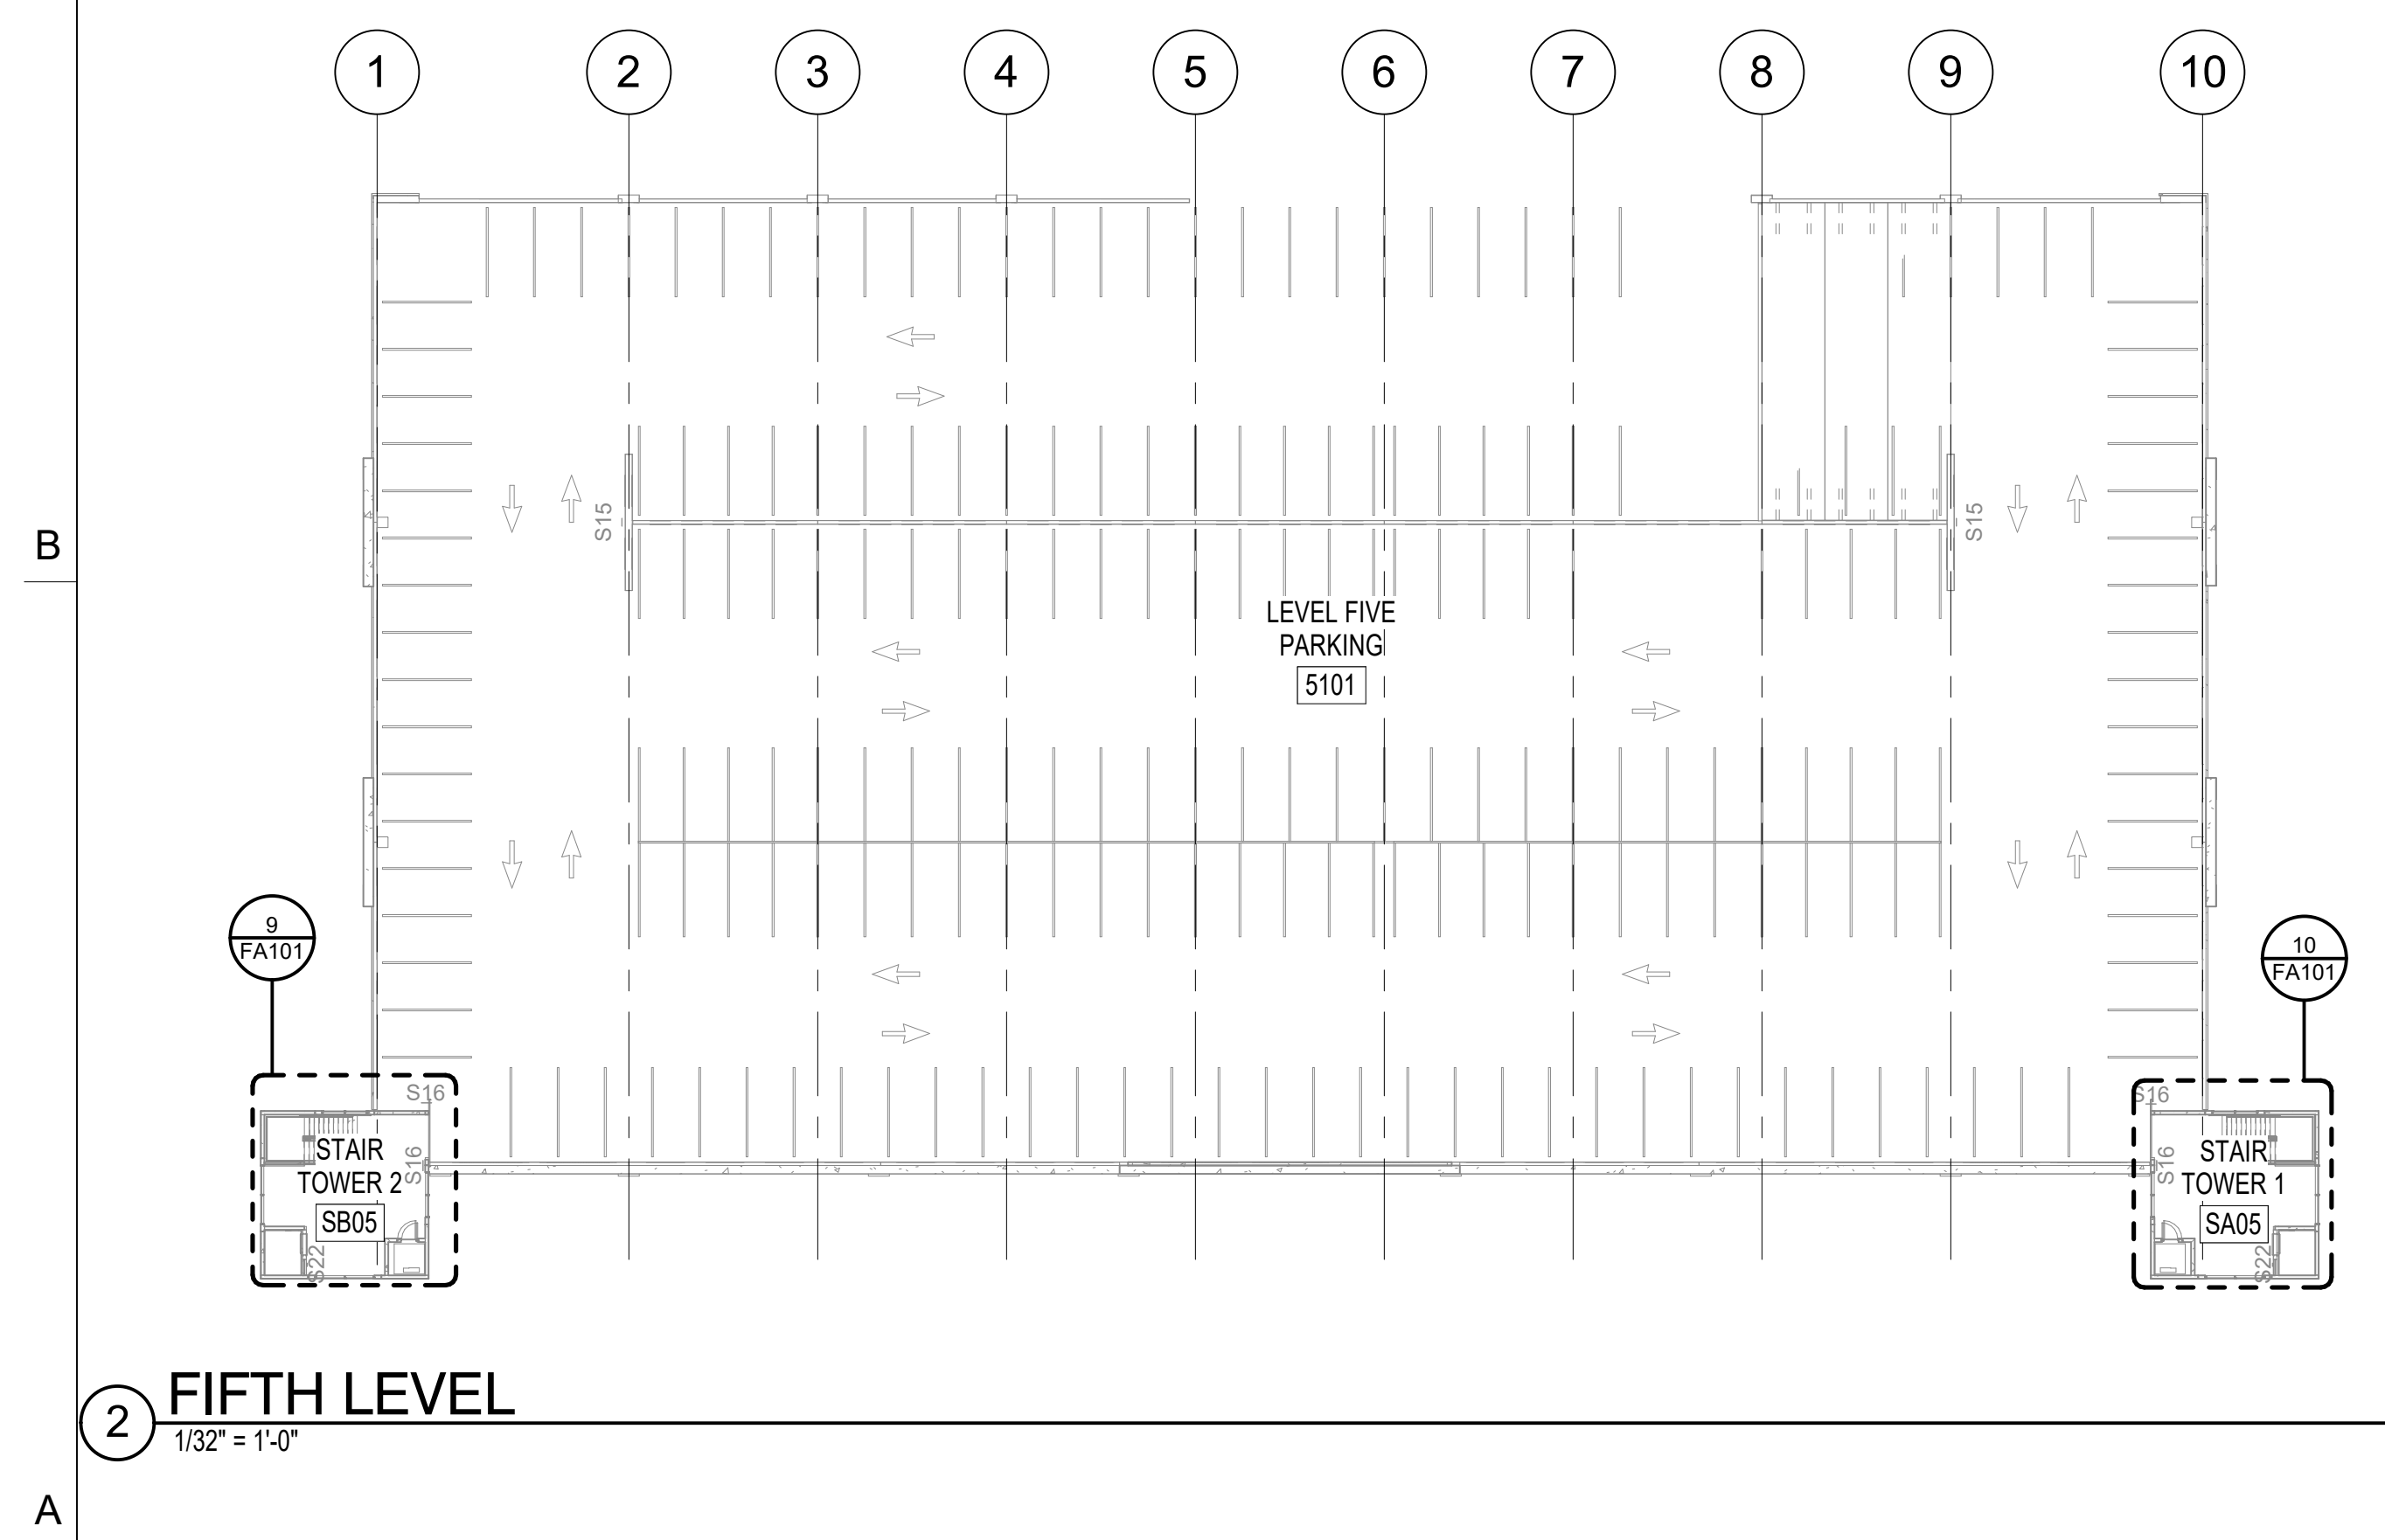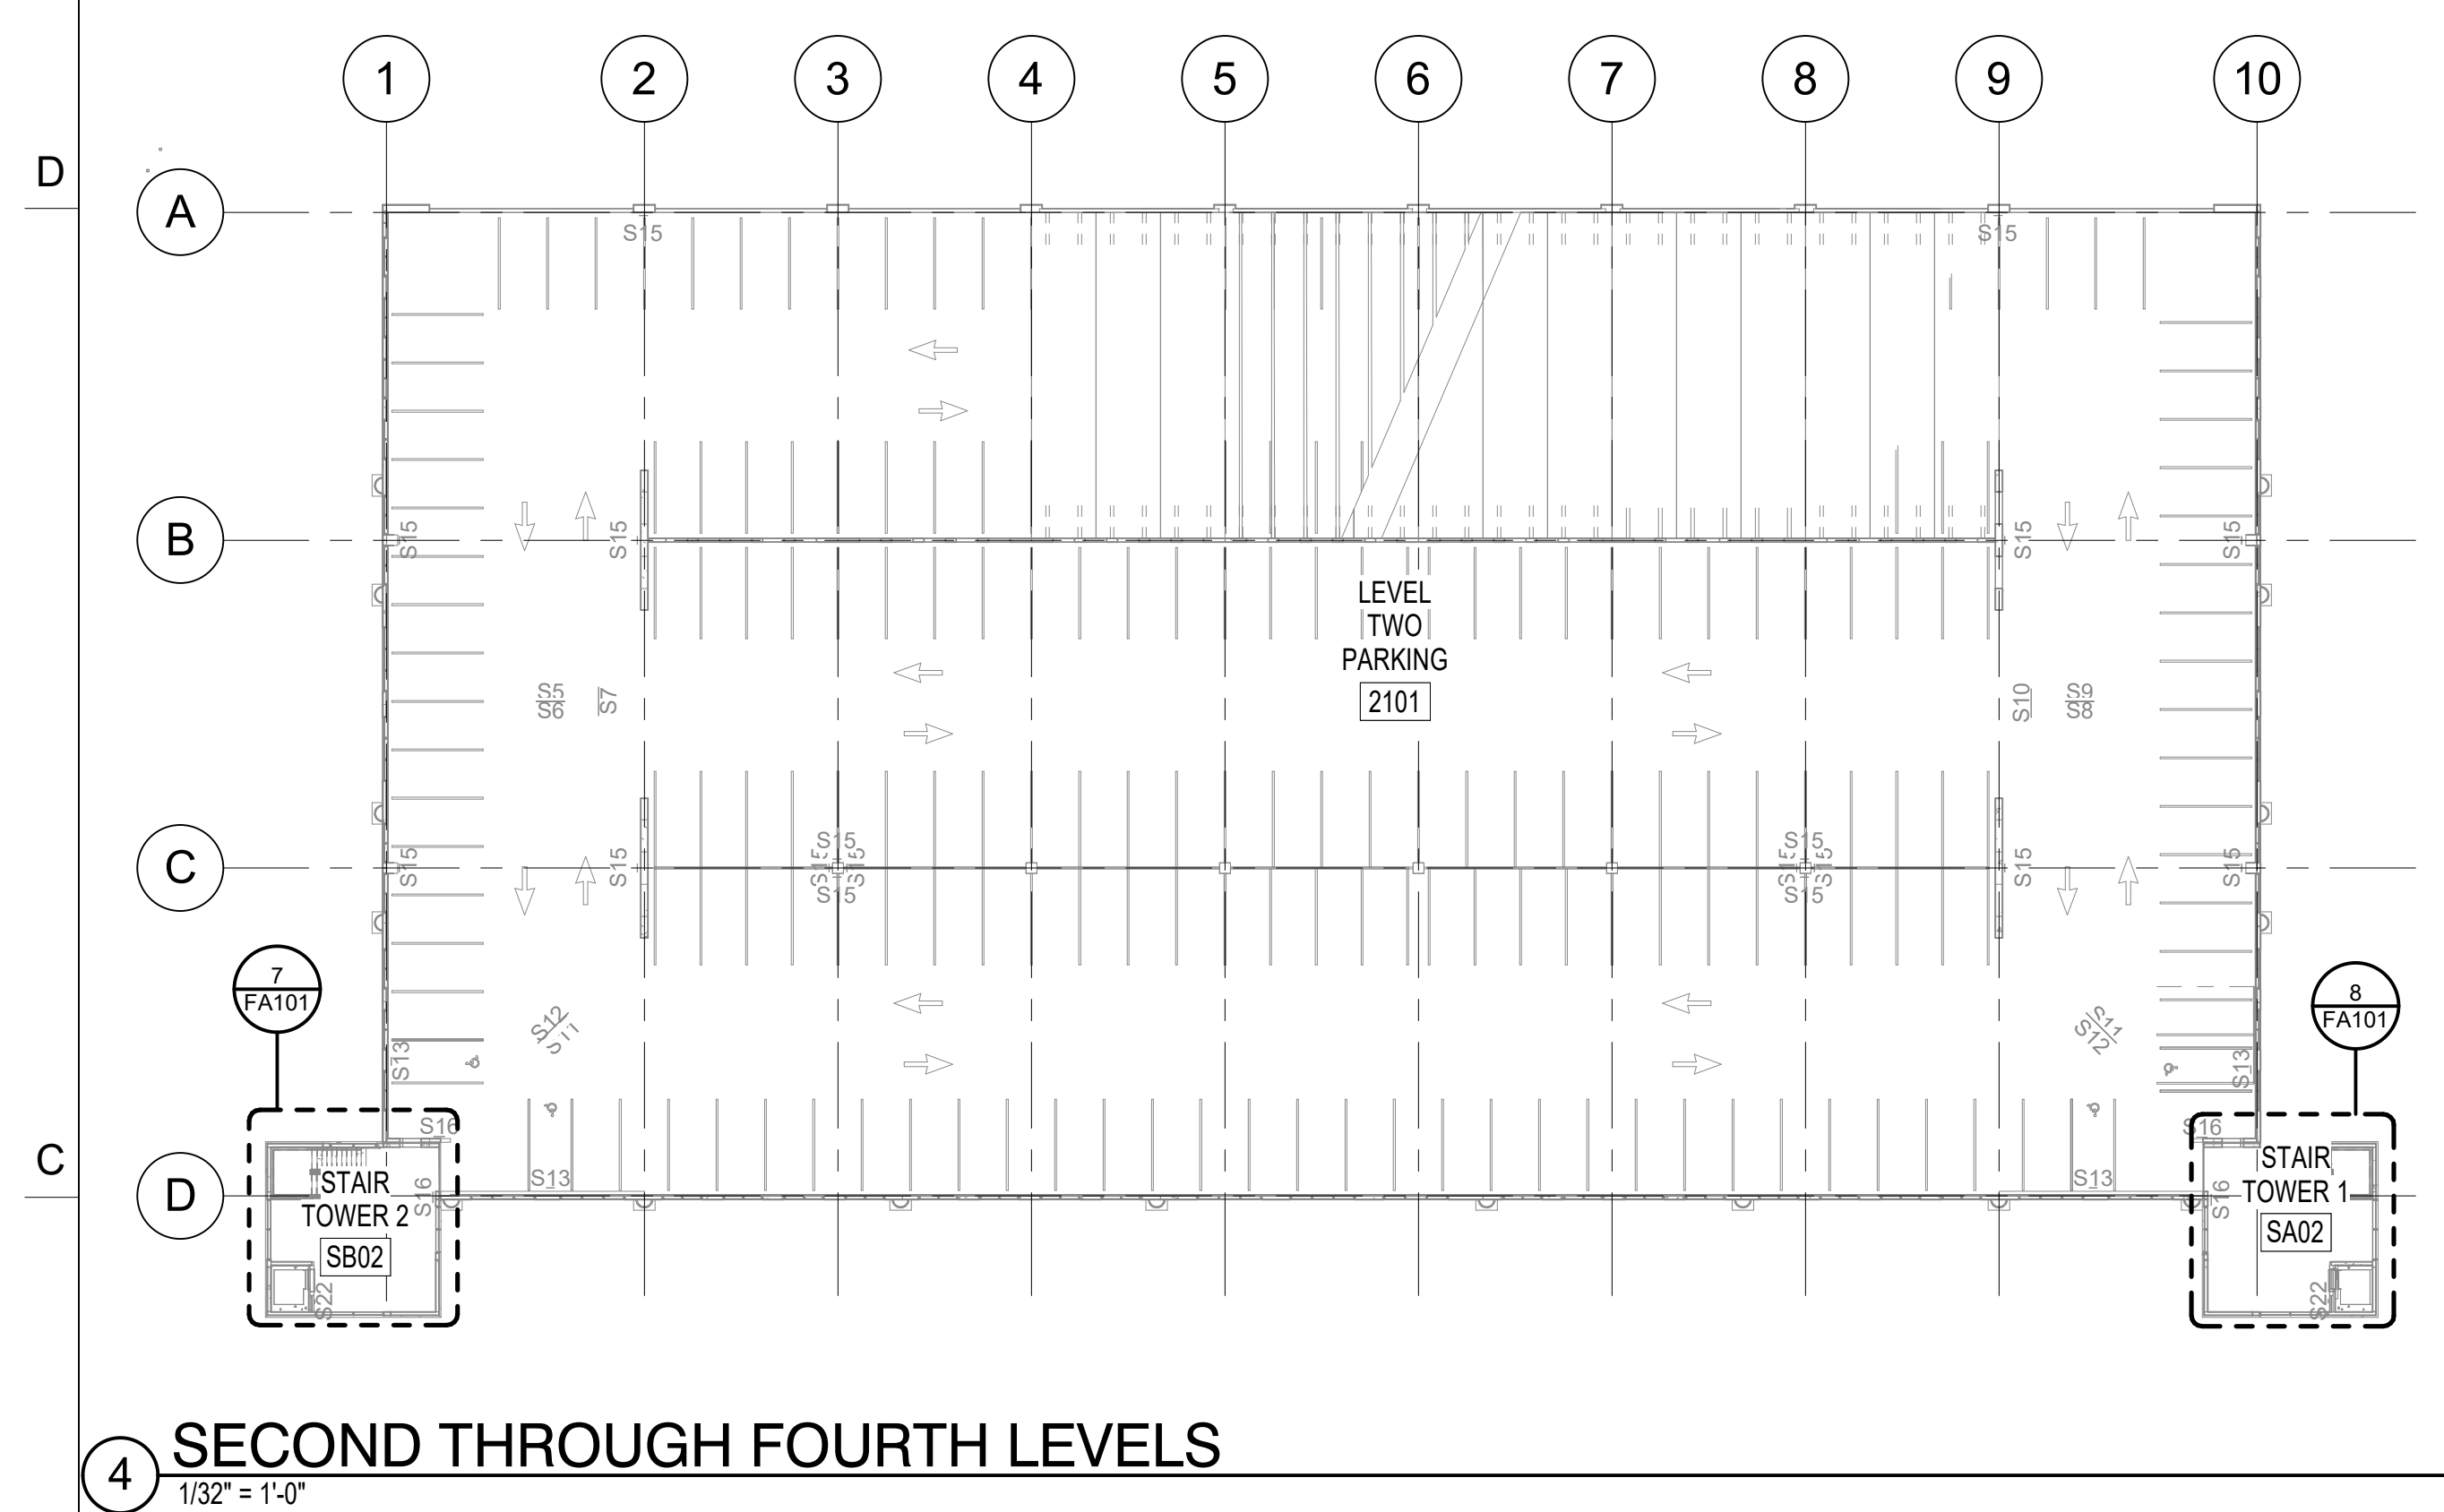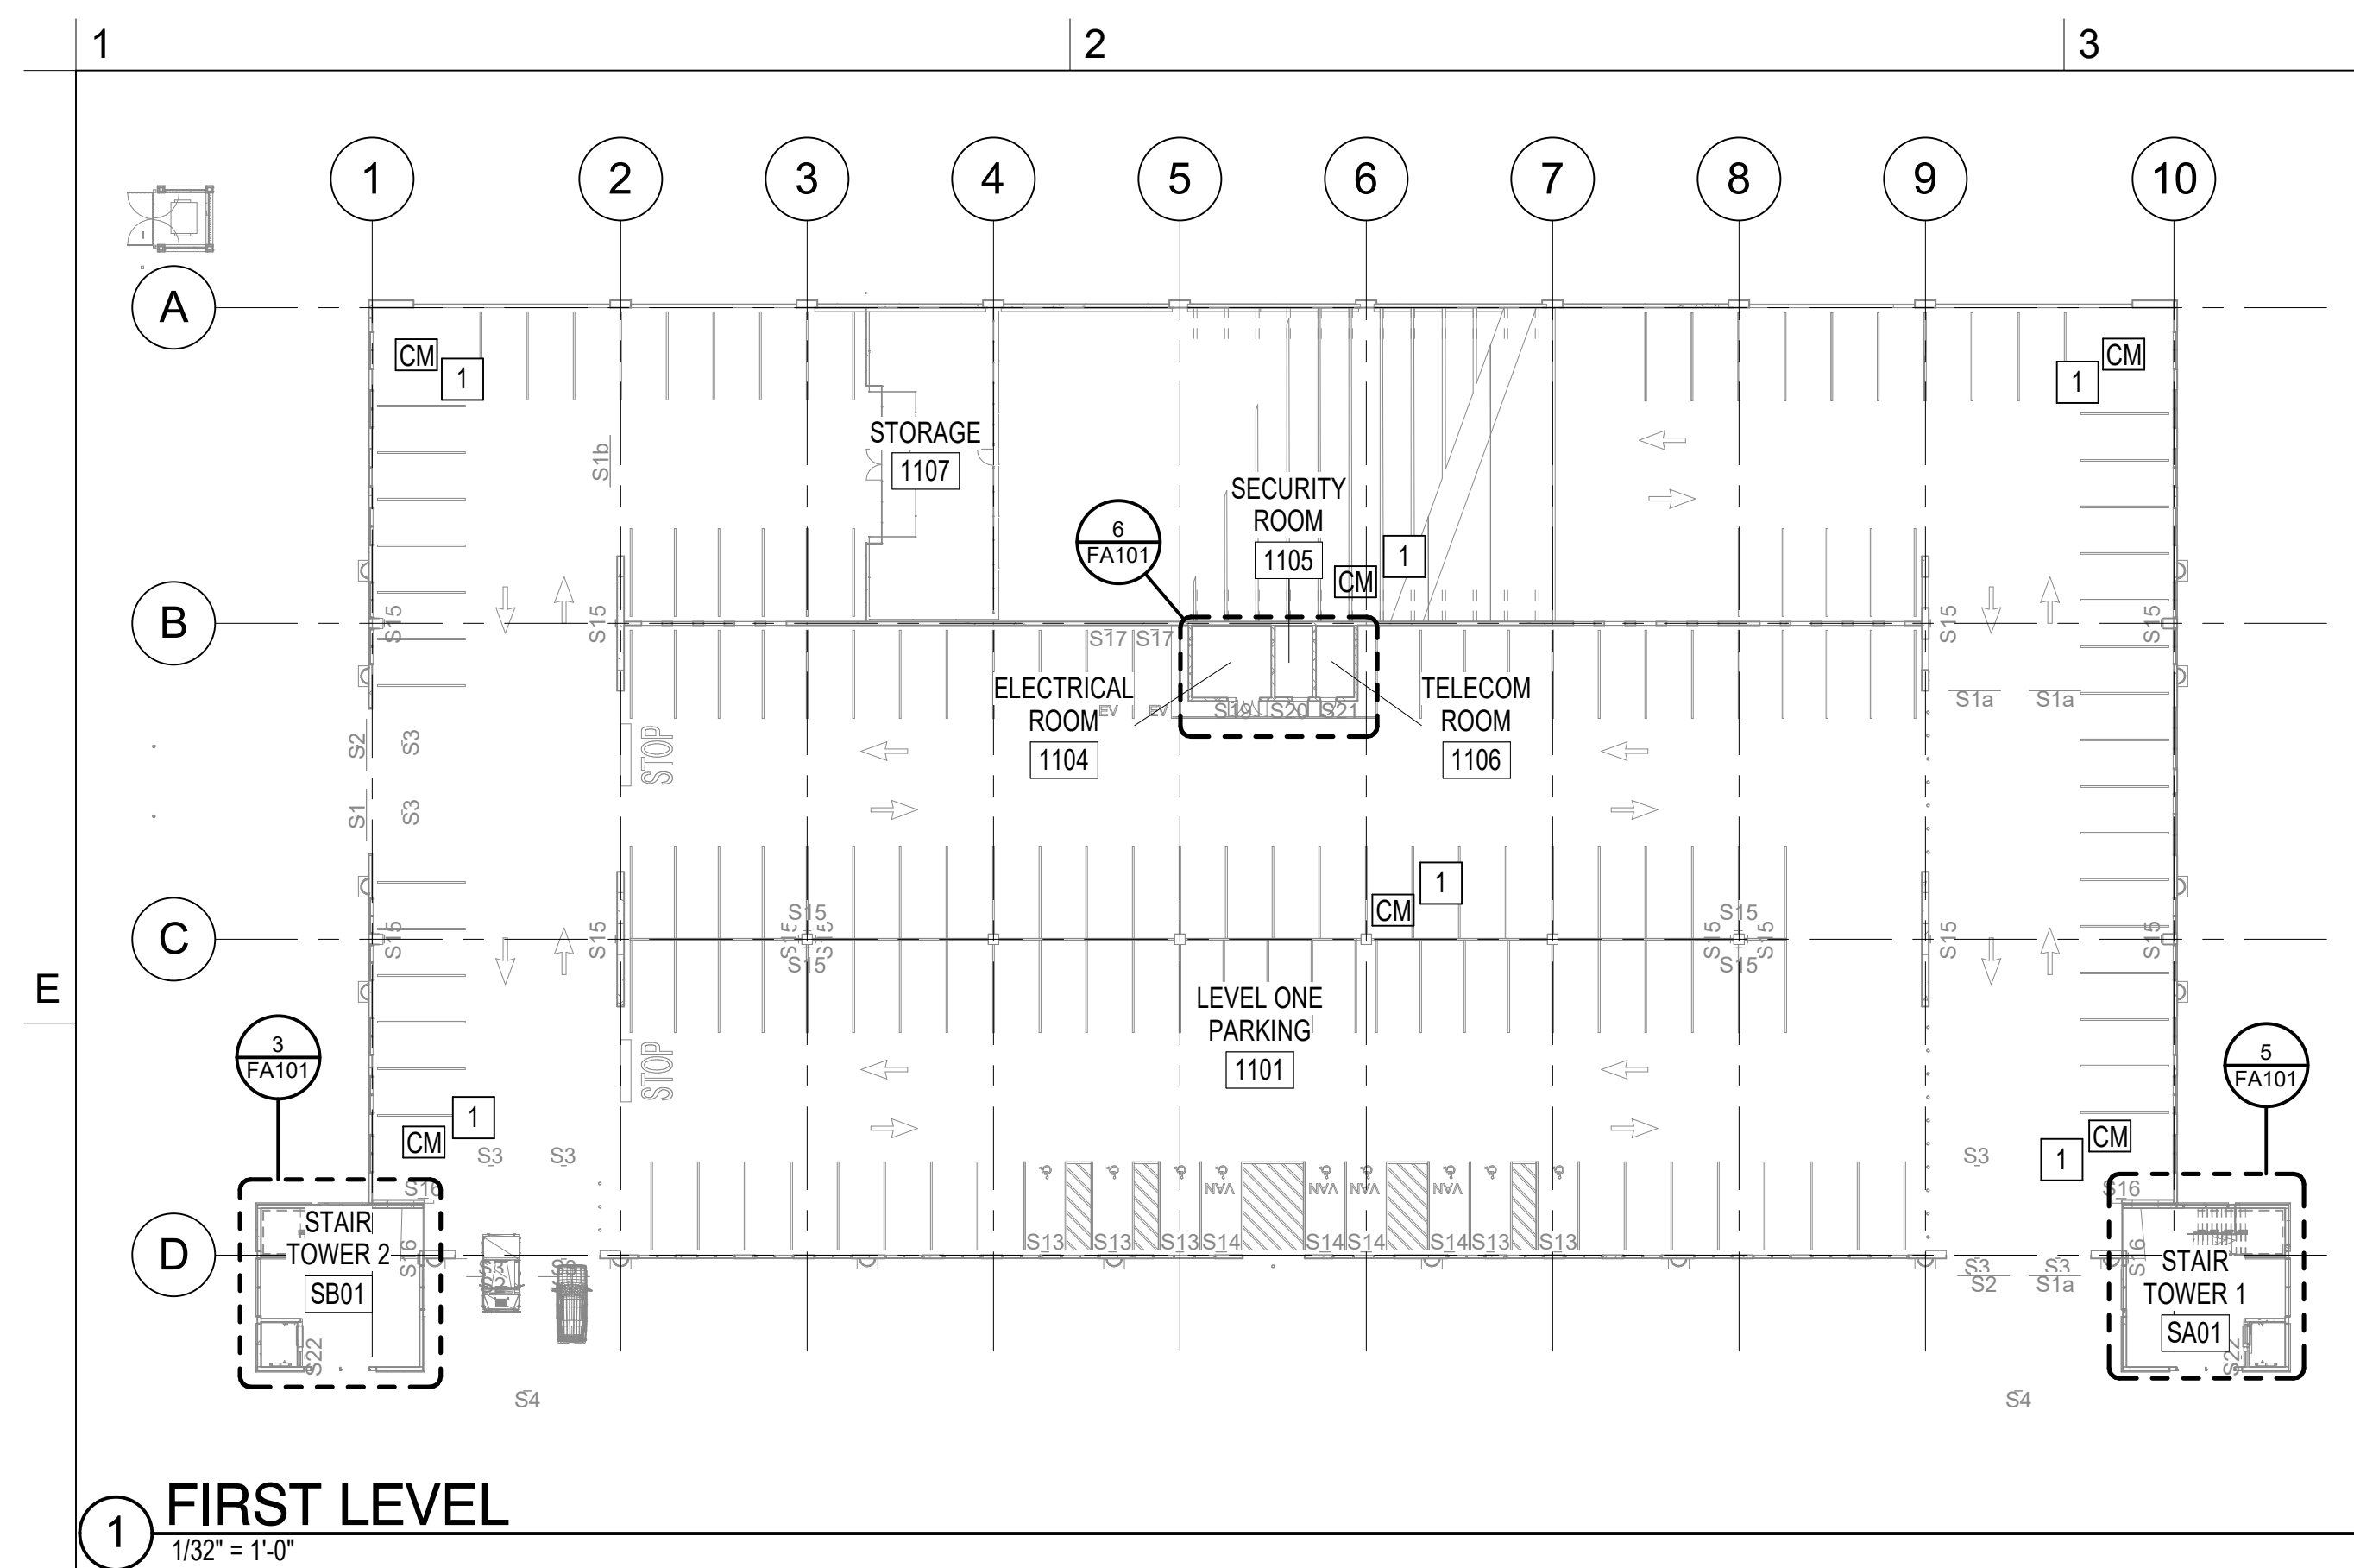

## ## KEY NOTES

1. CONTACT MONITOR MODULE FOR STANDPIPE ISOLATION VALVE TAMPER SWITCH MONITORING. SEE FP SERIES SHEETS FOR COORDINATION.

GRAPHIC SCALE(S)

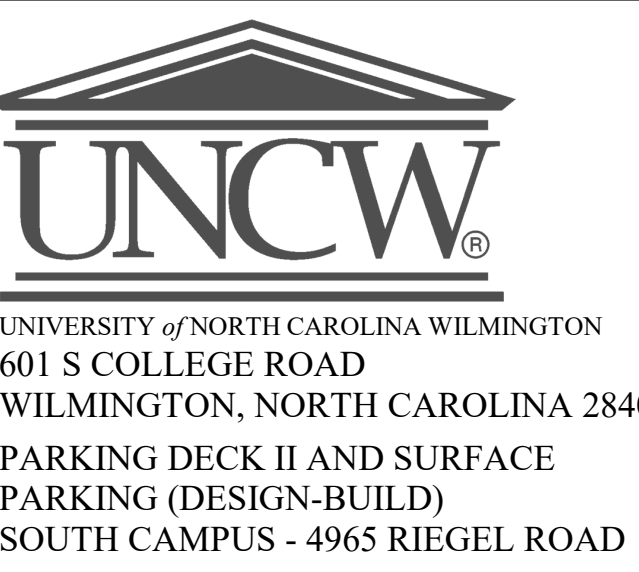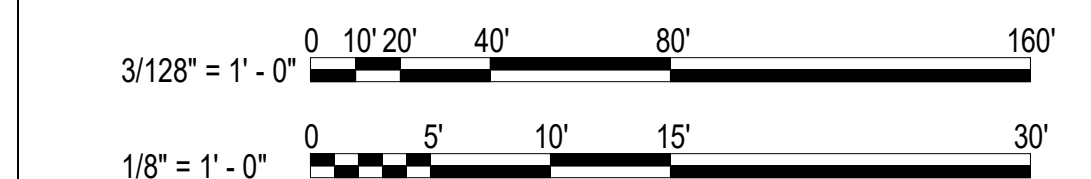

SCO ID NUMBER: 18-19226-01A  
CODE: 41828  
ITEM: 301

CONTRACTOR  
**Balfour Beatty**  
Construction

DESIGNER

**CLARK NEXSEN**  
1523 ELIZABETH AVENUE, SUITE 300  
CHARLOTTE, NORTH CAROLINA 28204  
704-377-8800  
CLARK NEXSEN LICENSE NUMBER: C-1028



13860 Ballantyne Corporate Place  
Suite 140  
Charlotte, NC 28277  
T: 704.247.6230  
[www.walkerconsultants.com](http://www.walkerconsultants.com)  
NC License No. F-0518



CIVIL ENGINEER  
243 NORTH FRONT STREET  
WILMINGTON, NORTH CAROLINA  
28401  
910.343.1048

---

PROFESSIONAL SEAL



NC CORPORATE ENGINEERING LICENSE #C-1028

SUBMITTAL

04/15/2019

CONSTRUCTION DOCUMENT  
SUBMITTAL 01

## REVISIONS

## KEY PLAN

SHEET

## FIRE ALARM FLOOR PLANS

FA101

DESIGN: Designer  
DRAWN: Author  
REVIEW: Checker

N 8112

7/15/2019 1:07:22 PM  
C:\Revit Projects\8112\_UNCW\_Parking\_Deck\_II\_F17\_kcrane@clarknexusen.com.rvt